
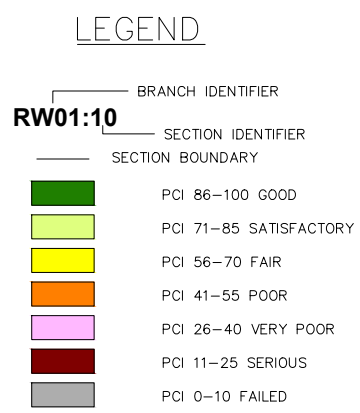


This document, together with the concepts and designs presented herein, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kinney-Horn and Associates, Inc. shall be without liability to Kinney-Horn and Associates, Inc.

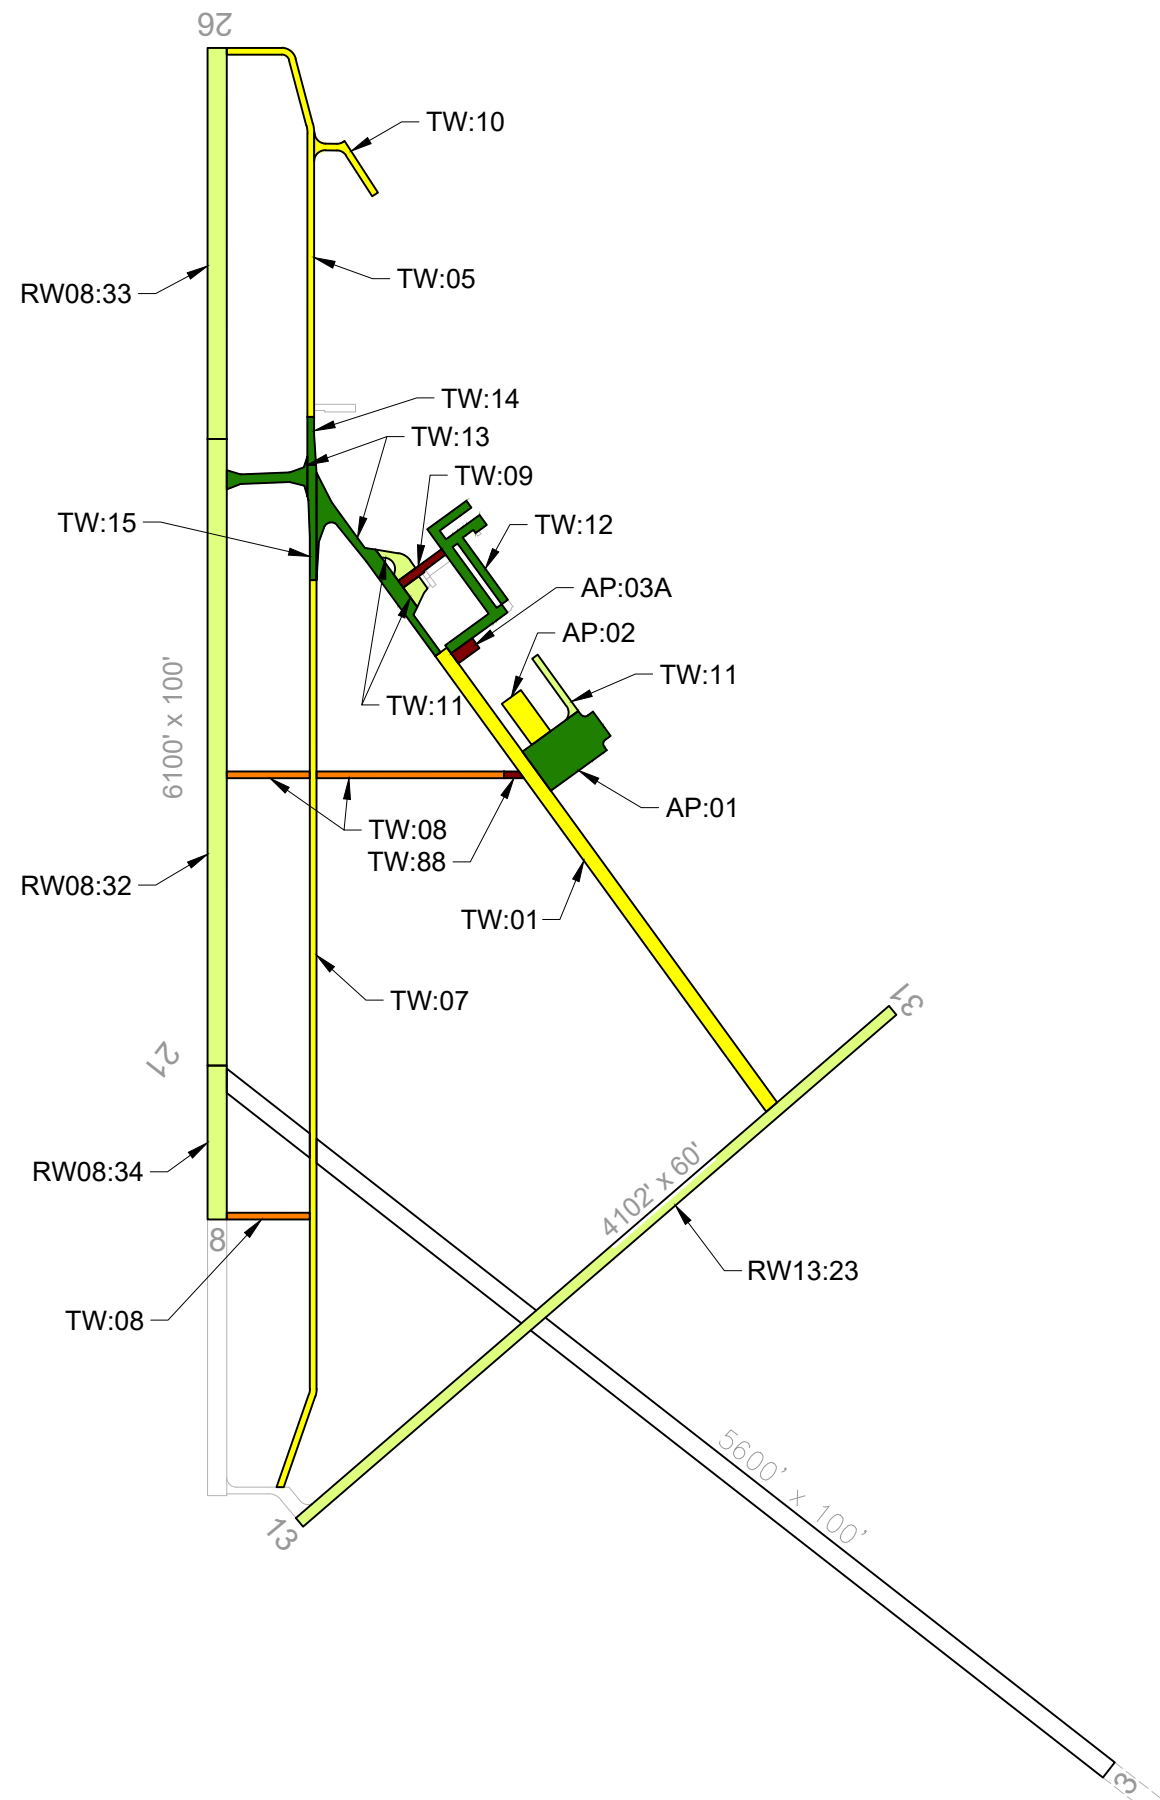

CURRENT 2024 PAVEMENT CONDITION INDEX



Branch ID	Section ID	Branch Name	Surface Type	Section Area (SF)	Approx. Age at Inspection	Last Major Work Date	Last Inspection Date	Pavement Condition Index	PCI Category
RW13	23	Runway 13-31	AAC	246,000	5.4	7/1/2019	10/10/2024	82	Satisfactory
RW08	32	Runway 08-26	AAC	327,000	14.2	9/1/2010	10/10/2024	82	Satisfactory
RW08	33	Runway 08-26	AAC	205,000	14.2	9/1/2010	10/10/2024	81	Satisfactory
RW08	34	Runway 08-26	AAC	78,000	14.2	9/1/2010	10/10/2024	84	Satisfactory
TW	01	Taxiway	AAC	219,766	31.1	9/30/1993	10/10/2024	58	Fair
TW	05	Taxiway	AC	88,200	35.3	7/31/1989	10/10/2024	62	Fair
TW	07	Taxiway	AC	183,706	25.2	8/20/1999	10/10/2024	60	Fair
TW	08	Taxiway	AC	49,338	25.3	8/17/1999	10/10/2024	45	Poor
TW	09	Taxiway	AC	70,000	44.3	8/1/1980	10/10/2024	20	Serious
TW	10	Taxiway	AC	17,814	19.1	9/28/2005	10/10/2024	58	Fair
TW	11	Taxiway	AC	36,781	18.3	8/1/2006	10/10/2024	71	Satisfactory
TW	12	Taxiway	AC	70,000	5.4	7/1/2019	10/10/2024	89	Good
TW	13	Taxiway	AAC	96,746	0.9	1/1/2024	1/1/2024	100	Good
TW	14	Taxiway	AAC	9,533	0.9	1/1/2024	1/1/2024	100	Good
TW	15	Taxiway	AAC	23,857	0.9	1/1/2024	1/1/2024	100	Good
TW	88	Taxiway	AC	3,150	25.3	8/17/1999	10/10/2024	17	Serious
AP	01	Apron	APC	100,800	4.4	7/1/2020	10/10/2024	92	Good
AP	02	Apron	AC	30,744	31.1	9/30/1993	10/10/2024	58	Fair
AP	03A	Apron	AC	15,000	41.3	7/30/1983	10/10/2024	23	Serious

AIRFIELD PAVEMENT WORK HISTORY

- ADAP-02, 1977, NARROW AND REHABILITATE RUNWAYS 7/25 AND 2/20.
- ADAP-03, 1980, CHIP-SEAL RUNWAY 2/20; RESURFACE TAXIWAY (TW:01); PFC OVERLAY APRON (AP:01).
- AIP-001-1983, PFC OVERLAY RUNWAY 7/25; RECONSTRUCT TW:01 AND RUNWAY THRESHOLD; CONSTRUCT APRON (AP:02).
- 10.5" PORTLAND CEMENT CONCRETE (EDGES), 7" (SLAB).
- AIP-002-1989, CONSTRUCT RUNWAY (RW08:33) AND TAXIWAY (TW:05); PFC OVERLAY RUNWAY 7/25 (RW08:32,RW08:34).
- AIP-003-1993, PFC OVERLAY TAXIWAY (TW:01) AND APRONS (AP:01,AP:02).
- AIP-005-1996, RECONSTRUCT RUNWAY 12/30 (RW13:23) AND CONNECTING TAXIWAY (TW:06).
- AIP-006-1999, MILL AND OVERLAY RUNWAY (RW08:34); CONSTRUCT TAXIWAYS (TW:07,TW:08).
- AIP-007-2001, CRACK SEAL, FOG SEAL, AND REMARK PAVEMENTS.
- AIP-008-2004, CRACK SEAL, FOG SEAL, AND REMARK PAVEMENTS.
- AIP-009-2005, CONSTRUCT TAXIWAY (TW:10); CRACK SEAL, FOG SEAL, AND REMARK PAVEMENTS.
- AIP-010-2006, CONSTRUCT TAXIWAY (TW:11) [INSPECTED PRIOR TO COMPLETION]; CRACK SEAL, FOG SEAL, REMARK PAVEMENTS.
- AIP-011-2010, MILL AND OVERLAY RUNWAY 8/26 (RW08:32,RW13:33,RW13:34). NON-AIP:MILL & OVERLAY TW:04 [BLM FIRE STA. PROJECT].
- AIP-019-2014, CRACK SEAL, FOG SEAL, REMARK RUNWAY (RW13:23), TAXIWAYS (TW:01,05,07,08), AND APRONS (AP:01,AP:02).
- AIP-022-2018, MILL AND OVERLAY RUNWAY 13-31 (RW13:23), RECONSTRUCT TAXIWAY (TW:12).
- AIP-023-2019, CRACK SEAL, SURFACE SEAL, REMARK RUNWAY 08-23 (RW08).
- AIP-024-2020, 2" AC OVERLAY APRON (AP:01).
- AIP-029-2022, MILL AND OVERLAY TAXIWAY (TW:13, TW:14, TW:15).



This document, together with the concepts and designs presented herein, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kinney-Horn and Associates, Inc. shall be without liability to Kinney-Horn and Associates, Inc.

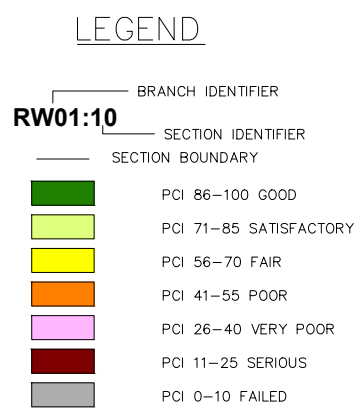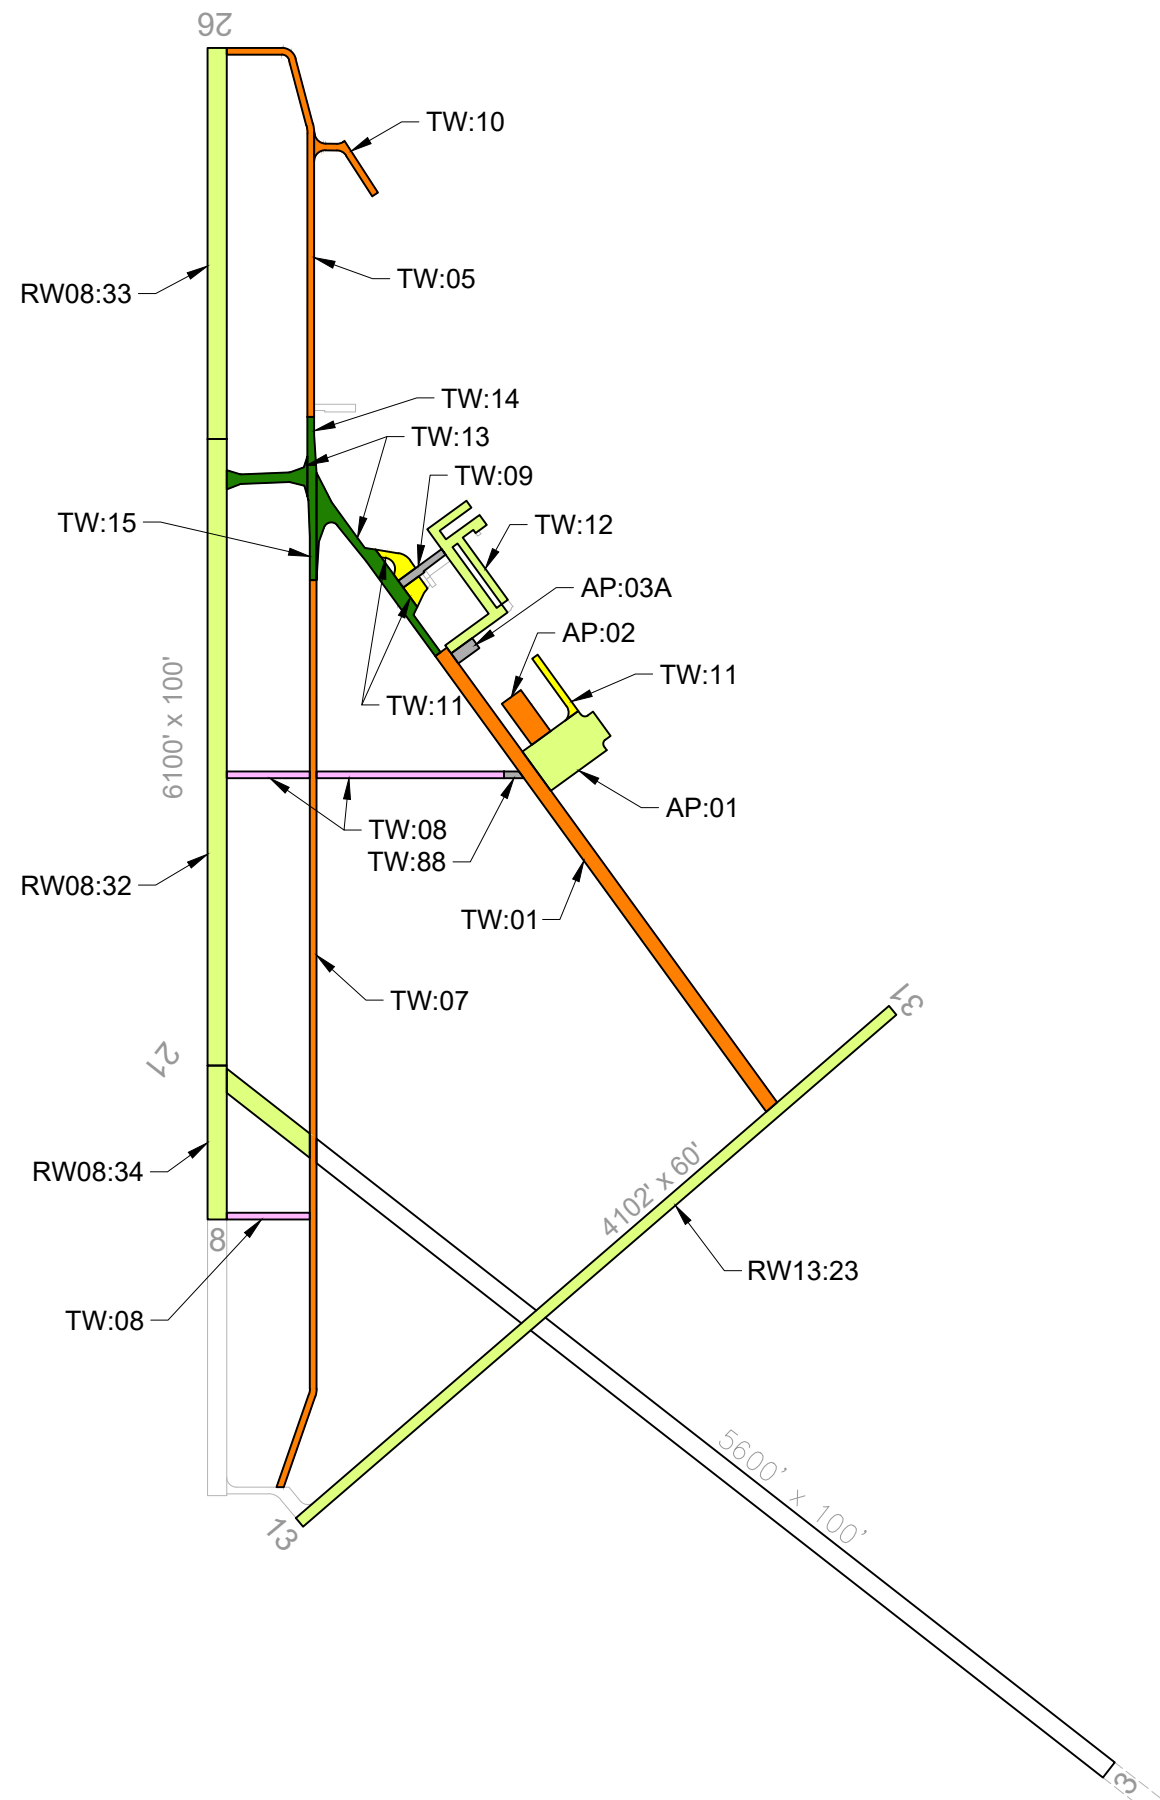


FORECASTED PAVEMENT CONDITION INDEX

Branch ID	Section ID	Surface Type	Current PCI (2024)	2025	2026	2027	2028	2029
RW13	23	AAC	82	82	80	79	78	77
RW08	32	AAC	82	82	80	79	78	77
RW08	33	AAC	81	81	79	78	78	77
RW08	34	AAC	84	84	82	81	79	78
TW	01	AAC	58	58	56	53	51	48
TW	05	AC	62	62	60	58	57	54
TW	07	AC	60	60	58	56	54	51
TW	08	AC	45	44	41	37	34	29
TW	09	AC	20	19	14	8	3	0
TW	10	AC	58	58	56	53	51	48
TW	11	AC	71	71	70	69	69	68
TW	12	AC	89	88	86	84	83	81
TW	13	AAC	100	97	94	91	88	86
TW	14	AAC	100	97	94	91	88	86
TW	15	AAC	100	97	94	91	88	86
TW	88	AC	17	16	10	5	0	0
AP	01	APC	92	92	89	87	85	83
AP	02	AC	58	58	56	55	53	51
AP	03A	AC	23	22	18	15	11	7



This document, together with the concepts and designs presented herein, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kinney-Horn and Associates, Inc. shall be without liability to Kinney-Horn and Associates, Inc.

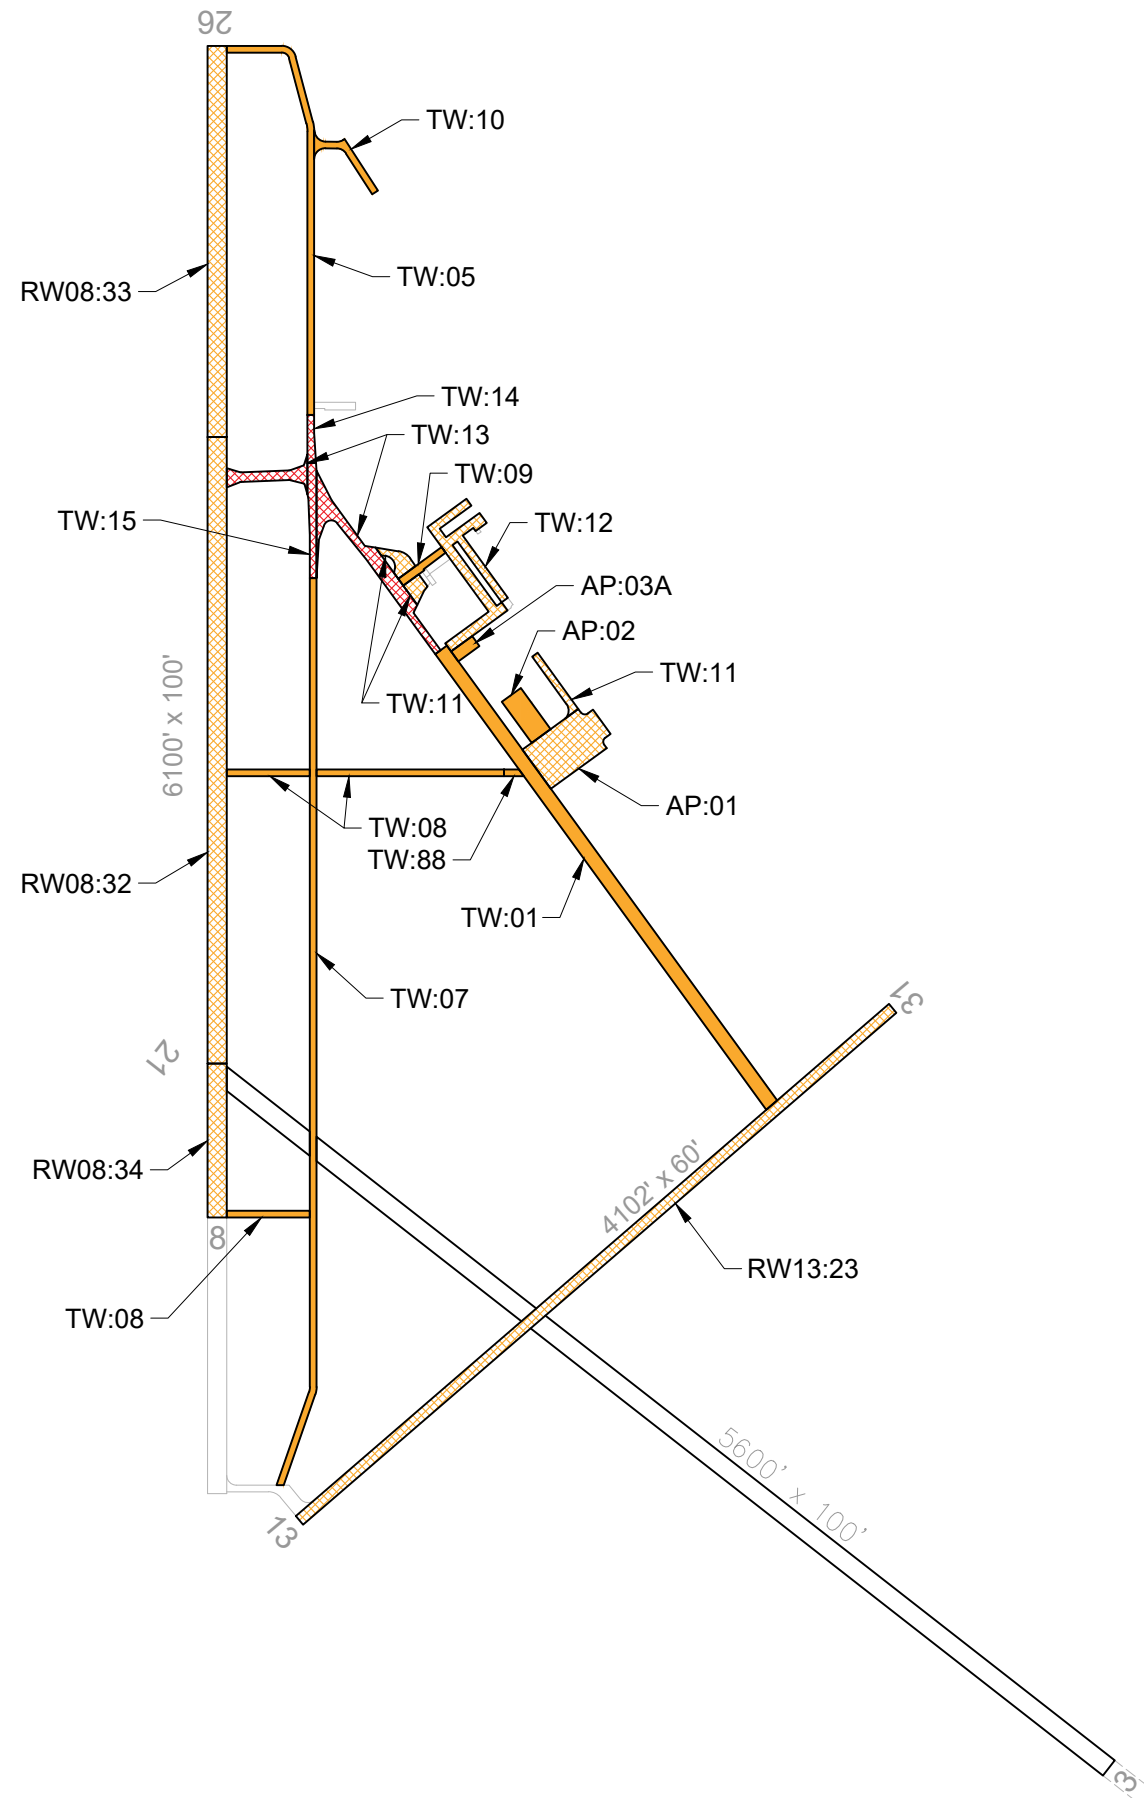

LEGEND

- BRANCH IDENTIFIER
 - SECTION IDENTIFIER
 - SECTION BOUNDARY
- | | |
|----------------------|------------------|
| MAJOR REHABILITATION | GLOBAL TREATMENT |
| 2025 | 2025 |
| 2026 | 2026 |
| 2027 | 2027 |
| 2028 | 2028 |
| 2029 | 2029 |

5-YEAR PAVEMENT NEEDS BY SECTION

Year	Branch ID	Section ID	Surface Type	Section Area (SF)	PCI at Treatment	Recommended Treatment	Treatment Category
2025	RW08	32	AAC	327,000	82	Crack Seal and Seal Coat	Global Treatment
2025	RW08	33	AAC	205,000	81	Crack Seal and Seal Coat	Global Treatment
2025	RW08	34	AAC	78,000	84	Crack Seal and Seal Coat	Global Treatment
2025	RW13	23	AAC	246,000	82	Crack Seal and Seal Coat	Global Treatment
2025	TW	01	AAC	219,766	58	Mill and Overlay	Major Rehabilitation
2025	TW	05	AC	88,200	62	Mill and Overlay	Major Rehabilitation
2025	TW	07	AC	183,706	60	Mill and Overlay	Major Rehabilitation
2025	TW	08	AC	49,338	44	Full-Depth Reconstruction	Major Rehabilitation
2025	TW	09	AC	70,000	19	Full-Depth Reconstruction	Major Rehabilitation
2025	TW	10	AC	17,814	58	Mill and Overlay	Major Rehabilitation
2025	TW	11	AC	36,781	71	Crack Seal and Seal Coat	Global Treatment
2025	TW	12	AC	70,000	88	Crack Seal and Seal Coat	Global Treatment
2025	TW	88	AC	3,150	16	Full-Depth Reconstruction	Major Rehabilitation
2025	AP	01	APC	100,800	92	Crack Seal and Seal Coat	Global Treatment
2025	AP	02	AC	30,744	58	Mill and Overlay	Major Rehabilitation
2025	AP	03A	AC	15,000	22	Full-Depth Reconstruction	Major Rehabilitation
2029	TW	13	AAC	96,746	86	Crack Seal and Seal Coat	Global Treatment
2029	TW	14	AAC	9,533	86	Crack Seal and Seal Coat	Global Treatment
2029	TW	15	AAC	23,857	86	Crack Seal and Seal Coat	Global Treatment



Runway



RW08-34-10: L&T Cracking



RW13-23-48: Weathering

Taxiway



TW-07-03: L&T Cracking



TW-88-01: Alligator Cracking

Apron



AP-02-01: Bleeding



AP-03A-02: Alligator Cracking

Re-Inspection Report

MDT SASP 2024

Generated Date 1/7/2025

Page 1 of 20

Network: LWT **Name:** Lewistown Municipal Airport

Branch: AP **Name:** Apron **Use:** APRON **Area:** 146,544 SqFt

Section: 01 of 3 **From:** TAXIWAY **To:** COMPLETE **Last Const.:** 7/1/2020

Surface: APC **Family:** _MDT2024 - All APC **Zone:** LEWI **Category:** P **Rank:** P

Area: 100,800 SqFt **Length:** 420 Ft **Width:** 240 Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** PCA **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 9/30/1993 **Work Type:** New Construction - Initial **Code:** NU-IN **Is Major M&R:** True

Work Date: 7/1/2020 **Work Type:** AC- Mill and Overlay **Code:** AC-MO **Is Major M&R:** True

Last Insp. Date: 10/10/2024 **TotalSamples:** 21 **Surveyed:** 5

Conditions: PCI: 92

Inspection Comments:

Sample Number: 02 **Type:** R **Area:** 5039.00 SqFt **PCI:** 94

Sample Comments:

57 WEATHERING L 5039.00 SqFt

Sample Number: 07 **Type:** R **Area:** 3267.00 SqFt **PCI:** 94

Sample Comments:

57 WEATHERING L 3267.00 SqFt

Sample Number: 11 **Type:** R **Area:** 5039.00 SqFt **PCI:** 88

Sample Comments:

48 L & T CR L 92.00 Ft

57 WEATHERING L 5039.00 SqFt

Sample Number: 15 **Type:** R **Area:** 5039.00 SqFt **PCI:** 94

Sample Comments:

57 WEATHERING L 5039.00 SqFt

Sample Number: 20 **Type:** R **Area:** 5039.00 SqFt **PCI:** 91

Sample Comments:

50 PATCHING L 44.00 SqFt

57 WEATHERING L 4995.00 SqFt

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	AP	Name:	Apron	Use:	APRON	Area:	146,544 SqFt		
Section:	02	of 3	From:	EAST END OF APRON A-1	To:	END OF APRON	Last Const.: 9/30/1993		
Surface:	AC	Family:	_MDT2024 - AP AC	Zone:	LEWI	Category:	A	Rank:	P
Area:	30,744 SqFt	Length:	252 Ft	Width:	122 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACL	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	9/30/1993	Work Type:	New Construction - Initial	Code:	NU-IN	Is Major M&R:	True		
Last Insp. Date:	10/10/2024	TotalSamples:	6	Surveyed:	3				
Conditions:	PCI: 58								
Inspection Comments:									
Sample Number:	01	Type:	R	Area:	5124.00 SqFt	PCI:	54		
Sample Comments:									
42	BLEEDING	N	15.00	SqFt					
48	L & T CR	L	838.00	Ft					
48	L & T CR	M	51.00	Ft					
57	WEATHERING	L	4868.00	SqFt					
57	WEATHERING	M	256.00	SqFt					
Sample Number:	03	Type:	R	Area:	5124.00 SqFt	PCI:	61		
Sample Comments:									
48	L & T CR	L	616.00	Ft					
48	L & T CR	M	88.00	Ft					
57	WEATHERING	L	4868.00	SqFt					
57	WEATHERING	M	256.00	SqFt					
Sample Number:	05	Type:	R	Area:	5124.00 SqFt	PCI:	59		
Sample Comments:									
48	L & T CR	L	723.00	Ft					
48	L & T CR	M	44.00	Ft					
57	WEATHERING	L	4868.00	SqFt					
57	WEATHERING	M	256.00	SqFt					

Network: LWT **Name:** Lewistown Municipal Airport

Branch: AP **Name:** Apron **Use:** APRON **Area:** 146,544 SqFt

Section: 03A of 3 **From:** T-1 **To:** END OF APRON **Last Const.:** 7/30/1983

Surface: AC **Family:** _MDT2024 - AP AC **Zone:** LEWI **Category:** B **Rank:** P

Area: 15,000 SqFt **Length:** 125 Ft **Width:** 120 Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** ACL **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 7/30/1983 **Work Type:** New Construction - Initial **Code:** NU-IN **Is Major M&R:** True

Last Insp. Date: 10/10/2024 **TotalSamples:** 2 **Surveyed:** 2

Conditions: PCI: 23

Inspection Comments:

Sample Number: 01 **Type:** R **Area:** 4994.00 SqFt **PCI:** 27

Sample Comments:

41	ALLIGATOR CR	M	216.00	SqFt
45	DEPRESSION	L	120.00	SqFt
45	DEPRESSION	M	120.00	SqFt
48	L & T CR	L	305.00	Ft
48	L & T CR	M	280.00	Ft
50	PATCHING	L	19.00	SqFt
52	RAVELING	L	4964.00	SqFt
52	RAVELING	H	30.00	SqFt

Sample Number: 02 **Type:** R **Area:** 5000.00 SqFt **PCI:** 19

Sample Comments:

41	ALLIGATOR CR	M	377.00	SqFt
41	ALLIGATOR CR	H	25.00	SqFt
48	L & T CR	L	136.00	Ft
48	L & T CR	M	280.00	Ft
52	RAVELING	L	4590.00	SqFt
52	RAVELING	M	210.00	SqFt
52	RAVELING	H	200.00	SqFt

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	RW08	Name:	Runway 08-26	Use:	RUNWAY	Area:	610,000 SqFt		
Section:	32	of	3	From:	RWY 8-26 STA 20+50	To:	RWY 8-26 STA 53+20 E TO W	Last Const.:	9/1/2010
Surface:	AAC	Family:	_MDT2024 - RW AC AAC	Zone:	LEWI	Category:	H	Rank:	P
Area:	327,000 SqFt	Length:	3,270 Ft	Width:	100 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACH	Grade:	0	Lanes:	0		
Section Comments:	1999 MILL & EXTEND REMOVED 280' OF R32, FORMERLY 3550'								
Work Date:	7/31/1989	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R:	True	
Work Date:	9/1/2010	Work Type:	2 in overlay		Code:	OL_2	Is Major M&R:	True	
Work Date:	7/1/2020	Work Type:	Crack Sealing - AC		Code:	CS-AC	Is Major M&R:	False	
Work Date:	7/1/2020	Work Type:	Surface Seal		Code:	SS-LO	Is Major M&R:	False	
Last Insp. Date:	10/10/2024	TotalSamples:	71	Surveyed:	7				
Conditions:	PCI: 82								
Inspection Comments:									
Sample Number:	07	Type:	R	Area:	5000.00 SqFt	PCI:	84		
Sample Comments:									
48	L & T CR	L	106.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	17	Type:	R	Area:	5000.00 SqFt	PCI:	78		
Sample Comments:									
48	L & T CR	L	230.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	28	Type:	R	Area:	5000.00 SqFt	PCI:	79		
Sample Comments:									
48	L & T CR	L	210.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	39	Type:	R	Area:	5000.00 SqFt	PCI:	83		
Sample Comments:									
48	L & T CR	L	125.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	50	Type:	R	Area:	5000.00 SqFt	PCI:	83		
Sample Comments:									
48	L & T CR	L	123.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	61	Type:	R	Area:	5000.00 SqFt	PCI:	86		
Sample Comments:									
48	L & T CR	L	67.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	67	Type:	R	Area:	5000.00 SqFt	PCI:	81		
Sample Comments:									
48	L & T CR	L	154.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	RW08	Name:	Runway 08-26	Use:	RUNWAY	Area:	610,000 SqFt		
Section:	33	of 3	From:	RWY 7-25 STA 0+00	To:	RWY 7-25 STA 20+50	Last Const.:	9/1/2010	
Surface:	AAC	Family:	_MDT2024 - RW AC AAC	Zone:	LEWI	Category:	H	Rank:	P
Area:	205,000 SqFt	Length:	2,050 Ft	Width:	100 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACH	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	7/31/1989	Work Type:			New Construction - Initial	Code:	NU-IN	Is Major M&R:	True
Work Date:	9/1/2010	Work Type:			2 in overlay	Code:	OL_2	Is Major M&R:	True
Work Date:	7/1/2020	Work Type:			Surface Seal	Code:	SS-LO	Is Major M&R:	False
Work Date:	7/1/2020	Work Type:			Crack Sealing - AC	Code:	CS-AC	Is Major M&R:	False
Last Insp. Date:	10/10/2024	TotalSamples:	40	Surveyed:	7				
Conditions:	PCI: 81								
Inspection Comments:									
Sample Number:	02	Type:	R	Area:	5000.00 SqFt	PCI:	82		
Sample Comments:									
48	L & T CR	L	135.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	08	Type:	R	Area:	5000.00 SqFt	PCI:	82		
Sample Comments:									
48	L & T CR	L	131.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	14	Type:	R	Area:	5000.00 SqFt	PCI:	81		
Sample Comments:									
48	L & T CR	L	161.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	20	Type:	R	Area:	5000.00 SqFt	PCI:	82		
Sample Comments:									
48	L & T CR	L	136.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	26	Type:	R	Area:	5000.00 SqFt	PCI:	81		
Sample Comments:									
48	L & T CR	L	164.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	32	Type:	R	Area:	5000.00 SqFt	PCI:	80		
Sample Comments:									
48	L & T CR	L	189.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	39	Type:	R	Area:	5000.00 SqFt	PCI:	81		
Sample Comments:									
48	L & T CR	L	168.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	RW08	Name:	Runway 08-26	Use:	RUNWAY	Area:	610,000 SqFt		
Section:	34	of 3	From:	STA 21+00	To:	STA 28+80	Last Const.: 9/1/2010		
Surface:	AAC	Family:	_MDT2024 - RW AC AAC	Zone:		Category:	H	Rank:	P
Area:	78,000 SqFt	Length:	780 Ft	Width:	100 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACH	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	10/14/1999	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R:	True	
Work Date:	9/1/2010	Work Type:	2 in overlay		Code:	OL_2	Is Major M&R:	True	
Work Date:	7/1/2020	Work Type:	Crack Sealing - AC		Code:	CS-AC	Is Major M&R:	False	
Work Date:	7/1/2020	Work Type:	Surface Seal		Code:	SS-LO	Is Major M&R:	False	
Last Insp. Date:	10/10/2024	TotalSamples:	16	Surveyed:	5				
Conditions:	PCI: 84								
Inspection Comments:									
Sample Number:	02	Type:	R	Area:	5000.00 SqFt	PCI:	82		
Sample Comments:									
48	L & T CR	L	38.00	Ft					
52	RAVELING	M	4.00	SqFt					
57	WEATHERING	L	4746.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	06	Type:	R	Area:	5000.00 SqFt	PCI:	86		
Sample Comments:									
48	L & T CR	L	72.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	10	Type:	R	Area:	5000.00 SqFt	PCI:	84		
Sample Comments:									
48	L & T CR	L	109.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	14	Type:	R	Area:	5000.00 SqFt	PCI:	85		
Sample Comments:									
48	L & T CR	L	89.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					
Sample Number:	16	Type:	R	Area:	5000.00 SqFt	PCI:	85		
Sample Comments:									
48	L & T CR	L	76.00	Ft					
57	WEATHERING	L	4750.00	SqFt					
57	WEATHERING	M	250.00	SqFt					

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	RW13	Name:	Runway 13-31	Use:	RUNWAY	Area:	246,000 SqFt		
Section:	23	of	1	From:	T-3	To:	Last Const.: 7/1/2019		
Surface:	AAC	Family:	_MDT2024 - RW AC AAC	Zone:	LEWI	Category:	D	Rank:	P
Area:	246,000 SqFt	Length:	4,100 Ft	Width:	60 Ft				
Slabs:	Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft			
Shoulder:	Street Type:	ACM	Grade:	0	Lanes:	0			
Section Comments:									
Work Date:	7/1/1996	Work Type:	New Construction - Initial	Code:	NU-IN	Is Major M&R:	True		
Work Date:	7/1/2019	Work Type:	4 in overlay	Code:	OL_4	Is Major M&R:	True		
Last Insp. Date:	10/10/2024	TotalSamples:	49	Surveyed:	6				
Conditions:	PCI: 82								
Inspection Comments:									
Sample Number:	04	Type:	R	Area:	5000.00 SqFt	PCI:	83		
Sample Comments:									
48	L & T CR	L	195.00 Ft						
57	WEATHERING	L	5000.00 SqFt						
Sample Number:	09	Type:	R	Area:	4800.00 SqFt	PCI:	81		
Sample Comments:									
48	L & T CR	L	230.00 Ft						
57	WEATHERING	L	4800.00 SqFt						
Sample Number:	14	Type:	R	Area:	5000.00 SqFt	PCI:	81		
Sample Comments:									
48	L & T CR	L	228.00 Ft						
57	WEATHERING	L	5000.00 SqFt						
Sample Number:	29	Type:	R	Area:	5000.00 SqFt	PCI:	83		
Sample Comments:									
48	L & T CR	L	182.00 Ft						
57	WEATHERING	L	5000.00 SqFt						
Sample Number:	38	Type:	R	Area:	5000.00 SqFt	PCI:	81		
Sample Comments:									
48	L & T CR	L	233.00 Ft						
57	WEATHERING	L	5000.00 SqFt						
Sample Number:	48	Type:	R	Area:	5000.00 SqFt	PCI:	84		
Sample Comments:									
48	L & T CR	L	160.00 Ft						
57	WEATHERING	L	5000.00 SqFt						

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	TW	Name:	Taxiway	Use:	TAXIWAY	Area:	868,891 SqFt		
Section:	01	of	12	From:	RUNWAY 7-25	To:	RUNWAY 12-30	Last Const.:	9/30/1993
Surface:	AAC	Family:	_MDT2024 - TW AAC	Zone:	LEWI	Category:	H	Rank:	P
Area:	219,766 SqFt	Length:	4,600 Ft	Width:	65 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACH	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	9/30/1993	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R:	True	
Last Insp. Date:	10/10/2024	TotalSamples:	67	Surveyed:	7				
Conditions:	PCI: 58								
Inspection Comments:									
Sample Number:	26	Type:	R	Area:	4875.00 SqFt	PCI:	60		
Sample Comments:									
48	L & T CR	L	535.00	Ft					
48	L & T CR	M	40.00	Ft					
57	WEATHERING	L	3900.00	SqFt					
57	WEATHERING	M	975.00	SqFt					
Sample Number:	30	Type:	R	Area:	5000.00 SqFt	PCI:	62		
Sample Comments:									
48	L & T CR	L	484.00	Ft					
48	L & T CR	M	49.00	Ft					
57	WEATHERING	L	4500.00	SqFt					
57	WEATHERING	M	500.00	SqFt					
Sample Number:	38	Type:	R	Area:	4875.00 SqFt	PCI:	56		
Sample Comments:									
48	L & T CR	L	325.00	Ft					
48	L & T CR	M	57.00	Ft					
50	PATCHING	L	1620.00	SqFt					
57	WEATHERING	L	2929.00	SqFt					
57	WEATHERING	M	326.00	SqFt					
Sample Number:	45	Type:	R	Area:	5000.00 SqFt	PCI:	57		
Sample Comments:									
48	L & T CR	L	490.00	Ft					
48	L & T CR	M	36.00	Ft					
53	RUTTING	L	100.00	SqFt					
57	WEATHERING	L	4500.00	SqFt					
57	WEATHERING	M	500.00	SqFt					
Sample Number:	50	Type:	R	Area:	4875.00 SqFt	PCI:	58		
Sample Comments:									
43	BLOCK CR	L	1100.00	SqFt					
48	L & T CR	L	235.00	Ft					
48	L & T CR	M	55.00	Ft					
57	WEATHERING	L	4387.00	SqFt					
57	WEATHERING	M	488.00	SqFt					
Sample Number:	55	Type:	R	Area:	5000.00 SqFt	PCI:	56		
Sample Comments:									
48	L & T CR	L	515.00	Ft					
48	L & T CR	M	35.00	Ft					
53	RUTTING	L	30.00	SqFt					
57	WEATHERING	L	4500.00	SqFt					
57	WEATHERING	M	500.00	SqFt					
Sample Number:	62	Type:	R	Area:	4875.00 SqFt	PCI:	58		
Sample Comments:									
48	L & T CR	L	659.00	Ft					

48	L & T CR	M	100.00	Ft
57	WEATHERING	L	4387.00	SqFt
57	WEATHERING	M	488.00	SqFt

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	TW	Name:	Taxiway	Use:	TAXIWAY	Area:	868,891 SqFt		
Section:	05	of 12	From:	T-1	To:	EAST END OF RWY 25-7	Last Const.: 7/31/1989		
Surface:	AC	Family:	_MDT2024 - TW AC	Zone:	LEWI	Category:	G	Rank:	P
Area:	88,200 SqFt	Length:	2,520 Ft	Width:	35 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACH	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	7/31/1989	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R:	True	
Last Insp. Date:	10/10/2024	TotalSamples:	18	Surveyed:	5				
Conditions:	PCI: 62								
Inspection Comments:									
Sample Number:	03	Type:	R	Area:	5000.00 SqFt	PCI:	64		
Sample Comments:									
48	L & T CR	L	420.00	Ft					
48	L & T CR	M	100.00	Ft					
57	WEATHERING	L	2500.00	SqFt					
57	WEATHERING	M	2500.00	SqFt					
Sample Number:	05	Type:	R	Area:	4900.00 SqFt	PCI:	61		
Sample Comments:									
48	L & T CR	L	524.00	Ft					
48	L & T CR	M	110.00	Ft					
57	WEATHERING	L	2450.00	SqFt					
57	WEATHERING	M	2450.00	SqFt					
Sample Number:	09	Type:	R	Area:	4900.00 SqFt	PCI:	67		
Sample Comments:									
48	L & T CR	L	478.00	Ft					
57	WEATHERING	L	2450.00	SqFt					
57	WEATHERING	M	2450.00	SqFt					
Sample Number:	13	Type:	R	Area:	4900.00 SqFt	PCI:	57		
Sample Comments:									
42	BLEEDING	N	36.00	SqFt					
48	L & T CR	L	769.00	Ft					
57	WEATHERING	L	2450.00	SqFt					
57	WEATHERING	M	2450.00	SqFt					
Sample Number:	17	Type:	R	Area:	4900.00 SqFt	PCI:	60		
Sample Comments:									
42	BLEEDING	N	50.00	SqFt					
45	DEPRESSION	L	4.00	SqFt					
48	L & T CR	L	556.00	Ft					
57	WEATHERING	L	2450.00	SqFt					
57	WEATHERING	M	2450.00	SqFt					

Network: LWT **Name:** Lewistown Municipal Airport

Branch: TW **Name:** Taxiway **Use:** TAXIWAY **Area:** 868,891 SqFt

Section: 07 of 12 **From:** RW 7-25 **To:** PARALLEL TW & TERMINAL **Last Const.:** 8/20/1999

Surface: AC **Family:** _MDT2024 - TW AC **Zone:** **Category:** D **Rank:** P

Area: 183,706 SqFt **Length:** 5,249 Ft **Width:** 35 Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** ACM **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 8/20/1999 **Work Type:** New Construction - Initial **Code:** NU-IN **Is Major M&R:** True

Last Insp. Date: 10/10/2024 **TotalSamples:** 37 **Surveyed:** 5

Conditions: PCI: 60

Inspection Comments:

Sample Number: 03 **Type:** R **Area:** 4900.00 SqFt **PCI:** 55

Sample Comments:

41 ALLIGATOR CR L 45.00 SqFt
48 L & T CR L 318.00 Ft
48 L & T CR M 44.00 Ft
53 RUTTING L 65.00 SqFt
57 WEATHERING L 4410.00 SqFt
57 WEATHERING M 490.00 SqFt

Sample Number: 11 **Type:** R **Area:** 4900.00 SqFt **PCI:** 64

Sample Comments:

41 ALLIGATOR CR L 18.00 SqFt
48 L & T CR L 251.00 Ft
48 L & T CR M 100.00 Ft
52 RAVELING L 490.00 SqFt
57 WEATHERING L 4410.00 SqFt

Sample Number: 19 **Type:** R **Area:** 4900.00 SqFt **PCI:** 64

Sample Comments:

48 L & T CR L 412.00 Ft
48 L & T CR M 44.00 Ft
52 RAVELING L 490.00 SqFt
57 WEATHERING L 4410.00 SqFt

Sample Number: 27 **Type:** R **Area:** 4900.00 SqFt **PCI:** 46

Sample Comments:

41 ALLIGATOR CR L 95.00 SqFt
41 ALLIGATOR CR M 50.00 SqFt
48 L & T CR L 249.00 Ft
48 L & T CR M 40.00 Ft
52 RAVELING L 490.00 SqFt
57 WEATHERING L 4410.00 SqFt

Sample Number: 31 **Type:** R **Area:** 5000.00 SqFt **PCI:** 69

Sample Comments:

48 L & T CR L 206.00 Ft
48 L & T CR M 104.00 Ft
52 RAVELING L 500.00 SqFt
57 WEATHERING L 4500.00 SqFt

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	TW	Name:	Taxiway	Use:	TAXIWAY	Area:	868,891 SqFt		
Section:	08	of	12	From:	RW 7-25	To:	parallel TW & terminal	Last Const.:	8/17/1999
Surface:	AC	Family:	_MDT2024 - TW AC	Zone:		Category:	D	Rank:	P
Area:	49,338 SqFt	Length:	1,296 Ft	Width:	35 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACM	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	8/17/1999	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R:	True	
Last Insp. Date:	10/10/2024	TotalSamples:	13	Surveyed:	4				
Conditions:	PCI: 45								
Inspection Comments:									
Sample Number:	03	Type:	R	Area:	5040.00 SqFt	PCI:	62		
Sample Comments:									
42	BLEEDING	N	4.00	SqFt					
45	DEPRESSION	L	22.00	SqFt					
48	L & T CR	L	395.00	Ft					
48	L & T CR	M	81.00	Ft					
57	WEATHERING	L	4536.00	SqFt					
57	WEATHERING	M	504.00	SqFt					
Sample Number:	04	Type:	R	Area:	5040.00 SqFt	PCI:	38		
Sample Comments:									
41	ALLIGATOR CR	L	170.00	SqFt					
45	DEPRESSION	L	16.00	SqFt					
48	L & T CR	L	709.00	Ft					
48	L & T CR	M	42.00	Ft					
53	RUTTING	L	240.00	SqFt					
57	WEATHERING	L	4788.00	SqFt					
57	WEATHERING	M	252.00	SqFt					
Sample Number:	07	Type:	R	Area:	5040.00 SqFt	PCI:	42		
Sample Comments:									
41	ALLIGATOR CR	L	108.00	SqFt					
45	DEPRESSION	L	125.00	SqFt					
48	L & T CR	L	541.00	Ft					
48	L & T CR	M	95.00	Ft					
52	RAVELING	L	504.00	SqFt					
53	RUTTING	L	80.00	SqFt					
57	WEATHERING	L	4536.00	SqFt					
Sample Number:	12	Type:	R	Area:	5040.00 SqFt	PCI:	37		
Sample Comments:									
41	ALLIGATOR CR	L	192.00	SqFt					
41	ALLIGATOR CR	M	16.00	SqFt					
48	L & T CR	L	214.00	Ft					
48	L & T CR	M	45.00	Ft					
53	RUTTING	L	144.00	SqFt					
57	WEATHERING	L	3780.00	SqFt					
57	WEATHERING	M	1260.00	SqFt					

Network: LWT **Name:** Lewistown Municipal Airport

Branch: TW **Name:** Taxiway **Use:** TAXIWAY **Area:** 868,891 SqFt

Section: 09 of 12 **From:** A-3 **To:** HANGARS **Last Const.:** 8/1/1980

Surface: AC **Family:** _MDT2024 - TW AC **Zone:** **Category:** D **Rank:** P

Area: 70,000 SqFt **Length:** 1,750 Ft **Width:** 40 Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** ACM **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 8/1/1980 **Work Type:** New Construction - Initial **Code:** NU-IN **Is Major M&R:** True

Last Insp. Date: 10/10/2024 **TotalSamples:** 2 **Surveyed:** 1

Conditions: PCI: 20

Inspection Comments:

Sample Number: 01 **Type:** R **Area:** 6034.00 SqFt **PCI:** 20

Sample Comments:

42	BLEEDING	N	3620.00	SqFt
45	DEPRESSION	L	15.00	SqFt
48	L & T CR	L	100.00	Ft
48	L & T CR	M	25.00	Ft
57	WEATHERING	L	5129.00	SqFt
57	WEATHERING	M	905.00	SqFt

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	TW	Name:	Taxiway	Use:	TAXIWAY	Area:	868,891 SqFt		
Section:	10	of	12	From:	T-5	To:	HANGARS	Last Const.:	9/28/2005
Surface:	AC	Family:	_MDT2024 - TW AC	Zone:		Category:	D	Rank:	P
Area:	17,814 SqFt	Length:	444 Ft	Width:	35 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACM	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	9/28/2005	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R:	True	
Last Insp. Date:	10/10/2024	TotalSamples:	3		Surveyed:	3			
Conditions:	PCI: 58								
Inspection Comments:									
Sample Number:	01	Type:	R	Area:	5180.00 SqFt	PCI:	63		
Sample Comments:									
41	ALLIGATOR CR	L	10.00	SqFt					
48	L & T CR	L	255.00	Ft					
48	L & T CR	M	148.00	Ft					
57	WEATHERING	L	4921.00	SqFt					
57	WEATHERING	M	259.00	SqFt					
Sample Number:	02	Type:	R	Area:	4620.00 SqFt	PCI:	56		
Sample Comments:									
41	ALLIGATOR CR	L	30.00	SqFt					
41	ALLIGATOR CR	M	15.00	SqFt					
45	DEPRESSION	L	8.00	SqFt					
48	L & T CR	L	351.00	Ft					
48	L & T CR	M	129.00	Ft					
57	WEATHERING	L	4389.00	SqFt					
57	WEATHERING	M	231.00	SqFt					
Sample Number:	03	Type:	R	Area:	5740.00 SqFt	PCI:	55		
Sample Comments:									
41	ALLIGATOR CR	L	8.00	SqFt					
41	ALLIGATOR CR	M	30.00	SqFt					
45	DEPRESSION	L	6.00	SqFt					
48	L & T CR	L	458.00	Ft					
48	L & T CR	M	150.00	Ft					
57	WEATHERING	L	5453.00	SqFt					
57	WEATHERING	M	287.00	SqFt					

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	TW	Name:	Taxiway	Use:	TAXIWAY	Area:	868,891 SqFt		
Section:	11	of	12	From:	TAXIWAY T-1	To:	TAXIWAY T-9	Last Const.:	8/1/2006
Surface:	AC	Family:	_MDT2024 - TW AC	Zone:	LEWI	Category:	D	Rank:	P
Area:	36,781 SqFt	Length:	585 Ft	Width:	35 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACM	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	8/1/2006	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R:	True	
Last Insp. Date:	10/10/2024	TotalSamples:	8		Surveyed:	3			
Conditions:	PCI:	71							
Inspection Comments:									
Sample Number:	02	Type:	R	Area:	4235.00 SqFt	PCI:	75		
Sample Comments:									
48	L & T CR	L	89.00	Ft					
57	WEATHERING	M	4235.00	SqFt					
Sample Number:	06	Type:	R	Area:	4714.00 SqFt	PCI:	70		
Sample Comments:									
48	L & T CR	L	156.00	Ft					
48	L & T CR	M	15.00	Ft					
57	WEATHERING	M	4714.00	SqFt					
Sample Number:	08	Type:	R	Area:	4377.00 SqFt	PCI:	68		
Sample Comments:									
45	DEPRESSION	L	12.00	SqFt					
48	L & T CR	L	280.00	Ft					
48	L & T CR	M	55.00	Ft					
57	WEATHERING	M	4377.00	SqFt					

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	TW	Name:	Taxiway	Use:	TAXIWAY	Area:	868,891 SqFt		
Section:	12	of	12	From:	-	To:	-	Last Const.:	7/1/2019
Surface:	AC	Family:	_MDT2024 - TW AC	Zone:		Category:		Rank:	P
Area:	70,000 SqFt	Length:	4,221 Ft	Width:	50 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:		Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	8/1/1980	Work Type:	New Construction - AC		Code:	NC-AC	Is Major M&R:	True	
Work Date:	7/1/2019	Work Type:	Complete Reconstruction - AC		Code:	CR-AC	Is Major M&R:	True	
Last Insp. Date:	10/10/2024	TotalSamples:	17	Surveyed:	5				
Conditions:	PCI: 89								
Inspection Comments:									
Sample Number:	01	Type:	R	Area:	5000.00 SqFt	PCI:	89		
Sample Comments:									
48	L & T CR	L	70.00	Ft					
57	WEATHERING	L	5000.00	SqFt					
Sample Number:	03	Type:	R	Area:	3735.00 SqFt	PCI:	88		
Sample Comments:									
48	L & T CR	L	68.00	Ft					
57	WEATHERING	L	3735.00	SqFt					
Sample Number:	10	Type:	R	Area:	5171.00 SqFt	PCI:	94		
Sample Comments:									
57	WEATHERING	L	5171.00	SqFt					
Sample Number:	11	Type:	R	Area:	4980.00 SqFt	PCI:	88		
Sample Comments:									
48	L & T CR	L	95.00	Ft					
57	WEATHERING	L	4980.00	SqFt					
Sample Number:	15	Type:	R	Area:	4823.00 SqFt	PCI:	87		
Sample Comments:									
48	L & T CR	L	106.00	Ft					
57	WEATHERING	L	4823.00	SqFt					

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	TW	Name:	Taxiway	Use:	TAXIWAY	Area:	868,891 SqFt		
Section:	13	of	12	From:	-	To:	-	Last Const.:	1/1/2024
Surface:	AAC	Family:	_MDT2024 - TW AAC	Zone:	LEWI	Category:	H	Rank:	P
Area:	96,746 SqFt	Length:	1,500 Ft	Width:	65 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACH	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	9/30/1993	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R:	True	
Work Date:	1/1/2024	Work Type:	Mill and Overlay		Code:	ML-OL	Is Major M&R:	True	
Last Insp. Date:	8/23/2021	Total Samples:	67	Surveyed:	6				
Conditions:	PCI: 65	NOTE: *** Pre-Construction PCI ***							
Inspection Comments:									
Sample Number:	02	Type:	R	Area:	4875.00 SqFt	PCI:	62		
Sample Comments:									
41	ALLIGATOR CR	L		39.00	SqFt				
48	L & T CR	L		475.00	Ft				
57	WEATHERING	L		2437.00	SqFt				
57	WEATHERING	M		2438.00	SqFt				
Sample Number:	14	Type:	R	Area:	4875.00 SqFt	PCI:	75		
Sample Comments:									
48	L & T CR	L		312.00	Ft				
57	WEATHERING	M		4875.00	SqFt				
Sample Number:	26	Type:	R	Area:	4875.00 SqFt	PCI:	69		
Sample Comments:									
48	L & T CR	L		422.00	Ft				
48	L & T CR	M		25.00	Ft				
57	WEATHERING	M		4875.00	SqFt				
Sample Number:	38	Type:	R	Area:	4875.00 SqFt	PCI:	60		
Sample Comments:									
48	L & T CR	L		272.00	Ft				
48	L & T CR	M		50.00	Ft				
50	PATCHING	L		1620.00	SqFt				
57	WEATHERING	M		3255.00	SqFt				
Sample Number:	50	Type:	R	Area:	4875.00 SqFt	PCI:	64		
Sample Comments:									
48	L & T CR	L		520.00	Ft				
48	L & T CR	M		100.00	Ft				
57	WEATHERING	M		4875.00	SqFt				
Sample Number:	62	Type:	R	Area:	4875.00 SqFt	PCI:	63		
Sample Comments:									
48	L & T CR	L		567.00	Ft				
48	L & T CR	M		100.00	Ft				
57	WEATHERING	M		4875.00	SqFt				

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	TW	Name:	Taxiway	Use:	TAXIWAY	Area:	868,891 SqFt		
Section:	14	of	12	From:	-	To:	-	Last Const.:	1/1/2024
Surface:	AAC	Family:	_MDT2024 - TW AAC	Zone:	LEWI	Category:	G	Rank:	P
Area:	9,533 SqFt	Length:	250 Ft	Width:	35 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACH	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	7/31/1989	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R:	True	
Work Date:	1/1/2024	Work Type:	Mill and Overlay		Code:	ML-OL	Is Major M&R:	True	
Last Insp. Date:	8/23/2021	Total Samples:	18	Surveyed:	5				
Conditions:	PCI: 56	NOTE: *** Pre-Construction PCI ***							
Inspection Comments:									
Sample Number:	01	Type:	R	Area:	4900.00 SqFt	PCI:	24		
Sample Comments:									
42	BLEEDING	N		1540.00	SqFt				
45	DEPRESSION	M		16.00	SqFt				
48	L & T CR	L		250.00	Ft				
52	RAVELING	H		10.00	SqFt				
57	WEATHERING	M		4890.00	SqFt				
Sample Number:	05	Type:	R	Area:	4900.00 SqFt	PCI:	61		
Sample Comments:									
48	L & T CR	L		690.00	Ft				
48	L & T CR	M		100.00	Ft				
57	WEATHERING	M		4900.00	SqFt				
Sample Number:	09	Type:	R	Area:	4900.00 SqFt	PCI:	73		
Sample Comments:									
48	L & T CR	L		461.00	Ft				
57	WEATHERING	M		4900.00	SqFt				
Sample Number:	13	Type:	R	Area:	4900.00 SqFt	PCI:	62		
Sample Comments:									
42	BLEEDING	N		36.00	SqFt				
48	L & T CR	L		730.00	Ft				
57	WEATHERING	M		4900.00	SqFt				
Sample Number:	17	Type:	R	Area:	4900.00 SqFt	PCI:	60		
Sample Comments:									
42	BLEEDING	N		40.00	SqFt				
45	DEPRESSION	L		4.00	SqFt				
48	L & T CR	L		564.00	Ft				
57	WEATHERING	L		2450.00	SqFt				
57	WEATHERING	M		2450.00	SqFt				

Network:	LWT	Name:	Lewistown Municipal Airport						
Branch:	TW	Name:	Taxiway	Use:	TAXIWAY	Area:	868,891 SqFt		
Section:	15	of	12	From:	-	To:	-	Last Const.:	1/1/2024
Surface:	AAC	Family:	_MDT2024 - TW AAC	Zone:		Category:	D	Rank:	P
Area:	23,857 SqFt	Length:	600 Ft	Width:	35 Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:	ACM	Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	8/20/1999	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R:	True	
Work Date:	1/1/2024	Work Type:	Mill and Overlay		Code:	ML-OL	Is Major M&R:	True	
Last Insp. Date:	8/23/2021	Total Samples:	37	Surveyed:	6				
Conditions:	PCI: 64	NOTE: *** Pre-Construction PCI ***							
Inspection Comments:									
Sample Number:	03	Type:	R	Area:	4900.00 SqFt	PCI:	58		
Sample Comments:									
41	ALLIGATOR CR	L	32.00	SqFt					
48	L & T CR	L	310.00	Ft					
48	L & T CR	M	68.00	Ft					
53	RUTTING	L	65.00	SqFt					
57	WEATHERING	L	4410.00	SqFt					
57	WEATHERING	M	490.00	SqFt					
Sample Number:	11	Type:	R	Area:	4900.00 SqFt	PCI:	66		
Sample Comments:									
41	ALLIGATOR CR	L	18.00	SqFt					
48	L & T CR	L	223.00	Ft					
48	L & T CR	M	75.00	Ft					
52	RAVELING	L	490.00	SqFt					
57	WEATHERING	L	4410.00	SqFt					
Sample Number:	19	Type:	R	Area:	4900.00 SqFt	PCI:	66		
Sample Comments:									
48	L & T CR	L	364.00	Ft					
48	L & T CR	M	48.00	Ft					
52	RAVELING	L	490.00	SqFt					
57	WEATHERING	L	4410.00	SqFt					
Sample Number:	27	Type:	R	Area:	4900.00 SqFt	PCI:	58		
Sample Comments:									
41	ALLIGATOR CR	L	10.00	SqFt					
48	L & T CR	L	436.00	Ft					
48	L & T CR	M	100.00	Ft					
52	RAVELING	L	490.00	SqFt					
57	WEATHERING	L	4410.00	SqFt					
Sample Number:	31	Type:	R	Area:	5000.00 SqFt	PCI:	69		
Sample Comments:									
48	L & T CR	L	289.00	Ft					
48	L & T CR	M	75.00	Ft					
52	RAVELING	L	500.00	SqFt					
57	WEATHERING	L	4500.00	SqFt					
Sample Number:	35	Type:	R	Area:	4900.00 SqFt	PCI:	70		
Sample Comments:									
48	L & T CR	L	253.00	Ft					
48	L & T CR	M	75.00	Ft					
52	RAVELING	L	490.00	SqFt					
57	WEATHERING	L	4410.00	SqFt					

Network: LWT **Name:** Lewistown Municipal Airport

Branch: TW **Name:** Taxiway **Use:** TAXIWAY **Area:** 868,891 SqFt

Section: 88 of 12 **From:** RW 7-25 **To:** parallel TW & terminal **Last Const.:** 8/17/1999

Surface: AC **Family:** _MDT2024 - TW AC **Zone:** **Category:** D **Rank:** P

Area: 3,150 SqFt **Length:** 90 Ft **Width:** 35 Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** ACM **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 8/17/1999 **Work Type:** New Construction - Initial **Code:** NU-IN **Is Major M&R:** True

Last Insp. Date: 10/10/2024 **TotalSamples:** 1 **Surveyed:** 1

Conditions: PCI: 17

Inspection Comments:

Sample Number: 01 **Type:** R **Area:** 5000.00 SqFt **PCI:** 17

Sample Comments:

41	ALLIGATOR CR	L	402.00	SqFt
41	ALLIGATOR CR	M	804.00	SqFt
50	PATCHING	L	88.00	SqFt
53	RUTTING	L	150.00	SqFt
57	WEATHERING	L	3684.00	SqFt
57	WEATHERING	M	1228.00	SqFt