


This document, together with the concepts and designs presented herein, is intended only for the specific purpose and client for which it was prepared. Reuse of and improper reliance on this document without written authorization and adaptation by Kinney-Horn and Associates, Inc. will be without liability to Kinney-Horn and Associates, Inc.

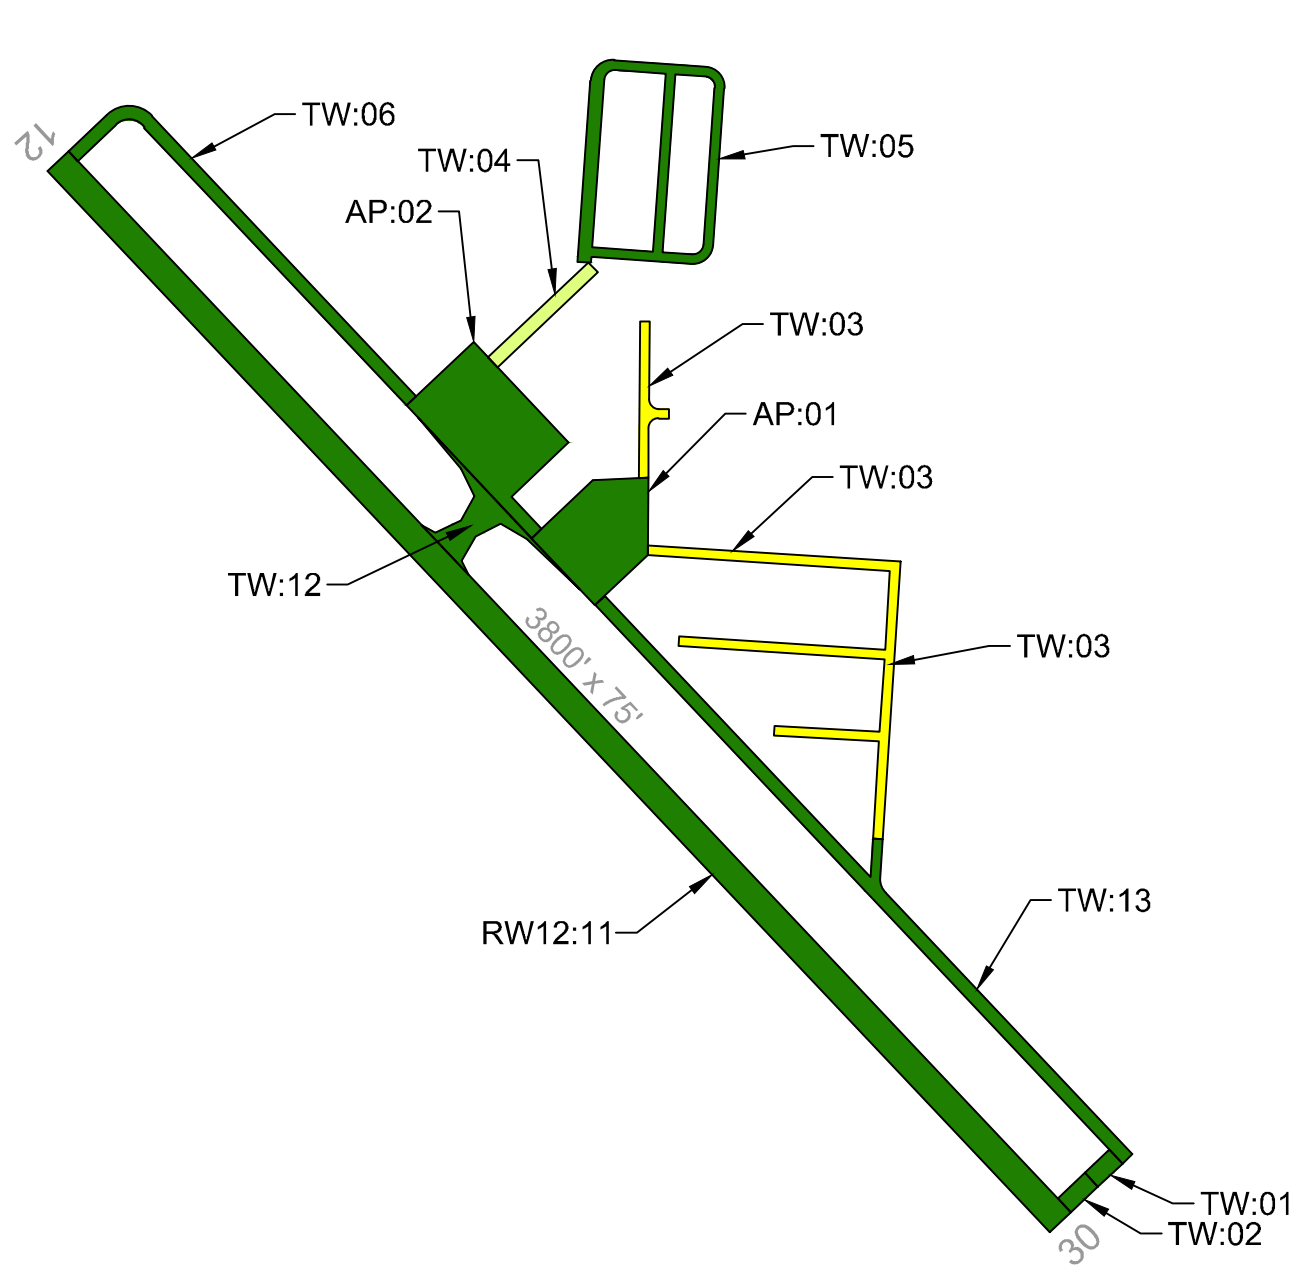

LEGEND

BRANCH IDENTIFIER	
RW01:10	SECTION IDENTIFIER
—	SECTION BOUNDARY
	PCI 86-100 GOOD
	PCI 71-85 SATISFACTORY
	PCI 56-70 FAIR
	PCI 41-55 POOR
	PCI 26-40 VERY POOR
	PCI 11-25 SERIOUS
	PCI 0-10 FAILED

CURRENT 2021 PAVEMENT CONDITION INDEX

Branch ID	Section ID	Branch Name	Surface Type	Section Area (SF)	Approx. Age at Inspection	Last Major Work Date	Last Inspection Date	Pavement Condition Index	PCI Category
AP	01	Apron	AC	70,000	0.9	1/1/2021	1/1/2021	100	Good
AP	02	Apron	AC	90,425	0.9	1/1/2021	1/1/2021	100	Good
RW12	11	Runway 12-30	AC	228,000	4.1	11/1/2017	9/8/2021	90	Good
TW	01	Taxiway	AC	4,400	0.9	1/1/2021	1/1/2021	100	Good
TW	02	Taxiway	AC	4,850	4	11/11/2017	9/8/2021	90	Good
TW	03	Taxiway	AC	66,018	27.5	6/1/1994	9/8/2021	57	Fair
TW	04	Taxiway	AC	12,600	18.3	8/1/2003	9/8/2021	78	Satisfactory
TW	05	Taxiway	AC	71,505	8.2	9/1/2013	9/8/2021	89	Good
TW	06	Taxiway	AC	51,886	4.1	11/1/2017	9/8/2021	93	Good
TW	12	Taxiway	AC	20,783	0.9	1/1/2021	1/1/2021	100	Good
TW	13	Taxiway	AC	72,839	0.9	1/1/2021	1/1/2021	100	Good

AIRFIELD PAVEMENT WORK HISTORY

- ADAP-03, 1981, ORIGINAL CONSTRUCTION
SUBGRADE IS CEMENTED SILTY GRAVEL AND HARD PAN.
- AIP-001, OVERLAY RUNWAY, APRON, AND TAXIWAY.
- AIP-002-1994, CONSTRUCT PARTIAL PARALLEL TAXIWAY (TW:03); CONSTRUCT ACCESS TAXIWAY (TW:03); EXPAND APRON (AP:02).
- AIP-004-2003, CONSTRUCT TAXIWAY (TW:04); CRACK SEAL, FOG SEAL, AND REMARK REMAINING PAVEMENTS.
- AIP-009-2011, CRACK SEAL, FOG SEAL, AND REMARK ALL PAVEMENTS.
- AIP-010-2013, CONSTRUCT TAXIWAYS (TW:05).
- AIP-012-2015, RECONSTRUCT AND WIDEN RUNWAY 12-30 (RW12:11); CONSTRUCT PARALLEL TAXIWAY (TW:06).
- AIP-015-2019, RECONSTRUCT TAXIWAYS (TW:01, TW:13) AND APRONS (AP:01, AP:02); CONSTRUCT MIDFIELD TAXIWAY (TW:12)



Runway



RW12-11-17: L&T Cracking



RW12-11-35: Weathering

Taxiway



TW03-20: Alligator Cracking



TW04-02: Depression



TW05-01: L&T Cracking



TW06-09: Weathering

Re-Inspection Report

MDT SASP 2021

Generated Date 12/15/2021

Network:	32S	Name:	Stevensville Airport		
Branch:	AP	Name:	Apron	Use:	APRON
				Area:	160,425SqFt
Section:	01	of 2	From:	ENTIRE APRON	To:
					Last Const.: 1/1/2021
Surface:	AC	Family:	DEFAULT	Zone:	STEV
				Category:	D
Area:	70,000SqFt	Length:	1,400Ft	Width:	50Ft
Slabs:		Slab Length:	Ft	Slab Width:	Ft
				Joint Length:	Ft
Shoulder:		Street Type:	STA	Grade:	0
				Lanes:	0

Section Comments:

Work Date: 9/30/1991	Work Type: New Construction - Initial	Code: NU-IN	Is Major M&R: True
-----------------------------	--	--------------------	-------------------------------

Work Date: 1/1/2021	Work Type: Complete Reconstruction - AC	Code: CR-AC	Is Major M&R: True
----------------------------	--	--------------------	-------------------------------

Last Insp. Date: 10/22/2018	TotalSamples: 13	Surveyed: 5
------------------------------------	-------------------------	--------------------

Conditions: PCI: 57 **NOTE: *** Pre-Construction PCI *****

Inspection Comments:

Sample Number: 003	Type: R	Area: 4800.00SqFt	PCI: 61
---------------------------	----------------	--------------------------	----------------

Sample Comments:

42	BLEEDING	N	105.00 SqFt
45	DEPRESSION	L	45.00 SqFt
45	DEPRESSION	H	1.50 SqFt
48	L & T CR	L	89.00 Ft
50	PATCHING	L	15.70 SqFt
52	RAVELING	L	345.00 SqFt
57	WEATHERING	L	4800.00 SqFt

Sample Number: 006	Type: R	Area: 4800.00SqFt	PCI: 54
---------------------------	----------------	--------------------------	----------------

Sample Comments:

42	BLEEDING	N	240.00 SqFt
45	DEPRESSION	H	4.50 SqFt
48	L & T CR	L	65.00 Ft
50	PATCHING	L	6.00 SqFt
52	RAVELING	L	1439.10 SqFt
57	WEATHERING	L	4800.00 SqFt

Sample Number: 007	Type: R	Area: 4800.00SqFt	PCI: 59
---------------------------	----------------	--------------------------	----------------

Sample Comments:

42	BLEEDING	N	188.00 SqFt
45	DEPRESSION	L	8.00 SqFt
45	DEPRESSION	H	7.50 SqFt
48	L & T CR	L	88.00 Ft
52	RAVELING	L	1860.00 SqFt
57	WEATHERING	L	4800.00 SqFt

Sample Number: 010	Type: R	Area: 4800.00SqFt	PCI: 55
---------------------------	----------------	--------------------------	----------------

Sample Comments:

42	BLEEDING	N	252.00 SqFt
45	DEPRESSION	H	4.50 SqFt
48	L & T CR	L	74.00 Ft
52	RAVELING	L	2700.00 SqFt
57	WEATHERING	L	4800.00 SqFt

Sample Number: 014	Type: R	Area: 4800.00SqFt	PCI: 55
---------------------------	----------------	--------------------------	----------------

Sample Comments:

42	BLEEDING	N	163.00 SqFt
42	BLEEDING	N	163.00 SqFt
45	DEPRESSION	L	200.00 SqFt
48	L & T CR	L	104.00 Ft
57	WEATHERING	L	4800.00 SqFt

Network: 32S **Name:** Stevensville Airport

Branch: AP **Name:** Apron **Use:** APRON **Area:** 160,425SqFt

Section: 02 of 2 **From:** NORTH APRON **To:** **Last Const.:** 1/1/2021

Surface: AC **Family:** DEFAULT **Zone:** STEV **Category:** D **Rank:** P

Area: 90,425SqFt **Length:** 360Ft **Width:** 240Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** ACN **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 6/1/1994 **Work Type:** New Construction - Initial **Code:** NU-IN **Is Major M&R:** True

Work Date: 1/1/2021 **Work Type:** Complete Reconstruction - AC **Code:** CR-AC **Is Major M&R:** True

Last Insp. Date: 10/22/2018 **TotalSamples:** 19 **Surveyed:** 5

Conditions: PCI: 43 **NOTE: *** Pre-Construction PCI *****

Inspection Comments:

Sample Number: 004 **Type:** R **Area:** 4800.00SqFt **PCI:** 34

Sample Comments:

41 ALLIGATOR CR L 400.00 SqFt
45 DEPRESSION L 97.70 SqFt
48 L & T CR L 65.00 Ft
48 L & T CR M 186.00 Ft
50 PATCHING H 2.40 SqFt
52 RAVELING L 396.00 SqFt
57 WEATHERING L 4800.00 SqFt

Sample Number: 008 **Type:** R **Area:** 4800.00SqFt **PCI:** 60

Sample Comments:

48 L & T CR L 76.00 Ft
48 L & T CR M 148.00 Ft
50 PATCHING L .09 SqFt
50 PATCHING M 3.90 SqFt
50 PATCHING H 1.80 SqFt
52 RAVELING L 1840.00 SqFt
57 WEATHERING L 4800.00 SqFt

Sample Number: 012 **Type:** R **Area:** 4800.00SqFt **PCI:** 19

Sample Comments:

41 ALLIGATOR CR M 840.00 SqFt
45 DEPRESSION L 48.70 SqFt
48 L & T CR L 268.00 Ft
48 L & T CR M 146.00 Ft
57 WEATHERING L 4800.00 SqFt

Sample Number: 016 **Type:** R **Area:** 4800.00SqFt **PCI:** 57

Sample Comments:

45 DEPRESSION L 33.70 SqFt
48 L & T CR L 18.00 Ft
48 L & T CR M 187.00 Ft
50 PATCHING M 4.70 SqFt
52 RAVELING L 2200.00 SqFt
57 WEATHERING L 4800.00 SqFt

Sample Number: 019 **Type:** R **Area:** 4800.00SqFt **PCI:** 47

Sample Comments:

41 ALLIGATOR CR M 60.00 SqFt
45 DEPRESSION L 16.00 SqFt
48 L & T CR L 58.00 Ft
48 L & T CR M 148.00 Ft
48 L & T CR H 2.00 Ft
50 PATCHING H 1.80 SqFt
57 WEATHERING L 4800.00 SqFt

Network:	32S	Name:	Stevensville Airport						
Branch:	RW12	Name:	Runway 12-30	Use:	RUNWAY	Area:	228,000SqFt		
Section:	11	of	1	From:	T-1	To:	T-6	Last Const.:	11/1/2017
Surface:	AC	Family:	DEFAULT	Zone:		Category:		Rank:	P
Area:	228,000SqFt	Length:	3,800Ft	Width:	60Ft				
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft		
Shoulder:		Street Type:		Grade:	0	Lanes:	0		
Section Comments:									
Work Date:	11/1/2017	Work Type:	New Construction - AC		Code:	NC-AC	Is Major M&R:	True	
Last Insp. Date:	9/8/2021	TotalSamples:	48	Surveyed:	7				
Conditions:	PCI: 90								
Inspection Comments:									
Sample Number:	05	Type:	R	Area:	4800.00SqFt	PCI:	90		
Sample Comments:									
48	L & T CR	L	23.00 Ft						
57	WEATHERING	L	4800.00 SqFt						
Sample Number:	10	Type:	R	Area:	4800.00SqFt	PCI:	90		
Sample Comments:									
48	L & T CR	L	33.00 Ft						
57	WEATHERING	L	4800.00 SqFt						
Sample Number:	17	Type:	R	Area:	4800.00SqFt	PCI:	89		
Sample Comments:									
48	L & T CR	L	38.00 Ft						
57	WEATHERING	L	4800.00 SqFt						
Sample Number:	23	Type:	R	Area:	4800.00SqFt	PCI:	91		
Sample Comments:									
48	L & T CR	L	7.00 Ft						
57	WEATHERING	L	4800.00 SqFt						
Sample Number:	29	Type:	R	Area:	4800.00SqFt	PCI:	90		
Sample Comments:									
48	L & T CR	L	20.00 Ft						
57	WEATHERING	L	4800.00 SqFt						
Sample Number:	35	Type:	R	Area:	4800.00SqFt	PCI:	90		
Sample Comments:									
48	L & T CR	L	17.00 Ft						
57	WEATHERING	L	4800.00 SqFt						
Sample Number:	41	Type:	R	Area:	4800.00SqFt	PCI:	92		
Sample Comments:									
48	L & T CR	L	2.00 Ft						
57	WEATHERING	L	4800.00 SqFt						

Network: 32S **Name:** Stevensville Airport

Branch: TW **Name:** Taxiway **Use:** TAXIWAY **Area:** 304,881SqFt

Section: 01 of 8 **From:** Runway **To:** Apron, Turnarounds **Last Const.:** 1/1/2021

Surface: AC **Family:** DEFAULT **Zone:** STEV **Category:** D **Rank:** P

Area: 4,400SqFt **Length:** 88Ft **Width:** 35Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** STA **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 9/30/1991 **Work Type:** New Construction - Initial **Code:** NU-IN **Is Major M&R:** True

Work Date: 1/1/2021 **Work Type:** Complete Reconstruction - AC **Code:** CR-AC **Is Major M&R:** True

Last Insp. Date: 10/22/2018 **TotalSamples:** 2 **Surveyed:** 2

Conditions: PCI: 77 **NOTE: *** Pre-Construction PCI *****

Inspection Comments:

Sample Number: 001 **Type:** R **Area:** 4800.00SqFt **PCI:** 73

Sample Comments:

41 ALLIGATOR CR L 12.00 SqFt

48 L & T CR L 65.00 Ft

48 L & T CR M 35.00 Ft

50 PATCHING L .09 SqFt

57 WEATHERING L 4800.00 SqFt

Sample Number: 002 **Type:** R **Area:** 4800.00SqFt **PCI:** 80

Sample Comments:

48 L & T CR L 53.00 Ft

48 L & T CR M 37.00 Ft

57 WEATHERING L 4800.00 SqFt

Network: 32S **Name:** Stevensville Airport

Branch: TW **Name:** Taxiway **Use:** TAXIWAY **Area:** 304,881SqFt

Section: 02 of 8 **From:** - **To:** - **Last Const.:** 11/11/2017

Surface: AC **Family:** DEFAULT **Zone:** **Category:** **Rank:** P

Area: 4,850SqFt **Length:** 97Ft **Width:** 50Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 11/11/2017 **Work Type:** New Construction - AC **Code:** NC-AC **Is Major M&R:** True

Last Insp. Date: 9/8/2021 **TotalSamples:** 1 **Surveyed:** 1

Conditions: PCI: 90

Inspection Comments:

Sample Number: 01 **Type:** R **Area:** 4850.00SqFt **PCI:** 90

Sample Comments:

48 L & T CR L 18.00 Ft

57 WEATHERING L 4832.00 SqFt

Network: 32S **Name:** Stevensville Airport

Branch: TW **Name:** Taxiway **Use:** TAXIWAY **Area:** 304,881SqFt

Section: 03 of 8 **From:** T-1 **To:** A-1 **Last Const.:** 6/1/1994

Surface: AC **Family:** DEFAULT **Zone:** STEV **Category:** D **Rank:** P

Area: 66,018SqFt **Length:** 1,945Ft **Width:** 35Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** ACM **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 6/1/1994 **Work Type:** New Construction - Initial **Code:** NU-IN **Is Major M&R:** True

Last Insp. Date: 9/8/2021 **TotalSamples:** 26 **Surveyed:** 3

Conditions: PCI: 57

Inspection Comments:

Sample Number: 20 **Type:** R **Area:** 5250.00SqFt **PCI:** 46

Sample Comments:

41	ALLIGATOR CR	L	132.00 SqFt
48	L & T CR	L	424.00 Ft
48	L & T CR	M	187.00 Ft
52	RAVELING	L	262.00 SqFt
57	WEATHERING	L	4463.00 SqFt
57	WEATHERING	M	525.00 SqFt

Sample Number: 23 **Type:** R **Area:** 5250.00SqFt **PCI:** 62

Sample Comments:

45	DEPRESSION	L	35.00 SqFt
48	L & T CR	L	87.00 Ft
48	L & T CR	M	74.00 Ft
52	RAVELING	L	262.00 SqFt
57	WEATHERING	L	4463.00 SqFt
57	WEATHERING	M	525.00 SqFt

Sample Number: 25 **Type:** R **Area:** 6450.00SqFt **PCI:** 63

Sample Comments:

48	L & T CR	L	176.00 Ft
48	L & T CR	M	252.00 Ft
57	WEATHERING	L	5482.00 SqFt
57	WEATHERING	M	968.00 SqFt

Network: 32S **Name:** Stevensville Airport

Branch: TW **Name:** Taxiway **Use:** TAXIWAY **Area:** 304,881SqFt

Section: 04 of 8 **From:** NORTHWEST TAXIWAY **To:** OFF A-2 **Last Const.:** 8/1/2003

Surface: AC **Family:** DEFAULT **Zone:** STEV **Category:** D **Rank:** P

Area: 12,600SqFt **Length:** 360Ft **Width:** 35Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** ACM **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 8/1/2003 **Work Type:** New Construction - Initial **Code:** NU-IN **Is Major M&R:** True

Last Insp. Date: 9/8/2021 **TotalSamples:** 3 **Surveyed:** 3

Conditions: PCI: 78

Inspection Comments:

Sample Number: 01 **Type:** R **Area:** 4200.00SqFt **PCI:** 80

Sample Comments:

45 DEPRESSION L 8.00 SqFt

48 L & T CR L 34.00 Ft

57 WEATHERING L 3150.00 SqFt

57 WEATHERING M 1050.00 SqFt

Sample Number: 02 **Type:** R **Area:** 4200.00SqFt **PCI:** 77

Sample Comments:

45 DEPRESSION L 44.00 SqFt

48 L & T CR L 3.00 Ft

57 WEATHERING L 3150.00 SqFt

57 WEATHERING M 1050.00 SqFt

Sample Number: 03 **Type:** R **Area:** 4200.00SqFt **PCI:** 76

Sample Comments:

48 L & T CR L 37.00 Ft

48 L & T CR M 28.00 Ft

57 WEATHERING L 3360.00 SqFt

57 WEATHERING M 840.00 SqFt

Network:	32S	Name:	Stevensville Airport				
Branch:	TW	Name:	Taxiway	Use:	TAXIWAY	Area:	304,881SqFt
Section:	05	of 8	From:	Apron	To:	Hangars	Last Const.: 9/1/2013
Surface:	AC	Family:	DEFAULT	Zone:		Category:	Rank: P
Area:	71,505SqFt	Length:	2,043Ft	Width:	35Ft		
Slabs:		Slab Length:	Ft	Slab Width:	Ft	Joint Length:	Ft
Shoulder:		Street Type:	ACM	Grade:	0	Lanes:	0
Section Comments:							
Work Date:	9/1/2013	Work Type:	New Construction - Initial		Code:	NU-IN	Is Major M&R: True
Last Insp. Date:	9/8/2021	TotalSamples:	13	Surveyed:	4		
Conditions:	PCI: 89						
Inspection Comments:							
Sample Number:	01	Type:	R	Area:	4200.00SqFt	PCI:	86
Sample Comments:							
48	L & T CR	L	19.00 Ft				
48	L & T CR	M	4.00 Ft				
57	WEATHERING	L	4200.00 SqFt				
Sample Number:	05	Type:	R	Area:	4575.00SqFt	PCI:	91
Sample Comments:							
48	L & T CR	L	11.00 Ft				
57	WEATHERING	L	4575.00 SqFt				
Sample Number:	09	Type:	R	Area:	4575.00SqFt	PCI:	90
Sample Comments:							
48	L & T CR	L	18.00 Ft				
57	WEATHERING	L	4575.00 SqFt				
Sample Number:	11	Type:	R	Area:	3875.00SqFt	PCI:	89
Sample Comments:							
48	L & T CR	L	32.00 Ft				
57	WEATHERING	L	3875.00 SqFt				

Network: 32S **Name:** Stevensville Airport

Branch: TW **Name:** Taxiway **Use:** TAXIWAY **Area:** 304,881SqFt

Section: 06 of 8 **From:** R-11 **To:** A-2 **Last Const.:** 11/1/2017

Surface: AC **Family:** DEFAULT **Zone:** **Category:** **Rank:** P

Area: 51,886SqFt **Length:** 1,277Ft **Width:** 25Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 11/1/2017 **Work Type:** New Construction - AC **Code:** NC-AC **Is Major M&R:** True

Last Insp. Date: 9/8/2021 **TotalSamples:** 9 **Surveyed:** 4

Conditions: PCI: 93

Inspection Comments:

Sample Number: 01 **Type:** R **Area:** 4970.00SqFt **PCI:** 91

Sample Comments:

48 L & T CR L 12.00 Ft

57 WEATHERING L 4970.00 SqFt

Sample Number: 03 **Type:** R **Area:** 4970.00SqFt **PCI:** 94

Sample Comments:

57 WEATHERING L 4970.00 SqFt

Sample Number: 07 **Type:** R **Area:** 4970.00SqFt **PCI:** 92

Sample Comments:

48 L & T CR L 4.00 Ft

57 WEATHERING L 4970.00 SqFt

Sample Number: 09 **Type:** R **Area:** 4970.00SqFt **PCI:** 94

Sample Comments:

57 WEATHERING L 4970.00 SqFt

Network: 32S **Name:** Stevensville Airport

Branch: TW **Name:** Taxiway **Use:** TAXIWAY **Area:** 304,881SqFt

Section: 13 of 8 **From:** T-1 **To:** A-1 **Last Const.:** 1/1/2021

Surface: AC **Family:** DEFAULT **Zone:** STEV **Category:** D **Rank:** P

Area: 72,839SqFt **Length:** 2,000Ft **Width:** 35Ft

Slabs: **Slab Length:** Ft **Slab Width:** Ft **Joint Length:** Ft

Shoulder: **Street Type:** ACM **Grade:** 0 **Lanes:** 0

Section Comments:

Work Date: 6/1/1994 **Work Type:** New Construction - Initial **Code:** NU-IN **Is Major M&R:** True

Work Date: 1/1/2021 **Work Type:** Complete Reconstruction - AC **Code:** CR-AC **Is Major M&R:** True

Last Insp. Date: 10/22/2018 **TotalSamples:** 26 **Surveyed:** 5

Conditions: PCI: 70 **NOTE: *** Pre-Construction PCI *****

Inspection Comments:

Sample Number: 005 **Type:** R **Area:** 4935.00SqFt **PCI:** 77

Sample Comments:

45 DEPRESSION L 10.00 SqFt

48 L & T CR L 65.00 Ft

48 L & T CR M 119.00 Ft

Sample Number: 011 **Type:** R **Area:** 4935.00SqFt **PCI:** 43

Sample Comments:

41 ALLIGATOR CR M 180.00 SqFt

45 DEPRESSION L 24.70 SqFt

48 L & T CR L 165.00 Ft

48 L & T CR M 212.00 Ft

Sample Number: 020 **Type:** R **Area:** 5250.00SqFt **PCI:** 74

Sample Comments:

45 DEPRESSION L 69.70 SqFt

48 L & T CR L 273.00 Ft

48 L & T CR M 111.00 Ft

Sample Number: 023 **Type:** R **Area:** 5250.00SqFt **PCI:** 79

Sample Comments:

45 DEPRESSION L 66.00 SqFt

48 L & T CR L 55.00 Ft

48 L & T CR M 57.00 Ft

Sample Number: 025 **Type:** R **Area:** 6450.00SqFt **PCI:** 73

Sample Comments:

45 DEPRESSION L 25.00 SqFt

48 L & T CR L 155.00 Ft

48 L & T CR M 189.00 Ft