


CRACKS 1/8" [3] TO 1 1/2" [38] WIDE

LONGITUDINAL CRACK

ROUT 3/4" [19] WIDE x 3/4" [19] DEEP
PRIOR TO APPLYING SEALANT


TRANSVERSE CRACK

ROUT 1 1/2" [38] WIDE x 1/2" [13] DEEP
PRIOR TO APPLYING SEALANT

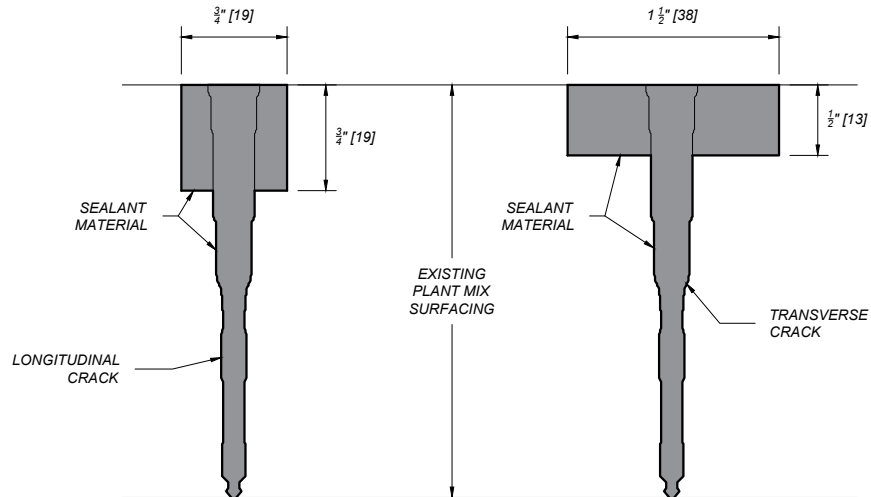

CRACKS 1 1/2" [38] OR WIDER

MASTIC REQUIRED
LEAVE EXISTING CRACK SEAL IN PLACE

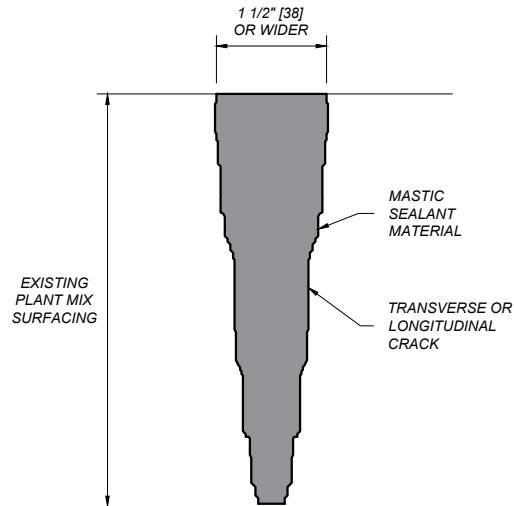

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE	DWG. NO.
STANDARD SPEC.	403-00
SECTION 403, 707	

CRACK SEALING

EFFECTIVE: JUN 26, 2025



MONTANA
Department of Transportation

--REVISED--

5/12/2025 3:31 PM

STDDRD403000.DWG