


DETAILED DRAWINGS

SUPPLEMENTAL TO
THE STANDARD
SPECIFICATIONS FOR
ROAD AND BRIDGE
CONSTRUCTION

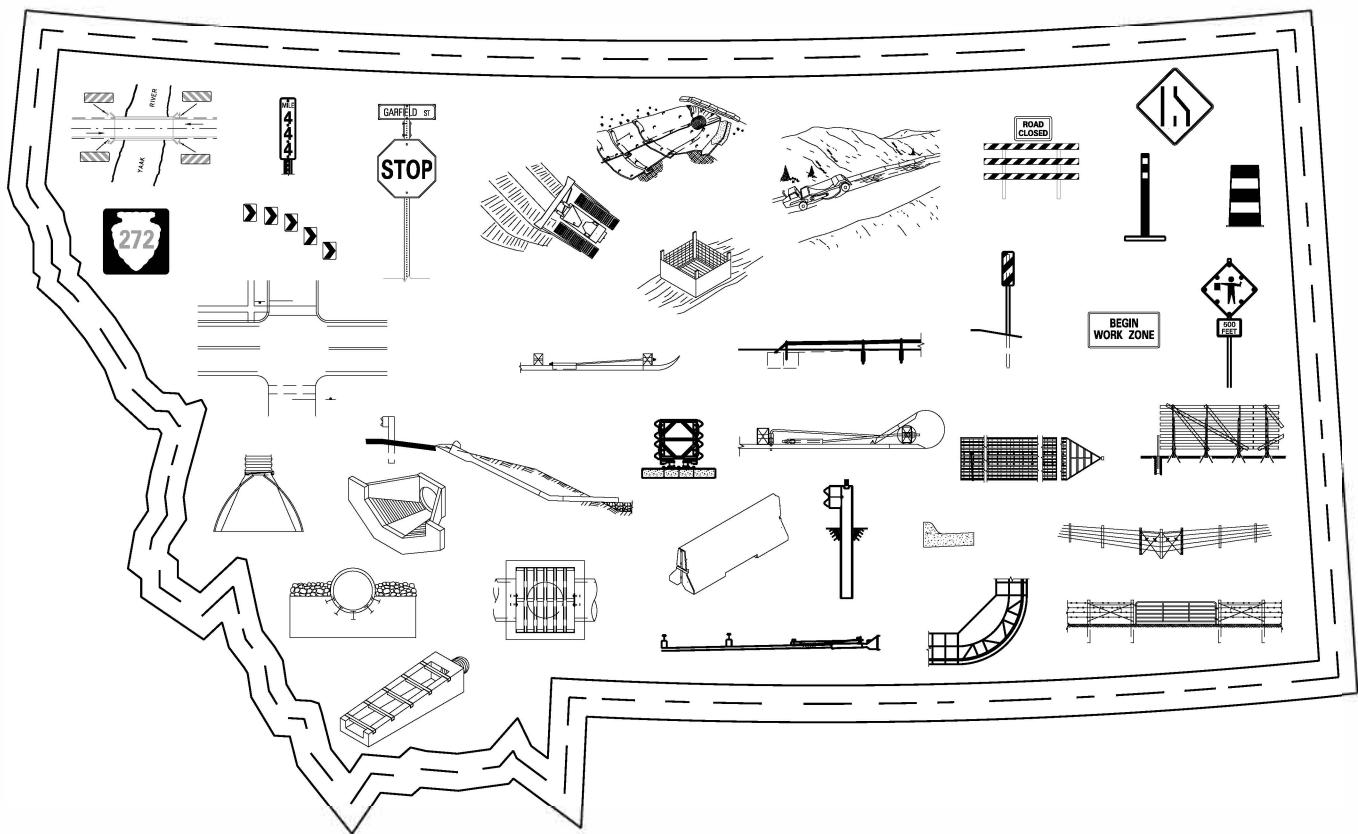

MONTANA DEPARTMENT
OF TRANSPORTATION

EFFECTIVE:
JANUARY 15, 2026 -
V1.4

DETAILED DRAWINGS

TABLE OF CONTENTS

STANDARD SPECIFICATION SECTION AND DRAWING TITLE	DRAWING NUMBER
<u>SECTION 101: DEFINITIONS AND TERMS</u>	
ABBREVIATIONS	101-05
ABBREVIATIONS	101-06
ABBREVIATIONS	101-07
ABBREVIATIONS	101-08
SYMBOLS	101-10
<u>SECTION 203: EXCAVATION AND EMBANKMENT</u>	
APPROACHES	203-05
DITCH BLOCKS	203-20
<u>SECTION 301: AGGREGATE SURFACING</u>	
ROADWAY EMBANKMENT AT BRIDGE END	301-00
<u>SECTION 403: CRACK SEALING</u>	
CRACK SEALING	403-00
<u>SECTION 411: COLD MILLING</u>	
SHOULDER RUMBLE STRIPS	411-02
MODIFIED SHOULDER RUMBLE STRIPS	411-03
CENTERLINE RUMBLE STRIPS	411-05
<u>SECTION 501: PORTLAND CEMENT CONCRETE PAVEMENT</u>	
PCCP JOINTS	501-00

PCCP ISOLATION JOINTS	501-05
PCCP ISOLATION JOINTS	501-10
PCCP REPAIR	501-15
DOWEL BAR RETROFIT FOR PCCP	501-20
DOWEL BAR RETROFIT FOR PCCP	501-25

SECTION 552: CONCRETE STRUCTURES

CONCRETE CUTOFF WALLS FOR CULVERTS	552-00
CONCRETE, RIPRAP AND GRANULAR BEDDING MATERIAL QUANTITIES FOR SING. AND DBL. CULVERT INSTALLATION	552-04
CONCRETE, RIPRAP AND GRANULAR BEDDING MATERIAL QUANTITIES FOR SING. AND DBL. CULVERT INSTALLATION	552-06
CONCRETE, RIPRAP AND GRANULAR BEDDING MATERIAL QUANTITIES FOR SING. AND DBL. CULVERT INSTALLATION	552-08

SECTION 603: CULVERTS, STORM DRAINS, SANITARY SEWERS, STOCKPASSES AND UNDERPASSES

CMP FLARED END TERMINAL SECTION (FETS)	603-02
PREFABRICATED RCP FLARED END TERMINAL SECTION (FETS)	603-08
PREFABRICATED RCP FLARED END TERMINAL SECTION (FETS) (METRIC)	603-08
PREFABRICATED RCP ARCH FLARED END TERMINAL SECTION (FETS)	603-10
RCP ROAD APPROACH CULVERT END TREATMENT (RACET)	603-12
CMP ROAD APPROACH CULVERT END TREATMENT (RACET)	603-14
PRECAST MEDIAN U-TURN CROSS DRAIN AND CONC. BEVELED END	603-17
BEDDING FOR CULVERTS 54" (1350 mm) EQUIVALENT & SMALLER	603-18
GRANULAR BEDDING FOR CULVERTS 54" (1350 mm) EQUIVALENT & LARGER	603-19
STORM DRAIN TRENCH BEDDING DETAIL	603-20
WATER TIGHT JOINT FOR REINFORCED CONCRETE PIPE	603-22
REINFORCED CONCRETE PIPE JOINT	603-24
TYPICAL FIELD CAST CONCRETE CONNECTIONS	603-26
CTX ADAPTER	603-27
EMBANKMENT PROTECTOR	603-28

VEHICULAR UNDERPASS AND BACKFILL RETAINER & CUTOFF WALL DETAIL.....	603-30
VEHICULAR UNDERPASS AND BACKFILL RETAINER & CUTOFF WALL DETAIL (METRIC).....	603-30
VEHICULAR UNDERPASS PCCP TRANSVERSE JOINT & BACKFILL RETAINER DETAIL.....	603-31
STEP BEVEL FOR CIRCULAR METAL CULVERT.....	603-32
BEVEL ON ARCH METAL CULVERT.....	603-34
CORRUGATED STEEL PIPE STOCKPASS.....	603-36

SECTION 604: MANHOLES, COMBINATION MANHOLES AND INLETS, AND INLETS

MEDIAN INLET	604-00
CONCRETE MANHOLE	604-02
CURB INLET TYPE II	604-03
DROP INLET TYPE IV	604-04
DROP INLETS TYPE I AND V	604-14
DROP INLETS TYPE III AND VI	604-16
TYPE A AND B CURB INLETS	604-18

SECTION 605: CONCRETE BARRIER RAIL

CONCRETE BARRIER RAIL.....	605-00
CONCRETE BARRIER RAIL ANCHORS.....	605-05
TALL CONCRETE BARRIER RAIL.....	605-10
CONCRETE BARRIER RAIL TRANSITION.....	605-15
CONCRETE BARRIER RAIL TERMINAL SECTION (ONE-WAY DEPARTURE).....	605-20

SECTION 606: GUARDRAIL

METAL GUARDRAIL - WOOD POSTS (MGS)	606-05A
METAL GUARDRAIL - STEEL POSTS (MGS)	606-05B
STIFFENED GUARDRAIL SECTIONS (MGS)	606-07
LONG SPAN GUARDRAIL (MGS).....	606-09
METAL GUARDRAIL - LONG POSTS - WOOD (MGS)	606-11A
METAL GUARDRAIL - LONG POSTS - STEEL (MGS)	606-11B

MASH OPTIONAL TERMINAL SECTIONS	606-13
ONE-WAY DEPARTURE TERMINAL SECTION (MGS)	606-18
MGS TO METAL GUARDRAIL TRANSITION	606-20
MGS THRIE BEAM BRIDGE APPROACH SECTION - WOOD POSTS	606-23A
MGS THRIE BEAM BRIDGE APPROACH SECTION - STEEL POSTS	606-23B
BRIDGE APPROACH SECTIONS - WOOD POSTS	606-24A
BRIDGE APPROACH SECTIONS - STEEL POSTS	606-24B
SKEWED BRIDGE APPROACH SECTIONS - WOOD POSTS	606-25A
SKEWED BRIDGE APPROACH SECTIONS - STEEL POSTS	606-25B
TAPERED CONCRETE CURB DETAIL	606-26
TAPERED CONCRETE CURB DETAIL	606-27
INTERSECTING ROADWAY TERMINAL SECTION (MGS)	606-46
BOX BEAM GUARDRAIL	606-50
BOX BEAM ONE-WAY DEPARTURE TERMINAL SECTION	606-52
BOX BEAM BRIDGE APPROACH SECTION - TYPES 1 & 2	606-53
BOX BEAM BRIDGE APPROACH SECTION - TYPE 3	606-53A
BOX BEAM ONE-WAY BRIDGE DEPARTURE SECTION	606-54
BOX BEAM TERMINAL SECTION	606-55
BOX BEAM TO MGS TRANSITION SECTION	606-58
SCHEDULE OF GUARDRAIL HARDWARE	606-80
GUARDRAIL HARDWARE	606-82
W-BEAM METAL GUARDRAIL HARDWARE	606-84
W-BEAM METAL GUARDRAIL HARDWARE	606-88
LOW-TENSION CABLE GUARDRAIL HARDWARE	606-94
BOX BEAM GUARDRAIL HARDWARE	606-97
BOX BEAM GUARDRAIL HARDWARE	606-98
BOX BEAM GUARDRAIL HARDWARE	606-99

SECTION 607: FENCES

FARM FENCE	607-00
MODIFIED FARM FENCE	607-01
FARM ENTRANCE GATES	607-02

FENCE DETAILS.....	607-05
FENCE DETAILS.....	607-10
FENCE DETAILS.....	607-15
FENCE DETAILS.....	607-17
FENCING AT RIGHT OF WAY BREAKS.....	607-20
CHAIN LINK FENCE.....	607-25
8' (2.4 m) WOOD SNOW FENCE W/ ANCHOR SYSTEM #1.....	607-30
12' (3.6 m) WOOD SNOW FENCE W/ ANCHOR SYSTEM #1.....	607-35
WOOD SNOW FENCE ANCHOR SYSTEM #3 AND #1 DETAILS.....	607-40
WOOD SNOW FENCE ANCHOR SYSTEM #2 DETAILS.....	607-45
WILDLIFE FENCE.....	607-50
JACKLEG WIRE FENCE.....	607-55
JACKLEG POLE FENCE.....	607-60

SECTION 608: CONCRETE SIDEWALKS

CONCRETE SIDEWALK.....	608-05
NEW CONSTRUCTION PUBLIC SIDEWALK CURB RAMPS.....	608-15
PERPENDICULAR PUBLIC SIDEWALK CURB RAMPS.....	608-25
PARALLEL PUBLIC SIDEWALK CURB RAMPS.....	608-30
DIAGONAL PERPENDICULAR PUBLIC SIDEWALK CURB RAMPS.....	608-35
DETECTABLE WARNING DEVICES.....	608-40

SECTION 609: CURBS AND GUTTERS

CONCRETE VALLEY GUTTER.....	609-00
MISCELLANEOUS CURBS.....	609-05
DROP INLET APRONS.....	609-07
MEDIAN CONCRETE CURBS.....	609-10
CONCRETE MEDIAN CAPS.....	609-12

SECTION 610: ROADSIDE RE-VEGETATION

TOPSOIL AND SEEDING.....	610-00
--------------------------	--------

ROLLED EROSION CONTROL (REC).....	610-05
-----------------------------------	--------

SECTION 611: CATTLE GUARDS

HEAVY DUTY CATTLE GUARD CAST-IN-PLACE.....	611-00
CATTLE GUARD HINGED GRATE.....	611-03
LIGHT DUTY CATTLE GUARD – PRECAST.....	611-10
LIGHT DUTY CATTLE GUARD - PRECAST (METRIC).....	611-10
HEAVY DUTY CATTLE GUARD – PRECAST.....	611-15
PRECAST CONCRETE CATTLE GUARD BASE DETAILS.....	611-20

SECTION 613: RIPRAP AND SLOPE AND BANK PROTECTION

CONCRETE EDGE PROTECTION FOR METAL CULVERTS.....	613-06
CONCRETE EDGE PROTECTION FOR CONCRETE CULVERTS.....	613-08
CONCRETE SLOPE PROTECTION.....	613-10
INLET AND OUTLET HEADWALLS FOR RCP AND CMP PIPES.....	613-12
CULVERT RIPRAP.....	613-14
RIPRAP SLOPE PROTECTION.....	613-16
DRAINAGE CHUTES.....	613-18

SECTION 615: IRRIGATION FACILITIES AND HEADWALLS

TRASHGUARD FOR CONCRETE IRRIGATION INLET AND OUTLET TRANSITION STRUCTURES.....	615-02
STANDARD CONCRETE IRRIGATION DIVISION BOXES.....	615-04
CONCRETE IRRIGATION INLET AND OUTLET TRANSITION FOR RCP AND CSP PIPES.....	615-06

SECTION 618: TRAFFIC CONTROL

CHANNELIZING DEVICES AND OBJECT MARKERS.....	618-00
CONSTRUCTION SIGN DETAILS.....	618-01
PORTABLE SIGN SUPPORT ASSEMBLY.....	618-02
BARRICADES.....	618-03
TWO-LANE CONSTRUCTION PROJECT.....	618-04

TWO-LANE CONSTRUCTION PROJECT WORK ZONES.....	618-08
TWO-LANE CONSTRUCTION PROJECT SEAL COAT.....	618-10
TWO-LANE CONSTRUCTION PROJECT LANE CLOSURE - FLAGGER CONTROLLED.....	618-12
TWO-LANE CONSTRUCTION PROJECT LANE CLOSURE - SIGNAL CONTROLLED.....	618-13
TWO-LANE EQUIPMENT ENTRANCES.....	618-14
TWO-LANE EQUIPMENT ENTRANCES.....	618-16
TWO-LANE CONSTRUCTION PROJECT DIVERSION.....	618-18
DIVIDED FOUR-LANE CONSTRUCTION PROJECT.....	618-20
DIVIDED FOUR-LANE CONSTRUCTION PROJECT WORK ZONES.....	618-21
DIVIDED FOUR-LANE EQUIPMENT ENTRANCE.....	618-22
DIVIDED FOUR-LANE MEDIAN CROSSING.....	618-23
DIVIDED FOUR-LANE SINGLE LANE CLOSURE LANE SHIFT.....	618-24
DIVIDED FOUR-LANE LANE SHIFT.....	618-25
DIVIDED FOUR-LANE SHOULDER MESSAGE SIGN.....	618-26
TEMPORARY FOUR-LANE TO TWO-LANE MEDIAN CROSSOVER.....	618-27
TEMPORARY TWO-LANE TO FOUR-LANE MEDIAN CROSSOVER.....	618-28
TEMPORARY ENTRANCE RAMP MEDIAN CROSSOVER.....	618-29
TEMPORARY EXIT RAMP MEDIAN CROSSING.....	618-30
DIVIDED FOUR-LANE RAMP MERGE.....	618-31
DIVIDED FOUR-LANE EXIT RAMP CLOSURE.....	618-32
SHORT DURATION OR SHORT-TERM STATIONARY CREW SIGNING.....	618-40
MAINTENANCE GUIDELINE FOR SHORT-TERM TWO-LANE CRACK SEALING WORK ZONE.....	618-M1
MAINTENANCE GUIDELINE FOR SHORT-TERM TWO-LANE CHIP SEAL AND OVERLAY (PILOTED TRAFFIC).....	618-M2
MAINTENANCE GUIDELINE FOR SHORT-TERM LANE CLOSURE ON INTERSTATE.....	618-M3
MOBILE OPERATIONS.....	618-M4
LANE CLOSURE - FLAGGER CONTROLLED (URBAN TWO-LANE, TWO-WAY ROAD).....	618-U01
WORK ZONE OCCUPIES ONE HALF OF ROAD (LOW SPEED URBAN TWO-LANE, TWO-WAY ROAD)	618-U02

WORK ZONE IN CENTER OF ROAD (URBAN TWO-LANE, TWO-WAY ROAD).....	618-U03
SIDEWALK CLOSURES AND BYPASS WALKWAY.....	618-U05
LANE CLOSURE (URBAN TWO-LANE, TWO-WAY ROAD WITH TWO-WAY LEFT TURN LANE)	618-U15
TURN LANE CLOSURE (URBAN TWO-LANE, TWO-WAY ROAD WITH TWO-WAY LEFT TURN LANE).....	618-U16
RIGHT LANE CLOSURE (URBAN MULTI-LANE, UNDIVIDED ROAD).....	618-U20
LEFT LANE CLOSURE (LOW SPEED URBAN MULTI-LANE, UNDIVIDED ROAD).....	618-U25
LEFT LANE CLOSURES (LOW SPEED URBAN MULTI-LANE, UNDIVIDED ROAD).....	618-U30
DOUBLE LANE CLOSURE (URBAN MULTI-LANE, UNDIVIDED ROAD).....	618-U35
RIGHT LANE CLOSURE - WORK ZONE BEYOND INTERSECTION (URBAN MULTI-LANE, UNDIVIDED ROAD)	618-U40
LEFT LANE CLOSURE - WORK ZONE BEYOND INTERSECTION (URBAN MULTI-LANE, UNDIVIDED ROAD).....	618-U45
DOUBLE LANE CLOSURE AT INTERSECTION (URBAN MULTI-LANE, UNDIVIDED ROAD).....	618-U50
LEFT LANE CLOSURE (URBAN LOW SPEED, MULTI-LANE UNDIVIDED ROAD WITH TWO-WAY LEFT TURN LANE).....	618-U60

SECTION 619: SIGNS AND DELINEATORS

SIGN CLEARANCES AND MOUNTING HEIGHTS.....	619-00
SIGN CLEARANCES AND MOUNTING HEIGHTS (METRIC).....	619-00
TYPICAL RURAL AND URBAN APPROACHES.....	619-02
ALUMINUM SHEET INCREMENT SIGN CONSTRUCTION DETAILS.....	619-04
PLYWOOD SHEET INCREMENT GUIDE SIGN CONSTRUCTION DETAILS.....	619-06
GUIDE SIGN CLEARANCE AND MOUNTING DETAILS.....	619-08
SHEET ALUMINUM OVERLAY.....	619-10
TUBULAR SIGN POST DETAILS.....	619-12
BREAKAWAY AND FOUNDATION DETAILS FOR MULTIPLE GUIDE SIGN SUPPORTS.....	619-13
BREAKAWAY AND FOUNDATION DETAILS FOR MULTIPLE GUIDE SIGN SUPPORTS (METRIC).....	619-13
SQUARE TUBULAR SIGN POST BREAKAWAY DEVICES.....	619-14
TYPICAL STEEL POST MOUNTING DETAILS.....	619-16
CANTILEVER TYPE SIGN SUPPORT DETAILS FOR SIDEWALK AREAS.....	619-18

STRUCTURAL STEEL POST SIGN MOUNTING DETAILS	619-19
TREATED WOOD POLE SIGN MOUNTING AND SUPPORT DETAILS	619-20
TREATED WOOD POLE SIGN MOUNTING DETAILS	619-21
TREATED WOOD POLE OPTIONAL BACKBRACE	619-22
CHEVRON MOUNTING DETAILS	619-24
SPECIAL DESIGN ROUTE MARKER PANELS AND SHIELDS	619-26
SIGN HINGE DETAILS	619-30
MILEPOST (REFERENCE POST) DETAILS	619-32
DELINEATOR DETAILS	619-34
PANEL DELINEATOR DETAIL	619-35
DELINEATOR PLACEMENT DETAILS	619-36
OBJECT MARKER DESIGN AND PLACEMENT DETAILS FOR OBSTRUCTIONS ADJACENT TO OR WITHIN HIGHWAYS	619-38
FLEXIBLE DELINEATORS	619-40
PERMANENT BARRICADE DESIGN DETAILS	619-42
INSTALLATION DATE TAGS	619-44
AUTHORIZED VEHICLE CROSSOVER DESIGNATOR	619-46

SECTION 620: PAVEMENT MARKING APPLICATION

PAVEMENT MARKINGS (LETTERS)	620-00
PAVEMENT MARKINGS (NUMBERS)	620-05
PAVEMENT MARKINGS (WORDS)	620-10
PAVEMENT MARKINGS (ARROWS)	620-15
PAVEMENT MARKINGS (SYMBOLS)	620-20
PAVEMENT MARKINGS (SYMBOLS)	620-25
PAVEMENT MARKINGS (CENTERLINE RUMBLE STRIPING)	620-30

SECTION 621: REMOVE, RE-SET AND ADJUST FACILITIES

MANHOLE AND VALVE BOX ADJUSTMENT DETAILS	621-00
MANHOLE AND VALVE BOX ADJUSTMENT DETAILS	621-05

SECTION 623: MAILBOXES

APPROACH MAILBOX TURNOUT	623-10
MAILBOX TURNOUT	623-15
MAILBOX DETAIL	623-20
OPTIONAL MAILBOX DETAIL	623-25
TEMPORARY MAILBOX SUPPORT	623-30
TEMPORARY MAILBOX SUPPORT BRACKET DETAILS	623-35

MISCELLANEOUS

U-TURN MEDIAN OPENINGS ON CONTROLLED ACCESS HIGHWAYS	900-00
ADJUSTABLE MONUMENT BOX	900-15

&	AND	CONC.	CONCRETE
@	AT	COND.(TEL.)	CONDUIT (SPECIFY TYPE)
A.A.D.T.	ANNUAL AVERAGE DAILY TRAFFIC	CONN.	CONNECTION
AASHTO	AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS	CONST.	CONSTRUCTION
AB.	ABRUPT	CONST. PMT.	CONSTRUCTION PERMIT
A.C.	ALUMINUM CAP OR ASPHALT CEMENT	COR.	CORNER
ADD. EXC.	ADDITIONAL EXCAVATION	CORR.	CORRECTED OR CORRUGATION
ADJ.	ADJUSTED	COV.	COVER
A.D.T.	AVERAGE DAILY TRAFFIC	C.P.	CATCH POINT
AGC	ASSOCIATED GENERAL CONTRACTORS OF AMERICA	CR.	CRUSHED OR CREEK
AGG.	AGGREGATE	CRS.	COURSE
AH.	AHEAD	C.S. OR CS	CURVE TO SPIRAL
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE	C.S.F. OR CSF	COMBINATION SCALE FACTOR
APP.	APPROACH	C.S.P. OR CSP	CORRUGATED STEEL PIPE
APPL.	APPLICATION	C.S.P.A OR CSPA	CORRUGATED STEEL PIPE ARCH
APPROX.	APPROXIMATE	CT.	COURT
ARTBA	AMERICAN ROAD AND TRANSPORTATION BUILDERS ASSOCIATION	CT.B. OR CTB	CEMENT TREATED BASE
ASPH.	ASPHALT	CTR.	CENTER
ASTM	AMERICAN SOCIETY FOR TESTING & MATERIALS	CTS. OR CTS	CRUSHED TOP SURFACING
AVE.	AVENUE	CULV.	CULVERT
AVG.	AVERAGE	C.Y.	CUBIC YARD
AWS	AMERICAN WELDING SOCIETY	D	DEGREE OF CURVATURE, DISTRIBUTION OF TRAFFIC, DIAMETER, OR DEPTH
AZ.	AZIMUTH	DBL.	DOUBLE
BAL.	BALANCE	D _c	DEGREE OF CURVATURE (WITH SPIRALS)
BBL. OR BBLS.	BARREL OR BARRELS	D.D.	DOWN DRAIN
B.C.	BRASS CAP	DE	DIFFERENCE IN ELEVATION
B.C.R.	BEGIN CURB RETURN	DEFL.	DEFLECTION
B.E. OR BE	BRIDGE END	DESC.	DESCRIPTION
BEG.	BEGIN	DEST.	DESTROYED
BIT.	BITUMINOUS OR BITUMEN	DET.	DETOUR OR DETAIL
BK.	BACK OR BANK	DETC.	DETECTOR
BLDG.	BUILDING	D.H.	DRILL HOLE
BLK.	BLOCK	D.H.V.	DESIGN HOURLY VOLUME
B.L.M. OR BLM	U.S. BUREAU OF LAND MANAGEMENT	D.I.	DROP INLET
BLVD.	BOULEVARD	DIA.	DIAMETER
B.M.	BENCH MARK	DIST.	DISTANCE OR DISTRICT
BNDRY.	BOUNDARY	DN.	DOWN
BOT.	BOTTOM	DP.	DEEP
BR.	BRIDGE	DR.	DRAIN OR DRIVE
B.R.	BASE OF RAIL	DT.	DITCH
BRG.	BEARING	DTL.	DETAIL OR DETAILED
B.S. OR BS	BACKSIGHT	DWG.	DRAWING
B.S.T.	BITUMINOUS SURFACE TREATMENT	DY.	DAYLIGHT
B.W.FE.	BARBED WIRE FENCE	E	EAST OR EXTERNAL DISTANCE
C	CUT	EASE. OR ESMT.	EASEMENT
C/A	CONTROL OF ACCESS	E.B. OR EB	EASTBOUND
C.A.C. OR CAC	CRUSHED AGGREGATE COURSE	E.C.R.	END CURB RETURN
CALC.	CALCULATED	E.D.M. OR EDM	ELECTRONIC DISTANCE MEASUREMENT
C.A.P. OR CAP	CORRUGATED ALUMINUM PIPE	E.G.	EDGE OF GUTTER
CATV	CABLE TV	ELEV. OR EL.	ELEVATION
CB.	CURB	ELONG.	ELONGATED
C.B.	CATCH BASIN	ELY.	EASTERLY
C.B.W.	CONCRETE BLOCK WALL	EMB.	EMBANKMENT
C.C.	CLOSING CORNER	EMUL.	EMULSIFIED
CDTN.	CONDITION	E.O.	EDGE OF OIL
CEM.	CEMENT	E.P.	EDGE OF PAVEMENT
C&G	CURB & GUTTER	EQ.	EQUATION
C.G.	CATTLE GUARD	Es	EXTERNAL DISTANCE (WITH SPIRALS)
CH.	CHANNEL OR CHAIN	ET.W. OR ETW	EDGE OF SHOULDER
CH.CH.	CHANNEL CHANGE	EW.	EDGE OF TRAVELED WAY
CHD.	CHORD	EX.	EXISTING
CHIS."x"	CHISELED CROSS	EXC.	EXCAVATION
C.I.	CURB INLET	EXT.	EXTENSION
CIR.	CIRCLE	EXWY.	EXPRESSWAY
CL.	CLASS OR CLEARANCE		DETAILED DRAWING
CL-4F,5F	CHAIN LINK FENCE (W/ HEIGHT - ENGLISH)		REFERENCE
CL-1.2F,1.5F	CHAIN LINK FENCE (W/ HEIGHT - METRIC)		STANDARD SPEC.
C/L OR £	CENTERLINE		SECTION 101
C.M.P. OR CMP	CORRUGATED METAL PIPE		DWG. NO.
C.N.	CONCRETE NAIL		101-05
CO.	COUNTY OR COMPANY		
C.O.	CLEAN OUT		
COMP.	COMPACTION		

ABBREVIATIONS
MDT MONTANA DEPARTMENT OF TRANSPORTATION

F	FILL	L	LENGTH OF CURVE, LITER OR ANGLE IRON
F.A.	FEDERAL AID	LB.	POUND
F.C.	FLOOD CONTROL	L.	LENGTH OF CIRCULAR CURVE
FND.	FOUND	L.C.	LONG CHORD
FDN.	FOUNDATION	L.D.	LOOP DETECTOR
FE.	FENCE	LENG.	LENGTH OR LENGTHEN
FERT.	FERTILIZER	L.F.	LINEAR FOOT
F.E.T.S. OR FETS	FLARED END TERMINAL SECTION	LN.	LANE
F.G. OR FG	FINISHED GRADE OR FRONT OF GUTTER	L.	LENGTH OF SPIRAL
F.G.S.	FINISHED GRADE STAKE	L.S.	LAND SURVEYOR
F.H.	FIRE HYDRANT	LT.	LEFT
FHWA	FEDERAL HIGHWAY ADMINISTRATION	m	METER
FIN.	FINISH	m ²	SQUARE METER
FL.	FLUSH	m ³	CUBIC METER
F.L. OR FL	FLOW LINE	mm	MILLIMETER
F.O. OR FO	FIBER OPTIC CABLE	mm ²	SQUARE MILLIMETER
F.P.	FENCE POST	MATL.	MATERIAL
FR. OR FR	FRONTAGE	MAX.	MAXIMUM
FR. RD.	FRONTAGE ROAD	M.C. OR MC	MEDIUM CURING
F.S. OR FS	FORESIGHT	MDT	MONTANA DEPARTMENT OF TRANSPORTATION
FT.	FOOT OR FEET	MEAS.	MEASURED
FTG.	FOOTING	MED.	MEDIAN
FUT.	FUTURE	MH.	MANHOLE
FWY.	FREEWAY	MIN.	MINIMUM, MINERAL OR MINUTE
g	GRAM	MISC.	MISCELLANEOUS
G	GRADING	MKR.	MARKER
GA.	GAUGE	M.L.	MAINLINE
GAL.	GALLON	MNCPL.	MUNICIPAL
GALV.	GALVANIZED	M.O.	MID ORDINATE
GAR.	GARAGE	MON.	MONUMENT
GEOD.	GEODETIC	M.P.C. OR MPC	MID-POINT OF CURVE
G.L.	GAS LINE	MUTCD	MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES
G.L.O.	GENERAL LAND OFFICE	M.Y.	MILE YARD
G.P.S. OR GPS	GLOBAL POSITIONING SYSTEM	N	NORTH
GR.	GRADE	N.B. OR NB	NORTHBOUND
GRD.	GUARDRAIL	N.C.	NORMAL CROWN
GRND.	GROUND	N.E.	NORTHEAST
GR.SEP.	GRADE SEPARATION	N.G. OR NG	NATURAL GAS
G.S.	GRAVEL SURFACING	N.G.S. OR NGS	NATIONAL GEODETIC SURVEY
G.S.P. OR GSP	GALVANIZED STEEL PIPE	NL.	NAIL
GTR.	GUTTER	NLY.	NORTHERLY
G.V.	GAS VALVE	NO. OR #	NUMBER
H	CONCRETE CUTOFF WALL DEPTH	N.W.	NORTHWEST
ha	HECTARE	N.W.EL.	NORMAL WATER ELEVATION
HDWL.	HEADWALL	O. OR O/S	OFFSET
HG.	HEADGATE	O.C.	ON CENTERS OR OVERHEAD CROSSING
H.I. OR HI	HEIGHT OF INSTRUMENT	O.D.	OUTSIDE DIAMETER
HO.	HOUSE	O.G.	OLD GROUND OR ORIGINAL GROUND
HOR.	HORIZONTAL	OH.	OVERHANG OR OVERHEAD
H.P.	HINGE POINT	OHWM	ORDINARY HIGH WATER MARK
HT.	HEIGHT	O'PASS	OVERPASS
H&T	HUB & TACK	P	POWER CABLE, PIPE OR PRIMARY
H.W.	HIGH WATER	P. OR PG.	PAGE
HWY.	HIGHWAY	PAVT.	PAVEMENT
I	INTERSTATE	P.B.	PULL BOX
I.C.	INCIDENTAL CONSTRUCTION	P.C. OR PC	POINT OF CURVE (BEGINNING)
I.D.	INSIDE DIAMETER	P.C.C. OR PCC	POINT OF COMPOUND CURVE OR PORTLAND CEMENT CONCRETE
I.E.	INVERT ELEVATION	P.C.S.	PROJECT CONTROL SYSTEM
IN.	INCH	P.E. OR PE	PRELIMINARY ENGINEERING OR PROFESSIONAL ENGINEER
INC.	INCORPORATED OR INCREMENT		
INCL.	INCLUDED		
INSTR.	INSTRUMENT		
INT.	INTERSECTION		
INTCH.	INTERCHANGE		
INV.	INVERT		
I.P.	IRON PIN		
IRR.	IRRIGATION		
I.R.T.S. OR IRTS	INTERSECTING ROADWAY TERMINAL SECTION		
JCT.	JUNCTION		
J.P.	JOINT USE POLE		
kg	KILOGRAM		
km	KILOMETER		

DETAILED DRAWING		
REFERENCE	DWG. NO.	
STANDARD SPEC.		101-06
SECTION 101		
ABBREVIATIONS		
 MONTANA DEPARTMENT OF TRANSPORTATION		

PEN.	PENETRATION	SLOT.DR.	SLOTTED DRAIN
PERF.	PERFORATED	SLP.STK.	SLOPE STAKE
P.I. OR PI	POINT OF INTERSECTION	SLY.	SOUTHERLY
PL.	PLACE, PLATE OR PLANT	S.P.	STAND PIPE OR STATE PLANE
P.L.	PROPERTY LINE	SPEC. PROV.	SPECIAL PROVISION
PLAS.	PLASTIC	S.P.H.P.	STEEL PIPE, HIGH PRESSURE
P.M.	PRINCIPAL MERIDIAN OR PUNCH MARK	SPK.	SPIKE
P.M.B.	PLANT MIX BASE	SQ.	SQUARE
P.M.P.	PERFORATED METAL PIPE	S.S. OR SS	EMULSIFIED ASPHALT
P.M.S. OR PMS	PLANT MIX SURFACING	S.S.P.P.	STRUCTURAL STEEL PLATE PIPE
PMT.	PERMIT	OR SSPP	STRUCTURAL STEEL PLATE PIPE ARCH
P.O.C. OR POC	POINT ON CURVE	S.S.P.P.A.	STRUCTURAL STEEL PLATE PIPE ARCH
P.O.L. OR POL	POINT ON LINE	OR SSPPA	CULVERT
P.O.S. OR POS	POINT ON SPIRAL	S.S.P.P.A.C.	SPRAL TO TANGENT
P.O.S.T. OR POST	POINT ON SEMI-TANGENT	OR SSPPAC	STREET
P.O.T. OR POT	POINT ON TANGENT	S.T. OR ST	STATION
P.O.V.C. OR POVC	POINT ON VERTICAL CURVE	ST.	STANDARD
P.P. OR PP	POWER POLE	STA.	STANDARD SPECIFICATIONS
PP.	PAGES	STD.	STAKED OR STAKE
PREST.	PRESTRESSED	STD. SPEC.	STEEL
PRIM.	PRIMARY	STK.	STORM DRAIN
PROC.	PROCESSING	STL.	STAMPED
PROJ.	PROJECT OR PROJECTED	STM.	STRUCTURE OR STRAIGHT
PROT.	PROTECT, PROTECTOR OR PROTECTION	STPD.	SUBDIVISION
P.T. OR PT	POINT OF TANGENT (END OF CURVE)	STR.	SURFACE OR SURFACING
PT.	POINT	SUBD.	SURVEY
P.T.W. OR PTW	PRESENT TRAVELED WAY	SURF.	SOUTHWEST OR SIDEWALK
PVC. OR PVC	POLYVINYL CHLORIDE	SURV.	SQUARE YARD
PVT.	PRIVATE	S.W.	
PWR. OR PWR	POWER (LINES)	S.Y.	
Q	PEAK DISCHARGE (WATER)	†	METRIC TON
QTY.	QUANTITY	T	TOWNSHIP, TANGENT LENGTH, PERCENT TRUCKS, OR THICKNESS
R	RANGE, RADIUS OR RISE	TAN.	TANGENT
R.A.C.E.T.	ROAD APPROACH CULVERT END TREATMENT	T.B.C. OR TBC	TOP BACK OF CURB
OR RACET		T.B.M.	TEMPORARY BENCH MARK
R.A.P. OR RAP	RECYCLED ASPHALT PAVEMENT	TBR.	TIMBER
Rc	SPIRAL CURVE RADIUS	TEL. OR TEL	TELEPHONE
R.C. OR RC	RAPID CURING	TELC.	TELEPHONE CABLE
R.C.B. OR RCB	REINFORCED CONCRETE BOX	TELG.	TELEGRAPH
R.C.P. OR RCP	REINFORCED CONCRETE PIPE	TELP.	TELEPHONE POLE
R.C.P.A. OR RCPA	REINFORCED CONCRETE PIPE ARCH	TEMP.	TEMPERATURE OR TEMPORARY
RD.	ROAD	THK.	THICKNESS
RDL.	RADIAL	TK.	TACK
RDWY.	ROADWAY	TOL.	TOLERANCE
REC.	RECORD	TOPOG.	TOPOGRAPHIC
REF.	REFERENCE	T.P. OR TP	TURNING POINT
REINF.	REINFORCEMENT	TR.	TRACT
RET.W.	RETAINING WALL	TRANS.	TRANSMISSION LINE OR TRANSITION
RIV.	RIVER	TRAV.	TRaverse
R.M.	REFERENCE MONUMENT	TRIA.	TRIANGULATION
R.P. OR RP	REFERENCE POINT, POST OR RADIUS POINT	T.R.M.	TRURF REINFORCEMENT MAT
R.R.	RAILROAD	Ts	LENGTH OF TANGENT (CURVE WITH SPIRALS)
RT.	RIGHT OR ROUTE	T.S. OR TS	TANGENT TO SPIRAL
RTE.	ROUTE	T.T. OR TT	TRANSMISSION TOWER
R/W	RIGHT OF WAY	Typ.	TYPICAL
RY.	RAILWAY	U	UNIT
S	RATE OF FULL SUPERELEVATION, SLOPE IN FT. PER FT., SPAN, SOUTH OR SECONDARY	U.G.	UNDERGROUND
SA.	SATELLITE (FOR TRAVERSE USE)	UNCL.	UNCLASSIFIED
SAN.SEW.	SANITARY SEWER	UPASS	UNDERPASS
S.B. OR SB	SOUTHBOUND	U.S.C. & G.S.	U.S. COAST & GEODETIC SURVEY
S.C. OR SC	SPIRAL TO CURVE OR SLOW CURING	U.S.C.E.	U.S. CORPS OF ENGINEERS
SCH.	SCHEDULE	U.S.F.S.	U.S. FOREST SERVICE
S.C.P. OR SCP	STEEL CASING PIPE	U.S.G.S.	U.S. GEOLOGICAL SURVEY
SDWK.	SIDEWALK	U.S.P.L.S.	U.S. PUBLIC LAND SURVEY
S.E.	SOUTHEAST		
SEC.	SECTION, SECOND OR SECONDARY		
SEL.	SELECT		
S.G. SG OR SUBGR.	SUBGRADE		
SHLD. OR SH.	SHOULDER		
SHT.	SHEET		
SING.	SINGLE		
SIP.	SIPHON		
S.L.D.	SEA LEVEL DATUM		

DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	101-07
SECTION 101	
ABBREVIATIONS	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

V	DESIGN SPEED OR VELOCITY
V.A.B.M.	VERTICAL ANGLE BENCH MARK
V.C. OR VC	VERTICAL CURVE
V.C. CORR.	VERTICAL CURVE OFFSET CORRECTION
V.C.M.	VERTICAL CONTROL MONUMENT
V.C.P.	VITRIFIED CLAY PIPE
VEH.	VEHICULAR
VERT. OR VT.	VERTICAL
VIT.	VITRIFIED
V.P.	VENT PIPE
V.P.C. OR VPC	VERTICAL POINT OF CURVE
V.P.I. OR VPI	VERTICAL POINT OF INTERSECTION
V.P.T. OR VPT	VERTICAL POINT OF TANGENCY
W	WEST OR WIDTH
W/	WITH
W.B. OR WB	WESTBOUND
W.C.	WITNESS CORNER
W.L.	WATER LINE
W.LY.	WESTERLY
W/O	WITHOUT
W.P.	WING POINT
W.S.	WATER SERVICE OR WARPED OR VARIABLE SLOPE
WT.	WEIGHT
W.T.	WATER TABLE
W.V.	WATER VALVE
W.W.	WING WALL OR WOVEN WIRE
YD	YARD
YD ²	SQUARE YARD
YD ³	CUBIC YARD
XING.	CROSSING
XSEC.	CROSS SECTION

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 101	DWG. NO. 101-08
ABBREVIATIONS	
 MONTANA DEPARTMENT OF TRANSPORTATION	

TITLE SHEET

=====	PRIMARY ROAD **
=====	PRIMITIVE ROAD
=====	PROPOSED ROAD
=====	GRADED ROAD
=====	BLADED ROAD
=====	PRIMITIVE ROAD
=====	GRAVELED ROAD (CADD *)
=====	PAVED ROAD
=====	FEDERAL AID ROUTING (ON EXISTING ROAD)
=====	FEDERAL AID ROUTING (NON-EXISTING ROAD)
=====	INTERCHANGE
=====	STRUCTURE
=====	FREE FERRY
=====	TOLL FERRY
=====	HIGHWAY TUNNEL
=====	PASS
=====	RAILROAD
=====	RESERVATION LINE
=====	STATE & NATIONAL LINE
=====	COUNTY LINE
=====	TOWNSHIP & SECTION LINE
10	INTERSTATE
10	U.S. HIGHWAY
23	STATE HIGHWAY (CADD *)
23	CITY OR TOWN
○	AIR FIELD
○	DAM
□	BUILDING OR HOUSE
)(BRIDGE

** PRIMARY ROADS ARE 0.08" [2.03 mm] WIDE.
ALL OTHERS ARE 0.05" [1.27 mm] WIDE.

PROFILE

Flowline at ↗	CULVERT
Flowline at ↗	IRRIGATION SYPHON
Flowline at ↗	CONCRETE BOX CULVERT

CROSS SECTIONS

T	POWER POLE (NO. OF WIRES AND VOLTAGE)
T	TELEPHONE POLE (NO. OF WIRES)
T	TELEGRAPH POLE (NO. OF WIRES)
♀	GUY POLE
♂	GUY AND ANCHOR
W	WETLAND BOUNDARY

PLAN

=====	STATE & NATIONAL LINE
=====	COUNTY LINE
=====	CITY OR TOWN BOUNDARIES
=====	TOWNSHIP OR SECTION LINE
=====	SECTION LINE (SHOWING CORNER SOLID IF FOUND - OPEN IF NOT FOUND)
=====	1/16 CORNER
=====	1/4 CORNER
=====	6 5 8
=====	SECTION LINE (SHOWING CORNER SOLID IF FOUND - OPEN IF NOT FOUND)
=====	CLOSING CORNER
=====	MEANDER CORNER
=====	OWNERSHIP TIE
=====	PROPERTY CORNER
=====	CALCULATED R/W MONUMENT
=====	FOUND OR SET MONUMENT
=====	PROPERTY LINE
=====	LIMITED ACCESS CONTROL
=====	FULL ACCESS CONTROL
=====	EXISTING LIMITED ACCESS CONTROL
=====	EXISTING FULL ACCESS CONTROL
=====	EXISTING ACCESS CONTROL (LEGACY PROJECTS ONLY)
=====	EXISTING RIGHT-OF-WAY
=====	HIGHWAY RIGHT-OF-WAY
=====	RAILROAD RIGHT-OF-WAY
=====	BASE OR SURVEY LINE
=====	R/W
=====	+90
=====	-100
=====	RR R/W
=====	PC STA
=====	N 89° 40'E
=====	1/16 OF STAKED LINE WHEN A PROJECTION IS MADE
=====	RAILROAD
=====	TRAVELED WAY
=====	LEVEE OR DIKE (CADD *)
=====	RETAINING WALL (CADD *)
=====	PROPOSED RETAINING WALL (CADD *)
=====	RIPRAP
=====	GEOTEXTILE PATTERN
=====	CONCRETE SIDEWALK
=====	NEW IN PLACE CONCRETE CURB
=====	EXISTING FENCE
=====	PROPOSED FENCE
=====	SNOW FENCE
=====	PROPOSED SNOW FENCE
=====	EXISTING GUARDRAIL
=====	PROPOSED GUARDRAIL
=====	EXISTING CONCRETE MEDIAN RAIL
=====	TEN MILE CREEK
=====	SMALL DRAINAGE
=====	LARGE DRAINAGE
=====	RESERVOIR WITH DAM
=====	LAKE
=====	MARSH, SWAMP (CADD *)

PLAN

=====	OHWM	ORDINARY HIGH WATER MARK
=====	WL	WETLAND DELINEATION
=====	-----	EXISTING WETLAND AREA
=====		DELINEATED WETLAND AREAS
=====	XXXXXX	IMPACTED WETLANDS
=====		BLUFFS OR CLIFFS
=====	WATER'S EDGE
=====		DEPRESSION
=====	DEPRESSION OBSCURE
=====		DITCH BLOCK
=====	----->	EXISTING DITCH OR FLOW LINE
=====	-----	PROPOSED DITCH
=====	----->	CULVERT WITH HEADWALL (IN PLACE)
=====	----->	CULVERT WITHOUT HEADWALL (IN PLACE)
=====	----->	PROPOSED CULVERT
=====	□	DROP OR MEDIAN INLET
=====	◎	WATER VALVE BOX
=====	◎	MANHOLE (LABEL AS TO TYPE OR SERVICE)
=====	◎	FIRE HYDRANT
=====	◎	WATER WELL (CADD *)
=====	□	CATCH BASIN
=====	-----	CONDUIT & WIRING
=====	P-----P	POWER CABLE
=====	P-----P	EXISTING UNDERGROUND POWER (CADD *)
=====	P-----P	EXISTING OVERHEAD POWER (CADD *)
=====	-----TEL-----	TELEPHONE OR TELEGRAPH CABLE
=====	-----TEL-----	EXISTING UNDERGROUND TELEPHONE (CADD *)
=====	-----TEL-----	EXISTING OVERHEAD TELEPHONE (CADD *)
=====	W-----W	WATER LINE
=====	W-----W	EXISTING WATER LINE (CADD *)
=====	STM-----STM	STORM SEWER
=====	STM-----STM	EXISTING STORM DRAIN (CADD *)
=====	STM-----STM	PROPOSED STORM DRAIN (CADD *)
=====	SAN-----SAN	SANITARY SEWER
=====	SAN-----SAN	EXISTING SANITARY SEWER (CADD *)
=====	SAN-----SAN	PROPOSED SANITARY SEWER (CADD *)
=====	NG-----NG	NATURAL GAS LINE
=====	NG-----NG	EXISTING NATURAL GAS LINE (CADD *)
=====	GAS OR OIL	GASOLINE OR OIL LINE
=====	GAS-----GAS	EXISTING GAS PIPE LINE (CADD *)
=====	OIL-----OIL	EXISTING OIL PIPE LINE (CADD *)
=====	FO-----FO	EXISTING UNDERGROUND FIBER CABLE (CADD *)
=====	TV-----TV	EXISTING UNDERGROUND TV CABLE (CADD *)
=====	MIS-----MIS	EXISTING UNDERGROUND MISSILE CABLE (CADD *)


PLAN

○	SINGLE POST SIGN
○○	MULTIPLE POST SIGN
○	TELEGRAPH POLE
○	TELEPHONE POLE
□	POWER POLE
□	POWER PEDESTAL
○	TROLLEY POLE
○	LIGHT POLE
○	GUY POLE
○	GUY WIRE & ANCHOR
○	TRANSMISSION TOWER
○	GAS VALVE
○	OIL OR GAS WELL
○	TANKS
○	TREE OR BUSH
○	TREE LINE
○	HEDGE LINE
MB	MAILBOX
○	EXISTING APPROACH
○	PROPOSED APPROACH
○	EXISTING CATTLE GUARD
○	PROPOSED CATTLE GUARD
○	GRAVEL PIT
○	SCALES
○	MILE POST
○	PROJECT MARKER
○	STATION MARKER
○	CENTERLINE
△	DEFLECTION ANGLE
△c	DEFLECTION ANGLE (CIRCULAR CURVE WITH SPIRALS)
○s	DEFLECTION ANGLE OF ONE SPIRAL
→	NORTH ARROW
+	GATE

* SYMBOLS USED ON CADD DRAFTED PLANS


DETAILED DRAWING	
REFERENCE SECTION 101	DWG. NO. 101-10
STANDARD SPEC.	
SYMBOLS	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

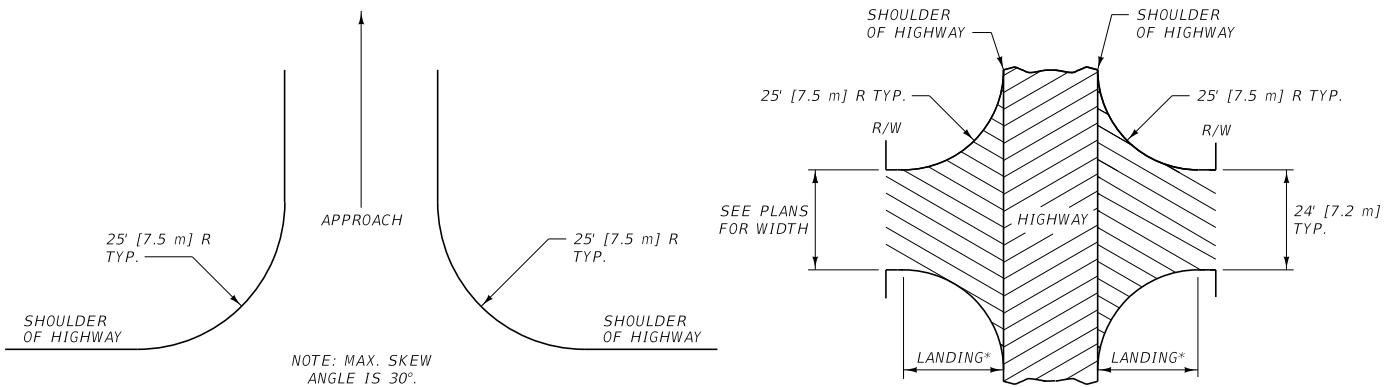

* 25.0' [7.5 m] MIN. FOR PRIVATE OR FIELD APP.
75.0' [25.0 m] MIN. FOR COUNTY AND MAIN ROADS.


LANDING GRADE (-3% DESIRABLE,
+3% ALLOWABLE).

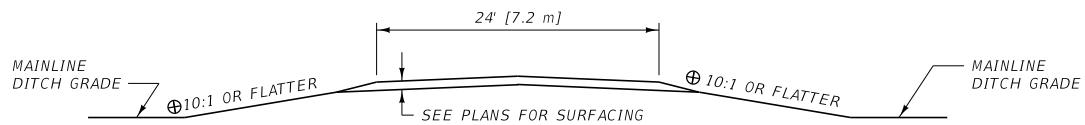

TYPICAL SECTION WITHIN CLEAR ZONE

USE A PIPE AS NECESSARY FOR DRAINAGE.
INSTALL CULVERTS OUTSIDE THE CLEAR ZONE OR PROVIDE END TREATMENT.

⊕ PROVIDE 6:1 SLOPES AT A MINIMUM.

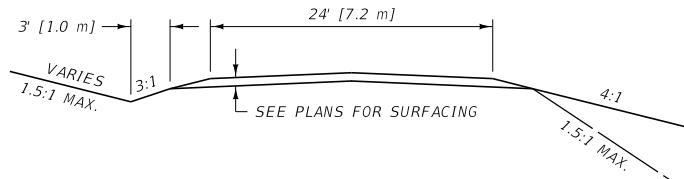

TYPICAL SECTION BEYOND CLEAR ZONE

BACK SLOPES **	
0' - 5' [0.0 m - 1.5 m]	4:1
5' - 10' [1.5 m - 3.0 m]	2:1
OVER 10' [3.0 m]	1.5:1

FILL SLOPES **	
0' - 10' [0.0 m - 3.0 m]	4:1
10' - 20' [3.0 m - 6.0 m]	2:1
OVER 20' [6.0 m]	1.5:1


NOTES:

- ① APPROACH GRADE BEYOND LANDING IS NOT TO EXCEED 10% UNLESS TRAFFIC VOLUMES AND COST INDICATE SUCH TO BE JUSTIFIABLE.
- ② CONSTRUCT APPROACHES TO FIT LOCAL CONDITIONS.
- ③ SECURE WRITTEN PERMISSION FROM LANDOWNER FOR WORK BEYOND THE RIGHT-OF-WAY.

** CRITERIA SHOWN ARE FOR PRIVATE AND FARM FIELD APPROACHES. FOR COUNTY AND MAIN ROADS USE ESTABLISHED STANDARDS FOR APPLICABLE FUNCTIONAL CLASS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 203-05
SECTION 203	
APPROACHES	
 MONTANA DEPARTMENT OF TRANSPORTATION	

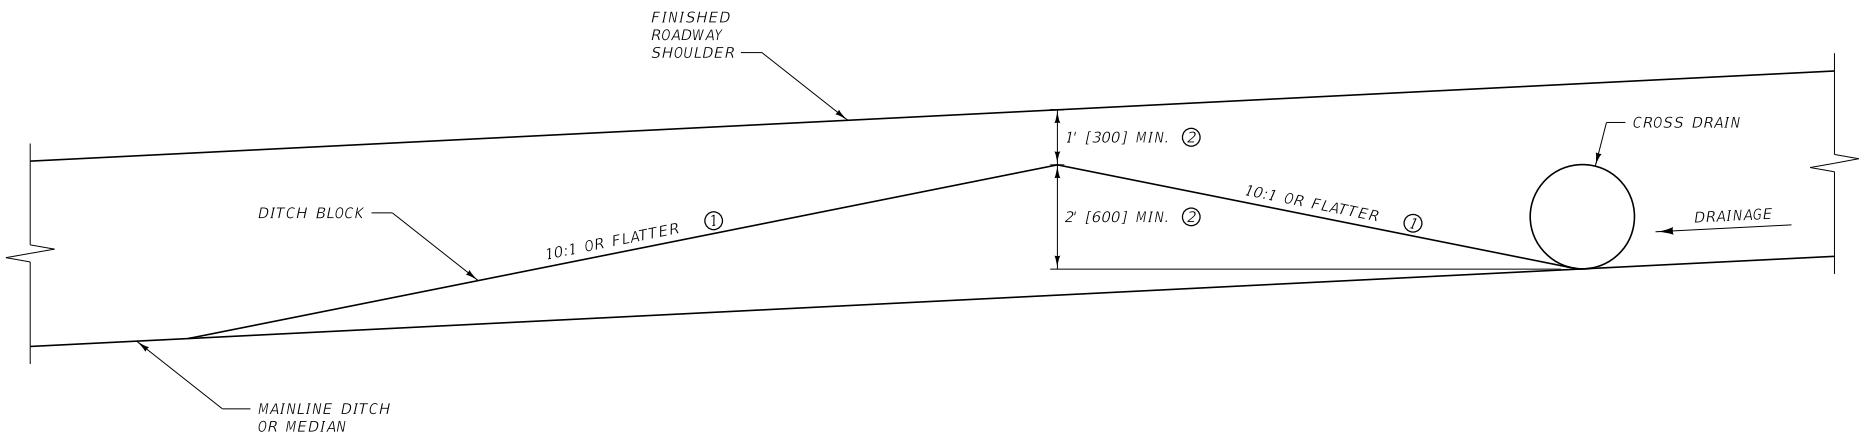





NOTES:

- ① CONSTRUCT DITCH BLOCKS TO FIT LOCAL CONDITIONS. WHEN CONDITIONS DO NOT ALLOW 10:1 SLOPES, USE 6:1 SLOPES.
- ② HEIGHTS SHOWN ARE MINIMUMS. SET HEIGHT OF DITCH BLOCKS BASED ON THE CULVERT DIAMETER OR ON THE ELEVATION SHOWN IN THE PLANS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 203	DWG. NO. 203-20

DITCH BLOCKS

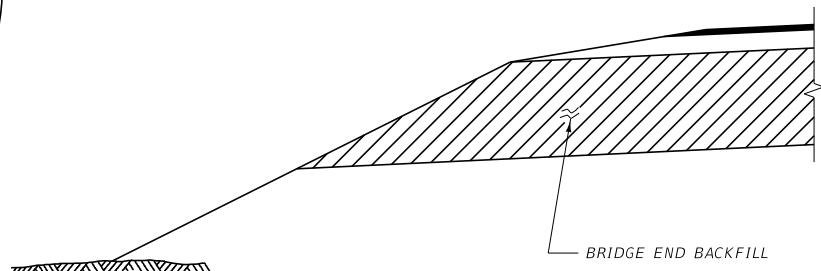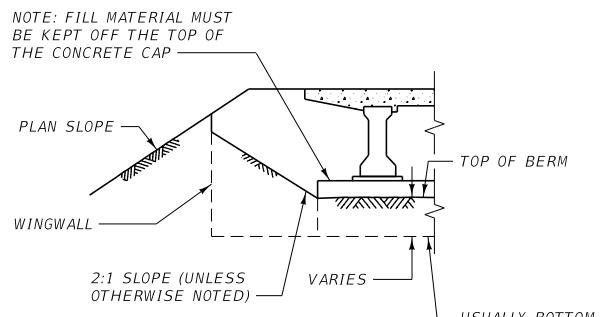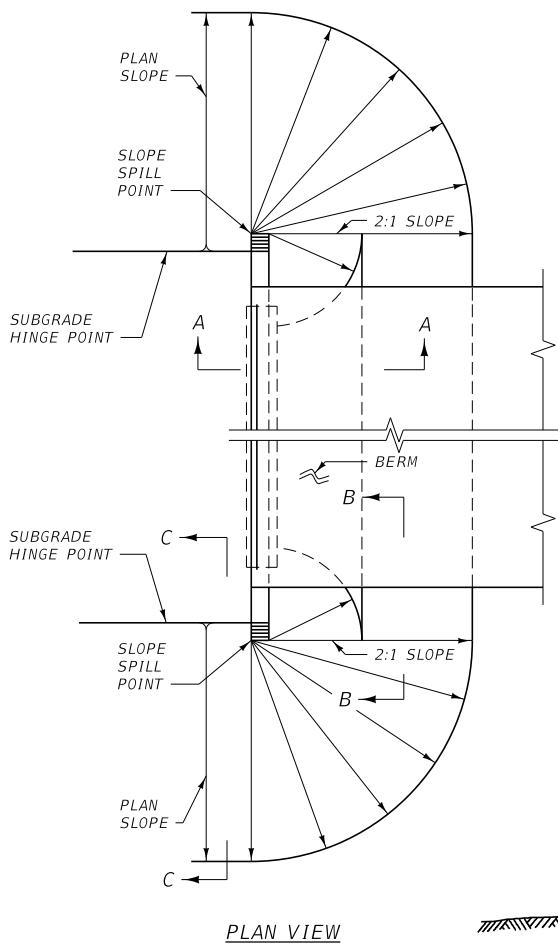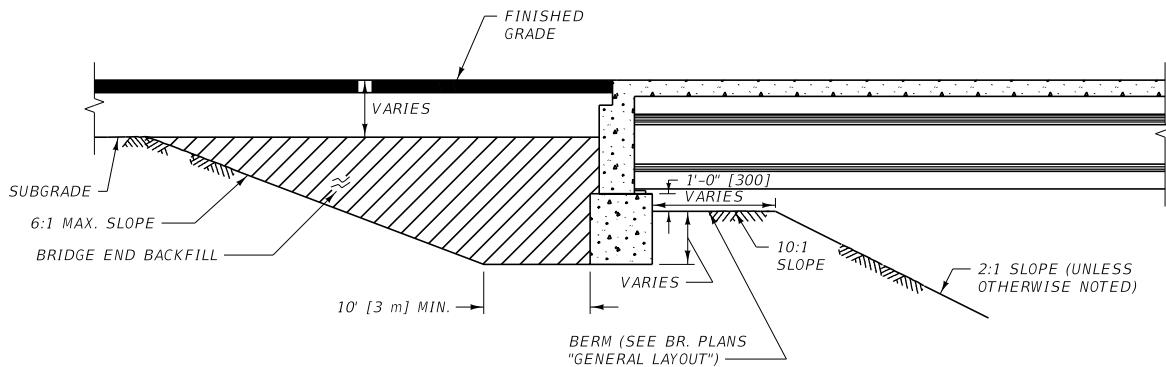


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	REFERENCE	DWG. NO.
	STANDARD SPEC.	301-00
SECTION 301, 701		
ROADWAY EMBANKMENT AT BRIDGE END		
MDT MONTANA DEPARTMENT OF TRANSPORTATION		

CRACKS 1/8" [3] TO 1 1/2" [38] WIDE


LONGITUDINAL CRACK

ROUT 3/4" [19] WIDE x 3/4" [19] DEEP
PRIOR TO APPLYING SEALANT

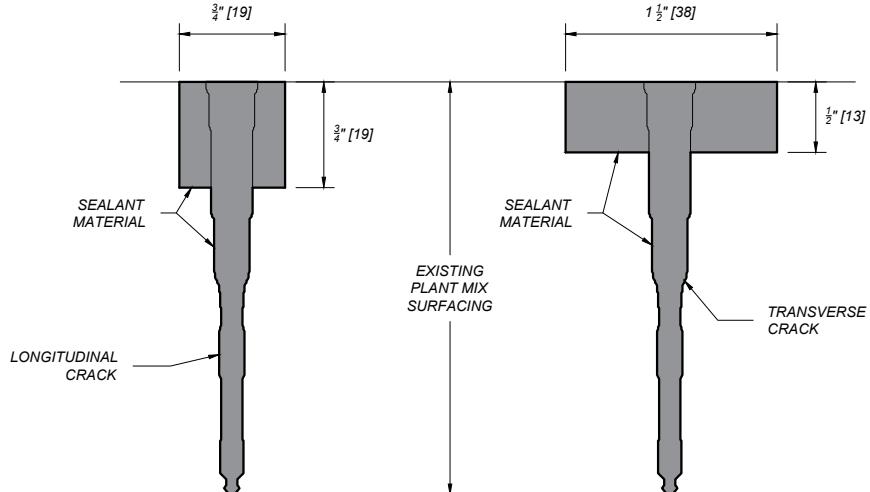


TRANSVERSE CRACK

ROUT 1 1/2" [38] WIDE x 1/2" [13] DEEP
PRIOR TO APPLYING SEALANT

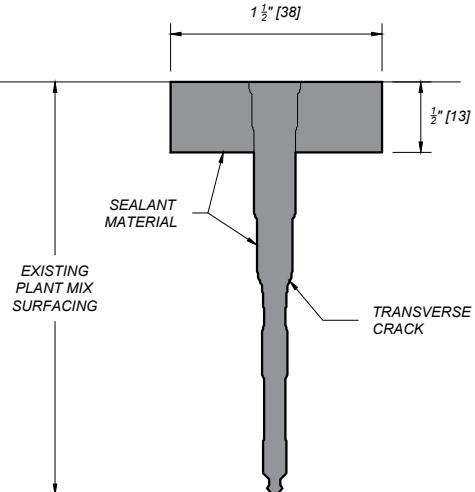

CRACKS 1 1/2" [38] OR WIDER

MASTIC REQUIRED
LEAVE EXISTING CRACK SEAL IN PLACE

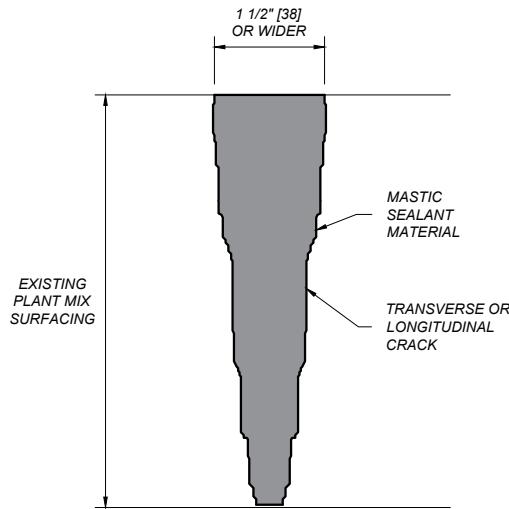

DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 403, 707	DWG. NO. 403-00
-------------------------------------------------	--------------------


CRACK SEALING

EFFECTIVE: JUN 26, 2025




UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

--REVISED--

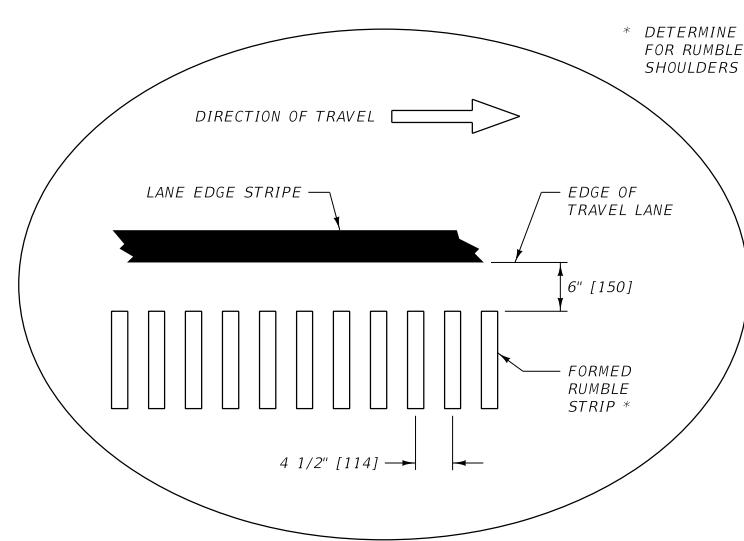


TYPICAL SHOULDER INSTALLATION
(CONCRETE PAVEMENT)

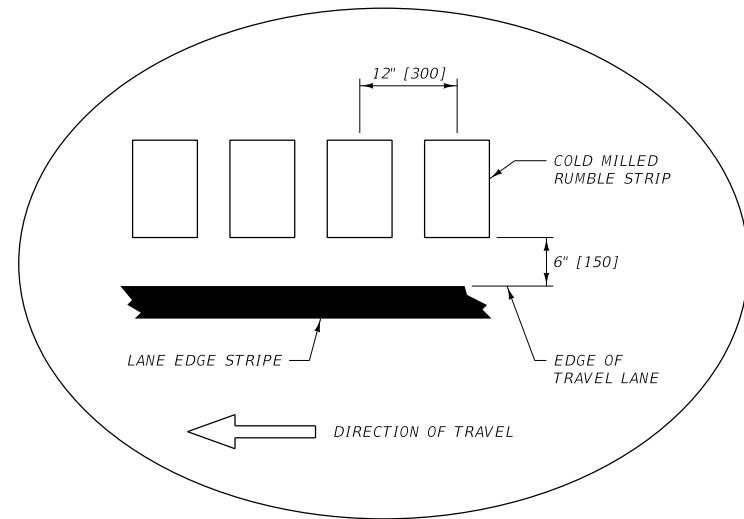


TYPICAL SHOULDER INSTALLATION
(ASPHALT PAVEMENT)

* DETERMINE THE METHOD OF INSTALLATION FOR RUMBLE STRIPS ON EXISTING CONCRETE SHOULDERS ON A CASE-BY-CASE BASIS.

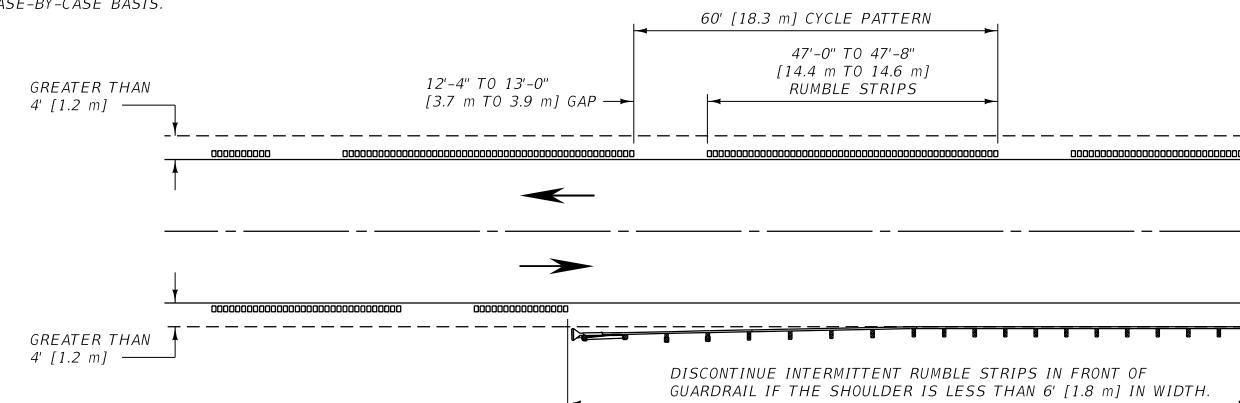


INTERMITTENT RUMBLE STRIP SPACING

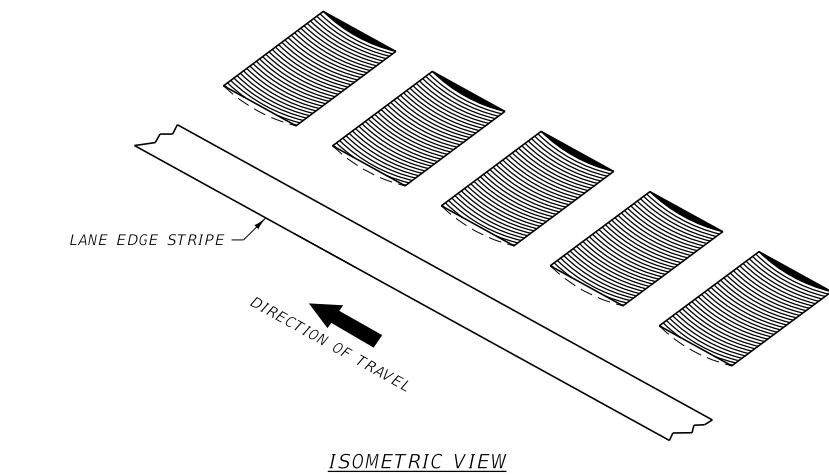

ISOMETRIC VIEW


CONTINUE RUMBLE STRIPS ALONG THE FULL LENGTH, INCLUDING TAPERS, OF MAILBOX TURNOUTS, SCENIC TURNOUTS, HISTORIC MARKER TURNOUTS, FARM FIELD APPROACHES, PRIVATE APPROACHES, ETC.

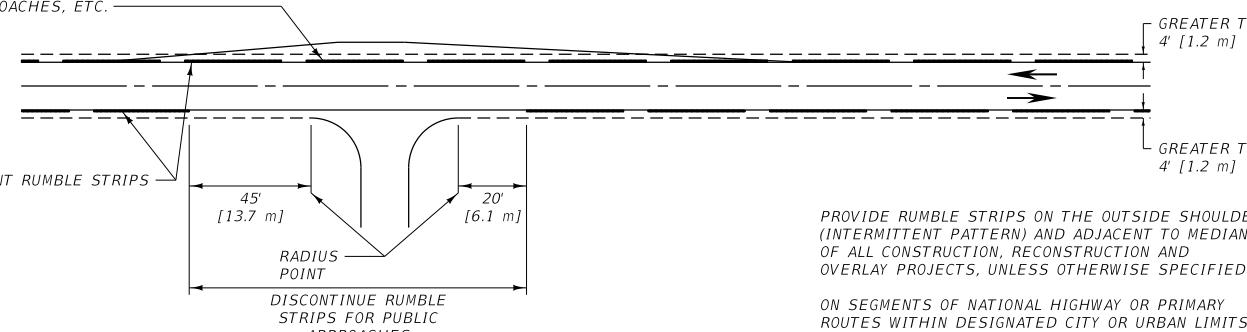

TYPICAL APPLICATION

PROVIDE RUMBLE STRIPS ON THE OUTSIDE SHOULDERS (INTERMITTENT PATTERN) AND ADJACENT TO MEDIAN OF ALL CONSTRUCTION, RECONSTRUCTION AND OVERLAY PROJECTS, UNLESS OTHERWISE SPECIFIED.


ON SEGMENTS OF NATIONAL HIGHWAY OR PRIMARY ROUTES WITHIN DESIGNATED CITY OR URBAN LIMITS, USE ENGINEERING JUDGEMENT ON A CASE-BY-CASE BASIS TO DETERMINE IF RUMBLE STRIP INSTALLATION IS APPROPRIATE.

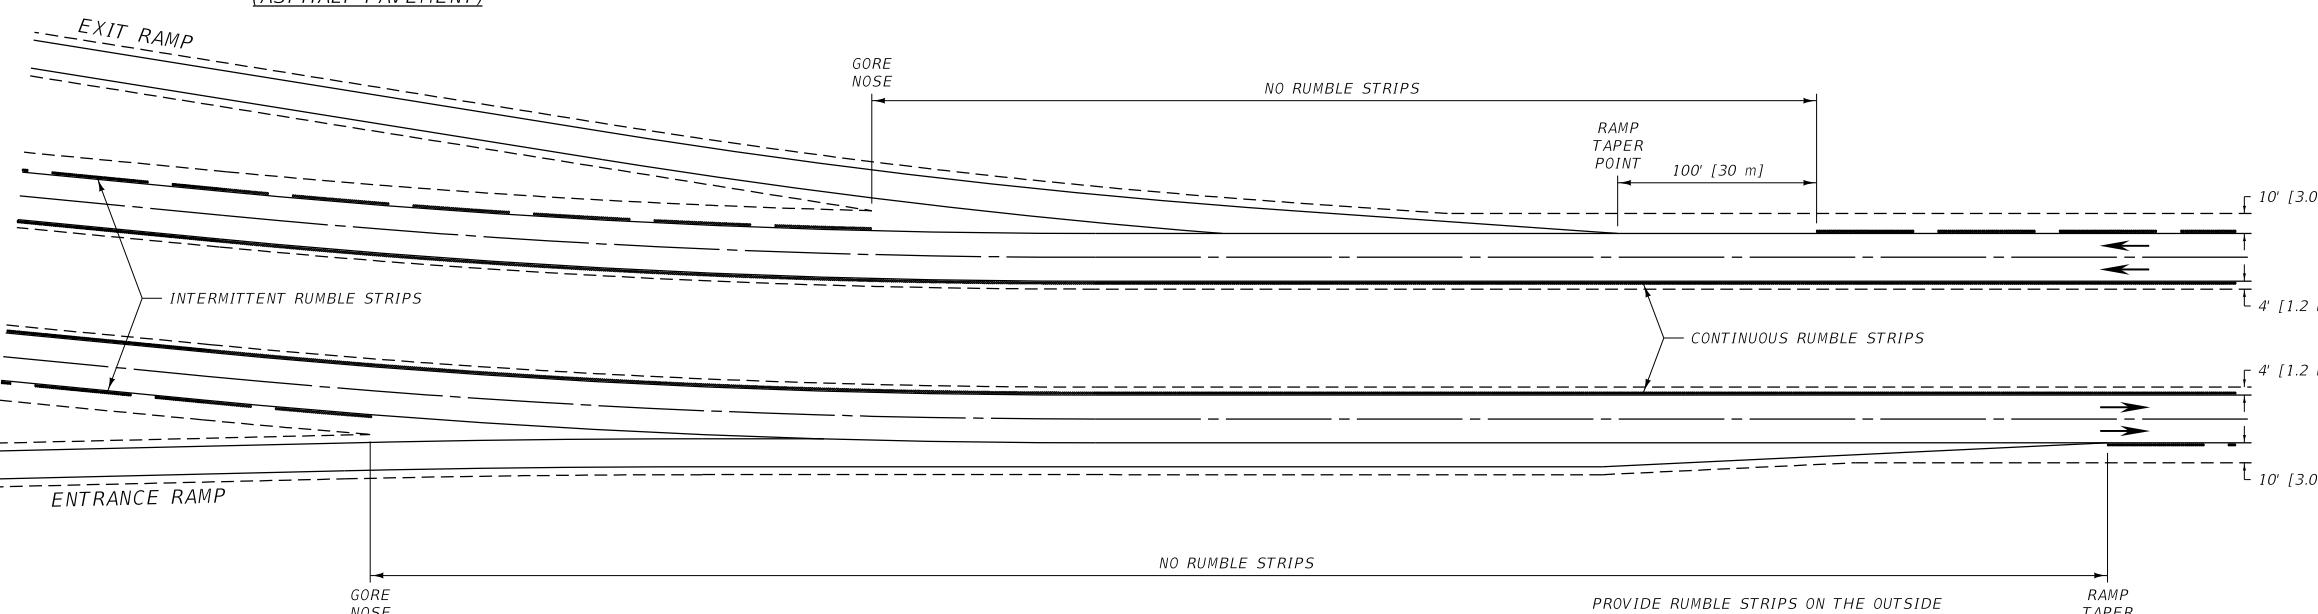

INTERSTATE APPLICATION

PROVIDE RUMBLE STRIPS ON THE OUTSIDE SHOULDERS (INTERMITTENT PATTERN) AND MEDIAN SHOULDERS (CONTINUOUS PATTERN) OF ALL INTERSTATE PROJECTS UNLESS OTHERWISE SPECIFIED.


DISCONTINUE RUMBLE STRIPS IN FRONT OF EXIT AND ENTRANCE RAMPS.

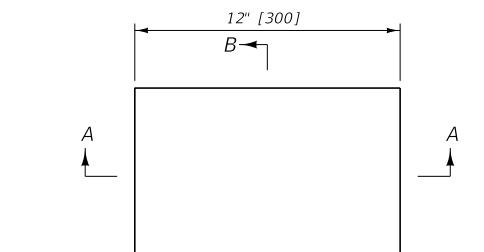

PLAN



SECTION A-A

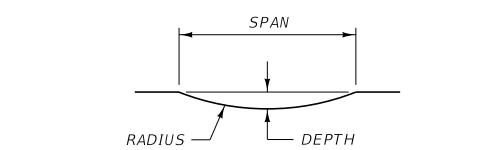

SECTION B-B

DEPTH	RADIUS	SPAN
CONCRETE	1"	1"
ASPHALT	1/2" TO 3/4"	12" MAX. 6 7/8" TO 8 3/8"

DEPTH (mm)	RADIUS (mm)	SPAN (mm)
CONCRETE	25	25
ASPHALT	13 TO 19	300 MAX. 175 TO 200

RUMBLE STRIP DETAIL

NOTE:


DO NOT INSTALL RUMBLE STRIPS OVER CONCRETE BRIDGE DECKS OR WHERE OBSTACLES, SUCH AS CONCRETE BARRIER RAIL, PREVENT PROPER PLACEMENT.

REFERENCE STANDARD SPEC.	DWG. NO.
SECTION 411	411-02






UNITS SHOWN IN BRACKETS () ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

SHOULDER RUMBLE STRIPS

MDT	MONTANA DEPARTMENT OF TRANSPORTATION
------------	--------------------------------------

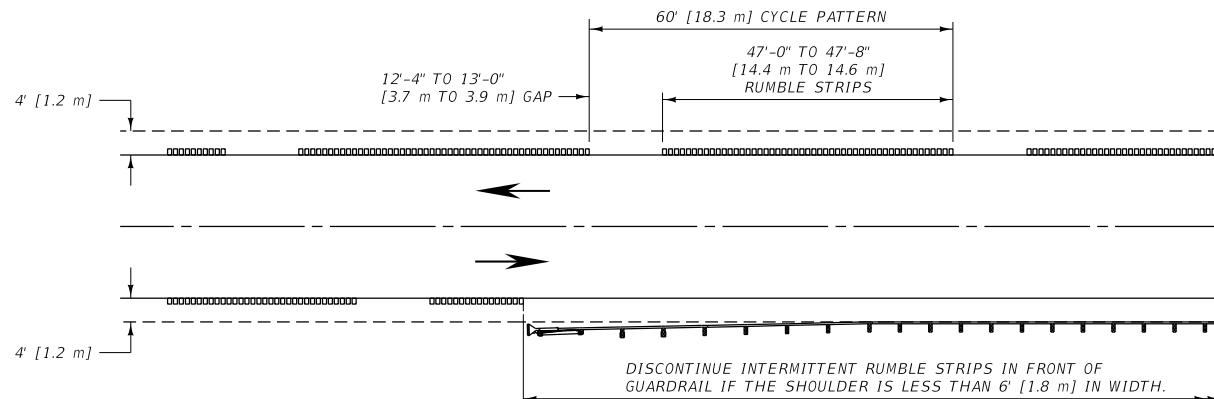


INTERMITTENT RUMBLE STRIP SPACING

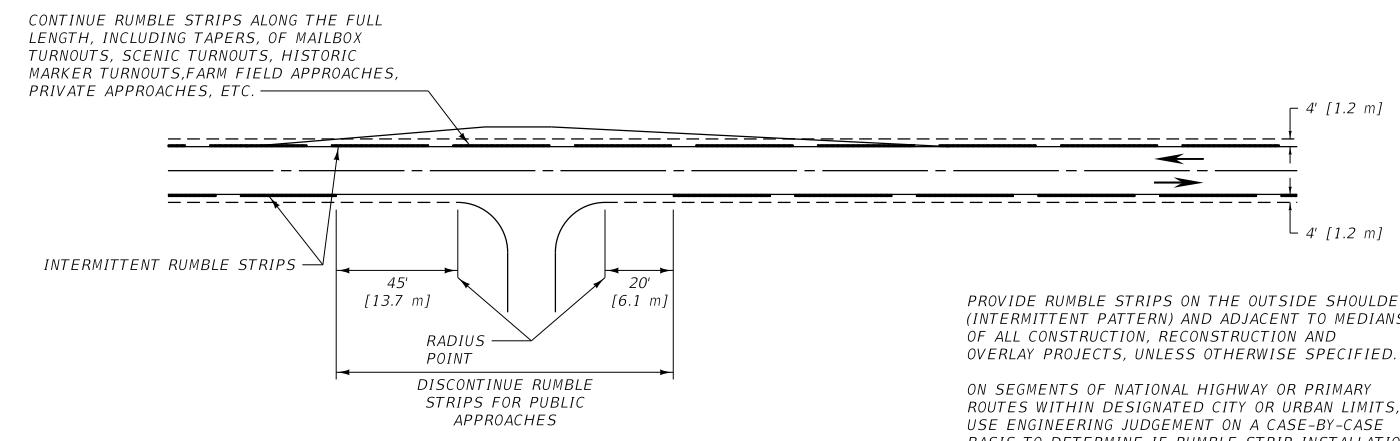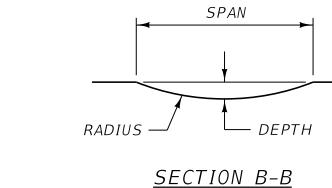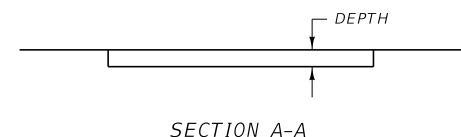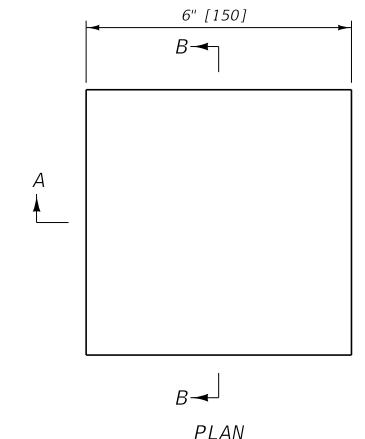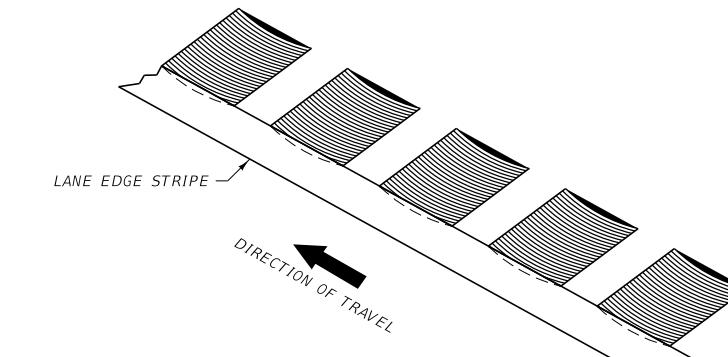

	DEPTH	RADIUS	SPAN
ASPHALT	1/2" TO 3/4"	12" MAX.	6 7/8" TO 8 3/8"

	DEPTH (mm)	RADIUS (mm)	SPAN (mm)
ASPHALT	13 TO 19	300 MAX.	175 TO 200

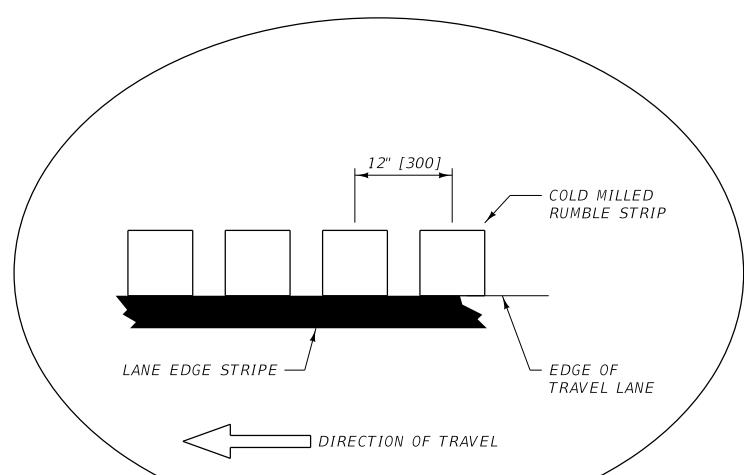

TYPICAL SHOULDER INSTALLATION
(ASPHALT PAVEMENT)

TYPICAL APPLICATION

RUMBLE STRIP DETAIL

NOTE:






① DO NOT INSTALL RUMBLE STRIPS OVER CONCRETE BRIDGE DECKS OR WHERE OBSTACLES, SUCH AS CONCRETE BARRIER RAIL, PREVENT PROPER PLACEMENT.

② INSTALLATION ON SHOULDER LESS THAN 4-FT [1.2 m] WILL BE DECIDED ON A CASE-BY-CASE BASIS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


REFERENCE STANDARD SPEC.	DWG. NO. 411-03
SECTION 411	

MODIFIED SHOULDER RUMBLE STRIPS

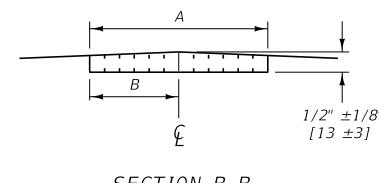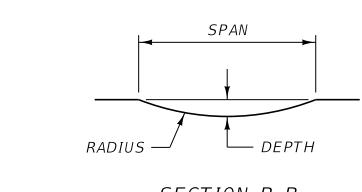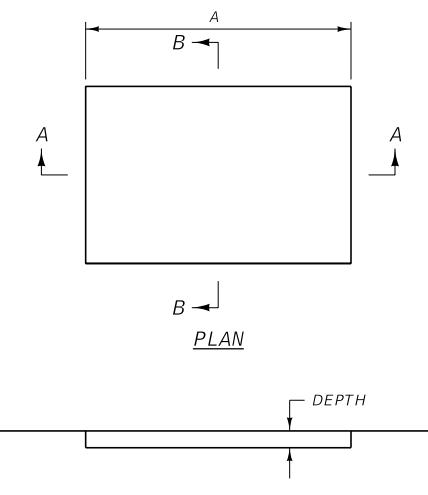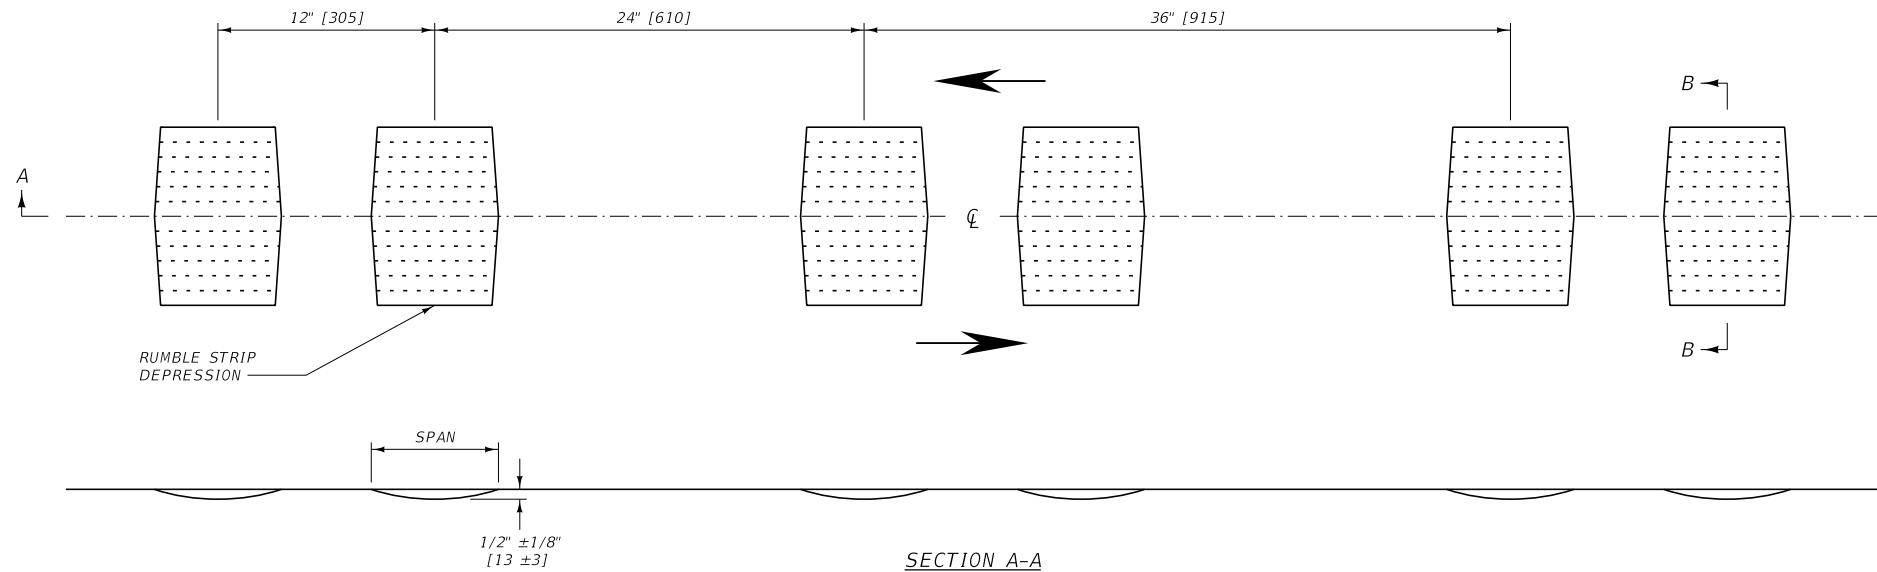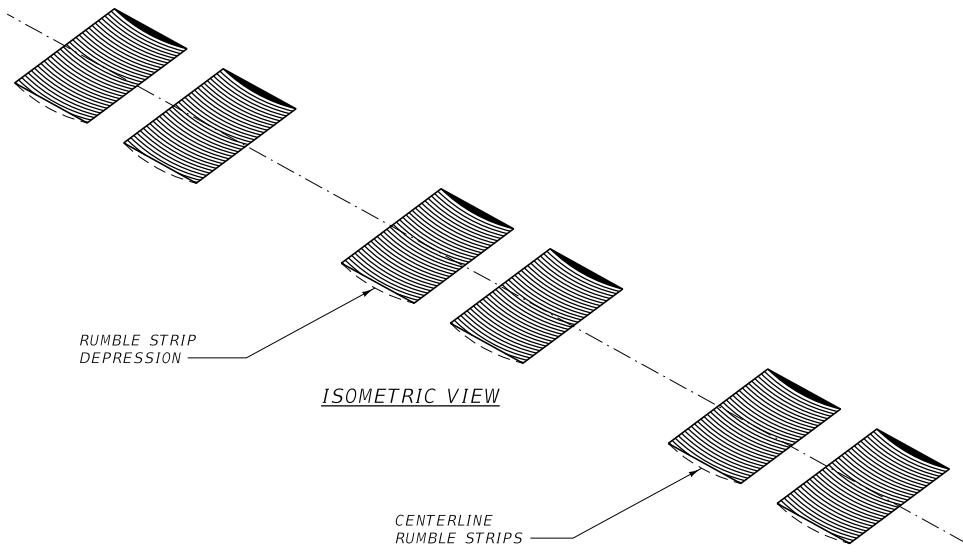

TYPE		INCHES	
		A	B
1	NO SHOULDER	6	3
2	≤ 2.0' SHOULDER	8	4
3	> 2.0' SHOULDER	12	6

TYPE		mm	
		A	B
1	NO SHOULDER	150	75
2	≤ 0.6 m SHOULDER	200	100
3	> 0.6 m SHOULDER	300	150

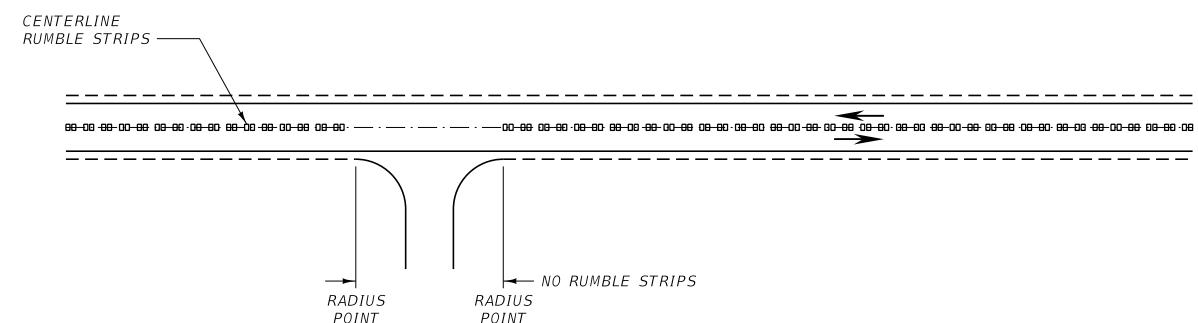

PUBLIC APPROACH ②

NOTES:

- ① ROUTES WITHIN DESIGNATED CITY OR URBAN LIMITS, USE ENGINEERING JUDGEMENT ON A CASE-BY-CASE BASIS TO DETERMINE IF CENTERLINE RUMBLE STRIP INSTALLATION IS APPROPRIATE.
- ② BREAK CENTERLINE RUMBLE STRIPS FOR PUBLIC APPROACHES ONLY.
- ③ CONSIDER REMILLING EXISTING CENTERLINE RUMBLE STRIPS PRIOR TO A SECOND SEAL AND COVER APPLICATION.
- ④ DO NOT INSTALL CENTERLINE RUMBLE STRIPS ON CONCRETE BRIDGE DECKS.





	DEPTH	SPAN
ASPHALT	1/2" ±1/8"	6" TO 7"

	DEPTH (mm)	SPAN (mm)
ASPHALT	13 ±3	150 TO 175


RUMBLE STRIP DETAIL

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 411-05
SECTION 411	
CENTERLINE RUMBLE STRIPS	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

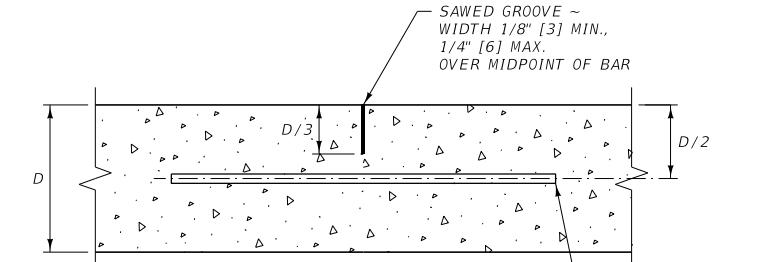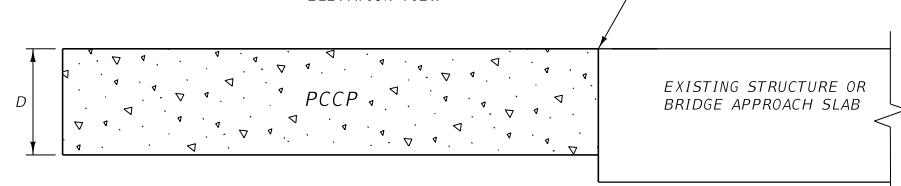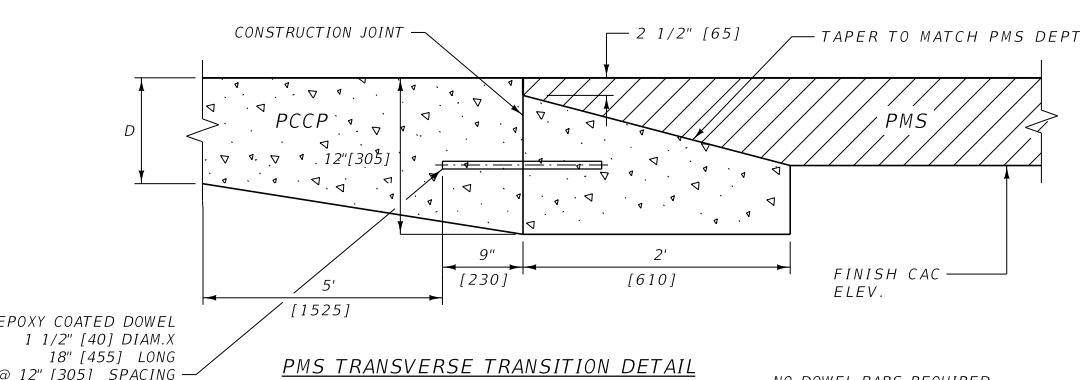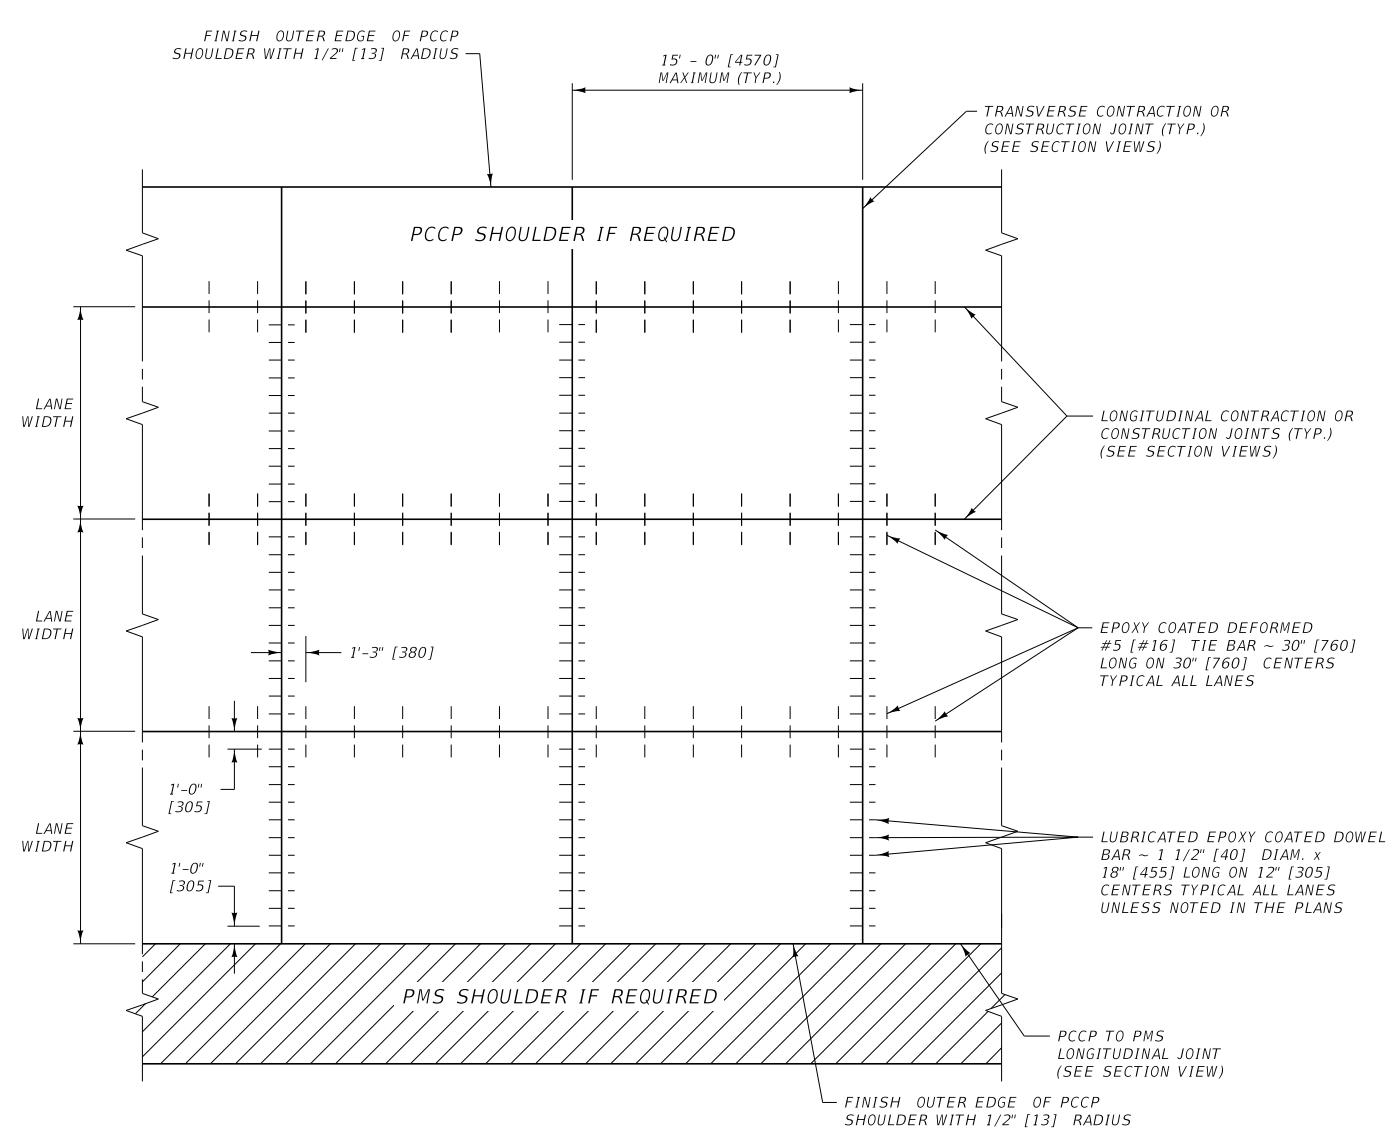


LONGITUDINAL CONTRACTION JOINT
SECTION VIEW

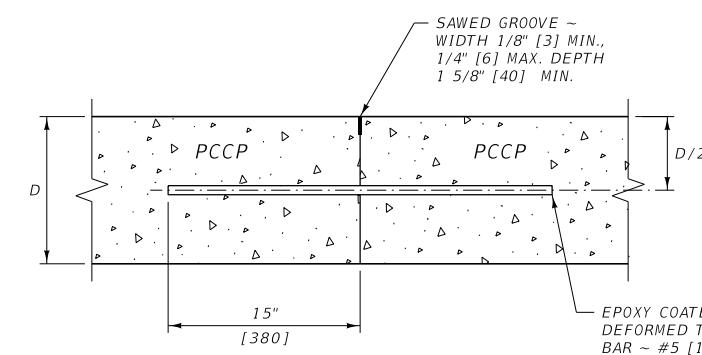


PCCP TO PCCP LONGITUDINAL CONSTRUCTION JOINT


SECTION VIEW
NOTE: SEE DTL. DWG. NO. 501-15
FOR BAR PLACEMENT WITH EXISTING RCCR

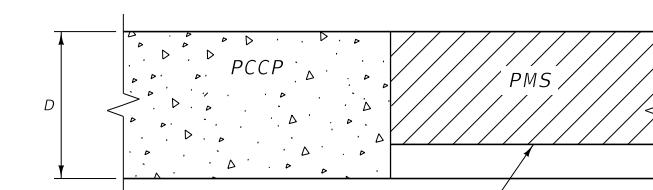


PCCP TO PMS LONGITUDINAL JOIN

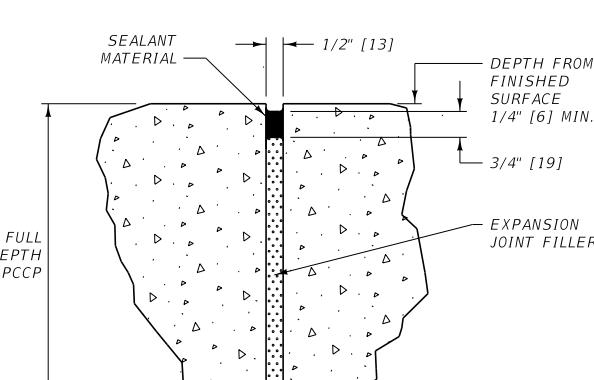

ISOLATION JOINT

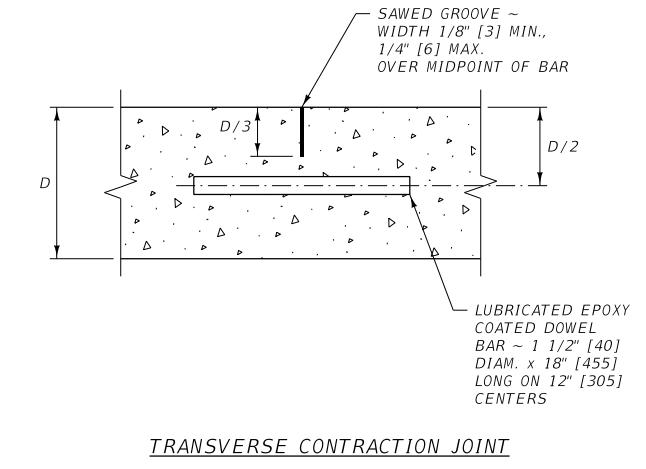


TRANSVERSE CONTRACTION JOINT
SECTION VIEW

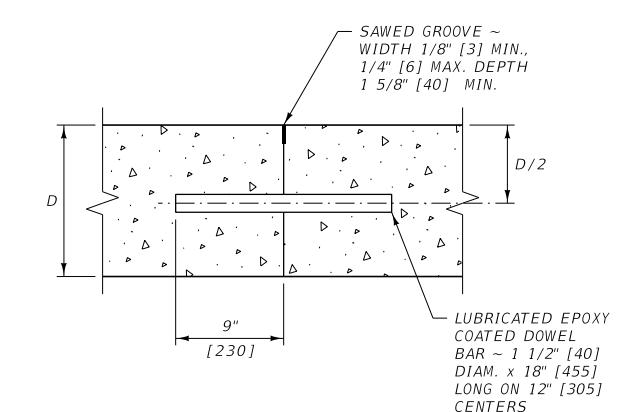

TRANSVERSE CONSTRUCTION JOINT
SECTION VIEW

NOTE: SEE DTL. DWG. NO. 501-15
FOR BAR PLACEMENT WITH EXISTING PCCP

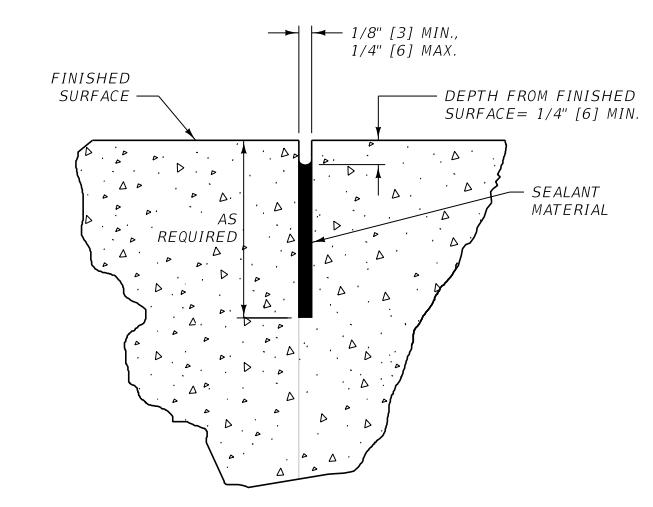


SAWED JOINT


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 501-00
SECTION 501


PCCP JOINTS

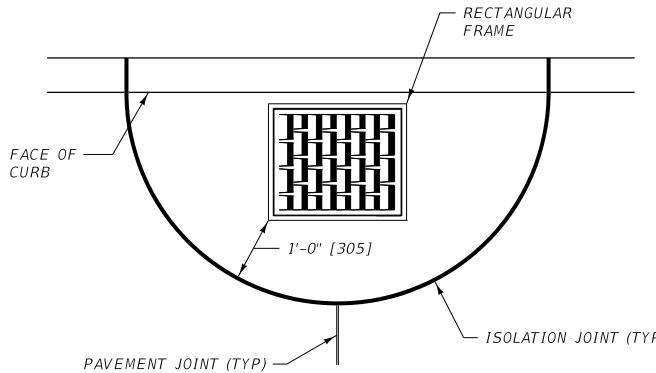


CONDITION A

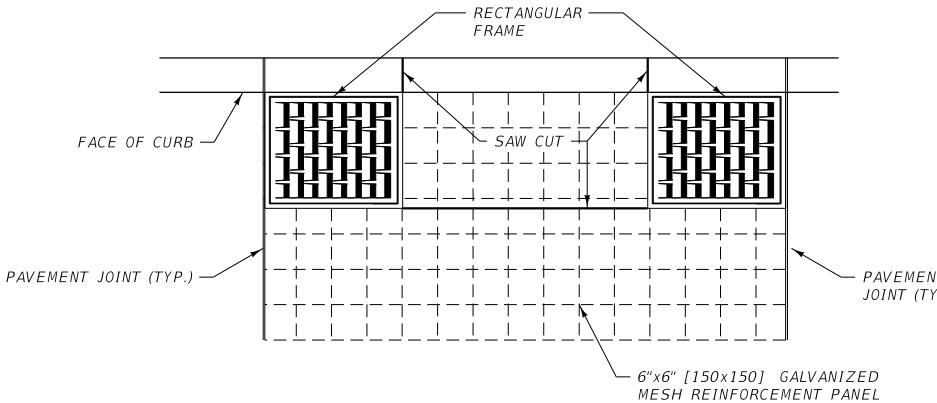


CONDITION B
NOTE: USE CONDITION B
WHEN MULTIPLE INLETS ARE
PRESENT IN ONE PANEL

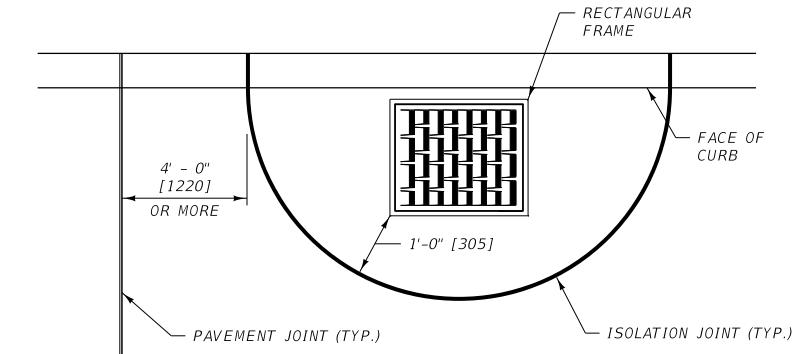




CONDITION C
(SHOULDER USE ONLY)

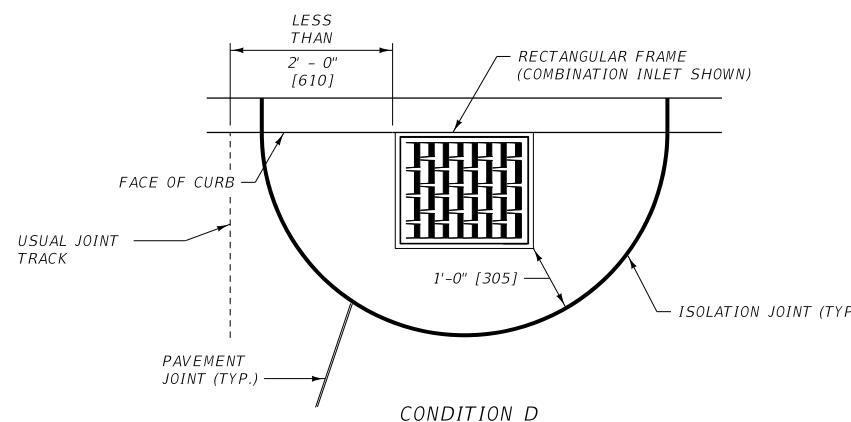


CONDITION D

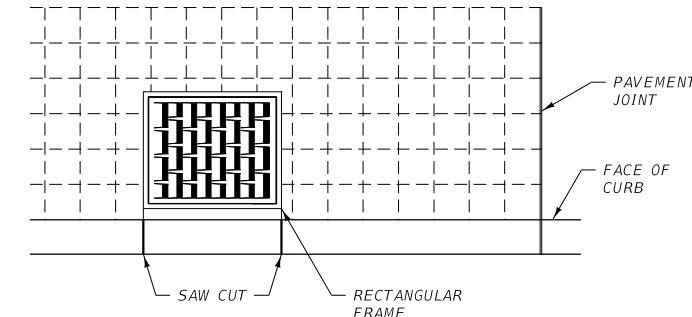

CONDITION F
NOTE: USE CONDITION F
ONLY IF CONDITIONS
C OR D CANNOT BE USED
DUE TO INLET PLACEMENT

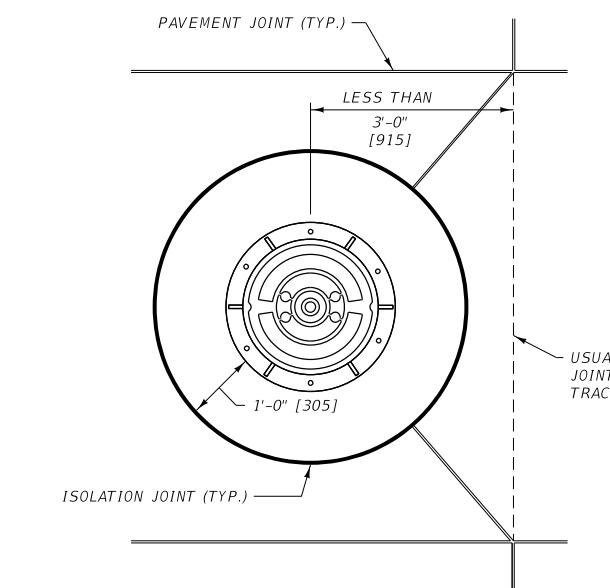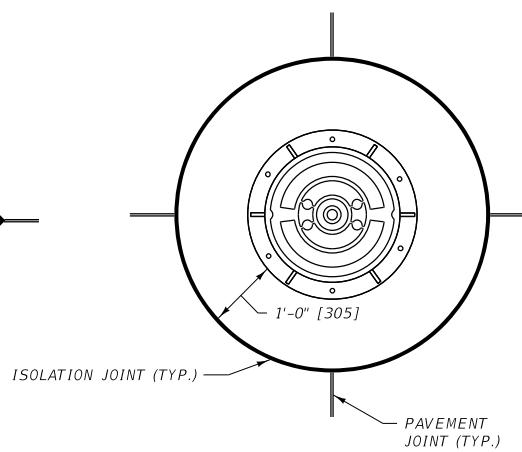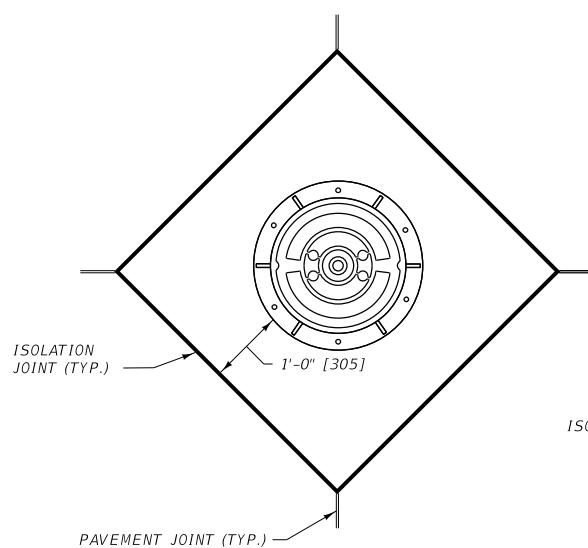

CONDITION I

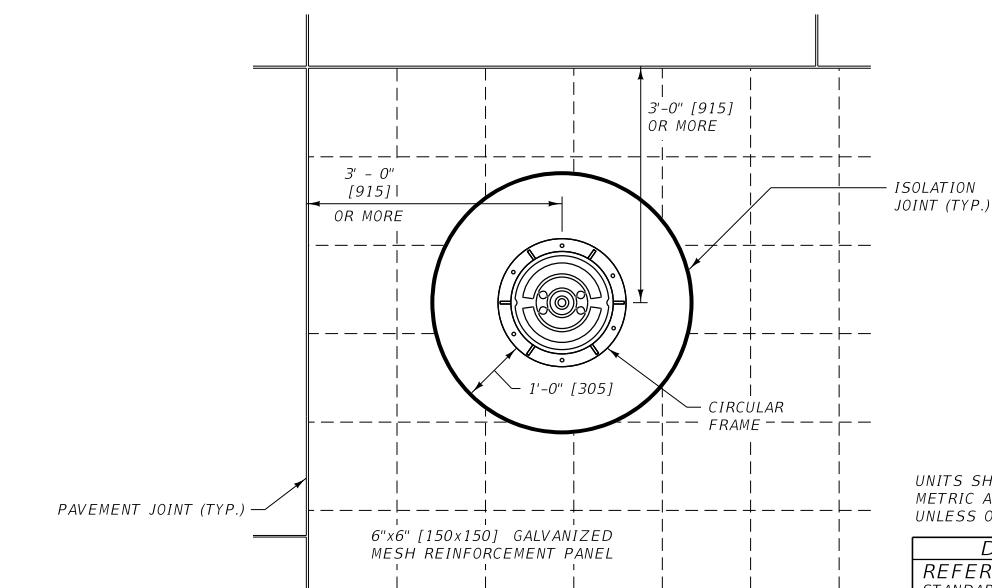


CONDITION J

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 501-05
SECTION 501

PCCP ISOLATION JOINTS




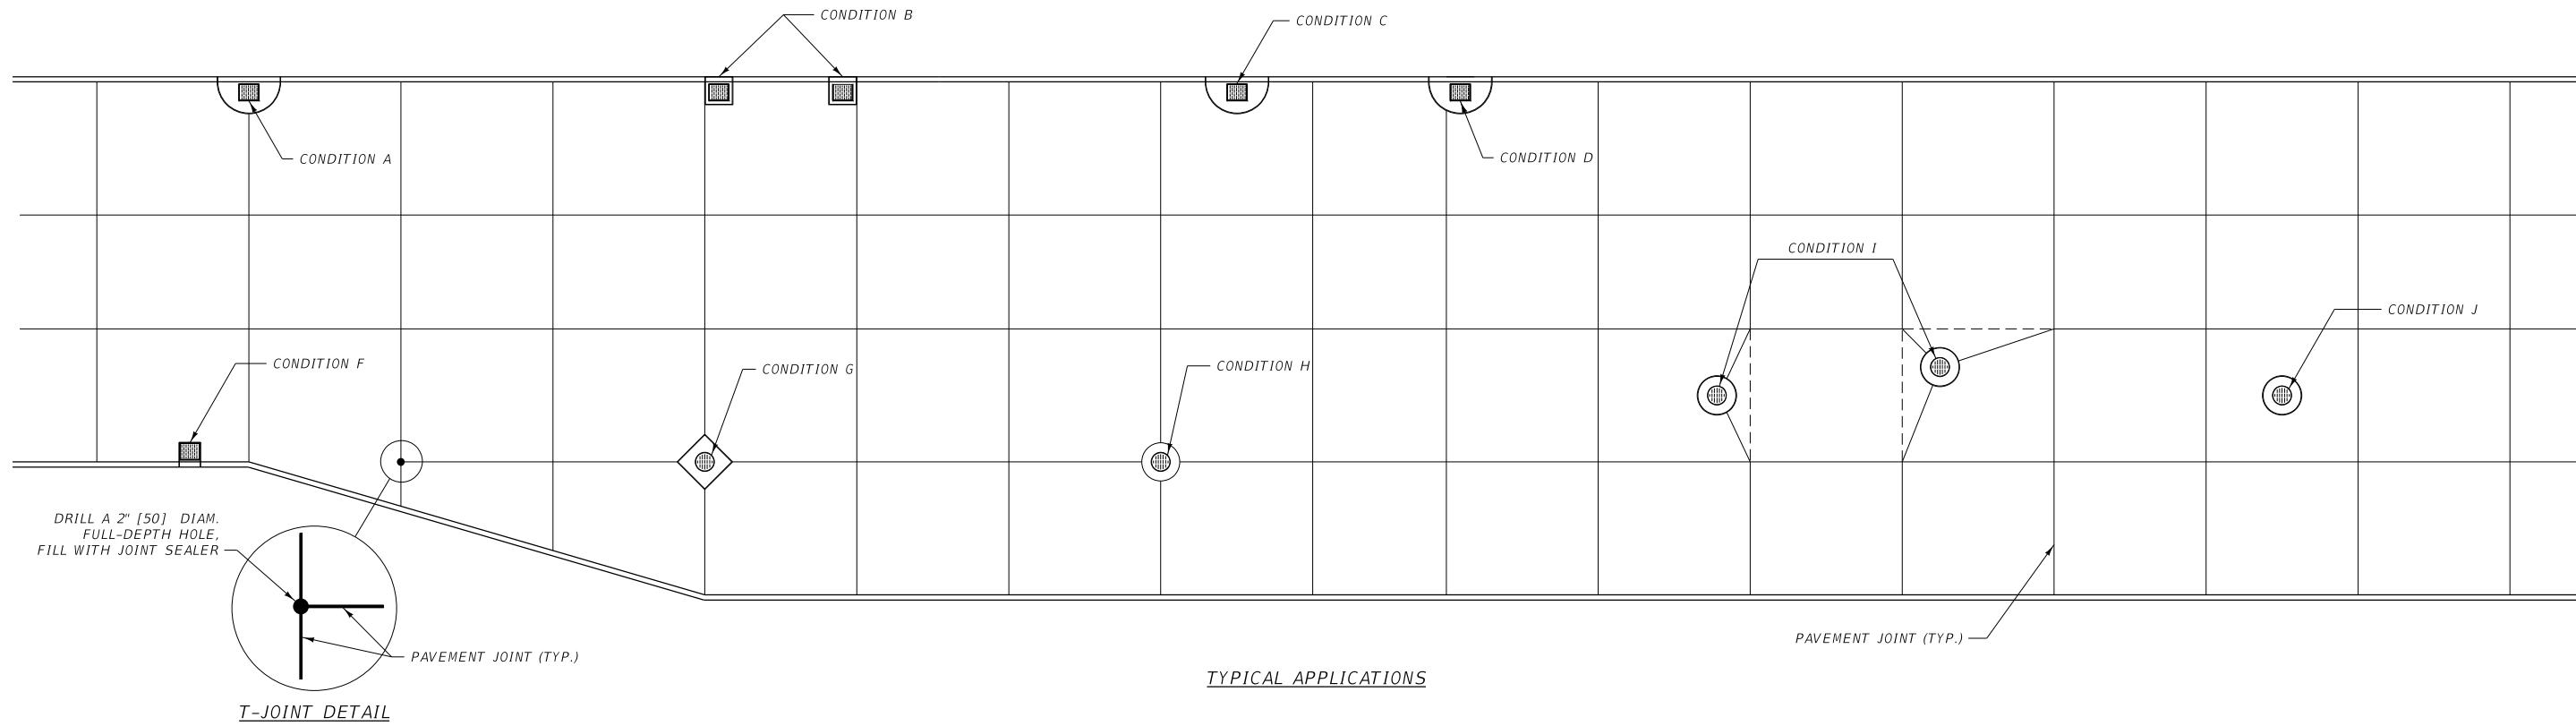


TYPICAL ISOLATION JOINT GUIDELINES		
CONDITION	FEATURE	DISTANCE FROM NEAREST PAVEMENT JOINT
A	DROP OR CURB INLET	-----
B	DROP OR CURB INLET	-----
C	DROP OR CURB INLET	EDGE OF ISOLATION JOINT > 4 FT [1220] FROM JOINT
D	DROP OR CURB INLET	EDGE OF INLET < 2 FT [610] FROM JOINT
F	DROP OR CURB INLET	> 4 FT [1220] FROM JOINT
G	MANHOLE	-----
H	MANHOLE	-----
I	MANHOLE	CENTER OF MANHOLE < 3 FT [915] FROM JOINT
J	MANHOLE	CENTER OF MANHOLE > 3 FT [915] FROM JOINT

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
 REFERENCE DWG. NO.
 STANDARD SPEC. 501-10
 SECTION 501

PCCP
ISOLATION JOINTS

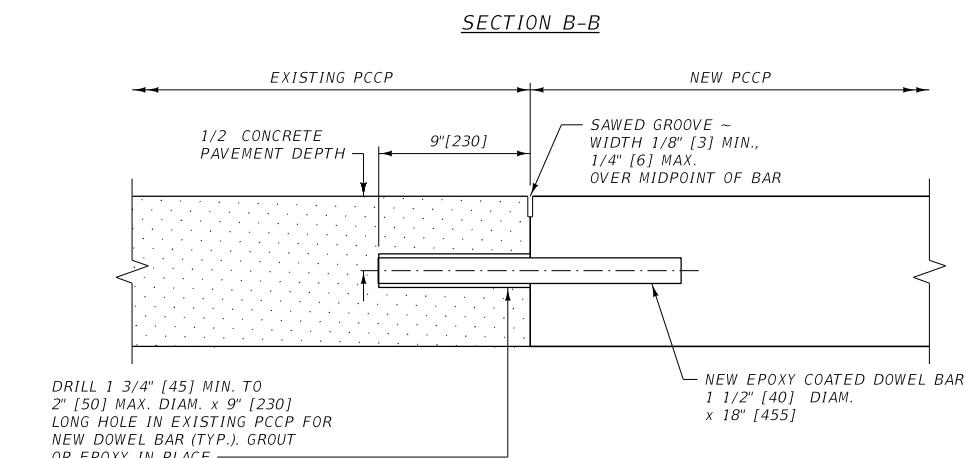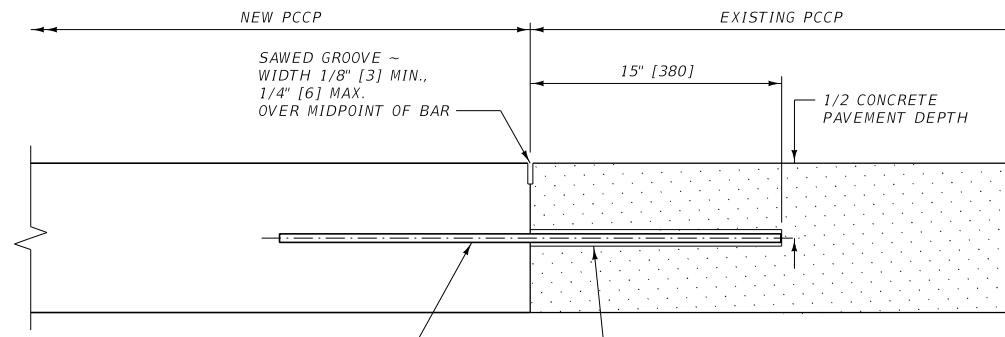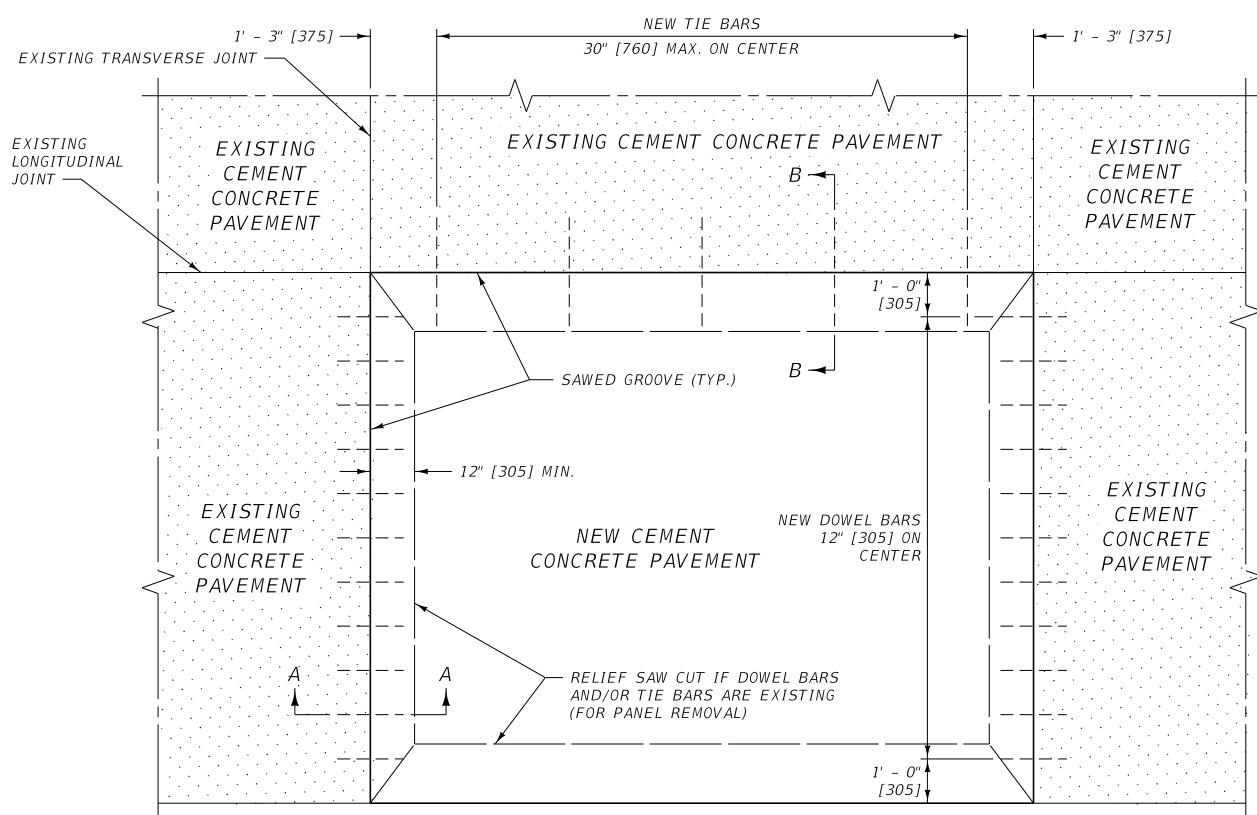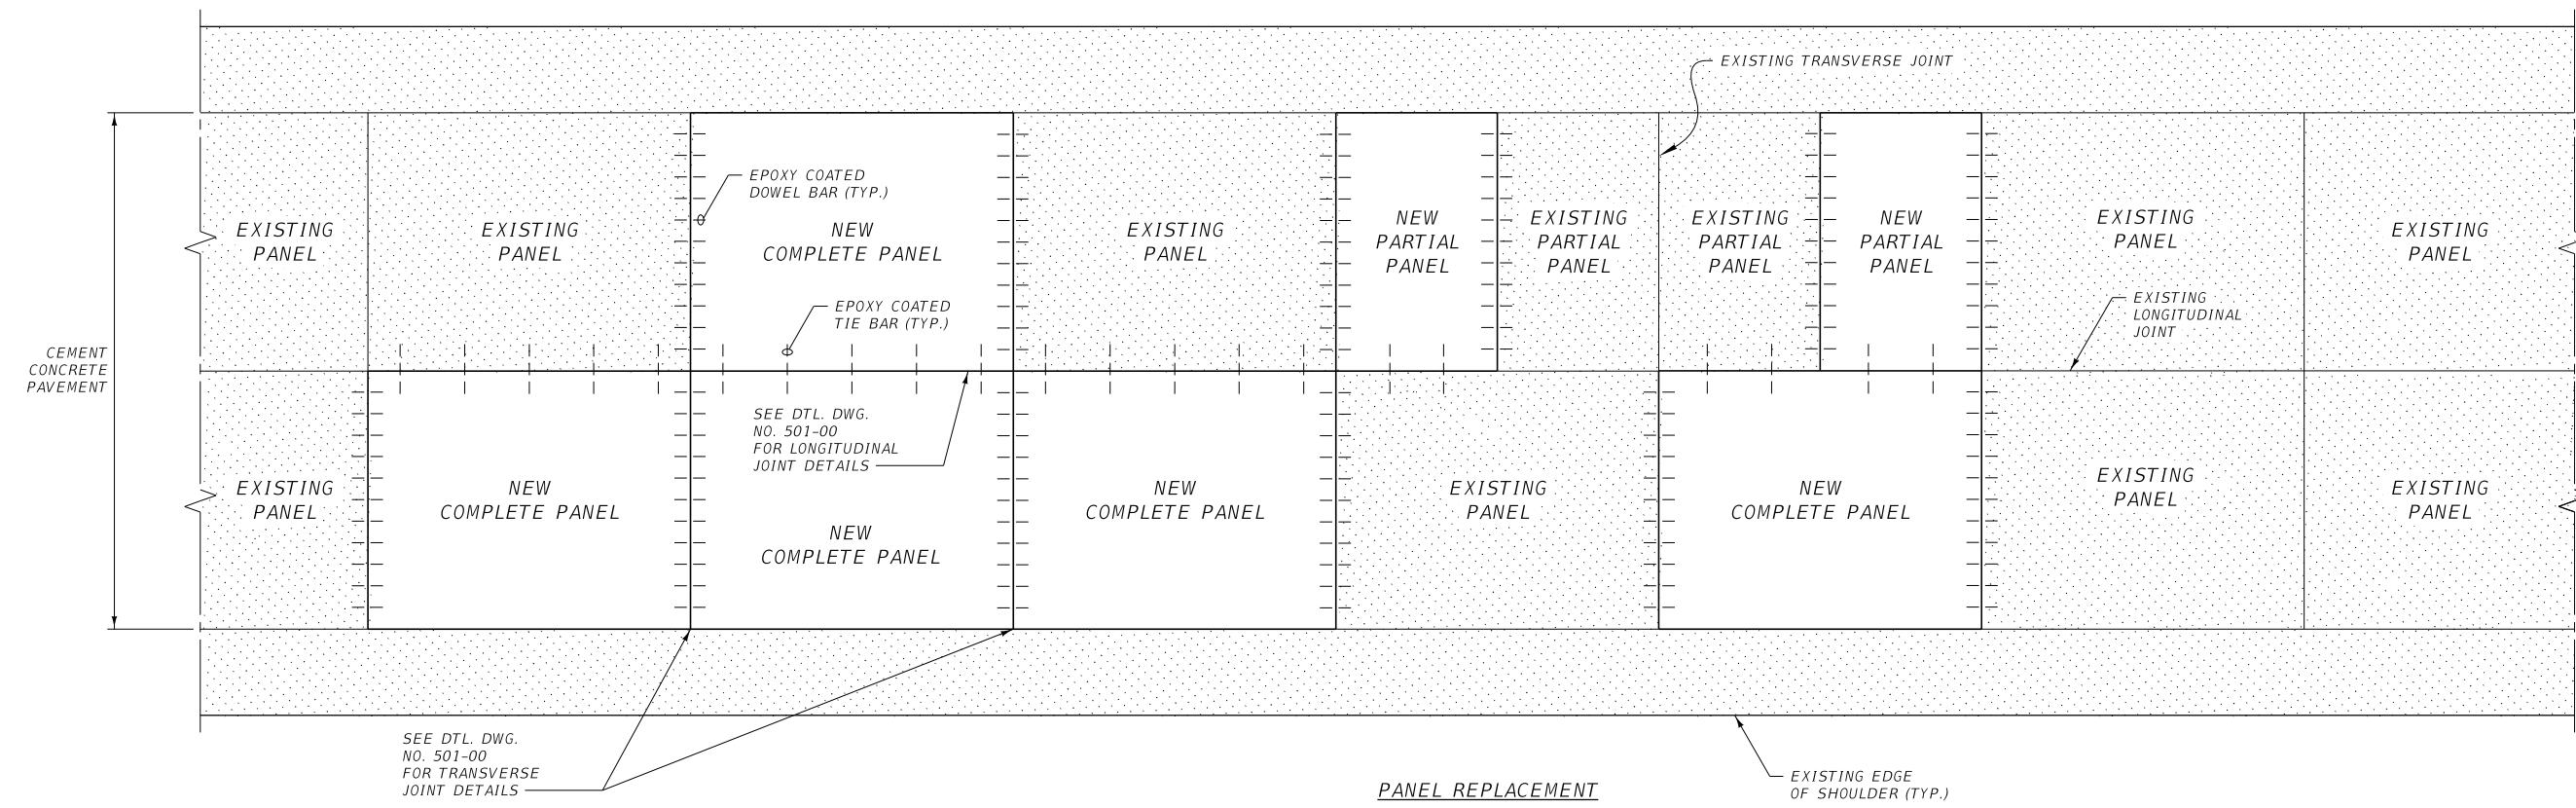


NOTES:

- ① INSTALL TIE BARS ALONG LONGITUDINAL JOINTS BETWEEN PANEL REPLACEMENT AND EXISTING PCCP. TIE BARS ARE NOT INSTALLED BETWEEN PCCP PAVEMENT AND PMS SHOULDERS.
- ② PLACE NEW DOWEL BARS BETWEEN EXISTING DOWEL BARS. DO NOT PLACE ANY DOWEL BARS CLOSER THAN 1'-0" [305] FROM EDGE OF CONCRETE PANEL.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 501-15
SECTION 501


PCCP REPAIR

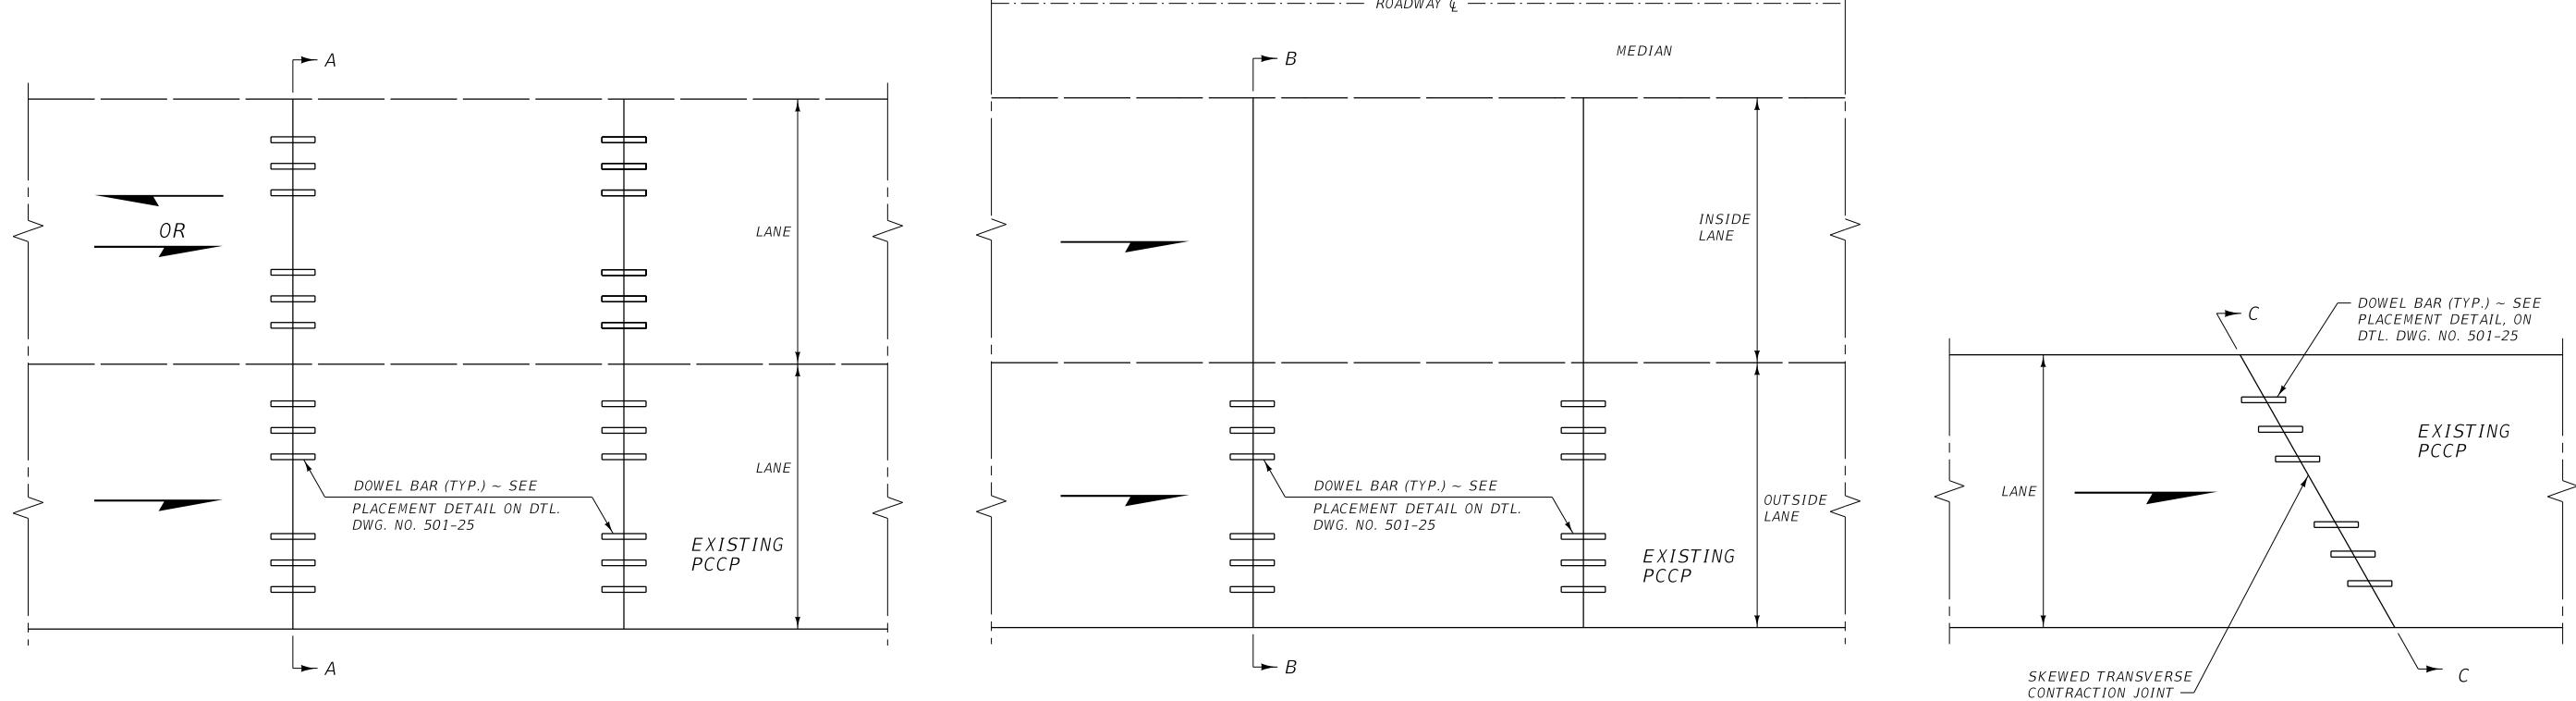


DOWEL BAR RETROFIT
FOR TWO LANE DIVIDED HIGHWAY (ONE WAY TRAFFIC)
FOR EACH LANE IN UNDIVIDED HIGHWAY (TWO WAY TRAFFIC)

DOWEL BAR RETROFIT FOR ONE LANE
DIVIDED HIGHWAY (ONE WAY TRAFFIC)


SKEWED JOINT DETAIL

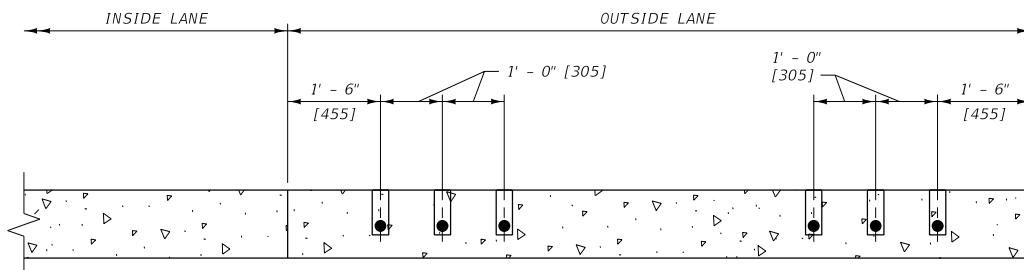

SECTION B-B

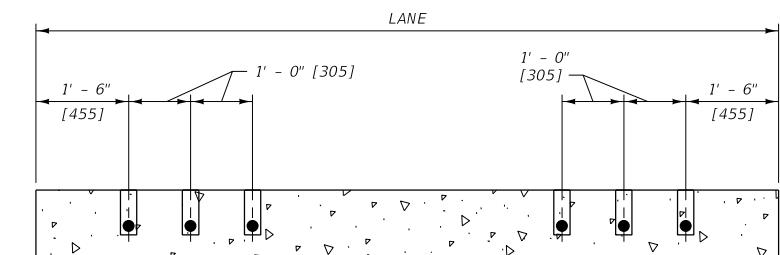

SECTION C-C
ALL DIMENSIONS PERPENDICULAR TO DIRECTION OF TRAVEL


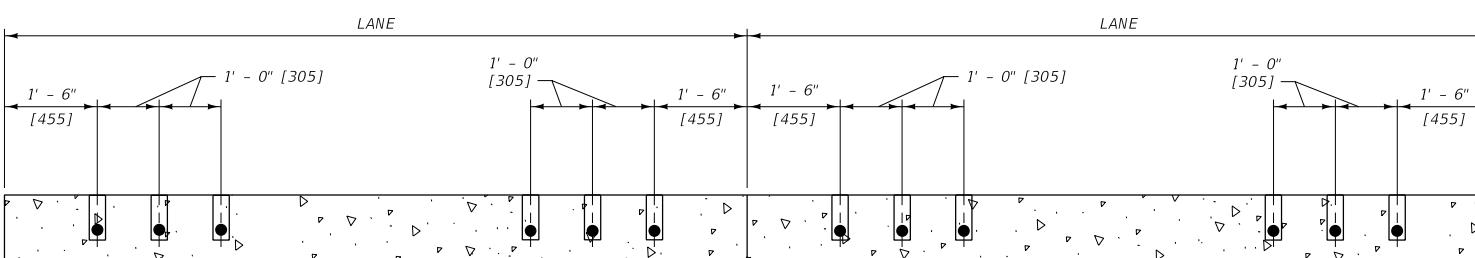


SECTION A-A



UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 501-20
SECTION 501

DOWEL BAR RETROFIT
FOR PCCP

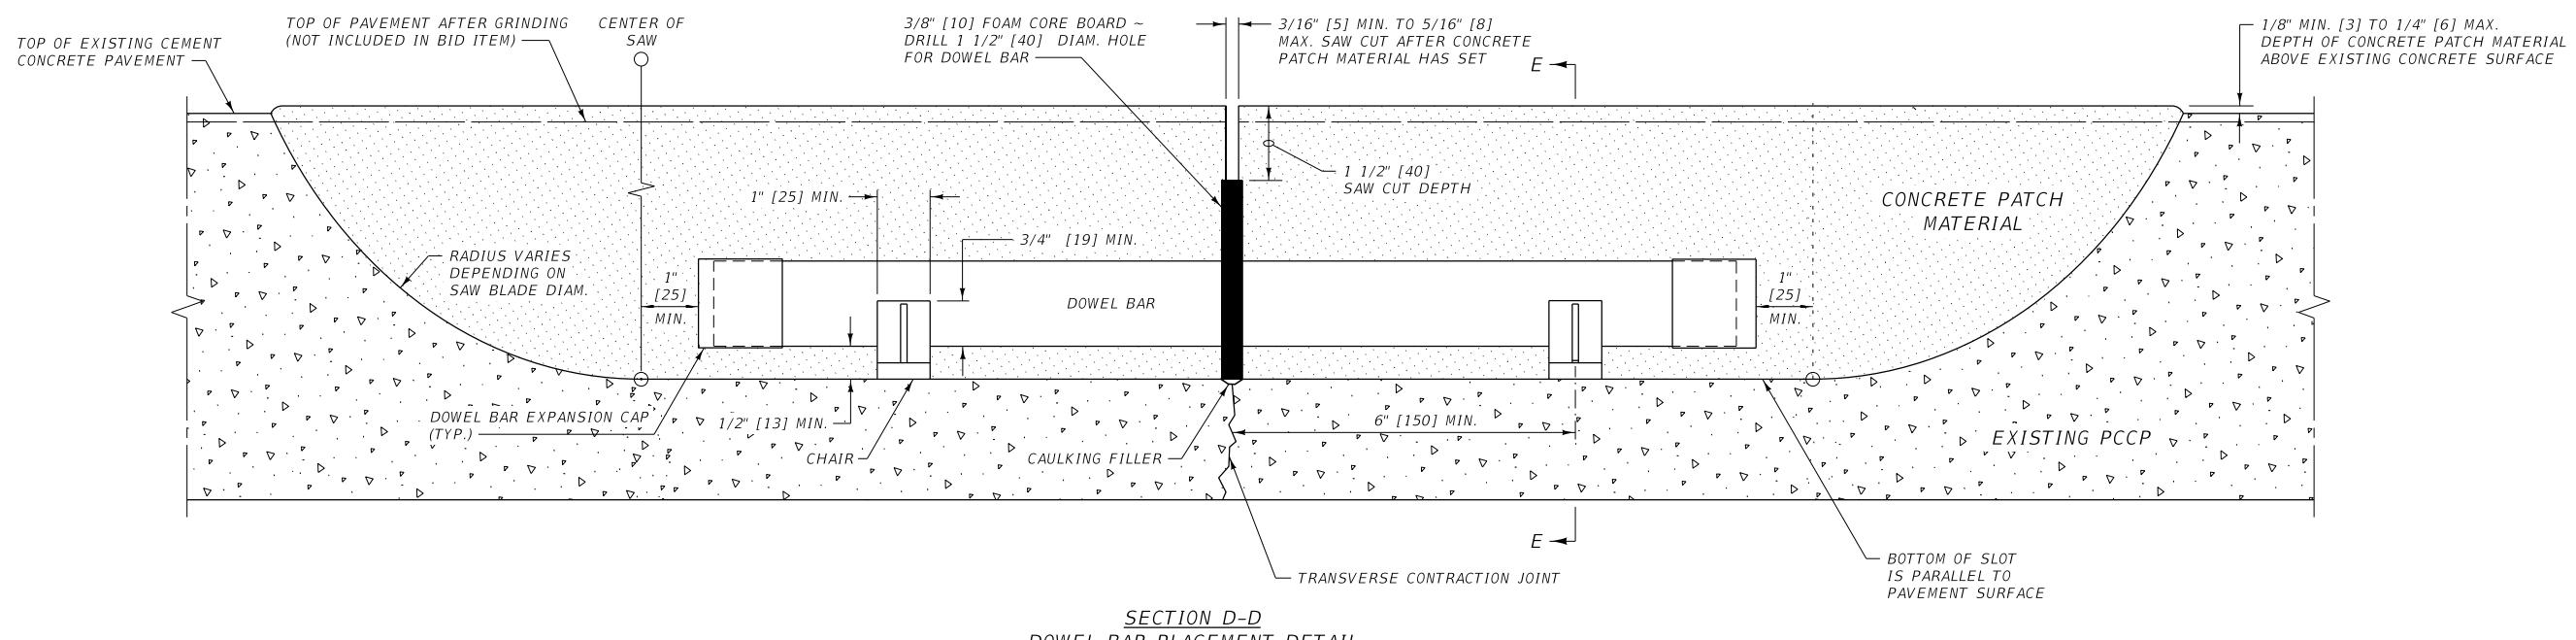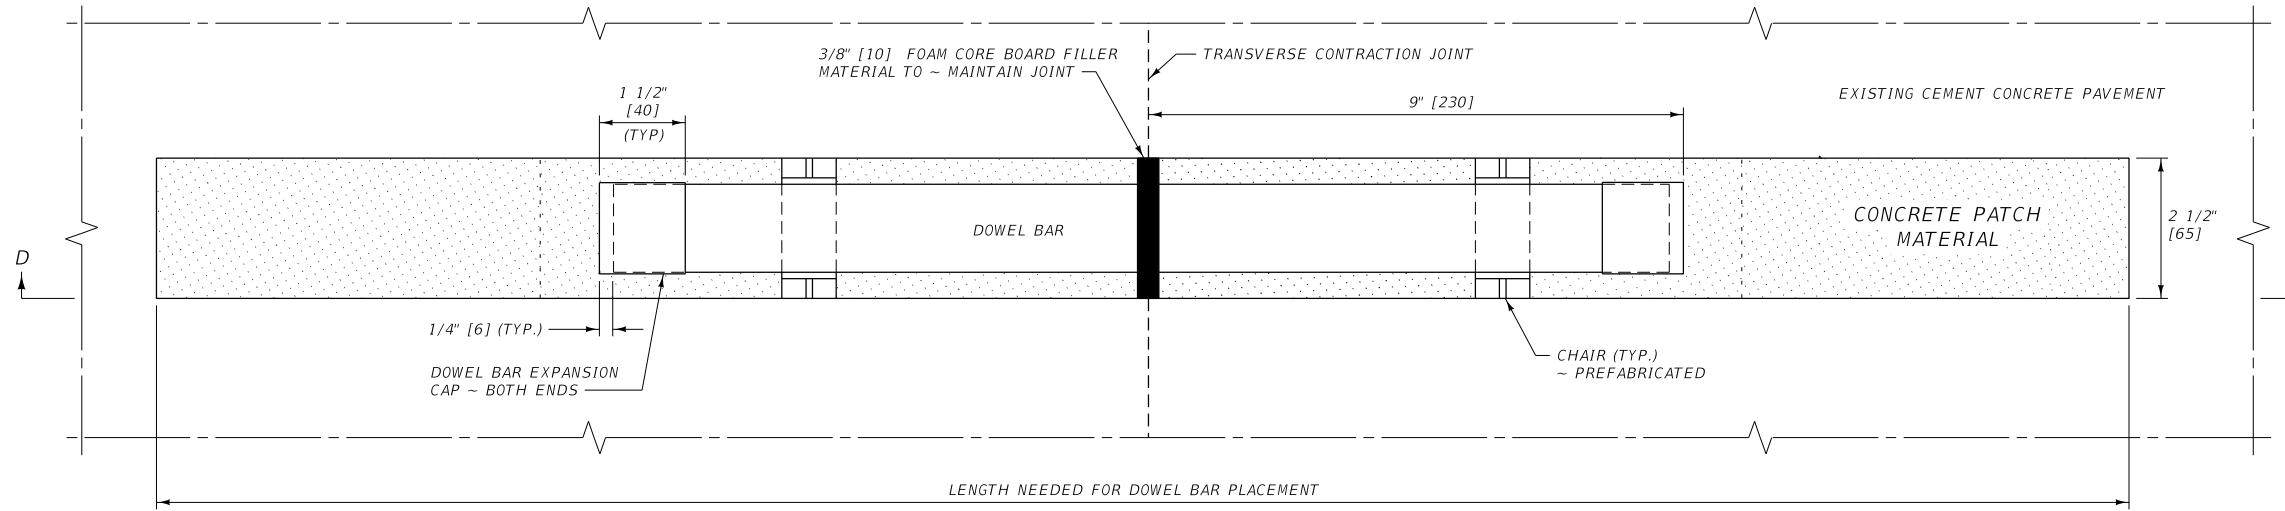

SECTION D-D
DOWEL BAR PLACEMENT DETAIL

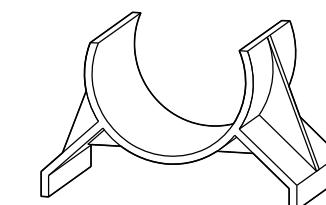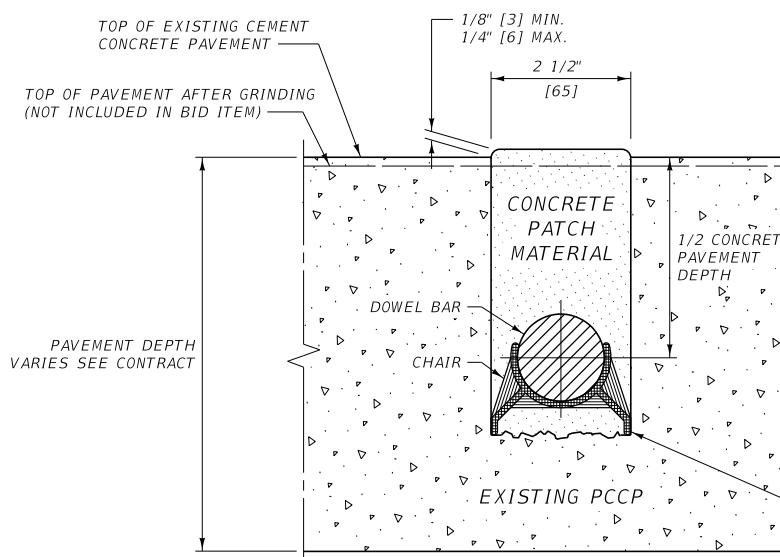

SECTION E-E

NOTE: USE PLASTIC CHAIR OR AS APPROVED BY PROJECT MANAGER


PCCP THICKNESS	DOWEL BAR DIMENSIONS		
	DIAMETER	MIN. LENGTH	SPACING
< 8" [200]	1" [25]	14" [350]	12" [300]
8" to 9.5" [200 to 240]	1 1/4" [32]	14" [350]	12" [300]
≥ 10" [250]	1 1/2" [38]	14" [350]	12" [300]

DOWEL BAR DIMENSION TABLE

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 501-25
SECTION 501

DOWEL BAR RETROFIT FOR PCCP

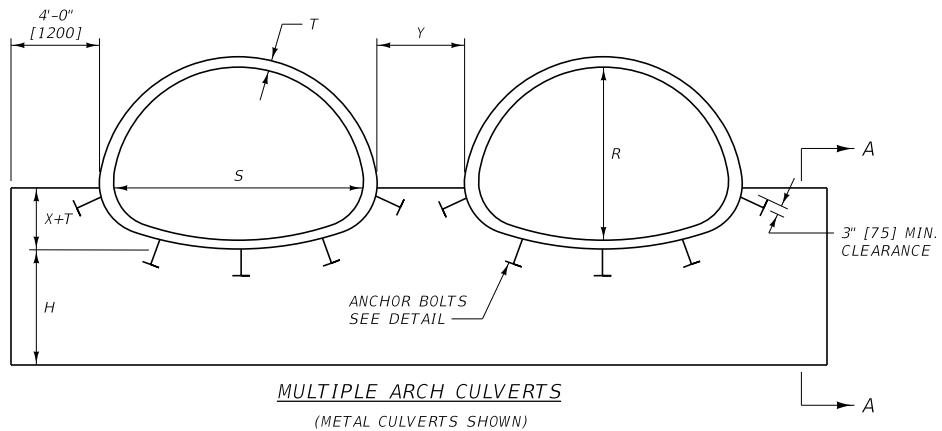

MULTIPLE ARCH CULVERTS
(METAL CULVERTS SHOWN)

X: VARIABLE, FOR METAL CULV. SEE DTL. DWG. 603-32 (CIRCULAR) OR 603-34 (ARCH), AND FOR CONCRETE CULV. WITH FETS SEE DTL. DWG. 603-08 (ROUND) OR 603-10 (ARCH), AND FOR CONCRETE CULV. WITH SQUARE ENDS, THE "X" DIMENSIONS IS D/4 OR R/3

Y: FOR METAL CULV. AND CULV. WITHOUT FETS: Y = 4'-0" [1200] (OUTSIDE WALL TO OUTSIDE WALL)


FOR CONCRETE CULV. WITH FETS: USE Y AS REQUIRED FOR PARALLEL PIPE INSTALLATION, PER DTL. DWG. NO. 613-08

NOTE: Y MAY BE INCREASED ON LARGE DIAMETER PIPES (UP TO A MAX. OF 8'-0" [2400]) TO AID IN INSTALLATION AND BACKFILL. THE QUANTITIES SHOWN IN 552-04, 06 & 08 WERE FIGURED USING Y = 4'-0" [1200]. ADJUST QUANTITIES AS NEEDED WHEN Y IS OTHER THAN 4'-0" [1200].


H: 3'-0" [900] MIN. OR 1'-0" [300] BELOW BOTTOM OF FOUNDATION MATERIAL IF SPECIFIED.

T: CULVERT WALL THICKNESS FOR CONCRETE OR CORRUGATION DEPTH FOR METAL.


S: INSIDE PIPE SPAN

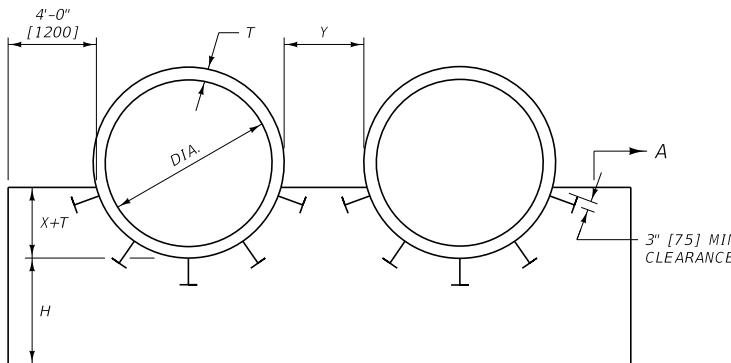

MULTIPLE ROUND CULVERTS
(METAL CULVERTS SHOWN)

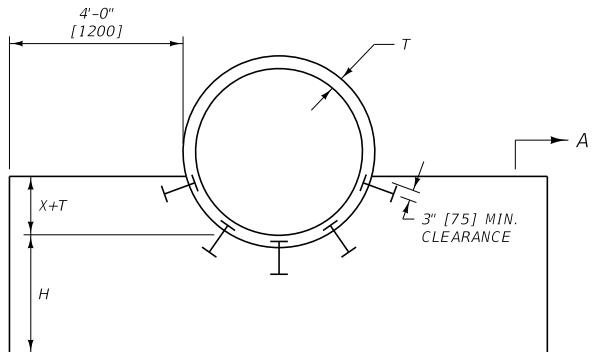

SINGLE ROUND CULVERT
(CONCRETE CULVERT SHOWN)

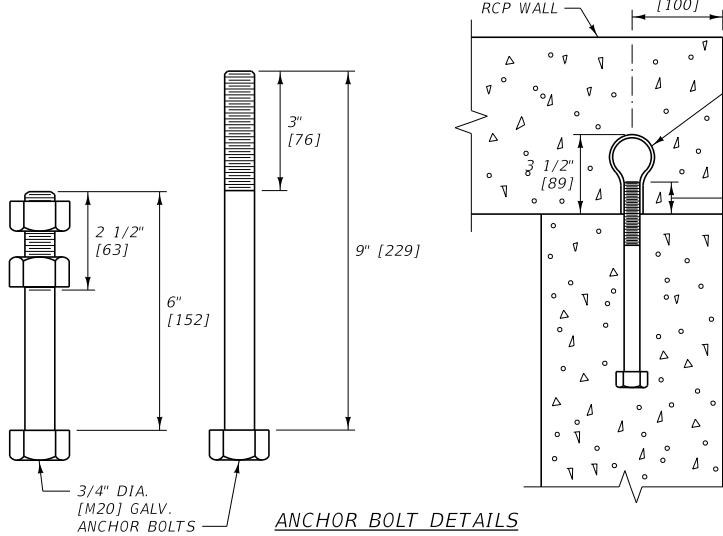

ANCHOR BOLT DETAILS



6" [152] LONG FOR METAL PIPE
9" [229] LONG FOR CONCRETE PIPE

ANCHOR BOLT SPACING:

MIN. OF FIVE 3/4" DIA. [M20] GALV. ANCHOR BOLTS IN WALL. USE MAX. SPACING OF 1.5' [455].

REINFORCING STEEL:
USE REBAR DOWELS MEETING THE REQUIREMENTS OF AASHTO M 31 GRADE 60 (GRADE 420).

EPOXY RESIN BONDING ADHESIVE:
MEET THE REQUIREMENTS OF AASHTO M 235 TYPE 4.

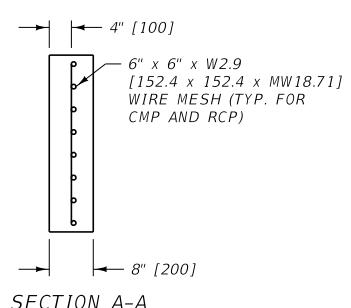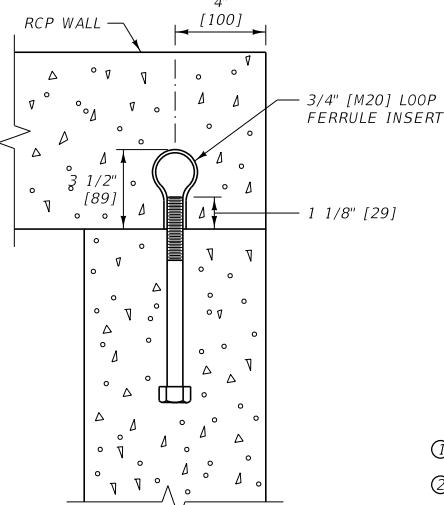

SECTION A-A

NOTES:

- ① USE CLASS GENERAL CONCRETE OR EQUAL.
- ② SEE DTL. DWG. NO. 603-18 AND 603-19 FOR BEDDING UNDER CULVERTS.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 552,603,613	DWG. NO. 552-00
CONCRETE CUTOFF WALLS FOR CULVERTS	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

CULVERT INSTALLATION QUANTITIES												
DIAMETER OR SPAN x RISE	CUBIC YARDS OF CLASS GENERAL CONCRETE (EACH END)						CUBIC YARDS OF RIPRAP (EACH END) ① (DTL. DWG. NO. 613-08)	CUBIC YARDS GRANULAR BEDDING MATERIAL PER FOOT OF PIPE (DTL. DWG. NO. 603-19) ②				
	CUTOFF WALL (DTL. DWG. NO. 552-00)			CONCRETE EDGE PROTECTION (DTL. DWG. NO. 613-14)								
	H=3ft			H=4ft								
	SING.	DBL.	SING.	SING.	DBL.	SING.						
RCP (SQ. END)												
54"	1.4	2.3	1.7	2.9	2.0	3.4	2.7	4.0	11.3	18.2	0.7	1.4
60"	1.5	2.5	1.8	3.1	2.2	3.7	3.0	4.4	12.2	19.7	0.8	1.5
66"	1.6	2.6	1.9	3.3	2.3	3.9	3.2	4.8	13.1	21.3	0.8	1.7
72"	1.7	2.8	2.0	3.5	2.4	4.1	3.5	5.2	14.0	22.8	0.9	1.8
78"	1.8	3.0	2.1	3.7	2.5	4.4	3.8	5.6	14.9	24.3	1.0	2.0
84"	1.9	3.2	2.3	3.9	2.7	4.6	4.0	6.0	15.8	25.9	1.1	2.1
90"	2.0	3.4	2.4	4.1	2.8	4.8	4.3	6.4	16.8	27.5	1.2	2.3
96"	2.1	3.6	2.5	4.3	2.9	5.1	4.6	6.9	17.7	29.1	1.2	2.5
RCPA (SQ. END)												
65.00" x 40.00"	1.4	2.4	1.8	3.0	2.1	3.6	2.3	3.5	10.1	16.6	0.7	1.4
73.00" x 45.00"	1.5	2.6	1.9	3.2	2.3	3.8	2.5	3.8	11.0	18.1	0.7	1.5
88.00" x 54.00"	1.7	2.9	2.1	3.6	2.5	4.3	3.0	4.6	12.6	20.9	0.9	1.8
102.00" x 62.00"	1.9	3.2	2.3	4.0	2.8	4.8	3.4	5.2	14.1	23.7	1.0	2.0
115.00" x 72.00"	2.1	3.5	2.5	4.4	3.0	5.2	3.8	5.9	15.7	26.4	1.1	2.2
122.00" x 77.25"	2.2	3.7	2.6	4.6	3.1	5.5	4.1	6.4	16.6	28.1	1.2	2.4
138.00" x 87.13"	2.4	4.1	2.9	5.0	3.4	6.0	4.6	7.3	18.6	31.6	1.3	2.7
154.00" x 95.88"	2.6	4.5	3.1	5.5	3.7	6.5	5.2	8.2	20.7	35.3	1.5	3.0
168.75" x 106.50"	2.7	4.7	3.3	5.8	3.9	6.9	5.6	8.9	22.2	38.0	1.6	3.2




CULVERT INSTALLATION QUANTITIES												
DIAMETER OR SPAN x RISE (mm)	CUBIC METERS OF CLASS GENERAL CONCRETE (EACH END)						CONCRETE EDGE PROTECTION (EACH END) ① (DTL. DWG. NO. 613-08)	CUBIC METERS OF RIPRAP (EACH END) ② (DTL. DWG. NO. 613-14)	CUBIC METERS OF GRANULAR BEDDING MATERIAL PER METER OF PIPE (DTL. DWG. NO. 603-19) ③			
	CUTOFF WALL (DTL. DWG. NO. 552-00)			RCP (SQ. END)								
	H=915 mm			H=1220 mm								
	SING.	DBL.	SING.	SING.	DBL.	SING.						
RCP (SQ. END)												
1350	1.1	1.8	1.3	2.2	1.5	2.6	2.1	3.1	8.6	13.9	1.8	3.5
1500	1.1	1.9	1.4	2.4	1.7	2.8	2.3	3.4	9.3	15.1	2.0	3.8
1650	1.2	2.0	1.5	2.5	1.8	3.0	2.4	3.7	10.0	16.3	2.0	4.3
1800	1.3	2.1	1.5	2.7	1.8	3.1	2.7	4.0	10.7	17.4	2.3	4.5
1950	1.4	2.3	1.6	2.8	1.9	3.4	2.9	4.3	11.4	18.6	2.5	5.0
2100	1.5	2.4	1.8	3.0	2.1	3.5	3.1	4.6	12.1	19.8	2.8	5.3
2250	1.5	2.6	1.8	3.1	2.1	3.7	3.3	4.9	12.8	21.0	3.0	5.8
2400	1.6	2.8	1.9	3.3	2.2	3.9	3.5	5.3	13.5	22.2	3.0	6.3
RCPA (SQ. END)												
1650 x 1015	1.1	1.8	1.4	2.3	1.6	2.8	1.8	2.7	7.7	12.7	1.8	3.5
1895 x 1145	1.1	2.0	1.5	2.4	1.8	2.9	1.9	2.9	8.4	13.8	1.8	3.8
2235 x 1370	1.3	2.2	1.6	2.8	1.9	3.3	2.3	3.5	9.6	16.0	2.3	4.5
2590 x 1575	1.5	2.4	1.8	3.1	2.1	3.7	2.6	4.0	10.8	18.1	2.5	5.0
2920 x 1830	1.6	2.7	1.9	3.4	2.3	4.0	2.9	4.5	12.0	20.2	2.8	5.5
3100 x 1960	1.7	2.8	2.0	3.5	2.4	4.2	3.1	4.9	12.7	21.5	3.0	6.0
3505 x 2215	1.8	3.1	2.2	3.8	2.6	4.6	3.5	5.6	14.2	24.2	3.3	6.8
3910 x 2460	2.0	3.4	2.4	4.2	2.8	5.0	4.0	6.3	15.8	27.0	3.8	7.5
4285 x 2705	2.1	3.6	2.5	4.4	3.0	5.3	4.3	6.8	17.0	29.1	4.0	8.0

DIAMETER OR SPAN x RISE	CUBIC YARDS OF CLASS GENERAL CONCRETE (EACH END)						CUBIC YARDS OF RIPRAP (EACH END) ① (DTL. DWG. NO. 613-08)	CUBIC YARDS OF GRANULAR BEDDING MATERIAL PER FOOT OF PIPE (DTL. DWG. NO. 603-19) ②	SLOPE ③
CUTOFF WALL (DTL. DWG. NO. 552-00)			RCP (FETS)						
H=3ft			H=4ft						

RCP (FETS) | | | | | | | | | || 54" | 1.8 | 3.0 | 2.2 | 3.7 | 2.6 | 4.4 | 3.0 | 4.7 | 10.1 | 17.0 | 0.7 | 1.4 |
60"	2.0	3.3	2.4	4.0	2.8	4.8	2.6	4.2	10.6	18.0	0.8	1.5
66"	1.9	3.2	2.3	3.9	2.7	4.7	2.9	4.6	12.0	20.3	0.8	1.7
72"	2.0	3.4	2.5	4.2	2.9	5.0	3.1	4.9	13.0	22.1	0.9</	

CULVERT INSTALLATION QUANTITIES												
DIAMETER OR SPAN x RISE	CUBIC YARDS OF CLASS GENERAL CONCRETE (EACH END) ④						CUBIC YARDS GRANULAR ② BEDDING MATERIAL PER FOOT OF PIPE (DTL. DWG. NO. 603-19)					
	CUTOFF WALL (DTL. DWG. NO. 552-00)			CONCRETE EDGE PROTECTION (DTL. DWG. NO. 613-06)								
	H=3ft	H=4ft	H=5ft	2:1	2:1	2:1						
	SING.	DBL.	SING.	DBL.	SING.	DBL.						
SSPPA 6" X 2" CORRUGATIONS 18" CORNER RADIUS												
6'-1" x 4'-7"	1.5	2.4	1.8	3.1	2.2	3.7	2.6	3.8	10.9	17.8	0.7	1.4
6'-4" x 4'-9"	1.5	2.5	1.9	3.1	2.2	3.8	2.6	4.0	11.2	18.4	0.7	1.5
6'-9" x 4'-11"	1.5	2.6	1.9	3.2	2.3	3.9	2.7	4.1	11.6	19.0	0.8	1.5
7'-0" x 5' 1"	1.6	2.6	1.9	3.3	2.3	4.0	2.8	4.3	11.9	19.5	0.8	1.6
7'-3" x 5'-3"	1.6	2.7	2.0	3.4	2.4	4.0	2.9	4.4	12.2	20.1	0.8	1.6
7'-8" x 5'5"	1.6	2.8	2.0	3.5	2.4	4.2	3.0	4.6	12.6	20.7	0.8	1.7
7'-11" x 5'-7"	1.7	2.8	2.1	3.5	2.5	4.2	3.1	4.7	12.9	21.3	0.9	1.7
8'-2" x 5'-9"	1.7	2.9	2.1	3.6	2.5	4.3	3.2	4.8	13.2	21.8	0.9	1.7
8'-7" x 5'-11"	1.8	3.0	2.2	3.7	2.6	4.5	3.3	5.0	13.6	22.5	0.9	1.8
8'-10" x 6'-11"	1.8	3.0	2.2	3.8	2.6	4.5	3.4	5.2	13.9	23.1	0.9	1.8
9'-4" x 6'-3"	1.8	3.2	2.3	3.9	2.7	4.7	3.5	5.4	14.4	24.0	1.0	2.0
9'-6" x 6'-5"	1.9	3.2	2.3	4.0	2.7	4.8	3.5	5.5	14.6	24.4	1.0	1.9
9'-9" x 6'-7"	1.9	3.2	2.3	4.0	2.8	4.8	3.6	5.6	14.9	25.0	1.0	2.0
10'-3" x 6'-9"	2.0	3.4	2.4	4.2	2.9	5.0	3.8	5.8	15.4	25.9	1.0	2.1
10'-8" x 6'-11"	2.0	3.5	2.5	4.3	3.0	5.2	3.9	6.0	15.8	26.6	1.1	2.2
10'-11" x 7'-1"	2.0	3.5	2.5	4.4	3.0	5.2	4.0	6.2	16.2	27.3	1.1	2.2
11'-5" x 7'-3"	2.1	3.7	2.6	4.6	3.1	5.4	4.1	6.4	16.7	28.2	1.2	2.4
12'-4" x 7'-9"	2.2	3.9	2.7	4.8	3.2	5.7	4.4	6.9	17.8	30.2	1.2	2.5
12'-6" x 7'-11"	2.2	3.9	2.7	4.8	3.3	5.8	4.5	7.0	18.1	30.7	1.2	2.5
12'-8" x 8'-1"	2.2	3.9	2.8	4.8	3.3	5.8	4.5	7.2	18.4	31.2	1.2	2.5
12'-10" x 8'-4"	2.3	3.9	2.8	4.9	3.3	5.8	4.7	7.3	18.7	31.8	1.2	2.5
13'-5" x 8'-5"	2.3	4.1	2.9	5.1	3.4	6.0	4.8	7.6	19.3	32.9	1.3	2.6
13'-11" x 8'-7"	2.4	4.2	3.0	5.2	3.5	6.2	4.9	7.8	19.8	33.8	1.4	2.8
14'-1" x 8'-9"	2.4	4.3	3.0	5.3	3.5	6.3	5.0	7.9	20.1	34.4	1.4	2.8
14'-3" x 8'-11"	2.4	4.3	3.0	5.3	3.6	6.3	5.1	8.1	20.4	34.9	1.4	2.7
14'-10" x 9'-1"	2.5	4.5	3.1	5.5	3.7	6.5	5.2	8.3	21.0	36.1	1.5	2.9
15'-4" x 9'-2"	2.6	4.6	3.2	5.7	3.8	6.8	5.3	8.5	21.5	36.9	1.5	3.1
15'-6" x 9'-5"	2.6	4.6	3.2	5.7	3.8	6.8	5.5	8.7	21.9	37.6	1.5	3.1
15'-8" x 9'-7"	2.6	4.6	3.2	5.7	3.8	6.8	5.6	8.9	22.2	38.2	1.5	3.0
15'-10" x 9'-9"	2.6	4.6	3.2	5.7	3.8	6.8	5.6	9.0	22.5	38.7	1.5	3.0
16'-5" x 9'-11"	2.7	4.8	3.3	6.0	4.0	7.1	5.8	9.3	23.2	40.0	1.6	3.2
16'-7" x 10'-1"	2.7	4.8	3.4	6.0	4.0	7.1	5.9	9.5	23.5	40.5	1.6	3.2
SSPPA 6" X 2" CORRUGATIONS 31" CORNER RADIUS												
13'-3" x 9'-4"	2.4	4.3	3.0	5.2	3.5	6.2	5.0	7.9	19.9	33.8	1.4	2.9
13'-6" x 9'-6"	2.5	4.3	3.0	5.3	3.5	6.3	5.1	8.0	20.3	34.5	1.4	2.9
14'-0" x 9'-8"	2.5	4.5	3.1	5.5	3.6	6.5	5.3	8.3	20.9	35.5	1.5	3.0
14'-3" x 9'-10"	2.6	4.5	3.1	5.5	3.7	6.5	5.4	8.5	21.3	36.2	1.5	3.0
14'-5" x 10'-0"	2.6	4.5	3.1	5.5	3.7	6.6	5.5	8.6	21.5	36.7	1.5	3.0
14'-11" x 10'-2"	2.7	4.7	3.2	5.7	3.8	6.8	5.6	8.8	22.1	37.8	1.6	3.2
15'-4" x 10'-4"	2.7	4.8	3.3	5.9	3.9	6.9	5.7	9.0	22.5	38.5	1.7	3.3
15'-7" x 10'-6"	2.7	4.8	3.3	5.9	3.9	7.0	5.8	9.2	23.0	39.3	1.7	3.3
15'-10" x 10'-8"	2.8	4.9	3.4	6.0	4.0	7.1	5.9	9.4	23.4	40.1	1.7	3.3
16'-3" x 10'-10"	2.8	5.0	3.4	6.1	4.1	7.2	6.0	9.6	23.8	40.8	1.7	3.5
16'-6" x 11'-0"	2.9	5.1	3.5	6.2	4.1	7.3	6.2	9.8	24.2	41.6	1.7	3.5
17'-0" x 11'-2"	2.9	5.2	3.6	6.4	4.2	7.5	6.3	10.1	24.8	42.7	1.8	3.6
17'-2" x 11'-4"	3.0	5.2	3.6	6.4	4.2	7.5	6.4	10.2	25.1	43.3	1.8	3.6
17'-5" x 11'-6"	3.0	5.3	3.6	6.4	4.2	7.6	6.5	10.4	25.6	44.1	1.8	3.6
17'-11" x 11'-8"	3.1	5.4	3.7	6.6	4.4	7.8	6.7	10.7	26.1	45.2	1.9	3.8
18'-1" x 11'-10"	3.1	5.4	3.7	6.6	4.4	7.8	6.7	10.8	26.5	45.7	1.9	3.8
18'-7" x 12'-0"	3.2	5.6	3.8	6.8	4.5	8.1	6.9	11.1	27.1	46.8	2.0	4.0
18'-9" x 12'-2"	3.2	5.6	3.8	6.8	4.5	8.1	7.0	11.2	27.4	47.4	2.0	3.9
19'-3" x 12'-4"	3.3	5.8	3.9	7.1	4.6	8.3	7.1	11.5	28.0	48.5	2.1	4.1
19'-6" x 12'-6"	3.3	5.8	4.0	7.1	4.6	8.4	7.3	11.7	28.4	49.4	2.1	4.1
19'-8" x 12'-8"	3.3	5.8	4.0	7.1	4.7	8.4	7.3	11.9	28.8	50.0	2.0	4.1
19'-11" x 12'-10"	3.3	5.8	4.0	7.1	4.7	8.4	7.5	12.1	29.2	50.8	2.0	4.1
20'-3" x 13'-0"	3.4	6.0	4.1	7.3	4.8	8.6	7.6	12.2	29.5	51.4	2.1	4.2
20'-7" x 13'-2"	3.4	6.0	4.									

CULVERT INSTALLATION QUANTITIES														
DIAMETER OR SPAN x RISE	CUBIC YARDS OF CLASS GENERAL CONCRETE (EACH END) ④							CUBIC YARDS OF RIPRAP (EACH END) ① (DTL. DWG. NO. 613-06)	CUBIC YARDS GRANULAR ② BEDDING MATERIAL PER FOOT OF PIPE (DTL. DWG. NO. 603-19)	CULVERT INSTALLATION QUANTITIES				
	CUTOFF WALL (DTL. DWG. NO. 552-00)				CONCRETE EDGE PROTECTION (DTL. DWG. NO. 613-06)					CULVERT INSTALLATION QUANTITIES				
	H=3ft		H=4ft		H=5ft		2:1		2:1	CULVERT INSTALLATION QUANTITIES				
	SING.	DBL.	SING.	DBL.	SING.	DBL.	SING.	DBL.	SING.	SING.	DBL.	SING.	DBL.	
CSP <i>3" x 1" OR 5" x 1" CORRUGATIONS</i>														
54"	1.2	2.0	1.5	2.6	1.9	3.1	2.5	3.6	10.3	16.5	0.6	1.2		
60"	1.3	2.2	1.6	2.7	2.0	3.3	2.7	4.0	11.1	17.9	0.6	1.3		
66"	1.4	2.3	1.7	2.9	2.1	3.5	2.9	4.3	12.0	19.3	0.7	1.4		
72"	1.5	2.5	1.8	3.1	2.2	3.7	3.2	4.7	12.8	20.7	0.7	1.5		
78"	1.5	2.6	1.9	3.2	2.3	3.8	3.4	5.0	13.6	22.1	0.8	1.6		
84"	1.6	2.7	2.0	3.4	2.4	4.0	3.6	5.4	14.4	23.5	0.9	1.7		
90"	1.7	2.9	2.1	3.6	2.5	4.2	3.9	5.7	15.2	24.8	0.9	1.9		
96"	1.8	3.0	2.2	3.7	2.6	4.4	4.1	6.1	16.1	26.2	1.0	2.0		
102"	1.9	3.2	2.3	3.9	2.7	4.6	4.3	6.5	16.9	27.7	1.1	2.1		
108"	1.9	3.3	2.4	4.1	2.8	4.8	4.6	6.9	17.7	29.1	1.1	2.3		
114"	2.0	3.5	2.5	4.3	2.9	5.0	4.8	7.2	18.6	30.5	1.2	2.4		
120"	2.1	3.7	2.6	4.5	3.0	5.3	5.1	7.6	19.5	32.0	1.3	2.6		
SSPP <i>6" x 2" CORRUGATIONS</i>														
10'-6"	2.2	3.9	2.7	4.7	3.2	5.5	5.4	8.1	20.5	33.9	1.4	2.8		
11'-0"	2.3	4.0	2.8	4.9	3.3	5.8	5.6	8.5	21.4	35.4	1.5	2.9		
11'-6"	2.4	4.2	2.9	5.1	3.4	6.0	5.9	8.9	22.3	37.0	1.5	3.1		
12'-0"	2.5	4.4	3.0	5.3	3.5	6.2	6.2	9.3	23.2	38.5	1.6	3.2		
12'-6"	2.6	4.6	3.1	5.5	3.6	6.4	6.4	9.7	24.2	40.1	1.7	3.4		
13'-0"	2.7	4.7	3.2	5.7	3.7	6.6	6.7	10.1	25.1	41.7	1.8	3.6		
13'-6"	2.8	4.9	3.3	5.9	3.9	6.9	6.9	10.6	26.0	43.3	1.9	3.7		
14'-0"	2.9	5.1	3.4	6.1	4.0	7.1	7.2	11.0	27.0	45.0	2.0	3.9		
14'-6"	3.0	5.3	3.5	6.3	4.1	7.3	7.5	11.4	27.9	46.7	2.1	4.1		
15'-0"	3.1	5.4	3.6	6.5	4.2	7.6	7.8	11.9	28.9	48.3	2.1	4.3		
15'-6"	3.2	5.6	3.8	6.7	4.3	7.8	8.0	12.3	29.9	50.0	2.2	4.5		
16'-0"	3.3	5.8	3.9	6.9	4.5	8.0	8.3	12.8	30.8	51.8	2.3	4.7		
16'-6"	3.4	6.0	4.0	7.1	4.6	8.3	8.6	13.2	31.8	53.5	2.4	4.9		
17'-0"	3.5	6.2	4.1	7.4	4.7	8.5	8.9	13.7	32.8	55.3	2.5	5.0		
17'-6"	3.6	6.4	4.2	7.6	4.8	8.8	9.2	14.1	33.9	57.0	2.6	5.2		
18'-0"	3.7	6.6	4.3	7.8	5.0	9.0	9.4	14.6	34.9	58.8	2.7	5.5		
18'-6"	3.8	6.8	4.4	8.0	5.1	9.3	9.7	15.1	35.9	60.7	2.8	5.7		
19'-0"	3.9	7.0	4.6	8.3	5.2	9.5	10.0	15.5	37.0	62.5	2.9	5.9		
19'-6"	4.0	7.2	4.7	8.5	5.4	9.8	10.3	16.0	38.0	64.4	3.0	6.1		
20'-0"	4.1	7.4	4.8	8.7	5.5	10.0	10.6	16.5	39.1	66.2	3.2	6.3		
20'-6"	4.2	7.6	4.9	8.9	5.6	10.3	10.9	17.0	40.1	68.1	3.3	6.5		
21'-0"	4.3	7.8	5.1	9.2	5.8	10.5	11.2	17.5	41.2	70.0	3.4	6.8		
CSPA <i>2 2/3" x 1/2" CORRUGATIONS</i>														
64" x 43"	1.3	2.1	1.6	2.7	1.9	3.2	2.1	3.1	9.2	15.0	0.6	1.1		
71" x 47"	1.3	2.2	1.7	2.8	2.0	3.4	2.2	3.4	9.8	16.1	0.6	1.2		
77" x 52"	1.4	2.4	1.8	3.0	2.1	3.6	2.4	3.7	10.5	17.2	0.7	1.3		
83" x 57"	1.5	2.5	1.8	3.1	2.2	3.8	2.6	3.9	11.1	18.3	0.7	1.4		
CSPA <i>3" x 1" CORRUGATIONS</i>														
60" x 46"	1.3	2.1	1.6	2.7	1.9	3.2	2.2	3.3	9.6	15.5	0.6	1.2		
66" x 51"	1.4	2.3	1.7	2.9	2.0	3.4	2.4	3.6	10.3	16.7	0.7	1.3		
73" x 55"	1.4	2.4	1.8	3.0	2.2	3.6	2.6	3.9	11.0	17.9	0.7	1.4		
81" x 59"	1.5	2.5	1.9	3.2	2.2	3.8	2.8	4.1	11.6	18.9	0.8	1.5		
87" x 63"	1.6	2.7	2.0	3.4	2.4	4.0	2.9	4.4	12.3	20.2	0.8	1.6		
95" x 67"	1.7	2.8	2.1	3.5	2.5	4.2	3.1	4.7	12.9	21.3	0.9	1.7		
103" x 71"	1.8	3.0	2.2	3.7	2.6	4.5	3.3	5.1	13.7	22.6	0.9	1.9		
112" x 75"	1.8	3.2	2.3	3.9	2.7	4.7	3.5	5.4	14.4	23.8	1.0	2.0		
117" x 79"	1.9	3.3	2.4	4.1	2.8	4.9	3.7	5.7	15.1	25.1	1.1	2.1		
128" x 83"	2.0	3.5	2.5	4.3	2.9	5.1	3.9	6.0	15.8	26.4	1.1	2.2		
137" x 87"	2.1	3.6	2.6	4.5	3.0	5.3	4.1	6.3	16.6	27.7	1.2	2.4		
142" x 91"	2.2	3.8	2.7	4.6	3.1									

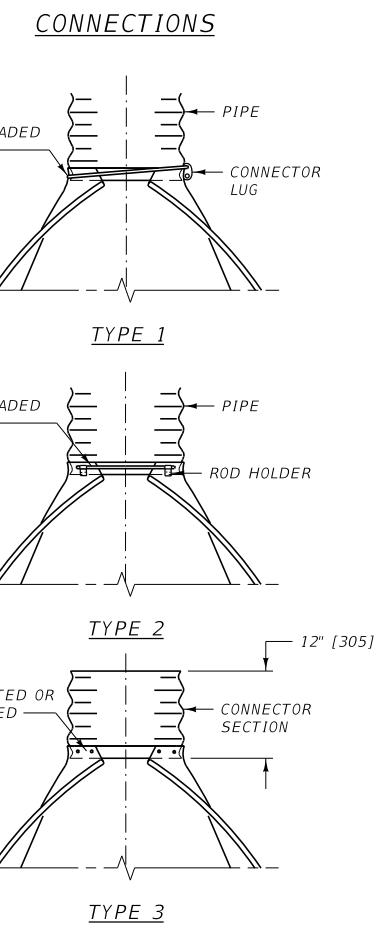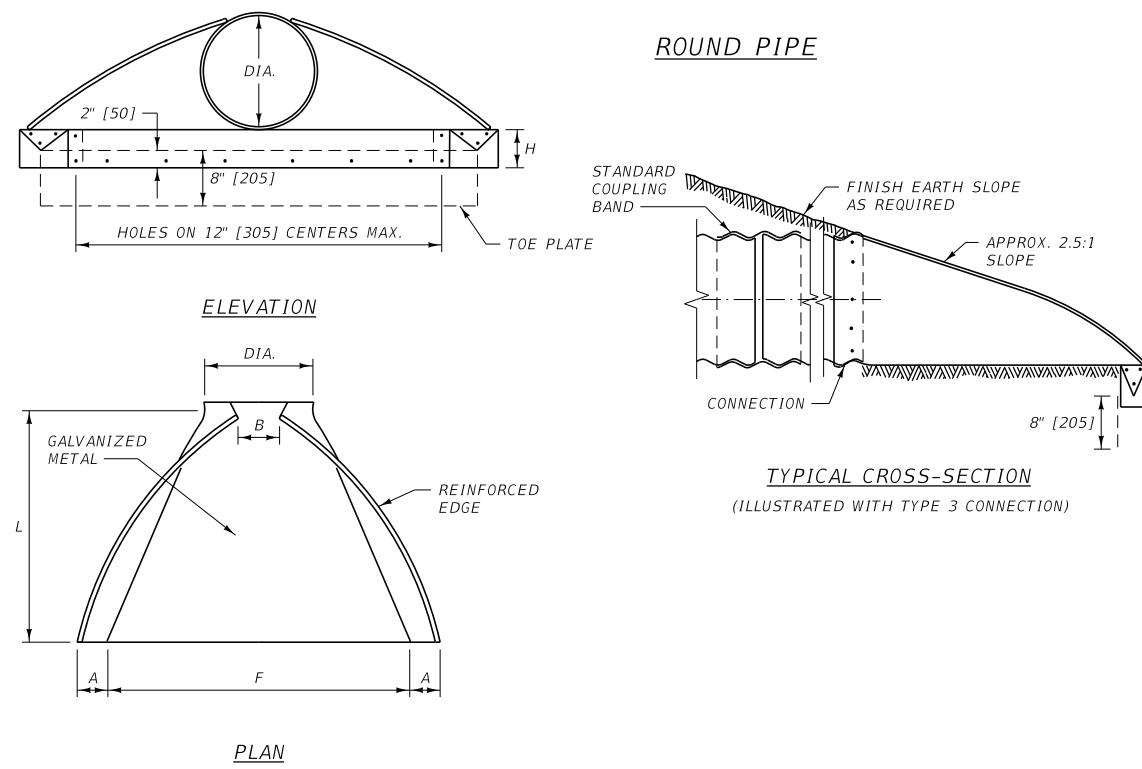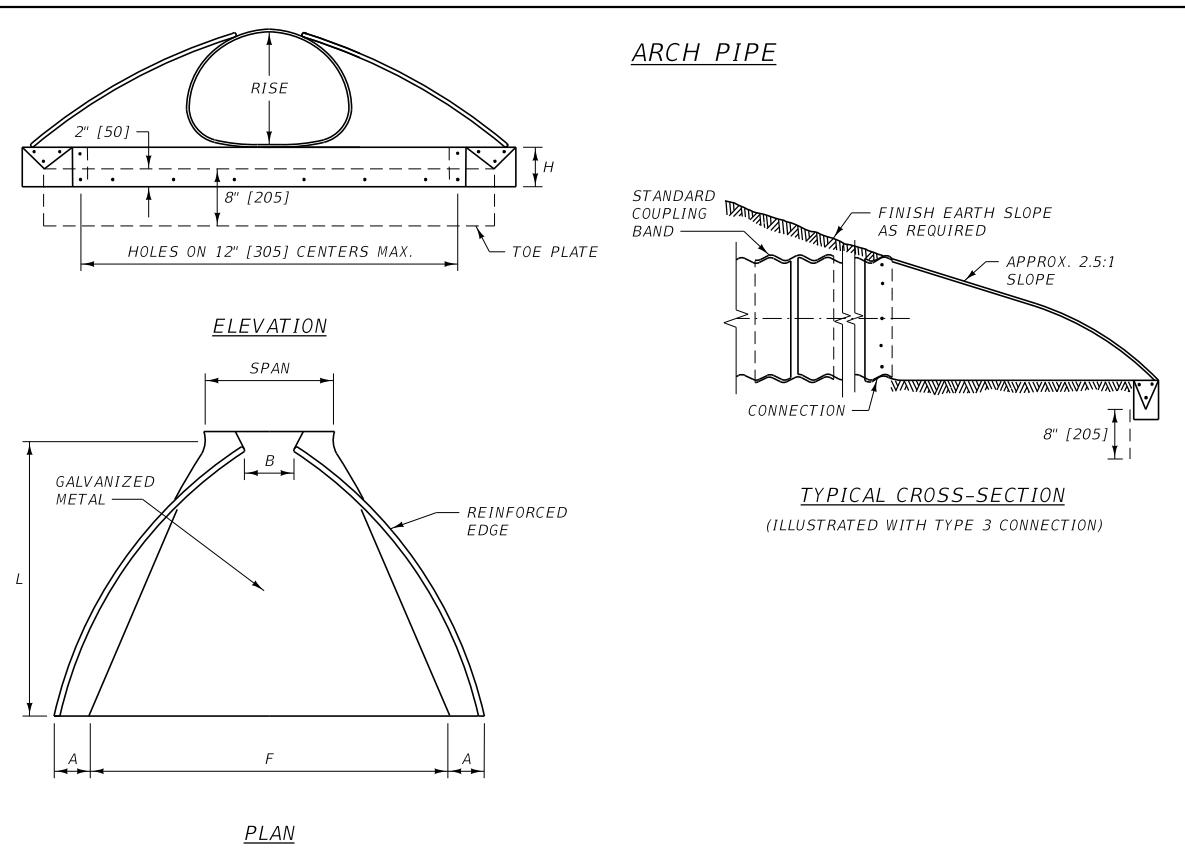

DIMENSION TABLE

EQUIVALENT DIAMETER	3" x 1" CORR. SPAN x RISE	MINIMUM THICKNESS * SPAN x RISE	2 2/3" x 1/2" CORR.		MINIMUM THICKNESS * SPAN x RISE	DIMENSIONS				TYPE CONNECTOR
			A 1" TOL.	B MAX.		H 1" TOL.	L 1 1/2" TOL.	F 2" TOL.		
			21" x 15"	0.064"		7"	10"	6"	23"	36"
18"			28" x 20"	0.064"	9"	14"	6"	32"	48"	2
24"			35" x 24"	0.079"	10"	16"	6"	39"	60"	2
30"			42" x 29"	0.079"	12"	18"	8"	46"	75"	3
36"			49" x 33"	0.109"	13"	21"	9"	53"	85"	3
42"			57" x 38"	0.109"	18"	26"	12"	63"	90"	3
48"	53" x 41"	0.109"	64" x 43"	0.109"	18"	30"	12"	70"	102"	3
54"	60" x 46"	0.109"	71" x 47"	0.109"	18"	33"	12"	77"	114"	3
60"	66" x 51"	0.109"	77" x 52"	0.109"	18"	36"	12"	77"	126"	3
66"	73" x 55"	0.109"	83" x 57"	0.109"	18"	39"	12"	77"	138"	3
72"	81" x 59"	0.109"	83" x 57"	0.109"	18"	39"	12"	77"	138"	3

METRIC DIMENSION TABLE





EQUIVALENT DIAMETER (mm)	SPAN x RISE (mm)	MINIMUM THICKNESS (mm) *	DIMENSIONS (mm)					APPROX. SLOPE	TYPE CONNECTOR	
			A 25 TOL.	B MAX.	H 25 TOL.	L 40 TOL.	F 50 TOL.			
68 x 13 CORRUGATIONS										
450	530 x 380	1.63	150	280	150	610	860	2:1	2	
600	710 x 510	1.63	180	410	150	810	1170	2:1	2	
750	885 x 610	2.01	230	410	150	990	1470	1.88:1	2	
900	1060 x 740	2.01	280	460	180	1170	1850	1.88:1	3	
1050	1240 x 840	2.77	300	530	230	1350	2080	1.75:1	3	
1200	1440 x 970	2.77	410	660	300	1570	2240	1.88:1	3	
1350	1620 x 1100	2.77	430	760	300	1750	2540	1.88:1	3	
1500	1800 x 1200	2.77	430	910	300	1960	2840	1.88:1	3	
1650	1950 x 1320	2.77	430	910	300	1960	3150	1.63:1	3	
1800	2100 x 1450	2.77	430	1120	300	1960	3300	1.5:1	3	
75 x 25 CORRUGATIONS										
1200	1340 x 1050	2.77	430	660	300	1600	2240	1.75:1	3	
1350	1520 x 1350	2.77	430	910	300	1780	2540	1.88:1	3	
1500	1670 x 1300	2.77	430	910	300	1960	2840	1.75:1	3	
1650	1850 x 1400	2.77	430	910	300	1960	3150	1.5:1	3	
1800	2050 x 1500	2.77	430	1120	300	1960	3450	1.63:1	3	

DIMENSION TABLE

PIPE DIA.	MINIMUM THICKNESS * SPAN x RISE	DIMENSIONS					TYPE CONNECTOR
		A 1" TOL.	B MAX.	H 1" TOL.	L 1 1/2" TOL.	F 2" TOL.	
12"	0.064"	6"	6"	6"	21"	24"	1
15"	0.064"	7"	8"	6"	26"	30"	1
18"	0.064"	8"	10"	6"	31"	36"	1
21"	0.064"	9"	12"	6"	36"	42"	1
24"	0.064"	10"	13"	6"	41"	48"	1
30"	0.079"	12"	16"	8"	51"	60"	2
36"	0.079"	14"	19"	9"	60"	72"	2
42"	0.109"	16"	22"	11"	69"	84"	3
48"	0.109"	18"	27"	12"	78"	90"	3
54"	0.109"	18"	30"	12"	84"	102"	3
60"	0.109"	18"	33"	12"	87"	114"	3
66"	0.109"	18"	36"	12"	87"	120"	3
72"	0.109"	18"	39"	12"	87"	126"	3
78"	0.109"	18"	42"	12"	87"	132"	3
84"	0.109"	18"	45"	12"	87"	138"	3

METRIC DIMENSION TABLE





PIPE DIA. (mm)	MINIMUM THICKNESS (mm) *	DIMENSIONS (mm)					APPROX. SLOPE	TYPE CONNECTOR
		A 25 TOL.	B MAX.	H 25 TOL.	L 40 TOL.	F 50 TOL.		
300	1.63	125	180	150	535	560	2.25:1	1
375	1.63	150	205	150	660	710	2.25:1	1
450	1.63	180	255	150	785	865	2.13:1	1
525	1.63	205	305	150	915	1015	2.13:1	1
600	1.63	230	330	150	1040	1170	2.13:1	1
750	2.01	280	405	205	1295	1395	2.13:1	2
900	2.01	330	485	230	1525	1780	2:1	2
1050	2.77	380	635	255	1755	2085	2.13:1	3
1200	2.77	430	735	305	1980	2235	2:1	3
1350	2.77	430	840	305	2135	2540	2:1	3
1500	2.77	430	915					

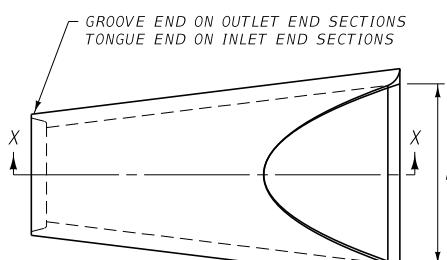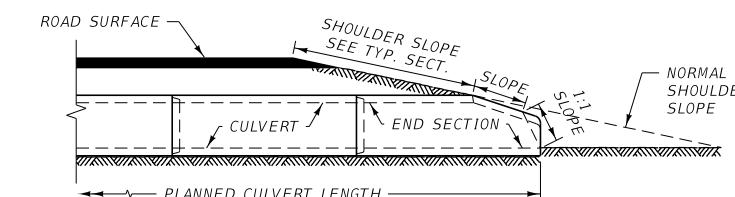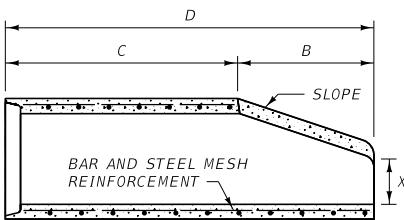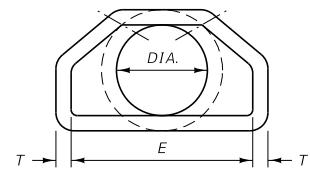TYPE "A"PLANSLOPE DETAILSECTION X-XEND VIEWTYPE "A"

DIA.	SLOPE	X	B	C	D	E	T *
12"	2.4:1	4"	2'-0"	4'-0"	6'-0"	2'-0"	2"
15"	2.4:1	6"	2'-3"	3'-9"	6'-0"	2'-6"	2 1/4"
18"	2.3:1	9"	2'-3"	3'-9"	6'-0"	3'-0"	2 1/2"
24"	2.5:1	9 1/2"	3'-7 1/2"	2'-4 1/2"	6'-0"	4'-0"	3"
30"	2.5:1	1'-0"	4'-6"	1'-6"	6'-0"	5'-0"	3 1/2"
36"	2.5:1	1'-3"	5'-3"	2'-11"	8'-2"	6'-0"	4"
42"	2.5:1	1'-9"	5'-3"	2'-11"	8'-2"	6'-6"	4 1/2"
48"	2.5:1	2'-0"	6'-0"	2'-2"	8'-2"	7'-0"	5"
54"	2.0:1	2'-3"	5'-5"	2'-9 1/2"	8'-2 1/2"	7'-6"	5 1/2"




* WALL "B" THICKNESS

TOLERANCES IN THE ADJACENT TABLES MAY NOT VARY MORE THAN $\pm 1.5\%$ FOR THE DIMENSIONS SHOWN. OTHERWISE THEY MUST CONFORM TO AASHTO M 170.

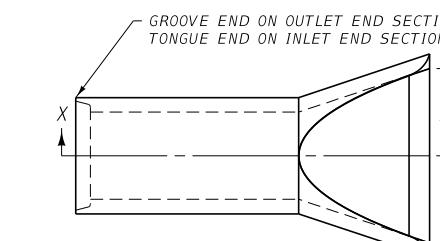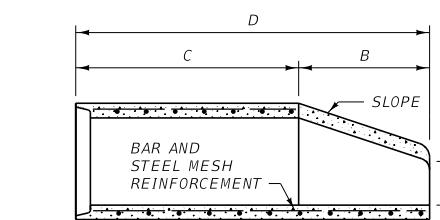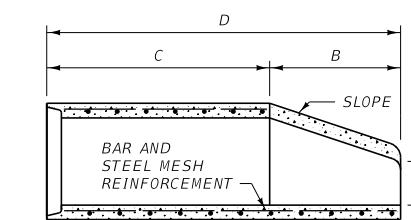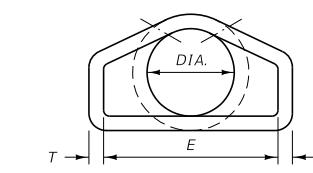TYPE "B"PLANSLOPE DETAILSECTION X-XEND VIEWTYPE "B"



DIA.	SLOPE	X	B	C	D	E	T *
12"	2.4:1	4"	2'-0"	4'-0"	6'-0"	2'-0"	2"
15"	2.4:1	6"	2'-3"	3'-9"	6'-0"	2'-6"	2 1/4"
18"	2.3:1	9"	2'-3"	3'-9"	6'-0"	3'-0"	2 1/2"
24"	2.5:1	9 1/2"	3'-7 1/2"	2'-4 1/2"	6'-0"	4'-0"	3"
30"	2.5:1	1'-0"	4'-6"	1'-6"	6'-0"	5'-0"	3 1/2"
36"	2.5:1	1'-3"	5'-3"	2'-11"	8'-2"	6'-0"	4"
42"	2.5:1	1'-9"	5'-3"	2'-11"	8'-2"	6'-6"	4 1/2"
48"	2.5:1	2'-0"	6'-0"	2'-2"	8'-2"	7'-0"	5"
54"	2.0:1	2'-3"	5'-5"	2'-9 1/2"	8'-2 1/2"	7'-6"	5 1/2"

* WALL "B" THICKNESS

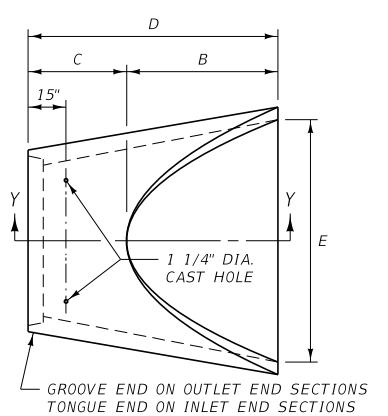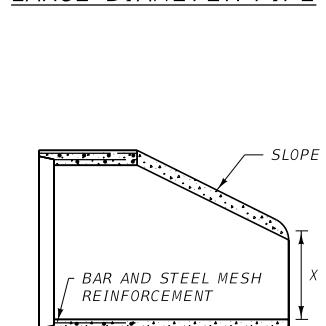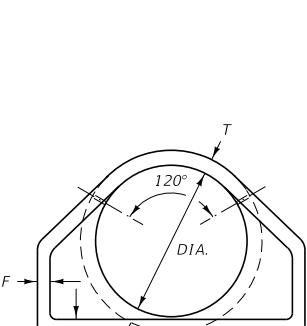LARGE DIAMETER PIPEPLANSECTION Y-YEND VIEWLARGE DIAMETER CULVERT

DIA.	SLOPE	T *	X	B	C	D	E	F
60"	1.9:1	6"	2'-11"	5'-0"	3'-3"	8'-3"	8'-0"	5"
66"	1.7:1	6 1/2"	2'-6"	6'-0"	2'-3"	8'-3"	8'-6"	5 1/2"
72"	1.9:1	7"	3'-0"	6'-6"	1'-9"	8'-3"	9'-0"	6"
78"	1.8:1	7 1/2"	3'-0"	7'-6"	1'-9"	9'-3"	9'-6"	6 1/2"
84"	1.5:1	8"	3'-0"	7'-6 1/2"	1'-9"	9'-3 1/2"	10'-0"	6 1/2"
90"	1.5:1	8 1/2"	3'-5"	7'-3 1/2"	2'-0"	9'-3 1/2"	11'-0"	6 1/2"

* WALL "B" THICKNESS

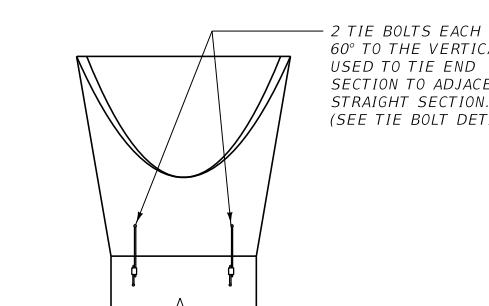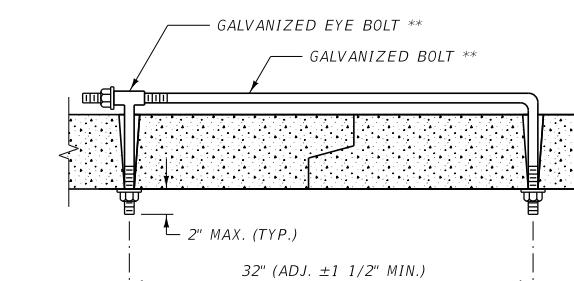TIE BOLT CONNECTIONTIE BOLT DETAIL


(TWO PER END SECTION)

TIE BOLTS: USE TWO TIE BOLTS ON ALL FLARED END SECTIONS, ONE ON EACH SIDE AT 60° TO THE VERTICAL. GALVANIZE ALL PARTS. SEE TIE BOLT DETAIL.

CONSTRUCTION: CONSTRUCT PER SECTION 708.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 603,708	DWG. NO. 603-08
PREFABRICATED RCP FLARED END TERMINAL SECTION (FETS)	


MDT MONTANA DEPARTMENT OF TRANSPORTATION

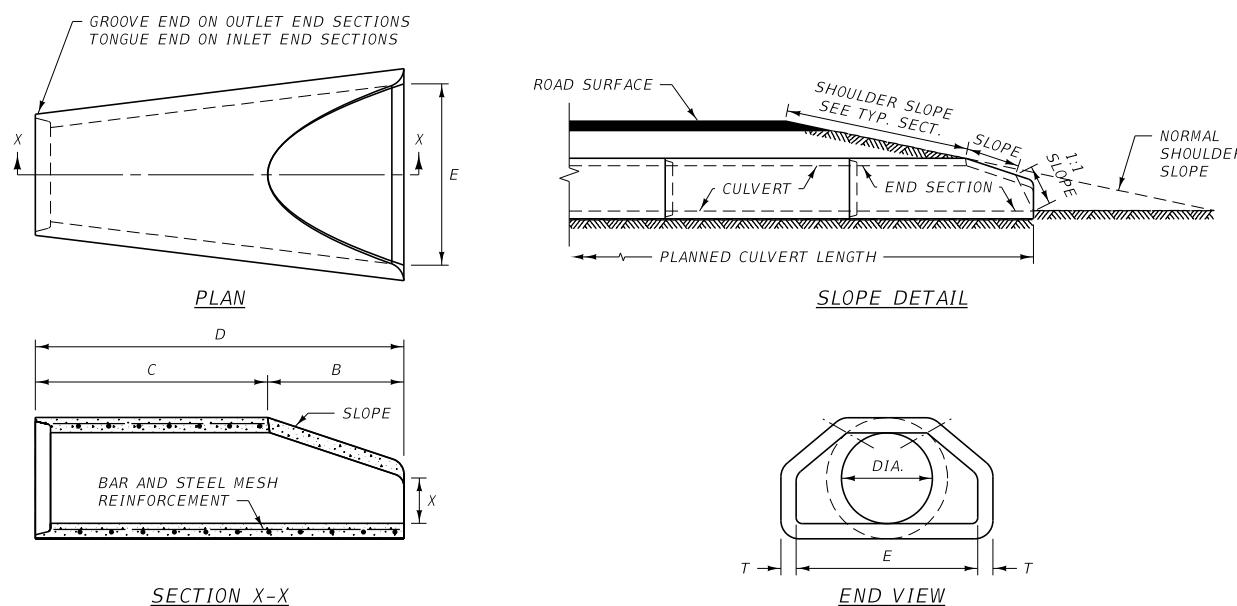TYPE "A"SECTION X-XEND VIEW

TYPE "A"							
DIA.	SLOPE	X	B	C	D	E	T *
300	2.4:1	101.6	609.6	1219.2	1828.8	609.6	50.8
375	2.4:1	152.4	685.8	1143.0	1828.8	762.0	57.2
450	2.3:1	228.6	685.8	1143.0	1828.8	914.4	63.5
600	2.5:1	241.3	1104.9	723.9	1828.8	1219.2	76.2
750	2.5:1	304.8	1371.6	457.2	1828.8	1524.0	88.9
900	2.5:1	381.0	1600.2	889.0	2489.2	1828.8	101.6
1050	2.5:1	533.4	1600.2	889.0	2489.2	1981.2	114.3
1200	2.5:1	609.6	1828.8	660.4	2489.2	2133.6	127.0
1350	2.0:1	685.8	1651.0	850.9	2501.9	2286.0	139.7


* WALL "B" THICKNESS

TOLERANCES IN THE ADJACENT TABLES MAY NOT VARY MORE THAN $\pm 1.5\%$ FOR THE DIMENSIONS SHOWN. OTHERWISE THEY MUST CONFORM TO AASHTO M 170.

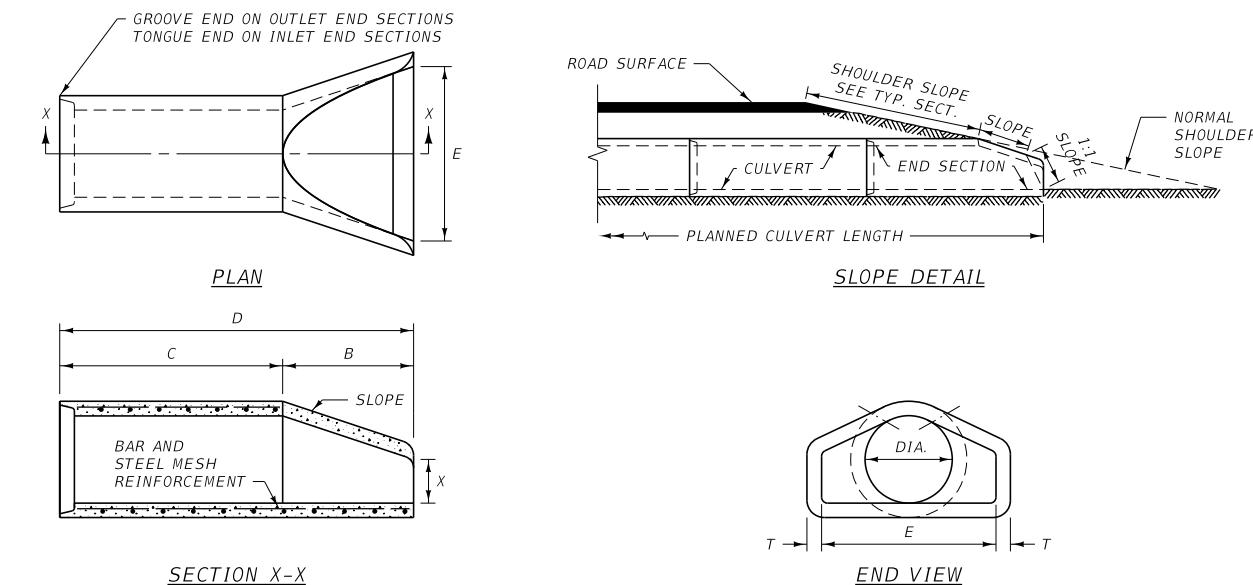TYPE "B"SECTION X-XEND VIEW

TYPE "B"							
DIA.	SLOPE	X	B	C	D	E	T *
300	2.4:1	101.6	609.6	1219.2	1828.8	609.6	50.8
375	2.4:1	152.4	685.8	1143.0	1828.8	762.0	57.2
450	2.3:1	228.6	685.8	1143.0	1828.8	914.4	63.5
600	2.5:1	241.3	1104.9	723.9	1828.8	1219.2	76.2
750	2.5:1	304.8	1371.6	457.2	1828.8	1524.0	88.9
900	2.5:1	381.0	1600.2	889.0	2489.2	1828.8	101.6
1050	2.5:1	533.4	1600.2	889.0	2489.2	1981.2	114.3
1200	2.5:1	609.6	1828.8	660.4	2489.2	2133.6	127.0
1350	2.0:1	685.8	1651.0	850.9	2501.9	2286.0	139.7

* WALL "B" THICKNESS

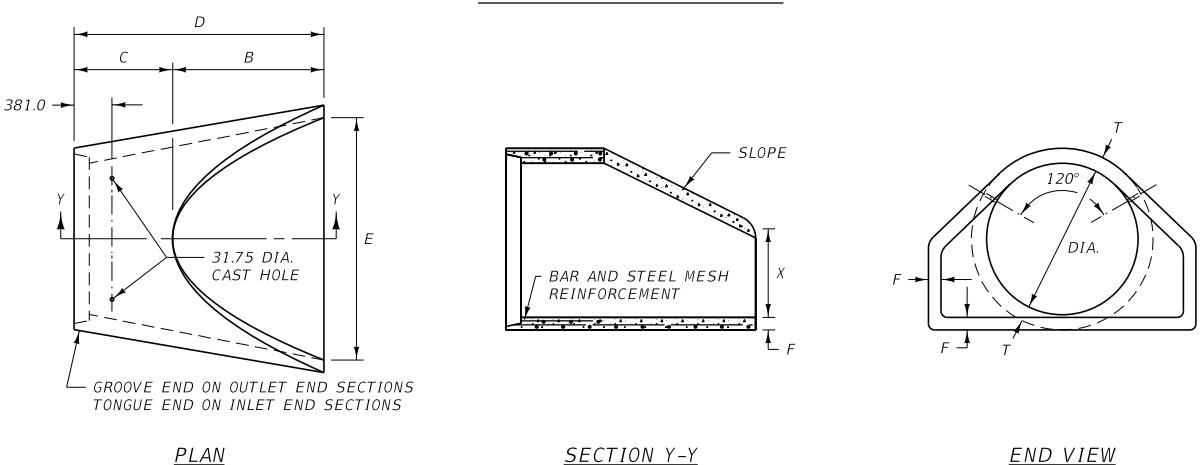LARGE DIAMETER PIPEPLANSECTION Y-YEND VIEWLARGE DIAMETER CULVERT

DIA.	SLOPE	T *	X	B	C	D	E	F
1500	1.9:1	152.4	889.0	1524.0	990.6	2514.6	2438.4	127.0
1650	1.7:1	165.1	762.0	1828.8	685.8	2514.6	2590.8	139.7
1800	1.9:1	177.8	914.4	1981.2	533.4	2514.6	2743.2	152.4
1950	1.8:1	190.5	914.4	2286.0	533.4	2819.4	2895.6	165.1
2100	1.5:1	203.2	914.4	2298.7	533.4	2832.1	3048.0	165.1
2250	1.5:1	215.9	1041.4	2222.5	609.6	2832.1	3352.8	165.1

* WALL "B" THICKNESS

TIE BOLT CONNECTION

TIE BOLTS: USE TWO TIE BOLTS ON ALL FLARED END SECTIONS, ONE ON EACH SIDE AT 60° TO THE VERTICAL. GALVANIZE ALL PARTS. SEE TIE BOLT DETAIL.


CONSTRUCTION: CONSTRUCT PER SECTION 708.

TIE BOLT DETAIL

(TWO PER END SECTION)

ALL DIMENSIONS ARE MILLIMETERS (mm) UNLESS OTHERWISE NOTED.

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 603-08
SECTION 603,708	
PREFABRICATED RCP FLARED END TERMINAL SECTION (FETS) (METRIC)	

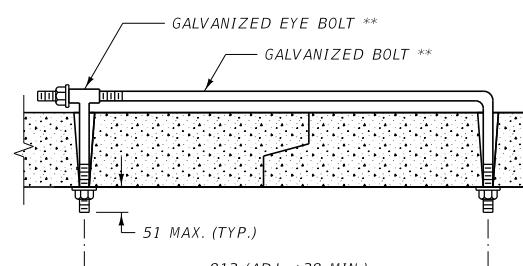

** M20 FOR 300 TO 1350 DIA. RCP

M24 FOR 1500 TO 2250 DIA. RCP

DIMENSION TABLE


EQUIV. SIZE	SPAN	RISE	T *	X	B	C	D	E	R	SLOPE
18"	22"	13 1/2"	2 1/2"	7"	27"	45"	72"	36"	3"	3:1
24"	28 1/2"	18"	3 1/2"	8 1/2"	39"	33"	72"	48"	3"	3:1
30"	36 1/4"	22 1/2"	4"	9 1/2"	50"	46"	96"	60"	3"	3:1
36"	43 3/4"	26 5/8"	4 1/2"	11 1/8"	60"	36"	96"	72"	6"	3:1
42"	51 1/8"	31 5/16"	4 1/2"	15 13/16"	60"	36"	96"	78"	6"	3:1
48"	58 1/2"	36"	5"	21"	60"	36"	96"	84"	6"	3:1
54"	65"	40"	5 1/2"	25 1/2"	60"	36"	96"	90"	6"	3:1
60"	73"	45"	6"	31"	60"	36"	96"	96"	6"	3:1
72"	88"	54"	7"	31"	60"	36"	96"	120"	6"	2:1
84"	102"	62"	8"	21 1/2"	84"	24"	108"	144"	6"	2:1

* WALL "B" THICKNESS


METRIC DIMENSION TABLE

EQUIV. SIZE (mm)	SPAN (mm)	RISE (mm)	T * (mm)	X (mm)	B (mm)	C (mm)	D (mm)	E (mm)	R (mm)	SLOPE
450	560	345	63.5	177.8	685.8	1143.0	1828.8	914.4	76.2	3:1
600	725	460	88.9	215.9	990.6	838.2	1828.8	1219.2	76.2	3:1
750	920	570	101.6	241.3	1270.0	1168.4	2438.4	1524.0	76.2	3:1
900	1110	675	114.3	282.6	1524.0	914.4	2438.4	1828.8	152.4	3:1
1050	1300	795	114.3	401.6	1524.0	914.4	2438.4	1981.2	152.4	3:1
1200	1485	915	127.0	533.4	1524.0	914.4	2438.4	2133.6	152.4	3:1
1350	1650	1015	139.7	647.7	1524.0	914.4	2438.4	2286.0	152.4	3:1
1500	1855	1145	152.4	787.4	1524.0	914.4	2438.4	2438.4	152.4	3:1
1800	2235	1370	177.8	787.4	1524.0	914.4	2438.4	3048.0	152.4	2:1
2100	2590	1575	203.2	546.1	2133.6	609.6	2743.2	3657.6	152.4	2:1


* WALL "B" THICKNESS

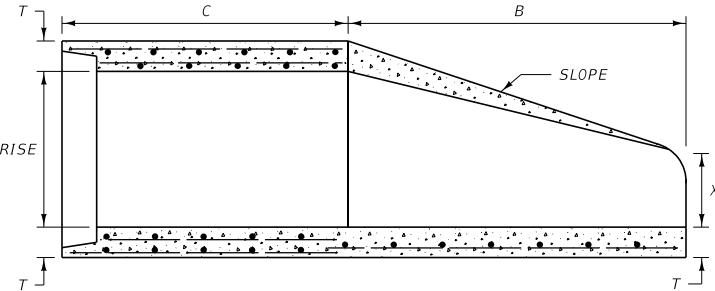

LONGITUDINAL SECTION

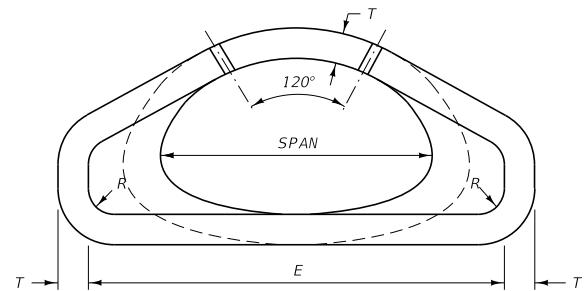


END VIEW

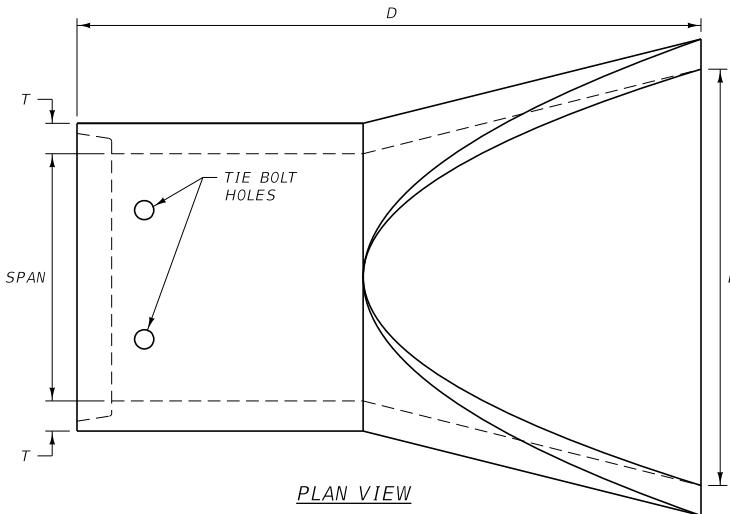

TIE BOLTS: USE TIE BOLTS ON ALL FLARED END SECTIONS, ONE ON EACH SIDE AT 60° TO THE VERTICAL. GALVANIZE ALL PARTS PER SECTION 711. SEE TIE BOLT DETAIL.

CONSTRUCTION: CONSTRUCT PER SECTION 708.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

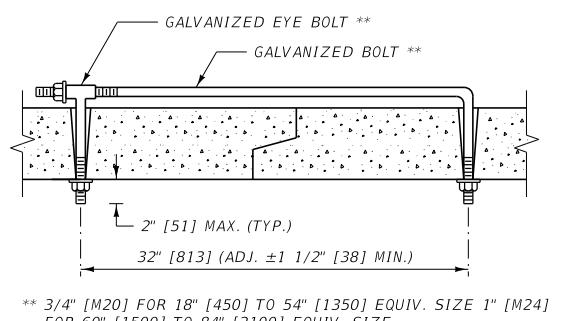


** 3/4" [M20] FOR 18" [450] TO 54" [1350] EQUIV. SIZE 1" [M24] FOR 60" [1500] TO 84" [2100] EQUIV. SIZE


TIE BOLT DETAIL
(TWO PER END SECTION)

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 603-10
SECTION 603, 708, 711	
PREFABRICATED RCP ARCH FLARED END TERMINAL SECTION (FETS)	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	


ROAD APPROACH CULVERT END TREATMENT										
QUANTITIES (FOR ESTIMATING ONLY)										
DIA. A RCP	H PIPE LENGTH	F-64 1/2" x 4 1/8" FERRULE LOOP INSERT (EACH)	LENGTH 2 1/2" DIA. SCHEDULE 40 GALV. PIPE	DIMENSIONS (FT.)						
				B	C	D	E	G	R	
15"	4.75'	~	~	~	~	0.69	0.27	4.0	0.25	0.75
18"	6.5'	~	~	~	~	0.71	0.25	5.75	0.25	0.75
24"	10.0'	10	12.5'	0.5	2.0	0.75	0.21	9.25	0.25	0.75
METRIC QUANTITIES (FOR ESTIMATING ONLY)										
DIA. A RCP	H PIPE LENGTH	M12 x 105 FERRULE LOOP INSERT, EACH	LENGTH 63 DIA. SCHEDULE 40 GALV. PIPE	DIMENSIONS (mm)						
				B	C	D	E	G	R	
375	1448	~	~	~	~	210	82	1219	76	229
450	1981	~	~	~	~	216	76	1752	76	229
600	3048	10	3800	152	610	229	64	2819	76	229

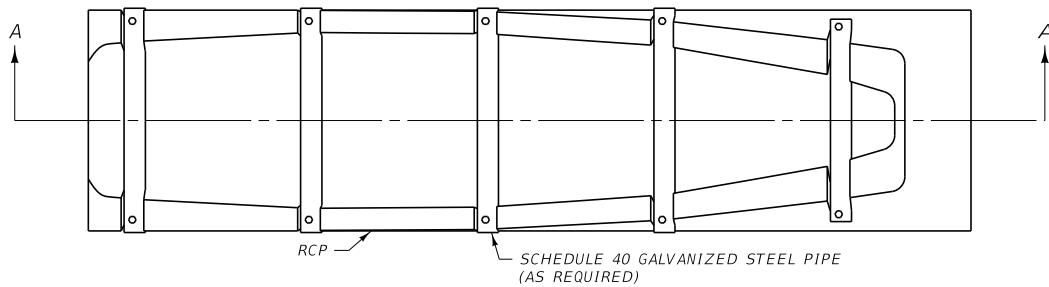


PLAN VIEW

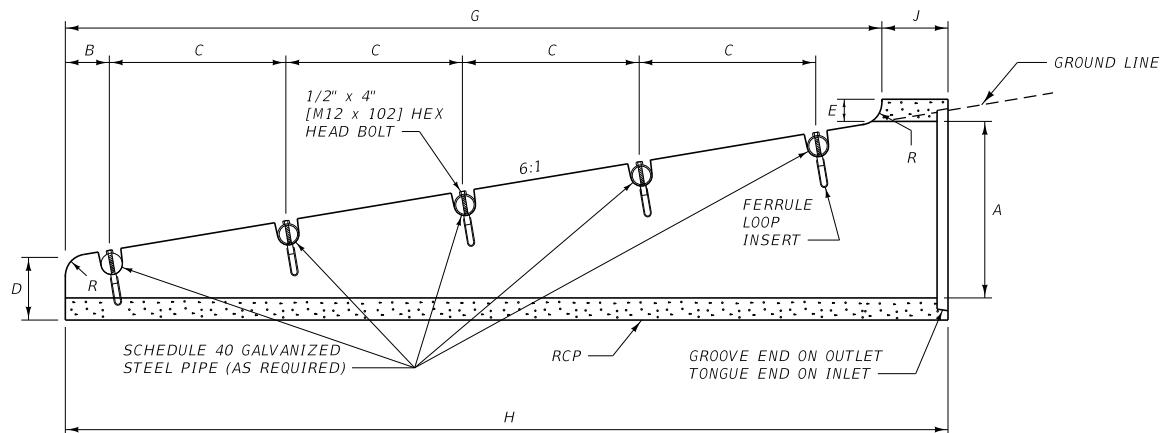

SECTION A-A

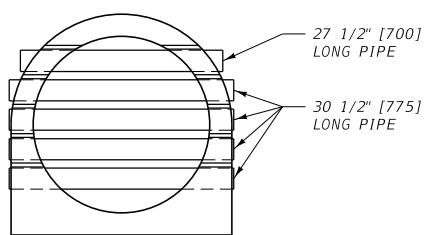

END VIEW

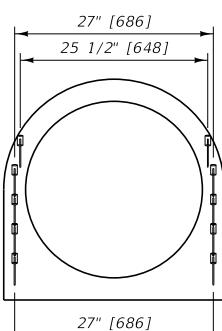


VIEW OF INSERTS


NOTE:
PAINT ALL NON-GALVANIZED PARTS.
PER SECTION 710.

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 603,710,711	DWG. NO. 603-12
RCP ROAD APPROACH CULVERT END TREATMENT (RACET)	

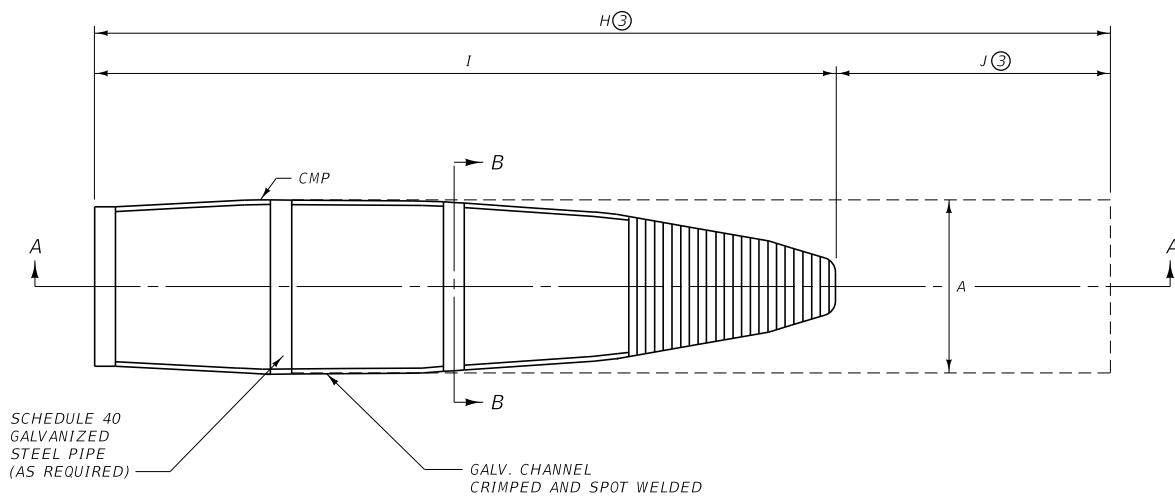


PLAN VIEW

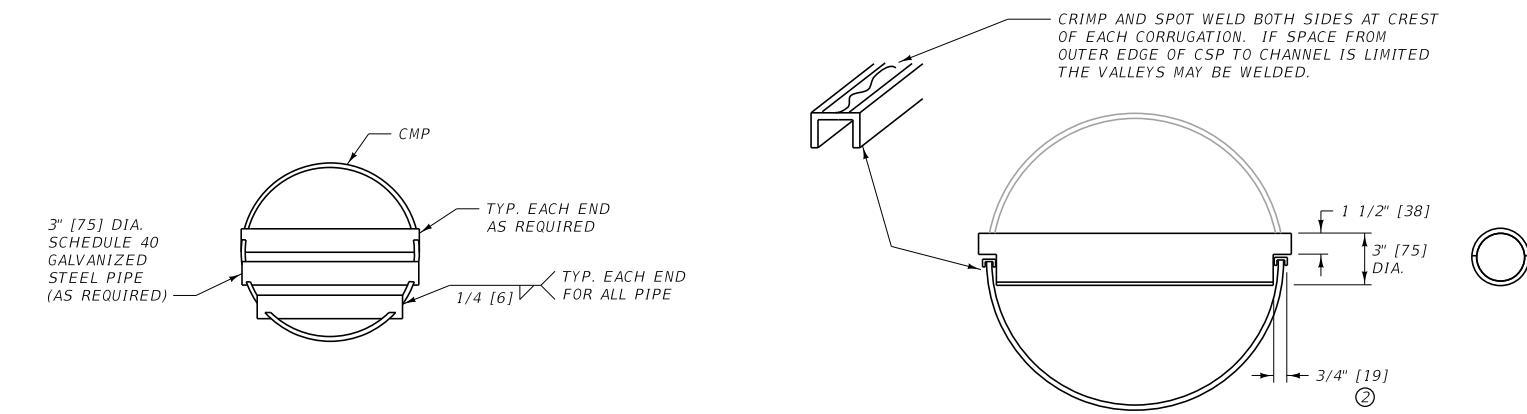

END VIEW

SECTION B-B

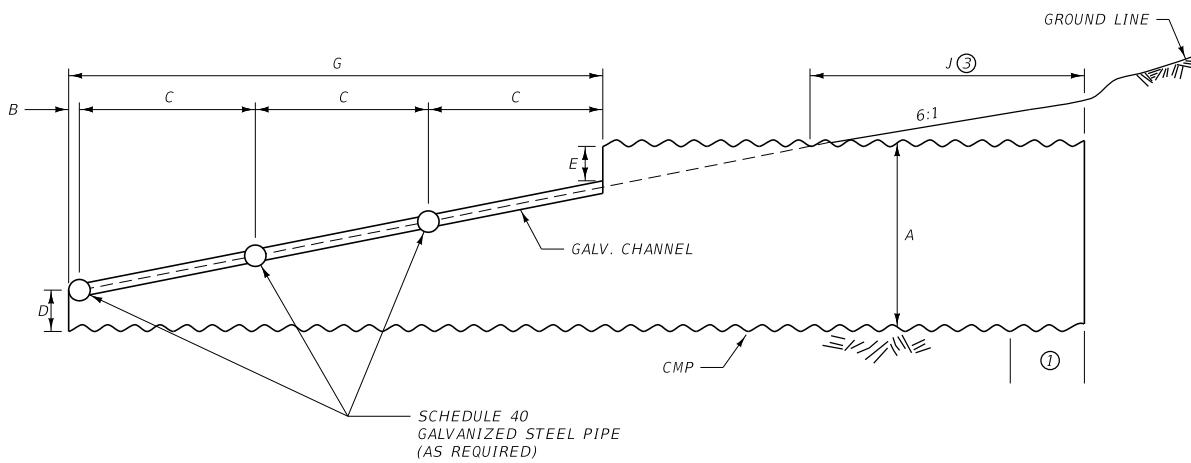

SECTION A-A

ILLUSTRATED WITH 24" [600] CMP (30" [750] CMP UTILIZES FOUR GALV. STEEL PIPES)

NOTES:

① PIPE TO HAVE ANNUAL CORRUGATION OR REROLLED ENDS. USE ONLY APPROVED COUPLING BAND PER SECTION 709 FOR CMP. FOR RCP END TREATMENT, SEE DTL. DWG. NO. 603-26 FOR CONNECTION.

② THE TWO 3/4" [19] CHANNELS MAY BE ELIMINATED FROM THE CULVERT END TREATMENT IF:

A. THE CULVERT IS FABRICATED WITH 12 GAUGE (0.109" [2.8] THICK) MATERIAL.

B. HALF CIRCLE NOTCHES ARE CUT IN THE CULVERT FOR THE STEEL PIPE WITH CONTINUOUS WELD OF THE PERIPHERY IN CONTACT PROVIDED.

C. ALL WELDS AND OTHER NON-GALVANIZED PARTS ARE PAINTED PER SECTION 710.




③ CONNECTIONS MADE PER DTL. DWG. NO. 603-26 REQUIRE PIPE LENGTHS H AND J TO BE INCREASED BY 3" [76].

ROAD APPROACH CULVERT END TREATMENT										
QUANTITIES (FOR ESTIMATING ONLY)										
DIA. A CMP	H PIPE LENGTH	3/4" x 3/8" x 1/8" GALV. CHANNEL	LENGTH 3" DIA SCHEDULE 40 GALV. PIPE	DIMENSIONS (FT.)						
				B	C	D	E	G	I	J
15"	7.0'	10'	~	~	~	0.20	0.20	5.0	6.0	1.0
18"	8.0'	10'	~	~	~	0.33	0.33	5.0	7.0	1.0
24"	10.0'	12'	6.0'	0.15	1.95	0.50	0.50	6.0	9.0	1.0
30"	12.5'	16'	10.0'	0.20	1.95	0.60	0.60	8.0	11.5	1.0

METRIC QUANTITIES (FOR ESTIMATING ONLY) (ALL DIMENSIONS IN MILLIMETERS)										
DIA. A CMP	H PIPE LENGTH	19 x 10 x 3.2 GALV. CHANNEL	LENGTH 75 DIA. SCHEDULE 40 GALV. PIPE	DIMENSIONS						
				B	C	D	E	G	I	J
375	2134	3048	~	~	~	61	61	1524	1829	305
450	2438	3048	~	~	~	101	101	1524	2133	305
600	3048	3656	1800	46	594	152	152	1828	2743	305
750	3810	4874	3000	61	594	183	183	2437	3505	305

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE SECTION 603,709,710	DWG. NO. 603-14
CMP ROAD APPROACH CULVERT END TREATMENT (RACET)	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

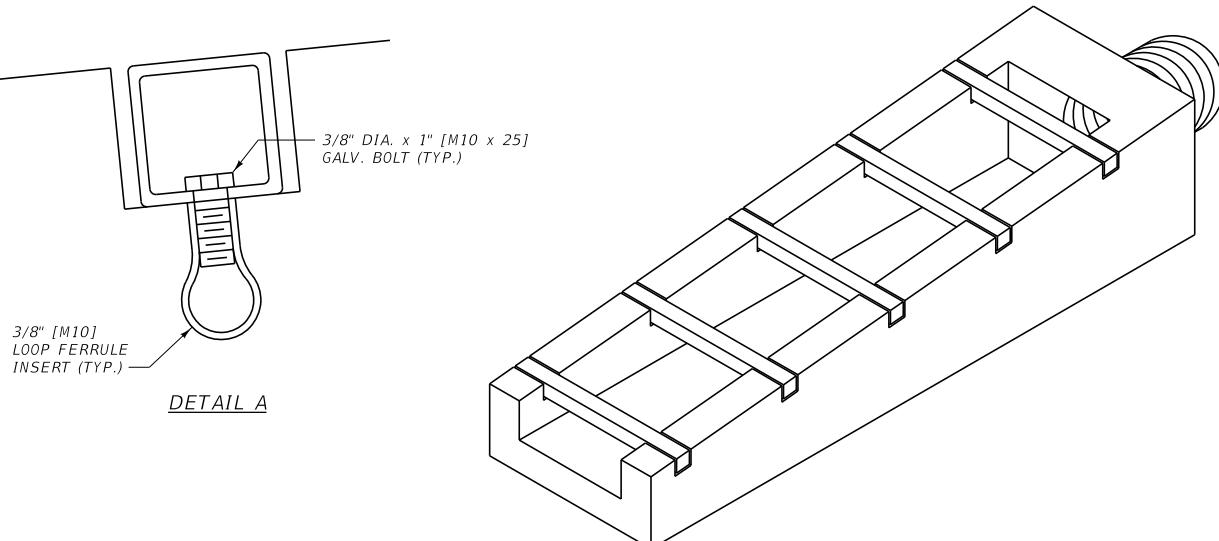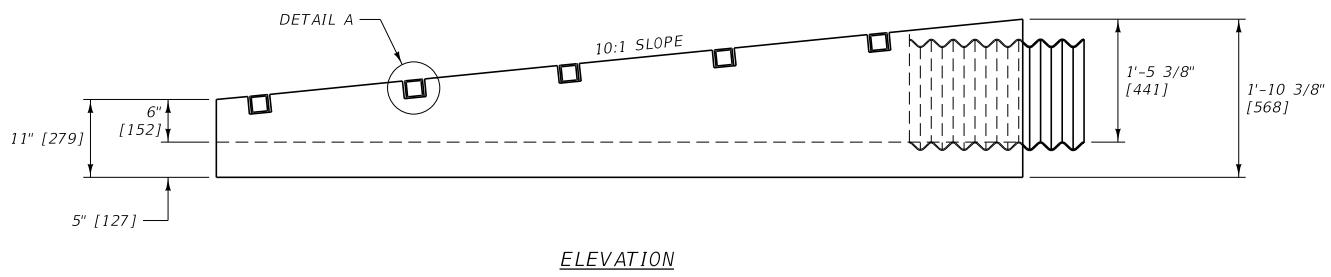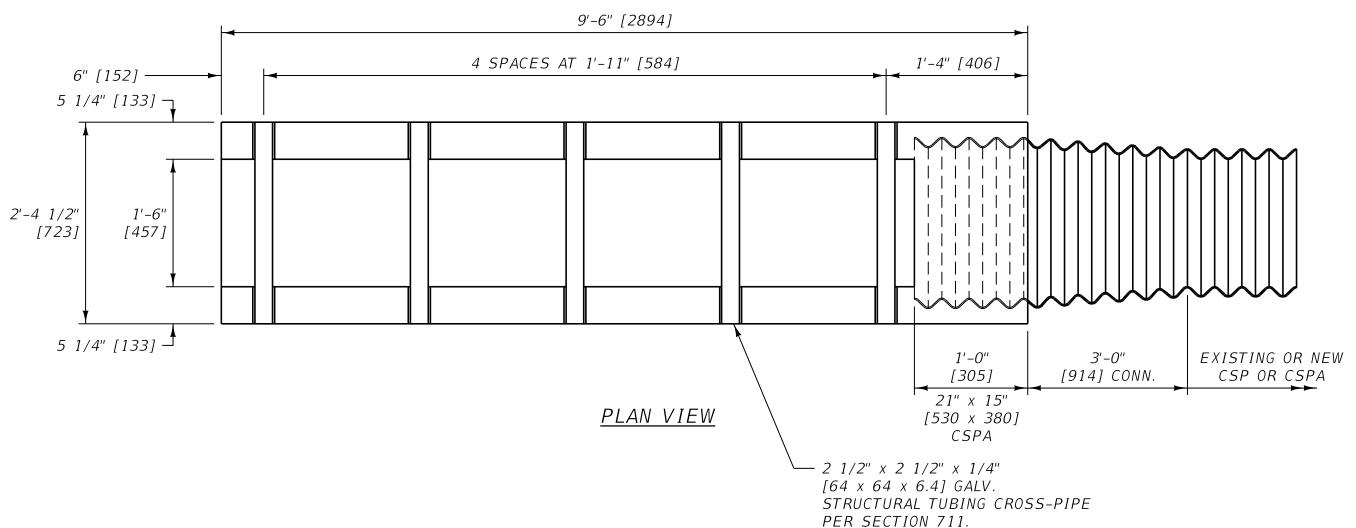



NOTE:
PAINT ALL EXPOSED METAL PARTS WITH
ONE COAT OF ZINC RICH PAINT AND TWO
COATS OF ALUMINUM PAINT PER SECTION 710.

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	603-17
SECTION 603,708,710,711	
PRECAST MEDIAN U-TURN CROSS DRAIN AND CONC. BEVELED END	
 MONTANA DEPARTMENT OF TRANSPORTATION	

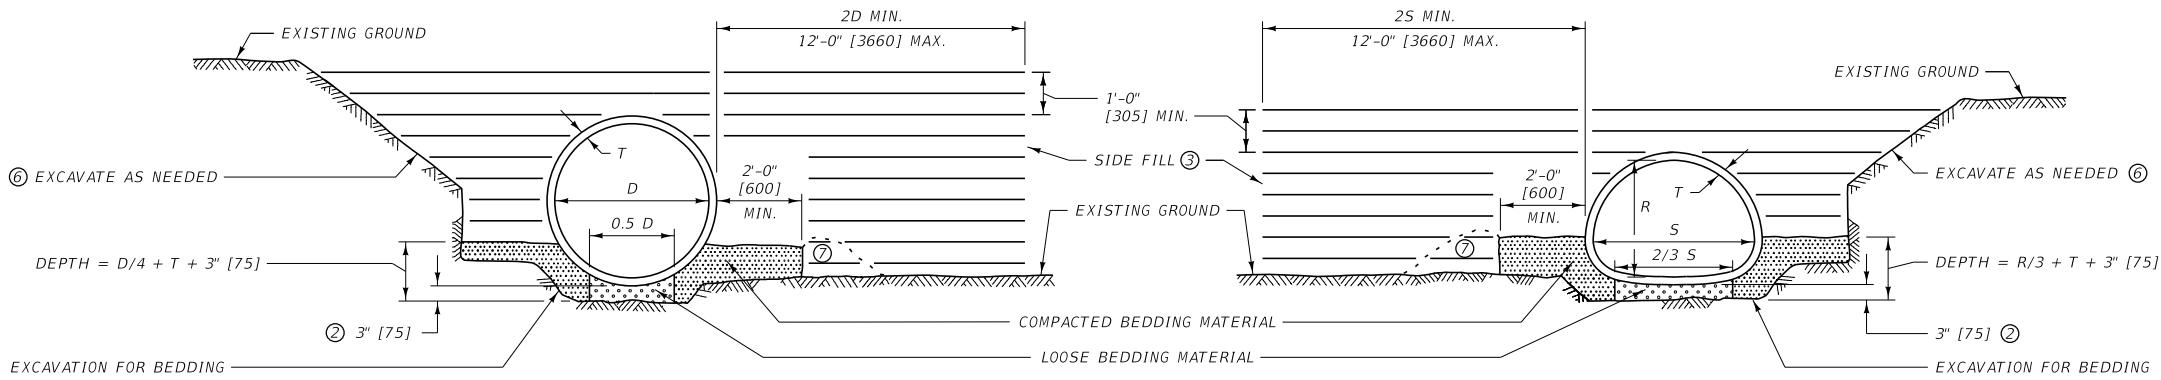

1-STANDARD BEDDING INSTALLATION

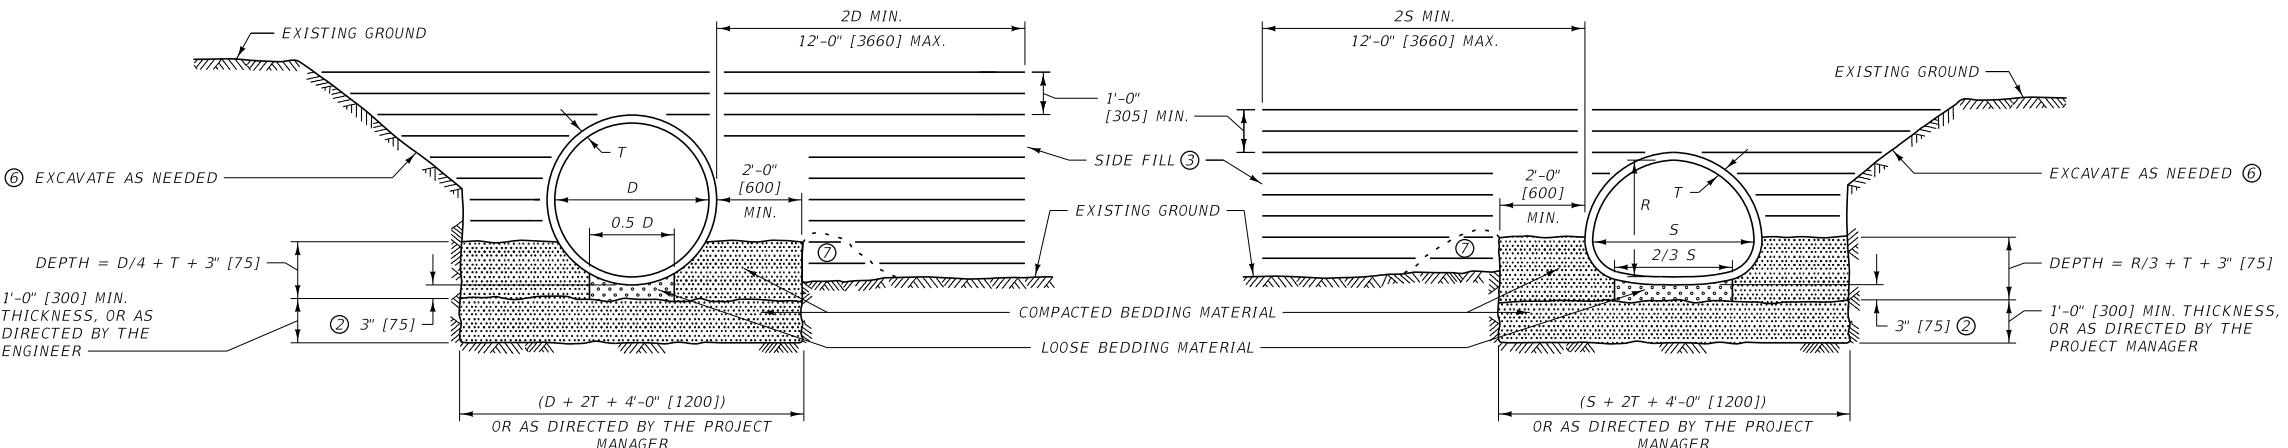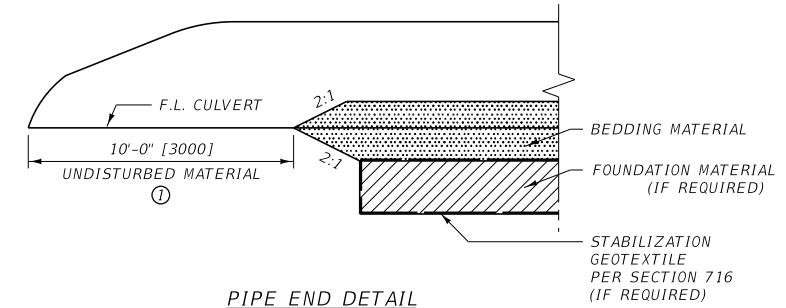

2-ROCK

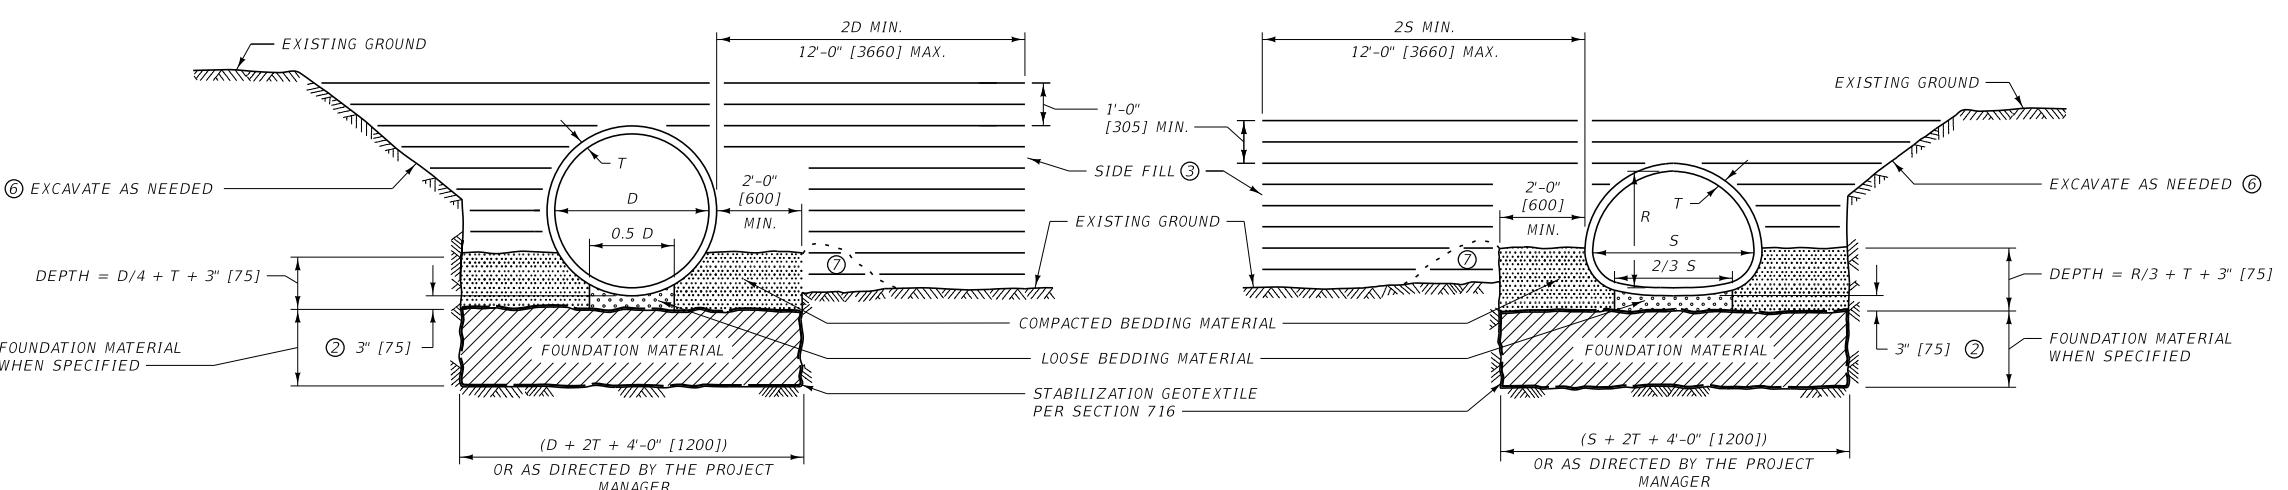

3-FOUNDATION STABILIZATION

NOTES:

① DO NOT EXTEND BEDDING MATERIAL TO THE END OF THE PIPE. LEAVE 10' [3000] OF UNDISTURBED MATERIAL AT EACH END UNLESS OTHERWISE NOTED IN PLANS. SEE PIPE END DETAIL.

② PLACE LOOSE BEDDING MATERIAL UNIFORMLY IN THE BOTTOM OF THE TRENCH AND SHAPE TO FIT BOTTOM OPIPE. THE MINIMUM THICKNESS BEFORE PLACING PIPE IS 3" [75], 42" [1050], AND 48" [1200]. RCP IRR. REQUIRE 4" [100] DEPTH OF LOOSE BEDDING MATERIAL TO ACCOMODATE BELL THICKNESS. AFTER LAYING CULVERT, COMPACT BEDDING MATERIAL AT HAUNCHES AND SIDES OF PIPE.

③ COMPACT AND PLACE SIDE FILL PER SECTION 603 AND 203.

④ FURNISH BEDDING AND FOUNDATION MATERIAL PER SECTION 701.

⑤ DIMENSIONS D, S AND R ARE INSIDE PIPE DIAMETER, SPAN AND RISE. DIMENSION T IS THE CULVERT WALL THICKNESS FOR CONCRETE OR CORRUGATION DEPTH FOR METAL. CORRUGATION WIDTHS ARE TYPICALLY 1/2" [13] FOR 48" [1200] EQUIVALENT SIZE METAL CULVERTS AND SMALLER.


⑥ EXCAVATE A SUFFICIENT AMOUNT TO PROVIDE A SAFE WORKING ENVIRONMENT AND TO ALLOW ACHIEVEMENT OF ALL CULVERT INSTALLATION AND COMPACTION REQUIREMENTS. SLOPE, BENCH OR PROVIDE SHORING FOR ALL EXCAVATIONS IN ACCORDANCE WITH THE U.S. DEPARTMENT OF LABOR, OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION (OSHA) SAFETY AND HEALTH REGULATIONS FOR CONSTRUCTION.

⑦ BUILD BERM WITH FILL MATERIAL AS NEEDED TO CONTAIN THE BEDDING MATERIAL TO THE PROPER DEPTH.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC.
SECTION 203,207,603,701
603-18


BEDDING FOR PIPES LESS
THAN 54" [1350 mm]
IN DIAMETER

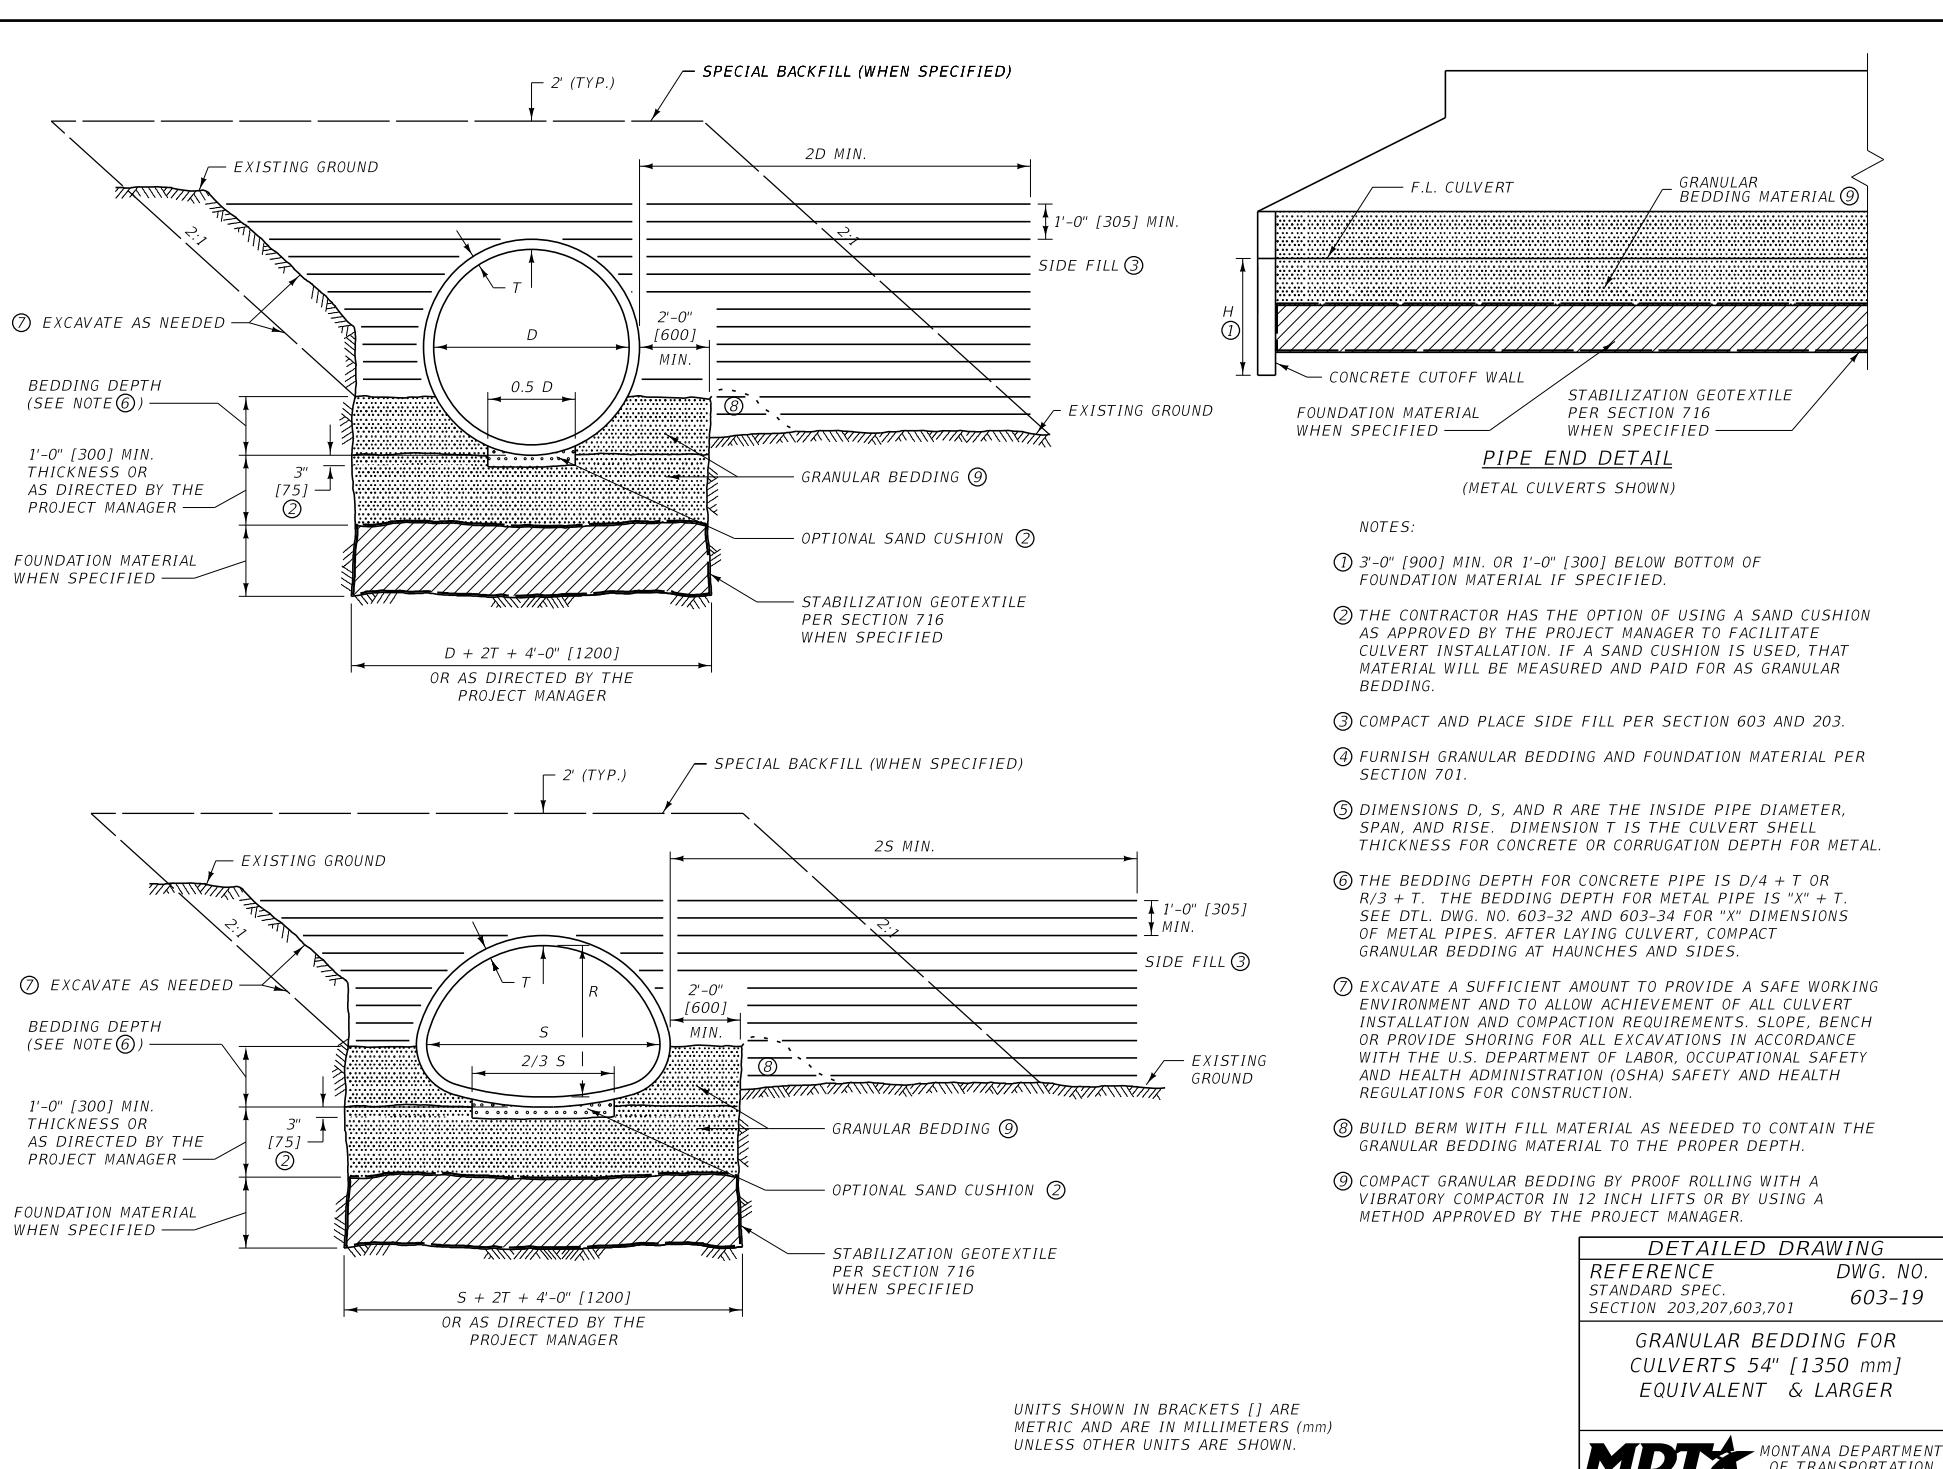


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING


*GRANULAR BEDDING FOR
CULVERTS 54" [1350 mm]
EQUIVALENT & LARGER*

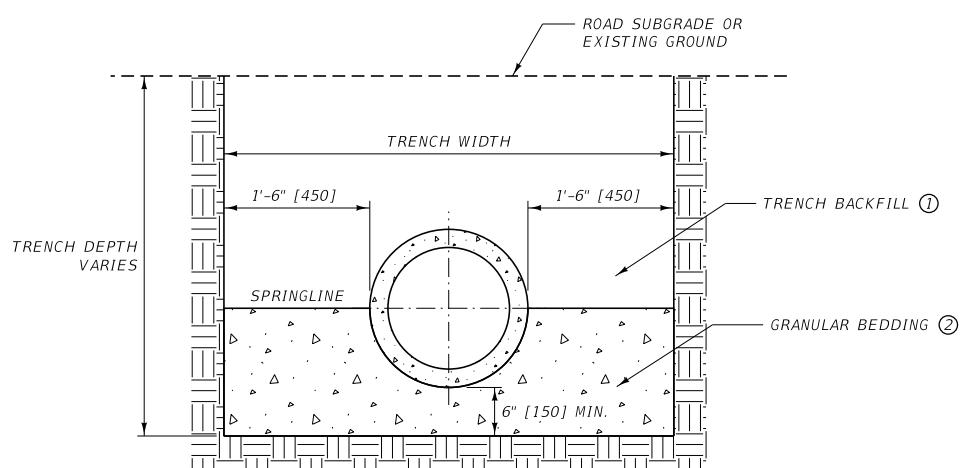

RIGID PIPE
TRENCH/BEDDING DETAIL
FOR 12" [300] TO 54" [1350] DIA.

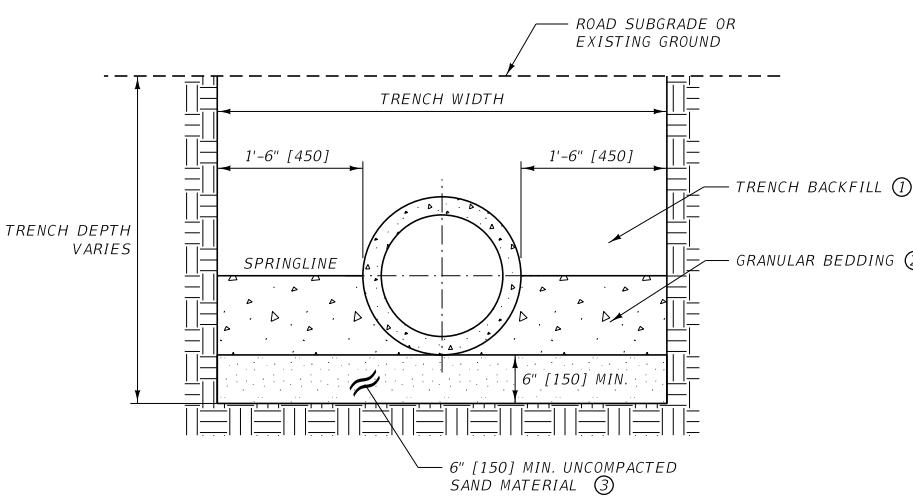

RIGID PIPE
TRENCH/BEDDING DETAIL
FOR 60" [1500] TO 84" [2100] DIA.

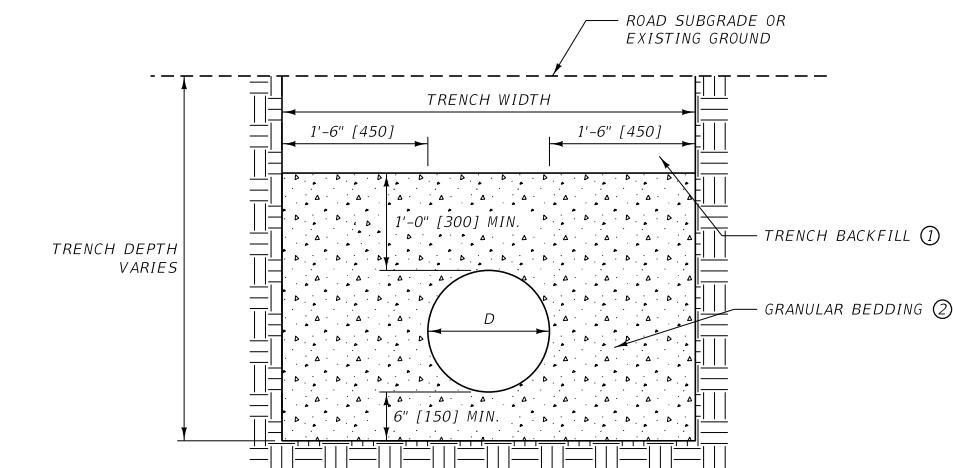

FLEXIBLE PIPE
TRENCH/BEDDING DETAIL
FOR 12" [300] TO 48" [1200] DIA.

QUANTITIES*		METRIC QUANTITIES	
RIGID PIPE 12" TO 54" DIA.		RIGID PIPE 300 TO 1350 DIA.	
DIAMETER	GRANULAR BEDDING (C.Y. PER Ft.)	DIAMETER (mm)	GRANULAR BEDDING (m³ PER m)
12"	0.15	300	0.39
18"	0.20	450	0.50
24"	0.25	600	0.63
30"	0.30	750	0.75
36"	0.35	900	0.88
42"	0.41	1050	1.02
48"	0.46	1200	1.16
54"	0.52	1350	1.30

* BASED ON RCP B WALL PIPE.

QUANTITIES*		METRIC QUANTITIES	
RIGID PIPE 60" TO 84" DIA.		RIGID PIPE 1500 TO 2100 DIA.	
DIAMETER	GRANULAR BEDDING (C.Y. PER Ft.)	DIAMETER (mm)	GRANULAR BEDDING (m³ PER m)
60"	0.48	1500	1.19
66"	0.54	1650	1.35
72"	0.60	1800	1.51
78"	0.67	1950	1.68
84"	0.74	2100	1.85

* BASED ON RCP B WALL PIPE.

QUANTITIES*		METRIC QUANTITIES	
FLEXIBLE PIPE 12" TO 48" DIA.		FLEXIBLE PIPE 300 TO 1200 DIA.	
DIAMETER	GRANULAR BEDDING (C.Y. PER Ft.)	DIAMETER (mm)	GRANULAR BEDDING (m³ PER m)
12"	0.37	300	0.93
18"	0.47	450	1.17
24"	0.57	600	1.42
30"	0.67	750	1.67
36"	0.77	900	1.94
42"	0.88	1050	2.22
48"	1.00	1200	2.51

* BASED ON 1" [25 mm] NOMINAL WALL THICKNESS.

① TRENCH BACKFILL: PLACE PER STANDARD SPECIFICATION 603.03.4. GRANULAR BEDDING MAY BE SUBSTITUTED AT NO ADDITIONAL COST.

② THE BEDDING MATERIAL DIRECTLY UNDERNEATH THE PIPE SHOULD BE LEFT UNCOMPACTED TO FACILITATE THE INSTALLATION OF THE PIPE.

COMPACT GRANULAR BEDDING BY PROOF ROLLING WITH VIBRATORY COMPACTOR IN 8 INCH [200] LIFTS OR BY USING A METHOD APPROVED BY THE PROJECT MANAGER.

INCLUDE THE COST OF GRANULAR BEDDING MATERIAL FOR PIPES LESS THAN 54" [1350 mm] DIAMETER IN THE COST OF PIPE.

③ SAND CUSHION: USE GRADE 5 MATERIAL PER TABLE 701-7 IN STANDARD SPECIFICATION 701.02.3.

THE SAND MATERIAL SHOULD BE LEFT UNCOMPACTED TO FACILITATE THE INSTALLATION OF THE PIPE.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 603.701	DWG. NO. 603-20
STORM DRAIN TRENCH BEDDING DETAIL	


DIMENSION TABLE

DIA. D	APPROX. DIA. GASKET MATL. NOT STRETCHED	LENGTH OF JOINT J	D1	D2	L2 (MIN.)	L1 (WALL"B")	L1 (WALL"C")	X1	X2	Y1	Y2	Y3
12"	21/32"	3 5/8"	15.223"	15.331"	5"	2"	~	1"	7/8"	0.062"	0.090"	0.313"
15"	21/32"	3 5/8"	18.723"	18.831"	4 3/4"	2 3/16"	~	1"	7/8"	0.062"	0.090"	0.313"
18"	21/32"	3 5/8"	22.098"	22.206"	5"	2 3/8"	~	1"	7/8"	0.062"	0.090"	0.313"
21"	21/32"	3 7/8"	25.600"	25.724"	5 1/4"	2 9/16"	~	1"	7/8"	0.062"	0.090"	0.313"
24"	21/32"	3 7/8"	28.975"	29.099"	5 1/2"	2 3/4"	2"	1"	7/8"	0.062"	0.090"	0.313"
27"	21/32"	4"	32.476"	32.608"	5 1/2"	2 3/4"	2"	1"	7/8"	0.062"	0.090"	0.313"
30"	21/32"	4"	35.976"	36.108"	5 1/2"	2 3/4"	2"	1"	7/8"	0.062"	0.090"	0.313"
33"	21/32"	4 1/8"	39.476"	39.616"	5 3/4"	2 7/8"	2 1/8"	1"	7/8"	0.062"	0.090"	0.313"
36"	21/32"	4 1/8"	42.976"	43.116"	6"	3 1/8"	2 3/8"	1"	7/8"	0.062"	0.090"	0.313"
42"	3/4"	4 5/8"	50.183"	50.183"	6 3/4"	3 3/4"	3"	1 3/16"	1"	0.067"	0.129"	0.376"
48"	3/4"	4 3/4"	57.023"	57.193"	7 1/4"	4 1/8"	3 3/8"	1 3/16"	1"	0.067"	0.129"	0.376"
54"	3/4"	5"	63.007"	63.192"	7 1/2"	3 5/8"	2 7/8"	1 3/16"	1"	0.067"	0.129"	0.376"
60"	3/4"	5"	69.007"	69.192"	7 1/2"	3 1/8"	2 3/8"	1 3/16"	1"	0.067"	0.129"	0.376"
66"	13/16"	5"	75.007"	75.192"	7 1/2"	2 3/4"	2"	1 3/16"	1"	0.067"	0.129"	0.376"
72"	13/16"	5 1/4"	79.250"	79.400"	~	~	~	1 3/16"	1 1/4"	0.093"	0.190"	0.376"
78"	13/16"	5 1/4"	86.250"	86.400"	~	~	~	1 3/16"	1 1/4"	0.093"	0.190"	0.376"
84"	13/16"	5 1/4"	91.500"	91.650"	~	~	~	1 3/16"	1 1/4"	0.093"	0.190"	0.376"
90"	13/16"	5 1/4"	97.750"	97.900"	~	~	~	1 3/16"	1 1/4"	0.093"	0.190"	0.376"
96"	13/16"	5 1/4"	104.250"	104.400"	~	~	~	1 3/16"	1 1/4"	0.093"	0.190"	0.376"
102"	13/16"	5 1/4"	110.750"	110.900"	~	~	~	1 3/16"	1 1/4"	0.093"	0.190"	0.376"
108"	13/16"	5 1/4"	117.250"	117.400"	~	~	~	1 3/16"	1 1/4"	0.093"	0.190"	0.376"


METRIC DIMENSION TABLE (mm)

DIA. D	APPROX. DIA. GASKET MATL. NOT STRETCHED	LENGTH OF JOINT J	D1	D2	L2 (MIN.)	L1 (WALL"B")	L1 (WALL"C")	X1	X2	Y1	Y2	Y3
300	16.67	92.08	386.66	389.41	127.00	50.80	~	25.40	22.23	1.57	2.29	7.95
375	16.67	92.08	475.56	478.31	120.65	55.56	~	25.40	22.23	1.57	2.29	7.95
450	16.67	92.08	561.29	564.03	127.00	60.33	~	25.40	22.23	1.57	2.29	7.95
525	16.67	98.43	650.24	653.39	133.35	65.09	~	25.40	22.23	1.57	2.29	7.95
600	16.67	98.43	735.97	739.11	139.70	69.85	50.80	25.40	22.23	1.57	2.29	7.95
675	16.67	101.60	824.89	828.24	139.70	69.85	50.80	25.40	22.23	1.57	2.29	7.95
750	16.67	101.60	913.79	917.14	139.70	69.85	50.80	25.40	22.23	1.57	2.29	7.95
825	16.67	104.78	1002.69	1006.25	146.05	73.03	53.98	25.40	22.23	1.57	2.29	7.95
900	16.67	104.78	1091.59	1095.15	152.40	79.38	60.33	25.40	22.23	1.57	2.29	7.95
1050	19.05	117.48	1274.65	1274.65	171.45	95.25	76.20	30.16	25.40	1.70	3.28	9.55
1200	19.05	120.65	1448.38	1452.70	184.15	104.78	85.73	30.16	25.40	1.70	3.28	9.55
1350	19.05	127.00	1600.38	1605.08	190.50	92.08	73.03	30.16	25.40	1.70	3.28	9.55
1500	19.05	127.00	1752.78	1757.48	190.50	79.38	60.33	30.16	25.40	1.70	3.28	9.55
1650	20.64	127.00	1905.18	1909.88	190.50	69.85	50.80	30.16	25.40	1.70	3.28	9.55
1800	20.64	133.35	2012.95	2016.76	~	~	~	30.16	31.75	2.36	4.83	9.55
1950	20.64	133.35	2190.75	2194.56	~	~	~	30.16	31.75	2.36	4.83	9.55
2100	20.64	133.35	2324.10	2327.91	~	~	~	30.16	31.75	2.36	4.83	9.55
2250	20.64	133.35	2482.85	2486.66	~	~	~	30.16	31.75	2.36	4.83	9.55
2400	20.64	133.35	2647.95	2651.76	~	~	~	30.16	31.75	2.36	4.83	9.55
2550	20.64	133.35	2813.05	2816.86	~	~	~	30.16	31.75	2.36	4.83	9.55
2700	20.64	133.35	2978.15	2981.96	~	~	~	30.16	31.75	2.36	4.83	9.55

72" [1800] DIA. PIPES AND LARGER

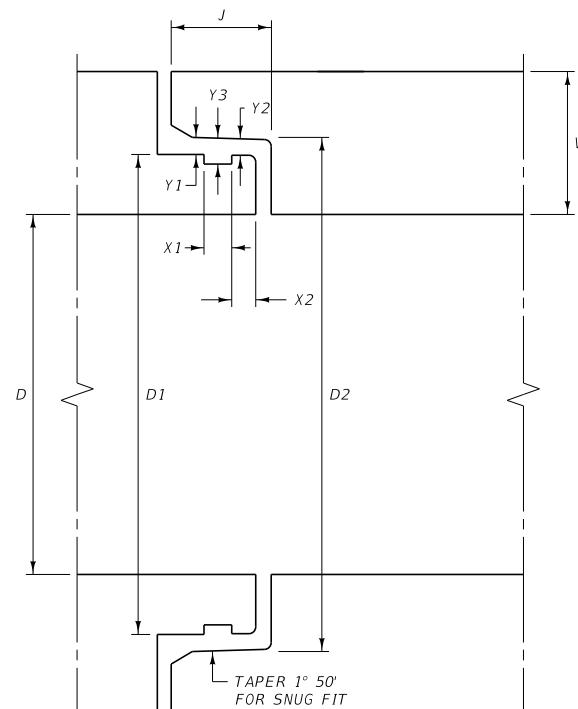

66" [1650] DIA. PIPES AND SMALLER

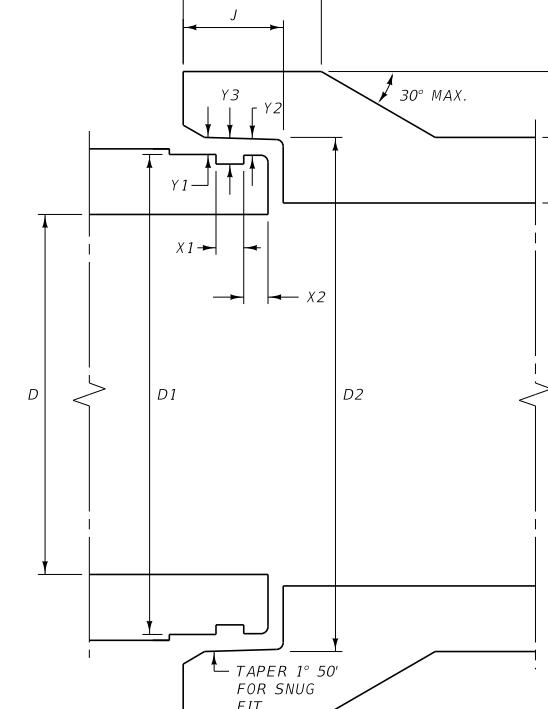

NOTES:

TYPICAL FOR STORM DRAIN AND IRRIGATION APPLICATIONS (FOR HEADS UP TO 20 FEET [6.1 m]).

USE RUBBER GASKETS THAT MEET THE REQUIREMENTS OF SECTION 707.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 603-22
SECTION 603,707,708

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

WATER TIGHT JOINT FOR
REINFORCED CONCRETE PIPE
MDT MONTANA DEPARTMENT OF TRANSPORTATION

DIMENSION TABLE

DIA. D	XSEC. WATER AREA (SQ. FT.)	WT. PER FOOT OF PIPE (LB.)	T * MIN. WALL THICKNESS	J LENGTH OF JOINT	A (NOMINAL) $= \frac{D_2 - D_1}{2}$	D1	D2	D3	D4
12"	0.79	92	2"	1 3/4"	3/16"	13 1/4"	13 5/8"	13 7/8"	14 1/4"
15"	1.23	127	2 1/4"	2"	3/16"	16 1/2"	16 7/8"	17 1/4"	17 5/8"
18"	1.77	168	2 1/2"	2 1/4"	3/16"	19 5/8"	20"	20 3/8"	20 3/4"
21"	2.40	214	2 3/4"	2 1/2"	3/16"	22 7/8"	23 1/4"	23 3/4"	24 1/8"
24"	3.14	265	3"	2 3/4"	3/16"	26"	26 3/8"	27"	27 3/8"
27"	3.98	322	3 1/4"	3"	3/16"	29 1/4"	29 5/8"	30 1/4"	30 5/8"
30"	4.91	384	3 1/2"	3 1/4"	3/16"	32 3/8"	32 3/4"	33 1/2"	33 7/8"
33"	5.94	452	3 3/4"	3 1/2"	1/4"	35 1/2"	36"	36 3/4"	37 1/4"
36"	7.07	524	4"	3 3/4"	1/4"	38 3/4"	39 1/4"	40"	40 1/2"
42"	9.62	685	4 1/2"	4"	1/4"	45 1/8"	45 3/8"	46 1/2"	47"
48"	12.57	867	5"	4 1/4"	1/4"	51 1/2"	52"	53"	53 1/2"
54"	15.90	1070	5 1/2"	4 1/2"	1/4"	57 7/8"	58 3/8"	59 3/8"	59 7/8"
60"	19.63	1296	6"	5"	1/4"	64 1/4"	64 3/4"	66"	66 1/2"
66"	23.76	1542	6 1/2"	5 1/2"	1/4"	70 5/8"	71 1/8"	72 1/2"	73"
72"	28.27	1810	7"	6"	1/4"	77"	77 1/2"	79"	79 1/2"
78"	33.18	2098	7 1/2"	6 1/2"	1/4"	83 3/8"	83 7/8"	85 5/8"	86 1/3"
84"	38.48	2410	8"	7"	1/4"	89 3/4"	90 1/4"	92 1/8"	92 5/8"
90"	44.18	2740	8 1/2"	7"	1/4"	95 3/4"	96 1/4"	98 1/8"	98 5/8"
96"	50.27	2950	9"	7"	1/4"	102 1/8"	102 5/8"	104 1/2"	105"
102"	56.75	3075	9 1/2"	7 1/2"	1/4"	109"	109 1/2"	111 1/2"	112"
108"	63.62	3870	10"	7 1/2"	1/4"	115 1/2"	116"	118"	118 1/2"

* WALL "B" THICKNESS




METRIC DIMENSION TABLE

DIA. D	XSEC. WATER AREA (m ²)	WT. PER m OF PIPE (kg)	T * MIN. WALL THICKNESS	J LENGTH OF JOINT	A (NOMINAL) $= \frac{D_2 - D_1}{2}$	D1	D2	D3	D4
300	0.073	136.9	50.8	44.45	4.76	336.55	346.08	352.43	361.95
375	0.114	189.0	57.2	50.80	4.76	419.10	428.63	438.15	447.68
450	0.164	250.0	63.5	57.15	4.76	498.48	508.00	517.53	527.05
525	0.223	318.5	69.9	63.50	4.76	581.03	590.55	603.25	612.78
600	0.292	394.4	76.2	69.85	4.76	660.40	669.93	685.80	695.33
675	0.369	479.2	82.6	76.20	4.76	742.95	752.48	768.35	777.88
750	0.456	571.5	88.9	82.55	4.76	822.33	831.85	850.90	860.43
825	0.552	672.6	95.3	88.90	6.35	901.70	914.40	933.45	946.15
900	0.657	779.8	101.6	95.25	6.35	984.25	996.95	1016.00	1028.70
1050	0.894	1019.4	114.3	101.60	6.35	1146.18	1152.53	1181.10	1193.80
1200	1.167	1290.2	127.0	107.95	6.35	1308.10	1320.80	1346.20	1358.90
1350	1.478	1592.3	139.7	114.30	6.35	1470.03	1482.73	1508.13	1520.83
1500	1.824	1928.7	152.4	127.00	6.35	1631.95	1644.65	1676.40	1689.10
1650	2.207	2294.7	165.1	139.70	6.35	1793.88	1806.58	1841.50	1854.20
1800	2.627	2693.6	177.8	152.40	6.35	1955.80	1968.50	2006.60	2019.30
1950	3.083	3122.2	190.5	165.10	6.35	2117.73	2130.43	2174.88	2192.87
2100	3.575	3586.5	203.2	177.80	6.35	2279.65	2292.35	2339.98	2352.68
2250	4.104	4077.6	215.9	177.80	6.35	2432.05	2444.75	2492.38	2505.08
2400	4.670	4390.1	228.6	177.80	6.35	2593.98	2606.68	2654.30	2667.00
2550	5.272	4576.1	241.3	190.50	6.35	2768.60	2781.30	2832.10	2844.80
2700	5.910	5759.2	254.0	190.50	6.35	2933.70	2946.40	2997.20	3009.90



NOTE: ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED

* WALL "B" THICKNESS

DIMENSION TABLE

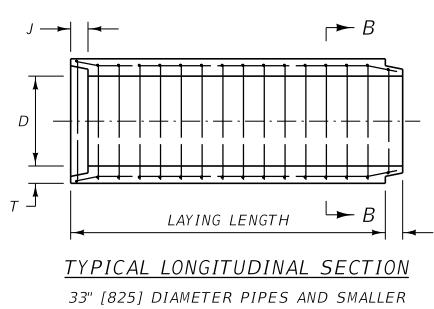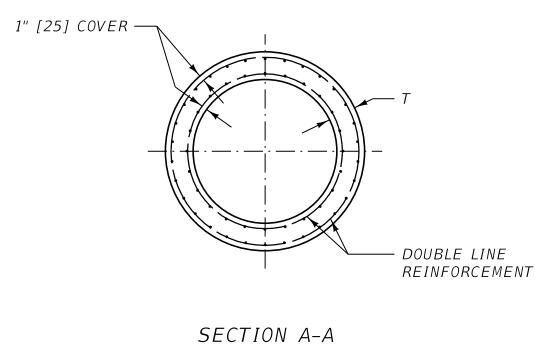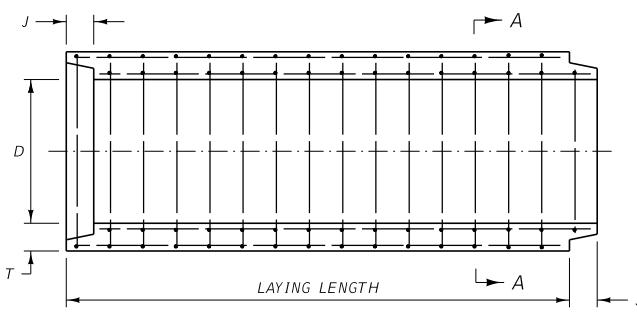

SECTION B-B

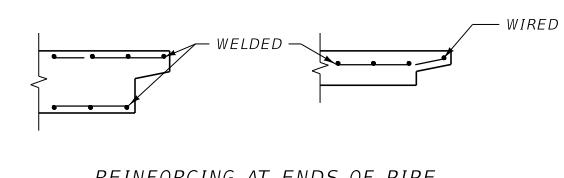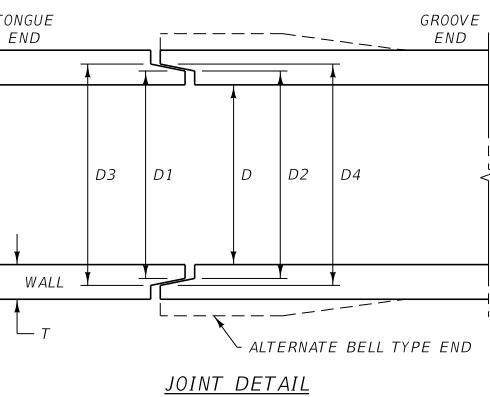


UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	DWG. NO.
REFERENCE STANDARD SPEC.	603-24
SECTION 603,708	

TYPICAL FOR DRAINAGE APPLICATIONS.


REINFORCED CONCRETE
PIPE JOINT

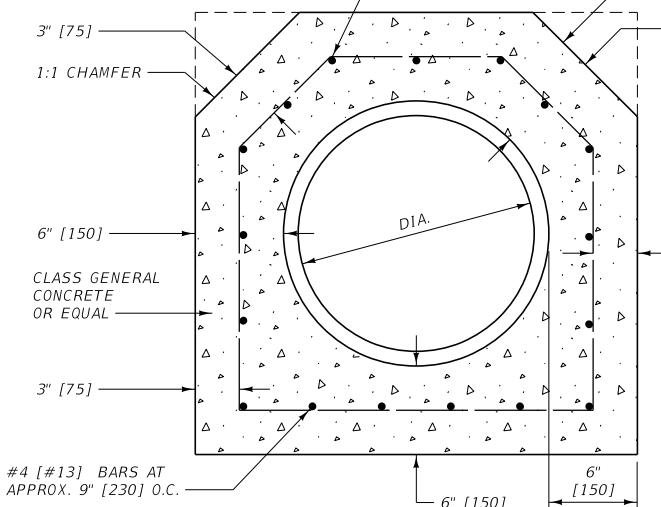

SECTION A-A

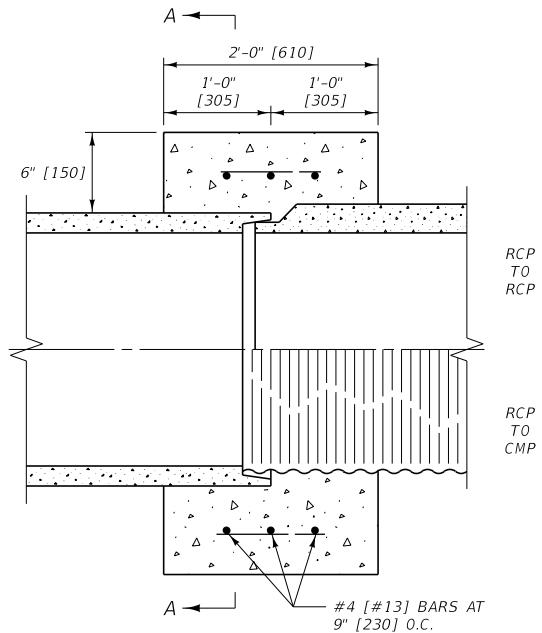

CONNECTION DETAILS

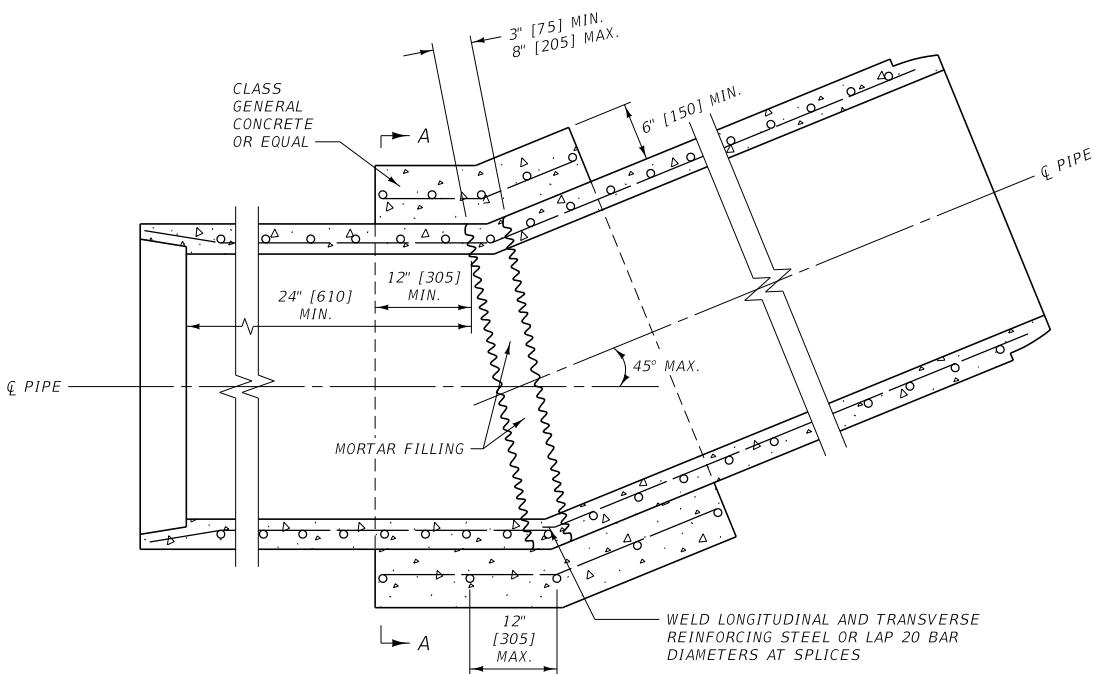


TYPICAL FIELD CAST CONCRETE BEND

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 603,708	DWG. NO. 603-26
TYPICAL FIELD CAST CONCRETE CONNECTIONS	
 MONTANA DEPARTMENT OF TRANSPORTATION	

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.


ADAPTER RING - TIE BOLT DETAIL

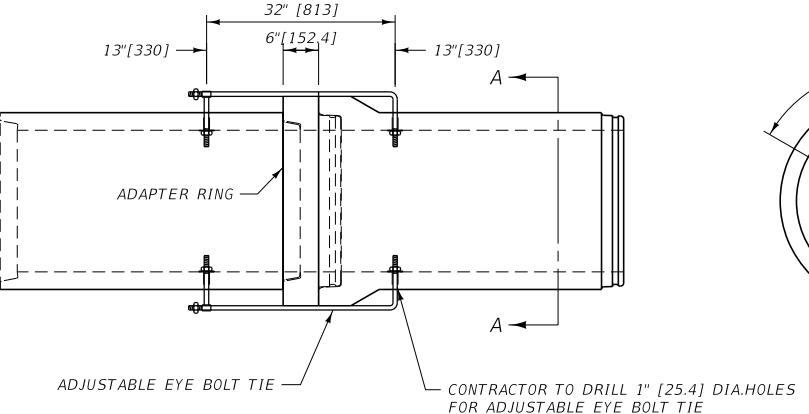

NOTES:

- ① PART NUMBER 11051-A FURNISH WITH ADJUSTING NUT ONLY, ALL OTHERS AS SHOWN
- ② BOLTS PAINTED WITH ZINC CHROMATE IRON OXIDE
- ③ PAINT STANDARD ROLLED THREADS ON ALL BOLTS
- ④ RODS MAY BE HOT BENT
- ⑤ FOR 18" [457] RCP USE 42-54 EYE BOLT TIE
- ⑥ FOR 24" [610] RCP USE 60-66 EYE BOLT TIE

ADJUSTABLE EYE BOLT TIE

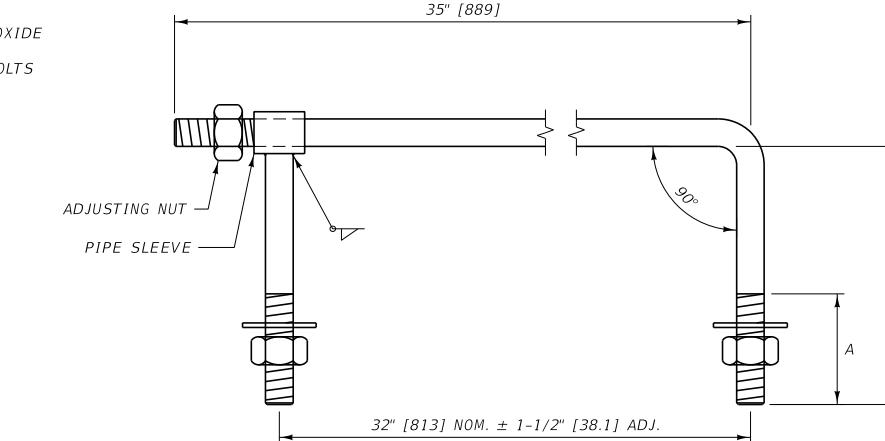

PLAN VIEW

SECTION A-A







PART NO.	PIPE SIZE *	WALL THK.	P/N	THREAD DIA.	A	B	ROD DIA.
	in	in		in	in	in	
11051-A	12"-27"	2"-3.5"	091000	5/8"	0	4	9/16"
11051-D	30"-36"	3.5"-4"	091004	3/4"	3	5.5	11/16"
11051-G	42"-54"	4.5"-5.5"	091008	3/4"	3	7	11/16"
11051-J	60"-66"	6"-6.5"	091012	3/4"	3	8.5	11/16"
11051-M	72"-84"	7"-8"	091016	1"	3	10.5	29/32"
11051-O	90"-102"	8.5"-9.5"	091019	1"	3	12	29/32"
11051-Q	108"-120"	10"	091022	1"	3	13	29/32"

PART NO.	PIPE SIZE *	WALL THK.	P/N	THREAD DIA.	A	B	ROD DIA.
	mm	mm		mm	mm	mm	
11051-A	300-675	50.8-88.9	091000	15.88	0.0	101.6	14.29
11051-D	750-900	88.9-101.6	091004	19.05	76.2	139.7	17.46
11051-G	1050-1350	114.3-139.7	091008	19.05	76.2	177.8	17.46
11051-J	1500-1650	152.4-165.1	091012	19.05	76.2	215.9	17.46
11051-M	1800-2100	177.8-203.2	091016	25.4	76.2	266.7	23.02
11051-O	2250-2550	215.9-241.3	091019	25.4	76.2	304.8	23.02
11051-Q	2700-3000	254.0	091022	25.4	76.2	330.2	23.02

* BASED ON 'B' WALL ROUND PIPE AND EQUIVALENT SIZE ARCH PIPE

* BASED ON 'B' WALL ROUND PIPE AND EQUIVALENT SIZE ARCH PIPE

18" [457] CTX ADAPTER RING

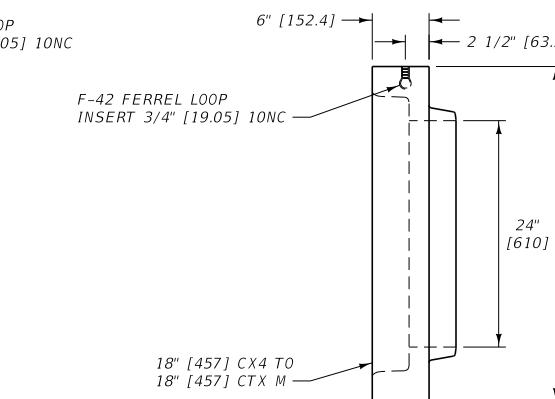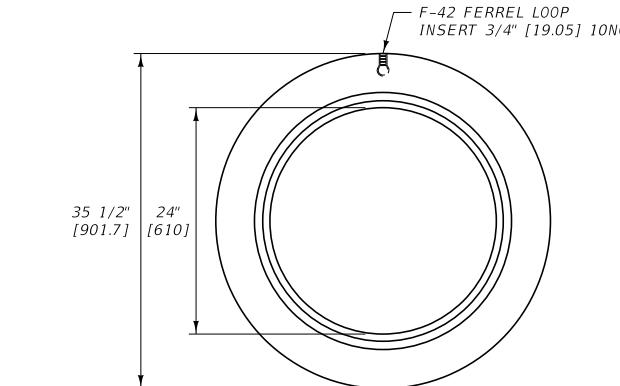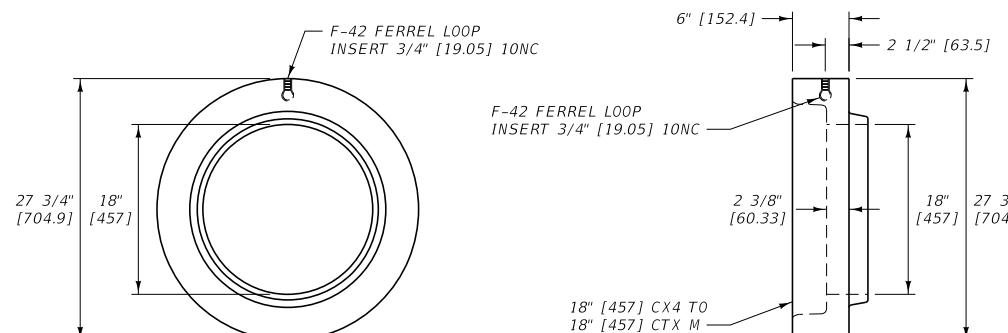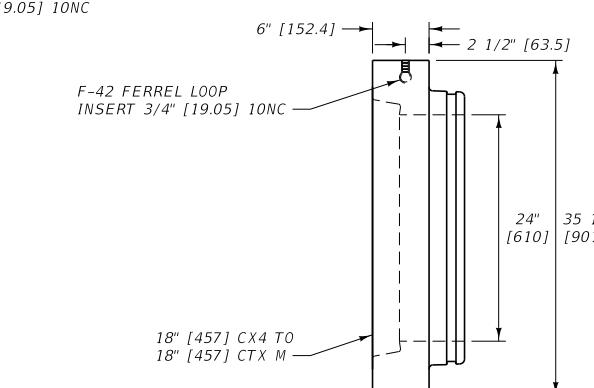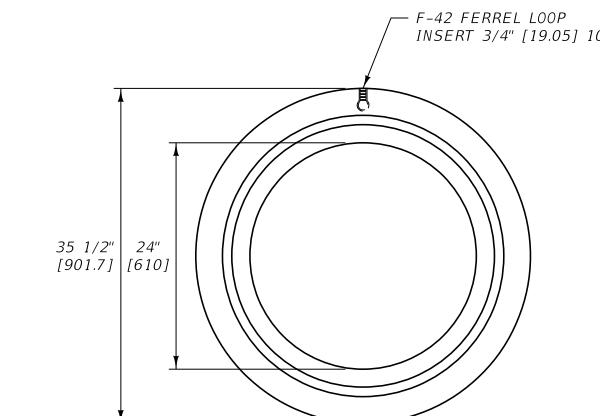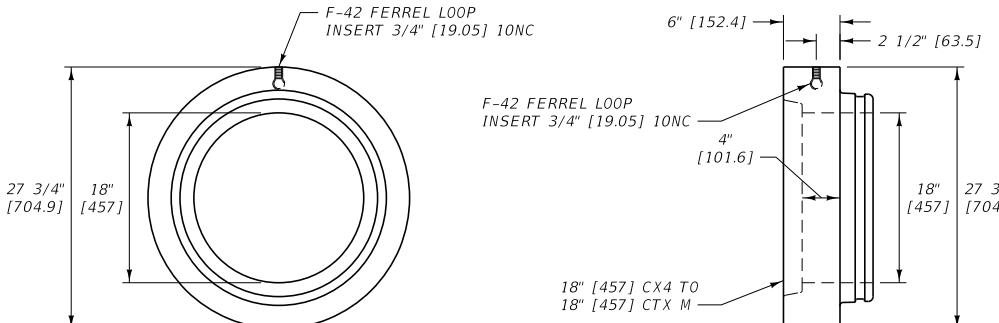



NOTES:

- ① PRODUCED PER ASTM C76
- ② CL5 REINFORCING, TYPE 5 CEMENT

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 603-27
SECTION 603

CTX ADAPTER

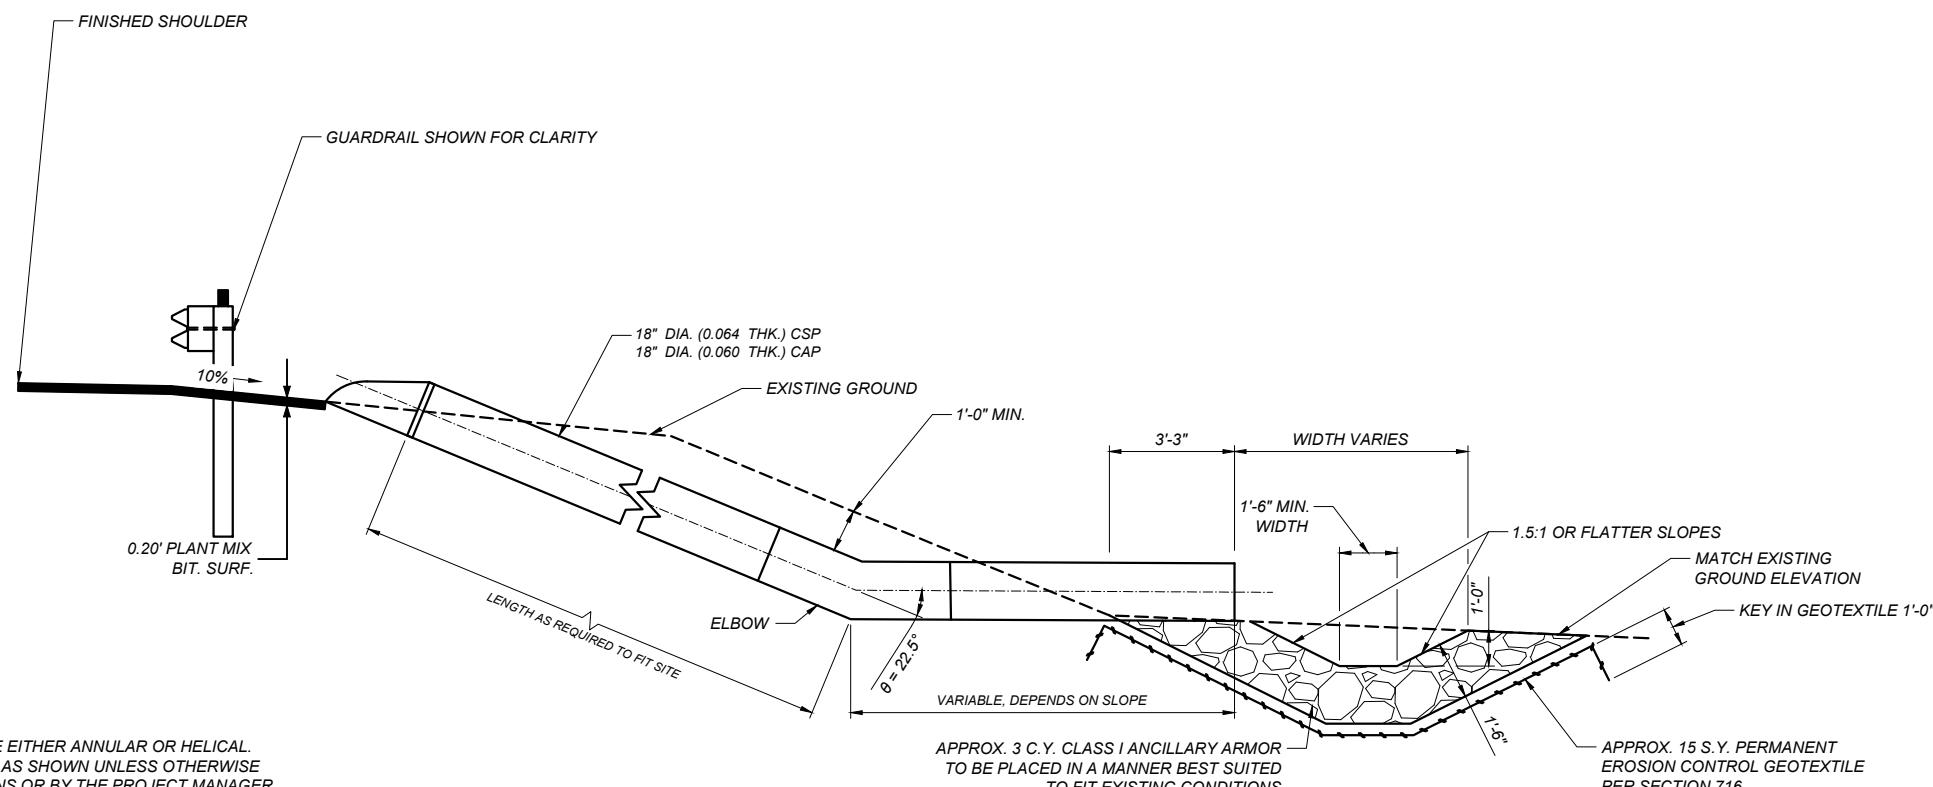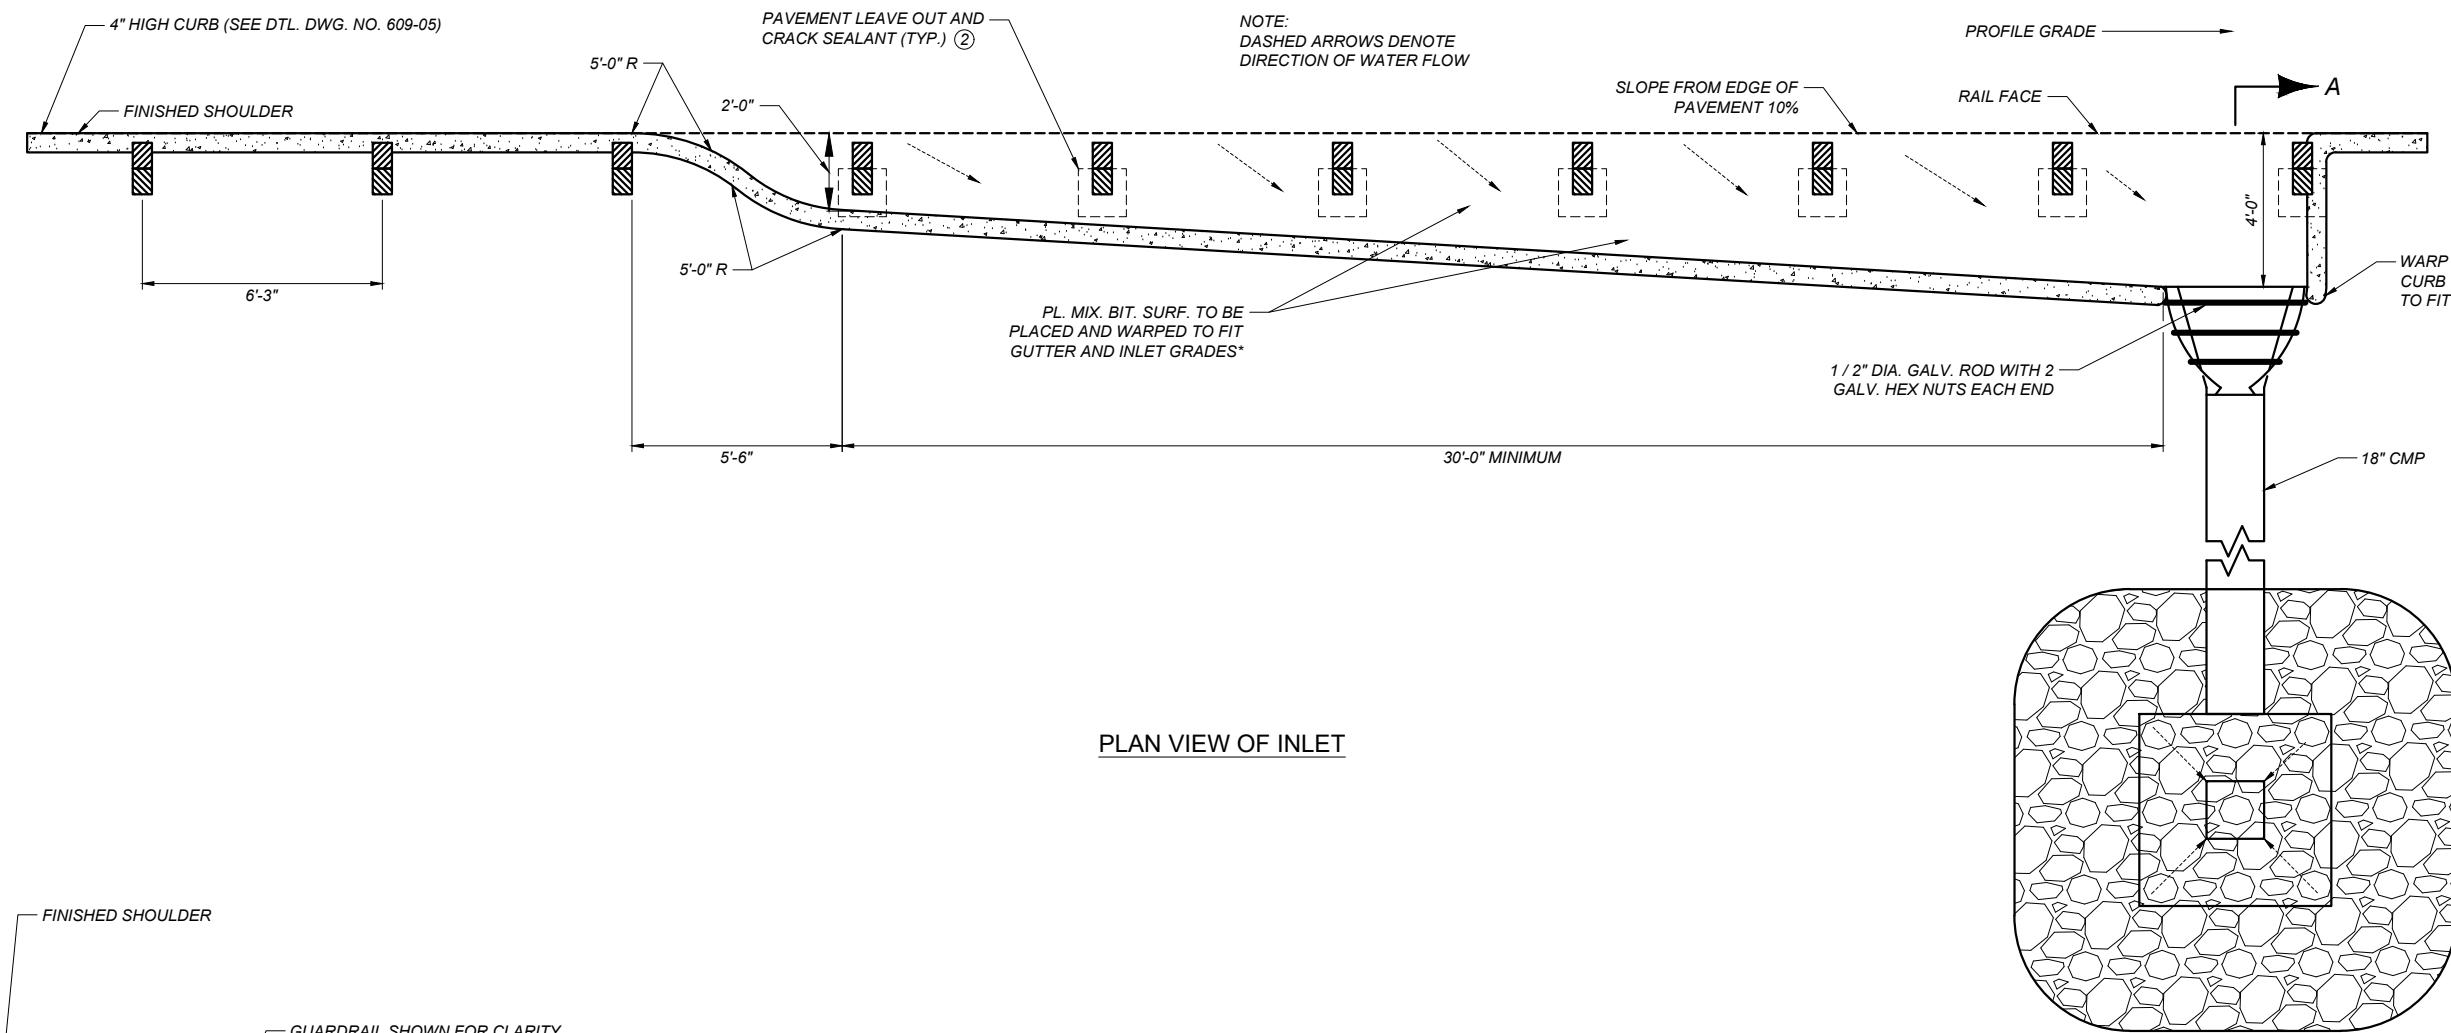

NOTES:


- ① CORRUGATION MAY BE EITHER ANNULAR OR HELICAL. BEND ON ELBOW (θ) IS AS SHOWN UNLESS OTHERWISE SPECIFIED IN THE PLANS OR BY THE PROJECT MANAGER.
- ② SEE DTL. DWG. NO. 606-05A AND 606-05B FOR PAVEMENT LEAVE OUT DETAILS. APPLY CRACK SEALANT PER SECTION 707 TO FULLY COVER THE C.A.C. IN LEAVE OUT AREAS WITHIN THE EMBANKMENT PROTECTOR.

* INCLUDED WITH ROADWAY QUANTITIES.


SECTION A-A

DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 603, 707, 716	DWG. NO. 603-28


EMBANKMENT PROTECTOR	
EFFECTIVE: JAN 23, 2020	

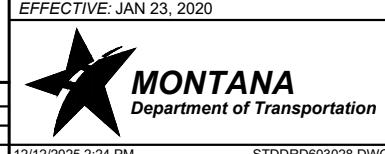

REVISED--
APR 28, 2022
JAN 15, 2026

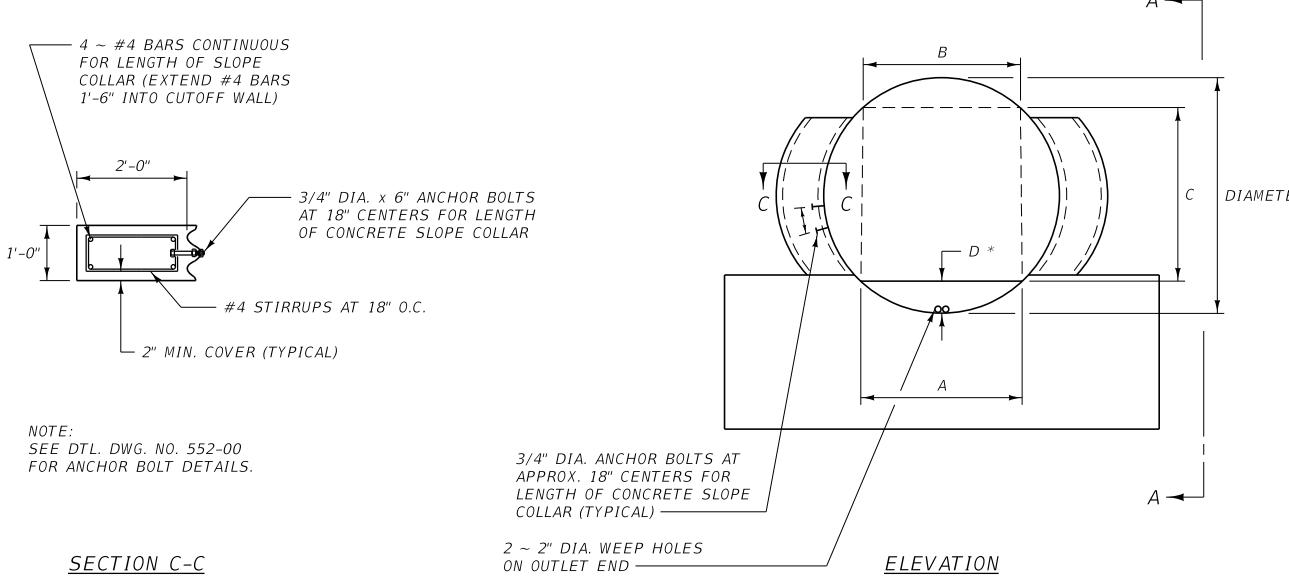

SECTION C-C

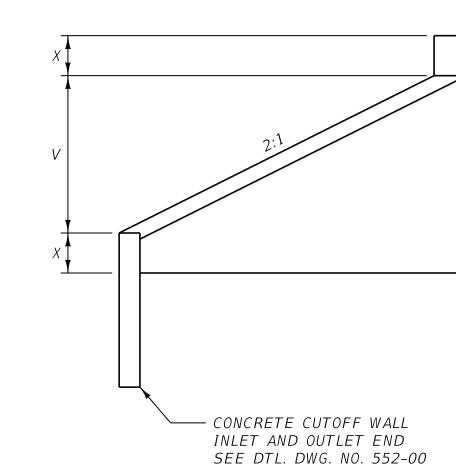

SECTION A-A

NOTES:


- ① DESIGNATE THESE STRUCTURES, IN PLANS AND PROPOSAL, AS "VEHICULAR UNDERPASS." USE THE TERM "VEHICULAR UNDERPASS," REGARDLESS OF THE USE OR PURPOSE OF THE STRUCTURE.
- ② PROVIDE END TREATMENT FOR ALL VEHICULAR UNDERPASSES INCLUDING CUTOFF WALLS, BACKFILL RETAINING WALLS AND CONCRETE SLOPE COLLARS.
- ③ PROVIDE SURFACING FOR THE INSIDE OF THE STRUCTURE, CROSS-SLOPED TO ALLOW A DRAINAGE COURSE DOWN THE CENTERLINE.
- ④ FOR PLATE THICKNESS SEE ROAD DESIGN MANUAL FILL HEIGHT TABLES.
- ⑤ USE CLASS GENERAL CONCRETE OR EQUAL.
- ⑥ SEE DTL. DWG. NO. 552-08 FOR QUANTITIES.
- ⑦ SEE DTL. DWG. NO. 603-31 FOR ALTERNATIVE "C" PCCP TRANSVERSE JOINT AND BACKFILL RETAINER DETAILS.

DEPTH OF SURFACING *				
MATERIAL	ALTERNATE "A"	ALTERNATE "B"	ALTERNATE "C"	
PL. MIX SURF.	—	0.20'	—	
PORT. CEM. CONC. PAVE.	—	—	0.67'	
CRUSHED AGGREGATE COURSE	BAL.	BAL.	BAL.	


DIAMETER	A	B	C	V	X	D *	BACKFILL RETAINER (C.Y.)	CONCRETE COLLAR (C.Y.)
96"	4'	4'	6.9'	4.0'	2.0'	0.5'	0.04	0.66
120"	7'	7'	7.1'	5.0'	2.5'	1.4'	0.17	0.82
150"	10'	8'	8.6'	6.25'	3.13'	2.5'	0.43	1.08
162"	10'	8'	10.0'	6.75'	3.38'	2.2'	0.38	1.16
186"	12'	10'	10.8'	7.75'	3.88'	2.9'	0.59	1.34
192"	12'	10'	11.5'	8.0'	4.0'	2.7'	0.55	1.38
204"	12'	10'	12.9'	8.5'	4.25'	2.5'	0.51	1.46
216"	12'	10'	14.2'	9.0'	4.50'	2.3'	0.47	1.54
228"	16'	12'	12.5'	9.5'	4.75'	4.4'	1.23	1.72
240"	16'	12'	14.0'	10.0'	5.0'	4.0'	1.10	1.72

SURFACING QUANTITIES PER LINEAR FOOT FOR DEPTH "D" *						
DIAMETER	CRUSHED AGGREGATE COURSE	ALTERNATE "A"		ALTERNATE "B"		ALTERNATE "C"
		C.Y. SURFACING	TONS SURFACING	C.Y. SURFACING	TONS BIT. MATL.	
96"	0.054	0.0056	0.052	0.027	0.0031	0.0005
120"	0.255	0.0097	0.097	0.205	0.0058	0.0009
150"	0.647	0.0139	0.141	0.574	0.0084	0.0014
162"	0.563	0.0139	0.140	0.489	0.0084	0.0014
186"	0.882	0.0167	0.169	0.794	0.0102	0.0017
192"	0.830	0.0167	0.168	0.744	0.0101	0.0016
204"	0.769	0.0167	0.169	0.680	0.0102	0.0016
216"	0.702	0.0167	0.168	0.615	0.0101	0.0016
228"	1.842	0.0222	0.227	1.725	0.0136	0.0022
240"	1.656	0.0222	0.226	1.539	0.0136	0.0022

BACKFILL RETAINER & CUTOFF WALL DETAIL

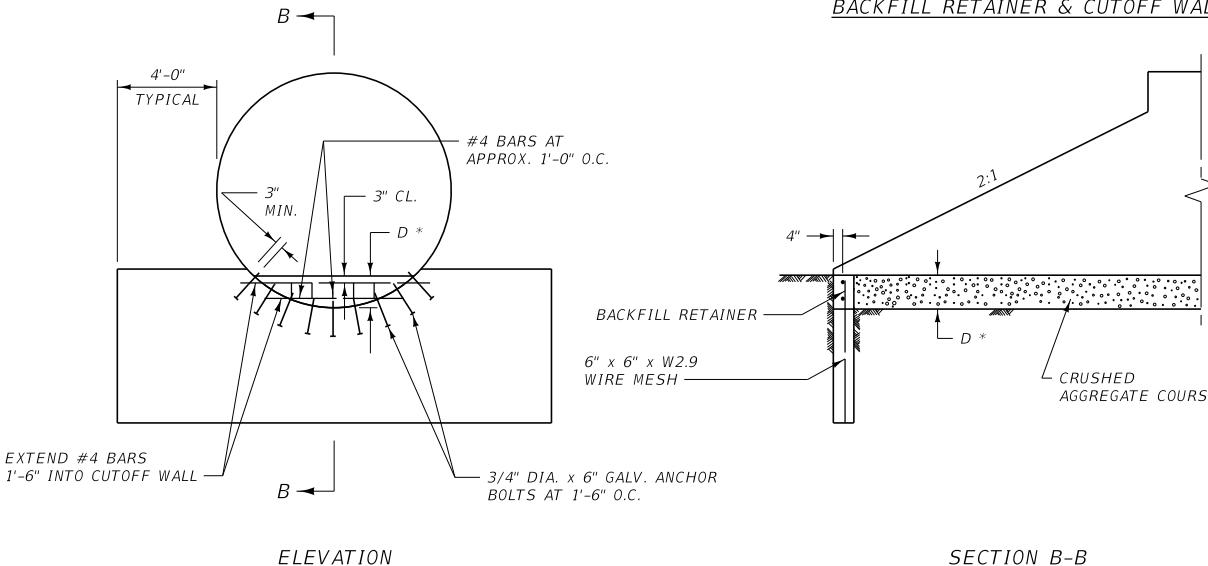


ELEVATION
(ALTERNATE "A")

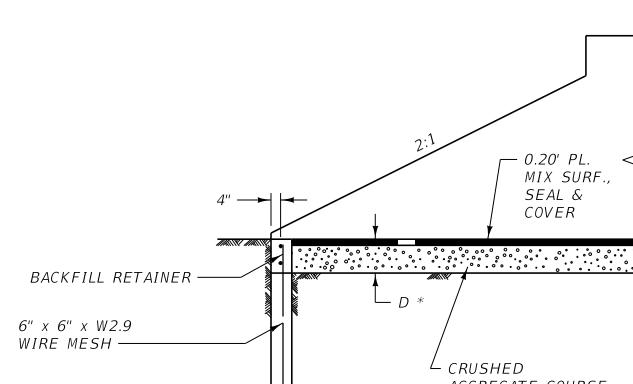


SECTION B-B
(ALTERNATE "A")

NOTE:
INCLUDE CONCRETE COLLAR
WHEN SPECIFIED.

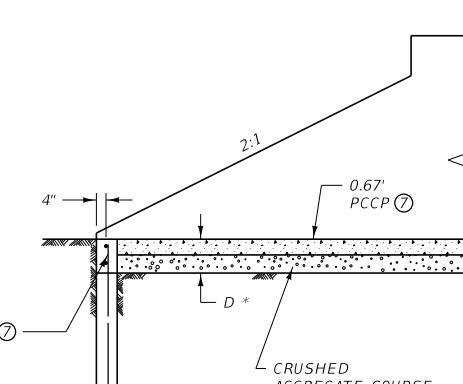


SECTION B-B
(ALTERNATE "B")

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 603-30
SECTION 552,603
VEHICULAR UNDERPASS AND
BACKFILL RETAINER
& CUTOFF WALL DETAIL

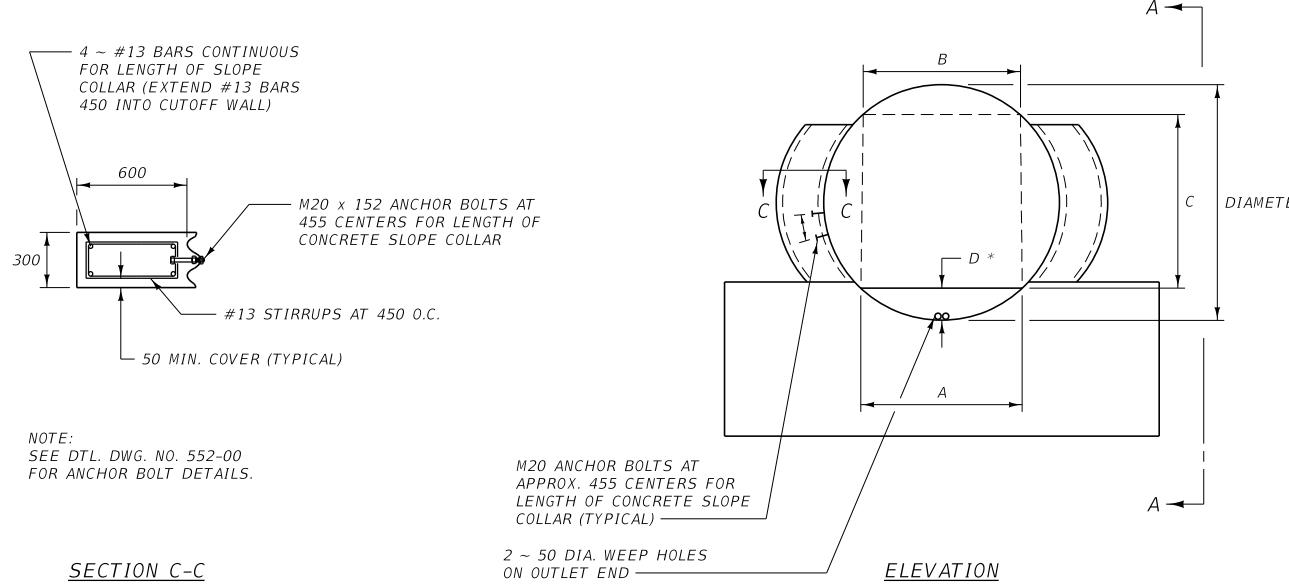

SECTION C-C

ELEVATION

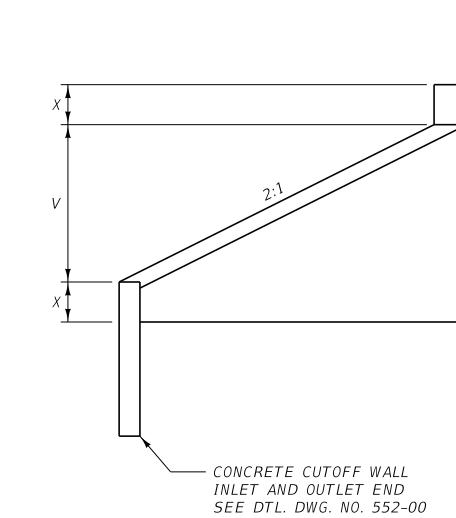


SECTION A-A

DEPTH OF SURFACING *				
MATERIAL	ALTERNATE "A"	ALTERNATE "B"	ALTERNATE "C"	
PL. MIX SURF.	—	60	—	
PORT. CEM. CONC. PAVE.	—	—	203	
CRUSHED AGGREGATE COURSE	BAL.	BAL.	BAL.	


DIAMETER	A (m)	B (m)	C (m)	V (m)	X (m)	D *	BACKFILL RETAINER (m³)	CONCRETE COLLAR (m³)
2400	1.2	1.2	2.078	1.200	0.600	173	0.03	0.50
3000	2.1	2.1	2.142	1.500	0.750	441	0.13	0.63
3.825 m	3.0	2.4	2.683	1.916	0.957	750	0.32	0.80
4.135 m	3.0	2.4	3.114	2.071	1.035	669	0.28	0.87
4.755 m	3.6	3.0	3.407	2.381	1.190	848	0.43	1.00
4.910 m	3.6	3.0	3.622	2.459	1.229	809	0.41	1.03
5.220 m	3.6	3.0	4.035	2.613	1.307	744	0.38	1.10
5.530 m	3.6	3.0	4.431	2.770	1.384	690	0.35	1.16
5.840 m	4.8	3.6	3.975	2.924	1.462	1279	0.87	1.23
6.150 m	4.8	3.6	4.428	3.079	1.540	1176	0.80	1.29

SURFACING QUANTITIES PER METER FOR DEPTH "D" *							
ALTERNATE "A"		ALTERNATE "B"			ALTERNATE "C"		
m³ SURFACING	TONS SURFACING	m³ SURFACING	TONS BIT. MATL.	m³ SURFACING	TONS BIT. MATL.	CRUSHED AGGREGATE COURSE	PORT. CEM. CONCRETE PAVEMENT
DIAMETER	CRUSHED AGGREGATE COURSE	COVER MATERIAL	PLANT MIX	CRUSHED AGGREGATE COURSE	PLANT MIX	PRIME	SEAL
2400	0.147	0.0175	0.158	0.078	0.0095	0.0015	0.0020
3000	0.649	0.0299	0.284	0.525	0.0170	0.0029	0.0034
3.825 m	1.604	0.0429	0.414	1.423	0.0248	0.0042	0.998
4.135 m	1.420	0.0430	0.414	1.239	0.0248	0.0042	0.822
4.755 m	2.159	0.0513	0.496	1.942	0.0298	0.0051	0.0059
4.910 m	2.056	0.0514	0.496	1.839	0.0298	0.0051	0.0059
5.220 m	1.882	0.0514	0.496	1.665	0.0298	0.0051	0.0059
5.530 m	1.741	0.0515	0.496	1.524	0.0298	0.0050	0.0059
5.840 m	4.368	0.0681	0.661	4.079	0.0397	0.0068	0.0078
6.150 m	3.985	0.0681	0.661	3.696	0.0397	0.0068	0.0078

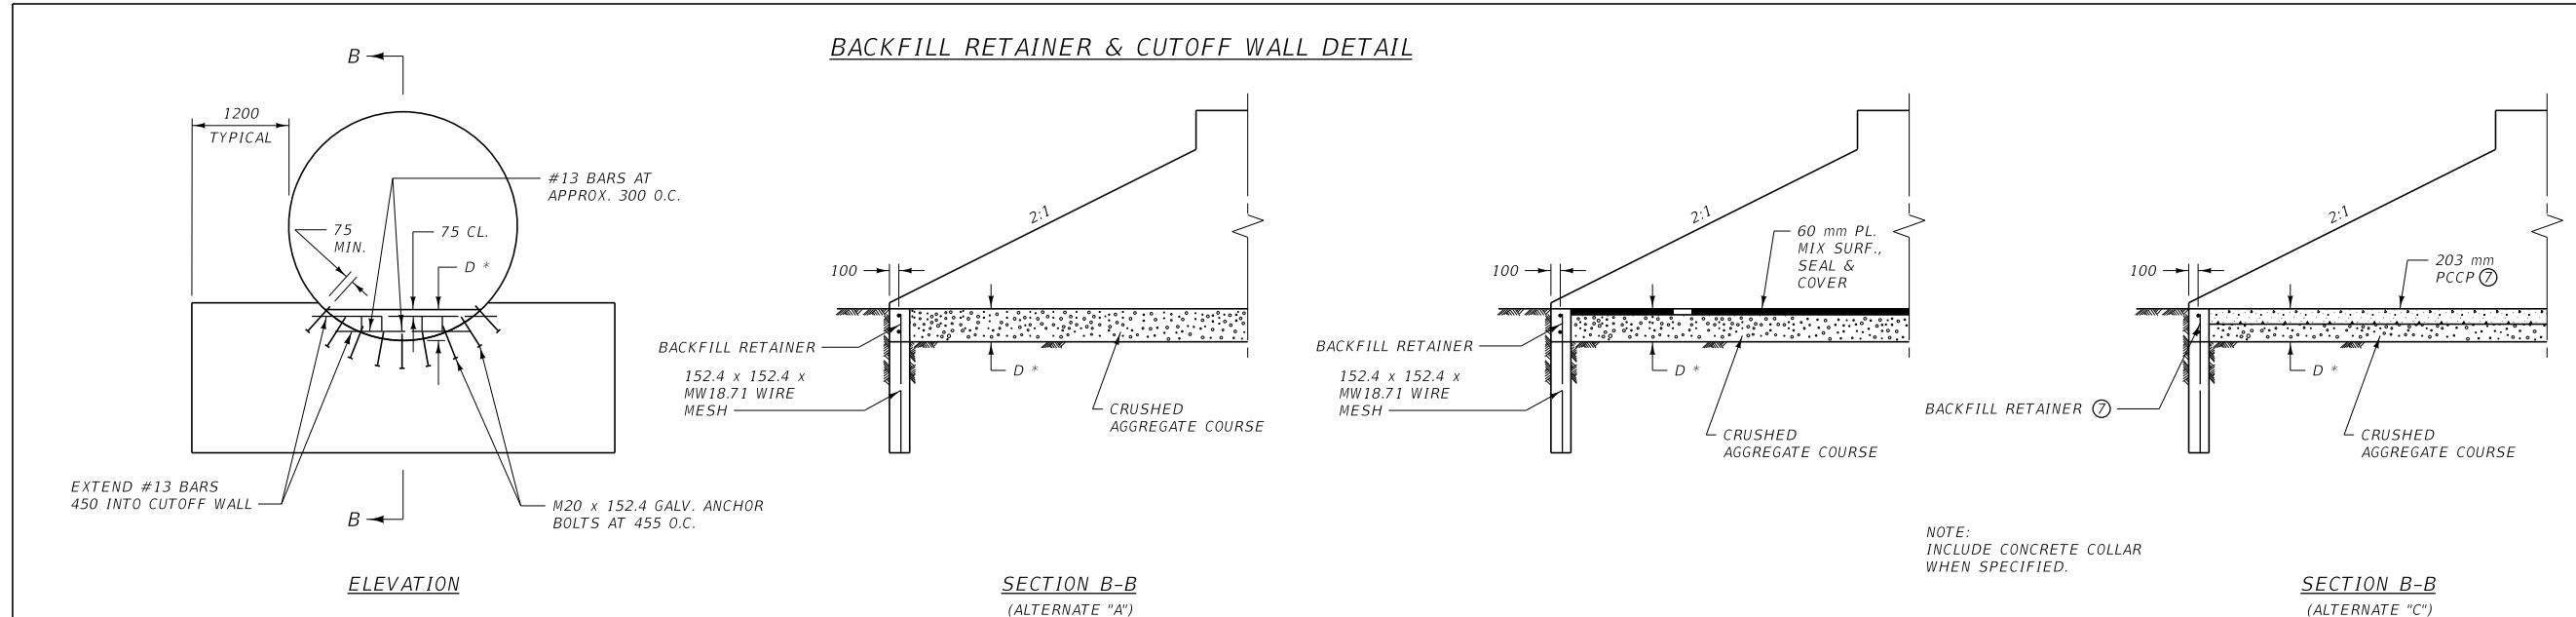


ALL DIMENSIONS ARE MILLIMETERS (mm) UNLESS OTHERWISE NOTED.


DETAILED DRAWING	DWG. NO.
REFERENCE STANDARD SPEC. SECTION 552,603	603-30
VEHICULAR UNDERPASS AND BACKFILL RETAINER & CUTOFF WALL DETAIL (METRIC)	

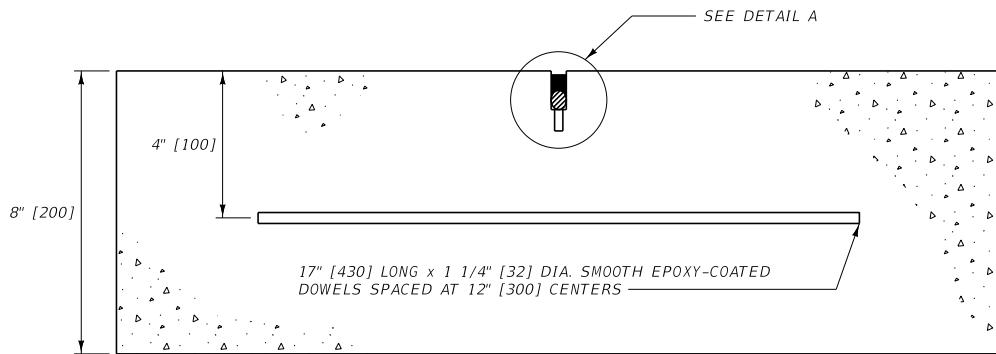

TRANSVERSE CONTRACTION JOINT (15' [4.5 m] O.C.)

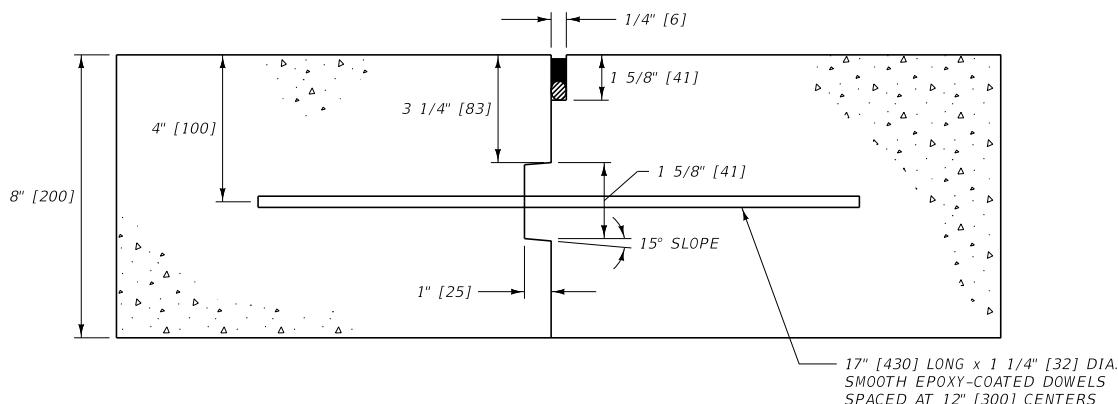

TRANSVERSE CONTRACTION JOINT (AS NEEDED)

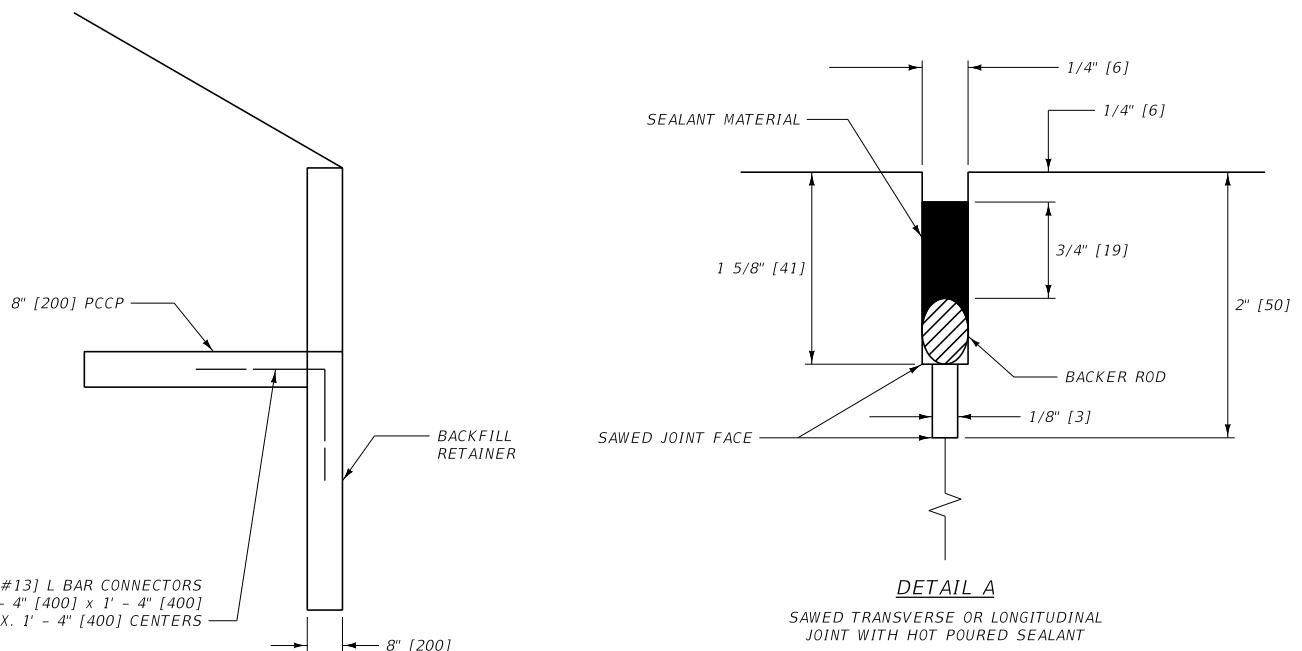


TYPICAL BOTH ENDS

REINFORCING STEEL FOR INLET
BACKFILL RETAINER & PCCP SLAB


UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 603	DWG. NO. 603-31
VEHICULAR UNDERPASS PCCP TRANSVERSE JOINT & BACKFILL RETAINER DETAILS	
 MONTANA DEPARTMENT OF TRANSPORTATION	

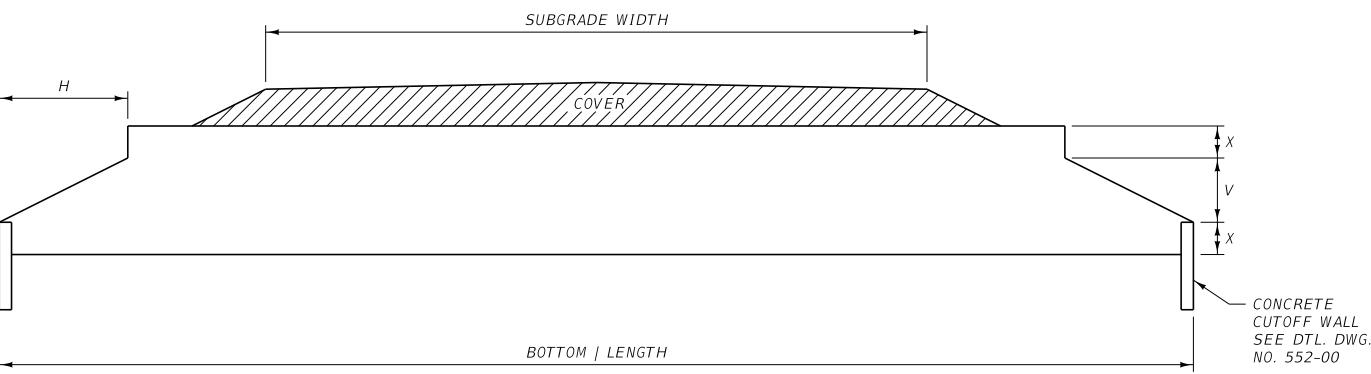

DIA.	X (FT.)	V (FT.)	H (FT.) FOR BEVELS:		AREA "A" (SQ. FT.) * 1.5:1	AREA "B" (SQ. FT.) 2:1
			1.5:1	2:1		
CSP 3" x 1" OR 5" x 1" CORRUGATIONS (SEE NOTE ③)						
54"	1.125	2.250	3.375	4.500	3	13
60"	1.250	2.500	3.750	5.000	4	16
66"	1.375	2.750	4.125	5.500	5	19
72"	1.500	3.000	4.500	6.000	6	23
78"	1.625	3.250	4.875	6.500	6	27
84"	1.750	3.500	5.250	7.000	8	31
90"	1.875	3.750	5.625	7.500	9	36
96"	2.000	4.000	6.000	8.000	10	40
102"	2.125	4.250	6.375	8.500	11	46
108"	2.250	4.500	6.750	9.000	12	51
114"	2.375	4.750	7.125	9.500	14	57
120"	2.500	5.000	7.500	10.000	15	63
SSPP 6" x 2" CORRUGATIONS						
10'-6"	2.625	5.250	7.875	10.500	17	70
11'-0"	2.750	5.500	8.250	11.000	19	76
11'-6"	2.875	5.750	8.625	11.500	20	84
12'-0"	3.000	6.000	9.000	12.000	22	91
12'-6"	3.125	6.250	9.375	12.500	24	99
13'-0"	3.250	6.500	9.750	13.000	26	107
13'-6"	3.375	6.750	10.125	13.500	28	115
14'-0"	3.500	7.000	10.500	14.000	30	124
14'-6"	3.625	7.250	10.875	14.500	32	133
15'-0"	3.750	7.500	11.250	15.000	35	142
15'-6"	3.875	7.750	11.625	15.500	37	152
16'-0"	4.000	8.000	12.000	16.000	39	162
16'-6"	4.125	8.250	12.375	16.500	42	172
17'-0"	4.250	8.500	12.750	17.000	44	183
17'-6"	4.375	8.750	13.125	17.500	47	194
18'-0"	4.500	9.000	13.500	18.000	50	205
19'-0"	4.750	9.500	14.250	19.000	55	228
20'-0"	5.000	10.000	15.000	20.000	61	253
21'-0"	5.250	10.500	15.750	21.000	68	279

* AREA "A" IS TO THE MIDDLE OF THE CORRUGATIONS.

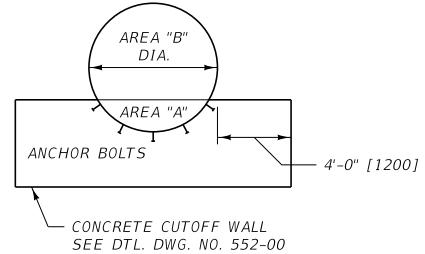

NOTES:

- ① BEVEL TO TOP OF CORNER PLATE.
- ② PIPE ENDS ARE SQUARE (PERPENDICULAR TO CENTERLINE OF PIPE) AND FILL SLOPES ARE WARPED TO ACCOMMODATE THE SQUARE ENDS UNLESS SPECIFIED OTHERWISE ON PLANS.
- ③ TABULATED VALUES BASED ON NOMINAL PIPE DIMENSIONS. IN PLACE DIMENSIONS SUBJECT TO TOLERANCE REQUIREMENTS OF SECTION 709.

DIA. #	X (m)	V (m)	H (m) FOR BEVELS:		AREA "A" (m ²) * 1.5:1	AREA "B" (m ²) 2:1
			1.5:1	2:1		
CSP 75 x 25 OR 125 x 25 CORRUGATIONS (SEE NOTE ③)						
1350 mm	0.345	0.685	1.030	1.370	0.28	1.21
1500 mm	0.380	0.760	1.145	1.525	0.37	1.49
1650 mm	0.420	0.840	1.255	1.675	0.46	1.77
1800 mm	0.460	0.915	1.370	1.830	0.56	2.14
1950 mm	0.495	0.990	1.485	1.980	0.56	2.51
2100 mm	0.535	1.065	1.600	2.135	0.74	2.88
2250 mm	0.570	1.145	1.715	2.285	0.84	3.34
2400 mm	0.610	1.220	1.830	2.440	0.93	3.72
2550 mm	0.650	1.295	1.945	2.590	1.02	4.27
2700 mm	0.685	1.370	2.055	2.745	1.11	4.74
2850 mm	0.725	1.450	2.170	2.895	1.30	5.30
3000 mm	0.760	1.525	2.285	3.050	1.39	5.85
SSPP 150 x 50 CORRUGATIONS						
3.150 m	0.800	1.600	2.400	3.200	1.58	6.50
3.300 m	0.840	1.675	2.515	3.355	1.77	7.06
3.450 m	0.875	1.755	2.630	3.505	1.86	7.80
3.600 m	0.915	1.830	2.745	3.660	2.04	8.45
3.750 m	0.955	1.900	2.860	3.810	2.23	9.20
3.900 m	0.990	1.980	2.970	3.960	2.42	9.94
4.050 m	1.030	2.055	3.085	4.115	2.60	10.68
4.200 m	1.065	2.135	3.200	4.265	2.79	11.52
4.350 m	1.105	2.210	3.315	4.420	2.97	12.36
4.500 m	1.145	2.285	3.430	4.570	3.25	13.19
4.650 m	1.180	2.360	3.545	4.725	3.44	14.12
4.800 m	1.220	2.440	3.660	4.875	3.62	15.05
4.950 m	1.255	2.515	3.770	5.030	3.90	15.98
5.100 m	1.295	2.590	3.885	5.180	4.09	17.00
5.250 m	1.335	2.665	4.000	5.335	4.37	18.02
5.400 m	1.370	2.745	4.115	5.485	4.65	19.05
5.700 m	1.450	2.895	4.345	5.790	5.11	21.18
6.000 m	1.525	3.050	4.570	6.095	5.67	23.50
6.300 m	1.600	3.200	4.800	6.400	6.32	25.92


* AREA "A" IS TO THE MIDDLE OF THE CORRUGATIONS.

NOMINAL DIAMETER


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC.
SECTION 552, 603, 709
603-32
STEP BEVEL FOR
CIRCULAR METAL CULVERT

MDT MONTANA DEPARTMENT OF TRANSPORTATION

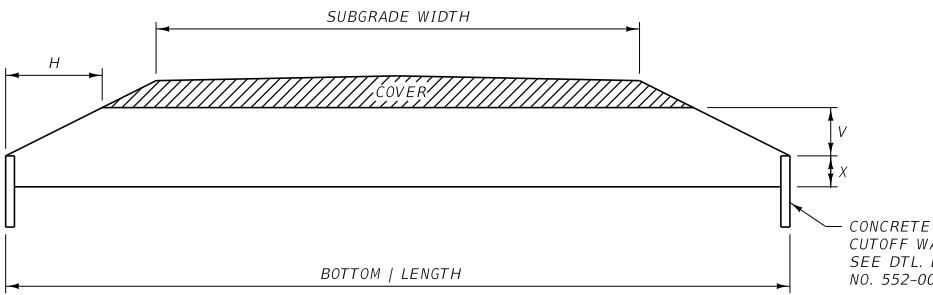


DIMENSIONS									
SPAN	RISE	EQUIV. DIA.	X (FT.)	V (FT.)	H (FT.) FOR BEVELS:		AREA "A" (SQ. FT.)	AREA "B" (SQ. FT.)	
					1.5:1	2:1			
SSPPA 6" x 2" CORRUGATIONS WITH 18" CORNER RADIUS									
6'-1"	4'-7"	66"	2.3	2.3	3.4	4.6	5.7	12	10
6'-9"	4'-11"	72"	2.4	2.5	3.8	5.0	6.3	14	12
7'-3"	5'-3"	78"	2.1	3.2	4.7	6.3	7.9	13	17
7'-11"	5'-7"	84"	2.3	3.3	4.9	6.6	8.2	16	19
8'-7"	5'-11"	90"	2.3	3.6	5.4	7.2	9.0	17	23
9'-4"	6'-3"	96"	2.5	3.8	5.6	7.5	9.4	20	26
9'-9"	6'-7"	102"	2.2	4.4	6.6	8.8	11.0	19	32
10'-8"	6'-11"	108"	2.8	4.1	6.2	8.2	10.3	25	32
11'-5"	7'-3"	114"	2.8	4.5	6.7	8.9	11.1	27	37
11'-10"	7'-7"	120"	2.5	5.1	7.6	10.2	13.6	25	45
12'-6"	7'-11"	126"	2.7	5.2	7.8	10.4	13.0	29	49
12'-10"	8'-4"	132"	2.3	6.0	8.9	11.9	14.9	26	60
SSPPA 6" x 2" CORRUGATIONS WITH 31" CORNER RADIUS									
13'-3"	9'-4"	~	3.9	5.5	8.2	10.9	13.6	44	54
13'-6"	9'-6"	~	3.8	5.7	8.6	11.5	14.3	44	58
14'-0"	9'-8"	144"	4.0	5.7	8.5	11.4	14.2	48	59
14'-2"	9'-10"	~	3.8	6.1	9.1	12.1	15.2	46	64
14'-5"	10'-0"	~	3.7	6.3	9.5	12.7	15.9	46	69
14'-11"	10'-2"	~	4.0	6.2	9.3	12.4	15.5	51	68
15'-4"	10'-4"	156"	4.3	6.0	9.1	12.1	15.1	56	68
15'-7"	10'-6"	~	4.1	6.4	9.6	12.8	16.1	54	74
15'-10"	10'-8"	~	3.9	6.8	10.2	13.6	17.0	53	80
16'-3"	10'-10"	~	4.3	6.5	9.8	13.1	16.4	59	79
16'-6"	11'-0"	168"	4.1	6.9	10.4	13.9	17.3	58	85
17'-0"	11'-2"	~	4.4	6.8	10.2	13.6	17.0	63	85
17'-2"	11'-4"	~	4.3	7.1	10.6	14.1	17.6	63	90
17'-5"	11'-6"	~	4.1	7.4	11.2	14.9	18.6	61	97
17'-11"	11'-8"	180"	4.3	7.4	11.1	14.8	18.5	65	98
18'-1"	11'-10"	~	4.2	7.7	11.5	15.3	19.2	65	103
18'-7"	12'-0"	~	4.5	7.5	11.3	15.0	18.8	70	103
18'-9"	12'-2"	~	4.3	7.9	11.8	15.8	19.7	68	111
19'-3"	12'-4"	192"	4.6	7.7	11.6	15.5	19.4	74	110
19'-6"	12'-6"	~	4.4	8.1	12.2	16.3	20.3	72	118
19'-8"	12'-8"	~	4.3	8.4	12.6	16.8	21.0	72	124
19'-11"	12'-10"	~	4.1	8.8	13.2	17.6	22.0	69	132
20'-5"	13'-0"	204"	4.4	8.6	12.9	17.3	21.6	76	132
20'-7"	13'-2"	~	4.3	8.9	13.4	17.8	22.3	75	137

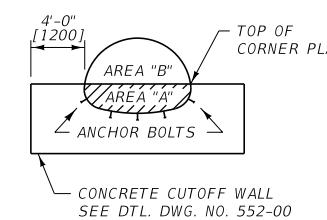

NOTES:

- ① BEVEL TO TOP OF CORNER PLATE.
- ② PIPE ENDS ARE SQUARE (PERPENDICULAR TO CENTERLINE OF PIPE) AND FILL SLOPES ARE warped TO ACCOMMODATE THE SQUARE ENDS UNLESS SPECIFIED OTHERWISE ON PLANS.
- ③ TABULATED VALUES BASED ON NOMINAL PIPE DIMENSIONS. IN PLACE DIMENSIONS SUBJECT TO TOLERANCE REQUIREMENTS OF SECTION 709.

METRIC DIMENSIONS									
SPAN (m)	RISE (m)	X (m)	V (m)	H (m) FOR BEVELS:			AREA "A" (m ²)	AREA "B" (m ²)	
				1.5:1	2:1	2.5:1			
SSPPA 150 x 50 CORRUGATIONS WITH 457 CORNER RADIUS									
1.850	1.400	0.701	0.701	1.036	1.402	1.737	1.11	0.93	
1.930	1.450	0.640	0.810	1.215	1.620	2.025	1.04	1.14	
2.060	1.500	0.732	0.762	1.158	1.524	1.920	1.30	1.11	
2.130	1.550	0.700	0.850	1.275	1.700	2.125	1.30	1.30	
2.210	1.600	0.640	0.975	1.433	1.920	2.408	1.21	1.58	
2.340	1.650	0.700	0.950	1.425	1.900	2.375	1.39	1.67	
2.410	1.700	0.701	1.006	1.494	2.012	2.500	1.49	1.77	
2.490	1.750	0.610	1.140	1.710	2.280	2.850	1.30	2.14	
2.620	1.800	0.701	1.097	1.646	2.195	2.743	1.58	2.14	
2.690	1.850	0.670	1.180	1.770	2.360	2.950	1.58	2.42	
2.840	1.910	0.762	1.158	1.707	2.286	2.865	1.86	2.42	
2.900	1.960	0.700	1.260	1.890	2.520	3.150	1.77	2.79	
2.970	2.010	0.671	1.341	2.012	2.682	3.353	1.77	2.97	
3.120	2.060	0.730	1.330	1.995	2.660	3.325	1.95	3.07	
3.250	2.110	0.853	1.250	1.890	2.500	3.139	2.32	2.97	
3.330	2.160	0.790	1.370	2.055	2.740	3.425	2.23	3.34	
3.480	2.210	0.853	1.372	2.042	2.713	3.383	2.51	3.44	
3.530	2.260	0.820	1.440	2.160	2.880	3.600	2.42	3.81	
3.610	2.310	0.762	1.554	2.316	3.109	4.145	2.32	4.18	
3.760	2.360	0.850	1.510	2.265	3.020	3.775	2.69	4.18	
3.810	2.410	0.823	1.585	2.377	3.170	3.962	2.69	4.55	
3.860	2.460	0.760	1.700	2.550	3.400	4.250	2.51	5.02	
3.910	2.540	0.701	1.829	2.713	3.627	4.542	2.42	5.57	
SSPPA 150 x 50 CORRUGATIONS WITH 787 CORNER RADIUS									
4.040	2.840	1.189	1.676	2.499	3.322	4.145	4.09	5.02	
4.110	2.900	1.158	1.737	2.621	3.505	4.359	4.09	5.39	
4.270	2.950	1.219	1.737	2.591	3.475	4.328			

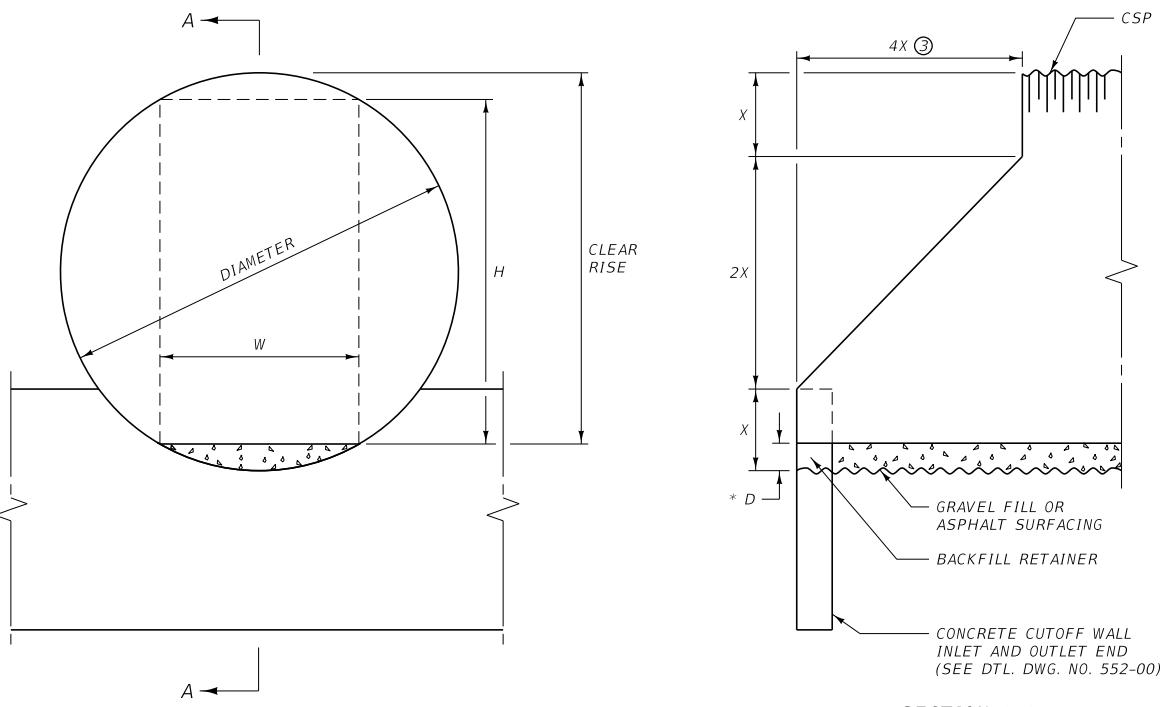

SECTION A-A

DIMENSIONS						
DIAMETER	X	* D	CLEAR RISE	H	W	BACKFILL RETAINER (CUBIC YARDS)
84"	21.0"	0.50'	6.5'	6.0'	3.6'	0.1
90"	22.5"	0.75'	6.75'	6.0'	4.5'	0.1
96"	24.0"	0.83'	7.17'	6.34'	4.9'	0.1

METRIC DIMENSIONS						
DIAMETER (mm)	X (m)	* D (mm)	CLEAR RISE (m)	H (m)	W (m)	BACKFILL RETAINER (m³)
2100	0.525	168	1.944	1.789	1.1	0.03
2250	0.563	257	2.006	1.761	1.4	0.05
2400	0.600	276	2.137	1.873	1.5	0.06

* SURFACING QUANTITIES PER LINEAR FOOT FOR DEPTH "D"					
	0.20' PMS AND REMAINING DEPTH GRAVEL				
	FULL DEPTH GRAVEL	C.Y. SURF.	TONS SURF.	C.Y. SURF.	TONS BIT. MATERIAL
DIAMETER	CR. TOP SURF.	PLANT MIX	CR. TOP SURF.	PLANT MIX	PRIME
84"	0.045	0.046	0.021	0.0028	0.0004
90"	0.085	0.060	0.054	0.0036	0.0006
96"	0.102	0.066	0.068	0.0040	0.0006


NOTES:

- ① UNLESS OTHERWISE SPECIFIED, INSTALL STOCKPASSES WITH CUTOFF WALLS AND BACKFILL RETAINERS AT EACH END, GRAVEL FILL AND GRANULAR BEDDING.
- ② WHEN COMBINATION STOCKPASSES AND DRAINS ARE SPECIFIED, INSTALL WITH CUTOFF WALLS, BACKFILL RETAINERS AT BOTH ENDS, CONCRETE EDGE PROTECTION AT THE INLET END AND OUTLET END, GRANULAR BEDDING AND ASPHALT SURFACING; CROSS SLOPE ASPHALT SURFACING TO ALLOW DRAINAGE COURSE ALONG ONE SIDE. (SEE DTL. DWG. NO. 613-14 AND 613-06.)
- ③ STEP BEVEL PIPE ENDS AT A 2:1 SLOPE.
- ④ THE MINIMUM THICKNESS FOR 84" [2100] DIAMETER AND 90" [2250] DIAMETER CORRUGATED STEEL PIPE STOCKPASS IS 0.079" [2.01]. THE MINIMUM THICKNESS FOR 96" [2400] DIAMETER CORRUGATED STEEL PIPE STOCKPASS IS 0.109" [2.77]. (SEE FILL HEIGHT TABLES FOR OTHER THAN THE MINIMUM REQUIREMENTS.)
- ⑤ SEE DTL. DWG. NO. 552-00, 603-30 AND 603-19.


* METRIC SURFACING QUANTITIES PER METER FOR DEPTH "D"					
	60 mm PMS AND REMAINING DEPTH GRAVEL				
	FULL DEPTH GRAVEL	m³ SURF.	TONS SURF.	m³ SURF.	TONS BIT. MATERIAL
DIAMETER (mm)	CR. TOP SURF.	PLANT MIX	CR. TOP SURF.	PLANT MIX	PRIME
2100	0.131	0.144	0.068	0.0086	0.0013
2250	0.253	0.188	0.171	0.0113	0.0018
2400	0.291	0.201	0.203	0.0121	0.0020

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.



DETAILED DRAWING	
REFERENCE DWG. NO.	
STANDARD SPEC.	603-36
SECTION 603	
CORRUGATED STEEL PIPE STOCKPASS	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

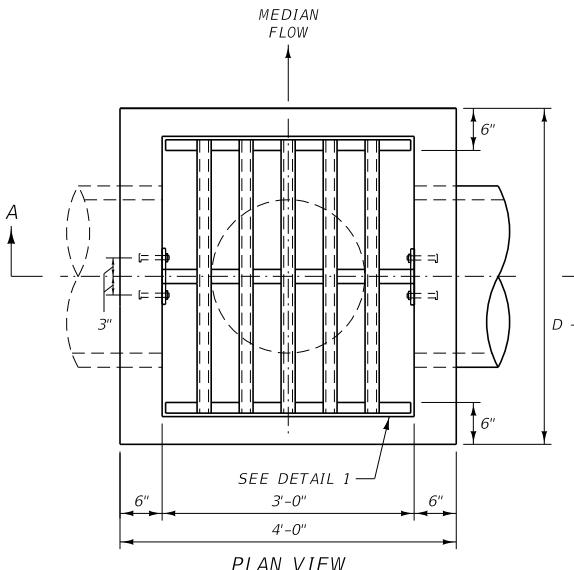

MEDIAN INLET

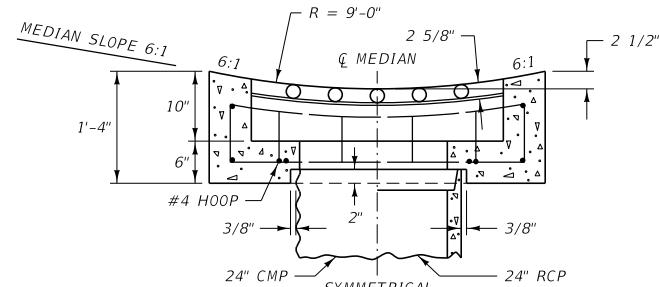

SECTION A-A
TYPE 1

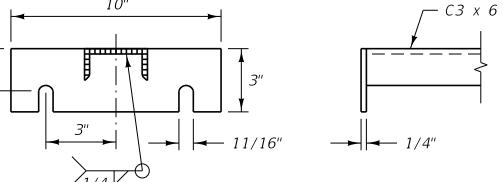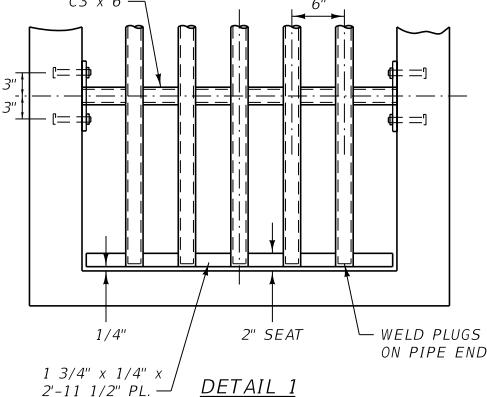

DETAIL 2

TYPE	CMP AND RCP		
	24"	30"	36"
1	50	~	~
2	85	95	105
3	85 ①	95 ①	105 ①
GRATE	165	185	210


* QUANTITIES ARE FOR ESTIMATING PURPOSES ONLY.

① TYPE 3 IS A SPECIAL CASE TO BE FIGURED FOR THE PARTICULAR INSTALLATION.


NOTE:
① PAINT ALL EXPOSED METAL PARTS WITH ONE COAT OF ZINC RICH PAINT AND TWO COATS OF ALUMINUM PAINT PER SECTION 710.

② WHEN MEDIAN INLET COVER IS INSTALLED OVER PIPES LARGER THAN 36", WITHOUT ADEQUATE COVER TO PERMIT THE USE OF TYPE 1 INSTALLATION, PROVIDE A DETAIL OF THE INSTALLATION IN THE PLANS.


TYPE	CLASS GENERAL CONCRETE OR EQUAL (C.Y.) *						
	24"	30"	36"	CMP	RCP	CMP	RCP
1	0.4	0.4	~	~	~	~	~
2	1.0	1.0	1.1	1.0	1.2	1.1	1.1
3	0.9 ①	0.9 ①	1.0 ①	0.9 ①	1.0 ①	0.9 ①	0.9 ①

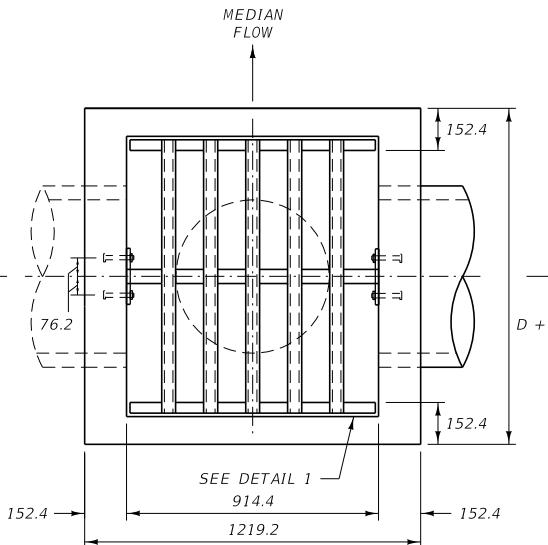


METRIC MEDIAN INLET

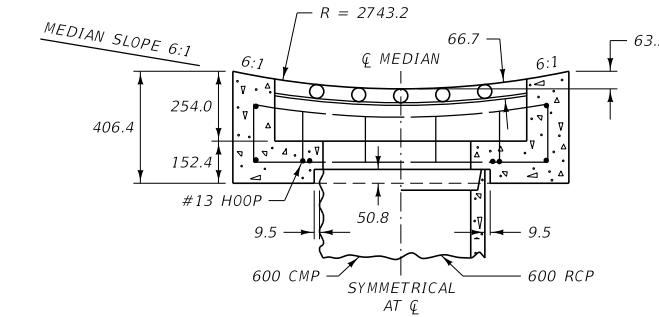

SECTION A-A
TYPE 1

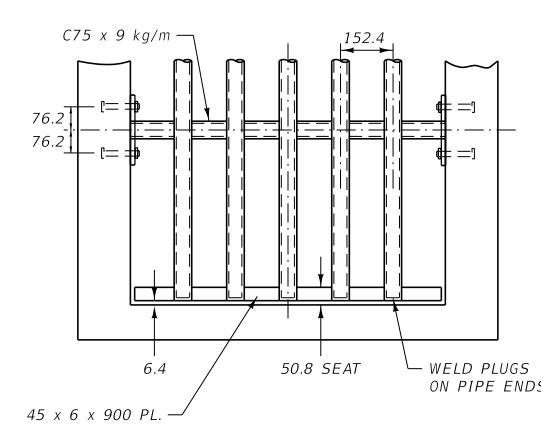

DETAIL 1

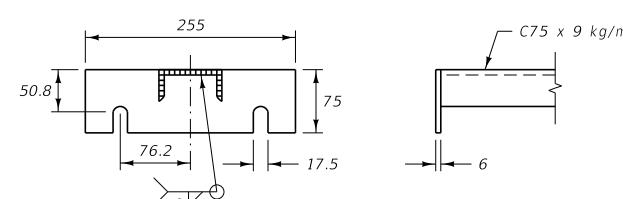

DETAIL 2

TYPE	CMP AND RCP		
	600 mm	750 mm	900 mm
1	22.7	~	~
2	38.6	43.1	47.6
3	38.6 ①	43.1 ①	47.6 ①
GRATE	74.8	83.9	95.3

* QUANTITIES ARE FOR ESTIMATING PURPOSES ONLY.


① TYPE 3 IS A SPECIAL CASE TO BE FIGURED FOR THE PARTICULAR INSTALLATION.


NOTE:
① PAINT ALL EXPOSED METAL PARTS WITH ONE COAT OF ZINC RICH PAINT AND TWO COATS OF ALUMINUM PAINT PER SECTION 710.

② WHEN MEDIAN INLET COVER IS INSTALLED OVER PIPES LARGER THAN 900 mm, WITHOUT ADEQUATE COVER TO PERMIT THE USE OF TYPE 1 INSTALLATION, PROVIDE A DETAIL OF THE INSTALLATION IN THE PLANS.


TYPE	CLASS GENERAL CONCRETE OR EQUAL (CUBIC METERS) *				
	600 mm	750 mm	900 mm	CMP	RCP
1	0.31	0.31	~	~	~
2	0.76	0.76	0.84	0.76	0.92
3	0.69 ①	0.69 ①	0.76 ①	0.69 ①	0.76 ①

ALL DIMENSIONS ARE MILLIMETERS (mm) UNLESS OTHERWISE NOTED.

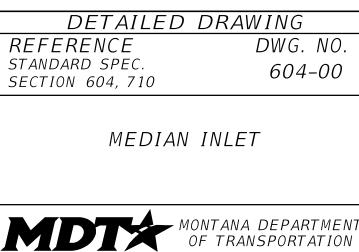

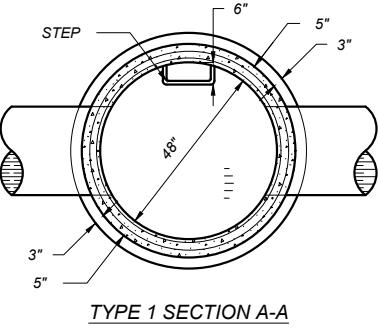


TYPE 1 SECTION A-A

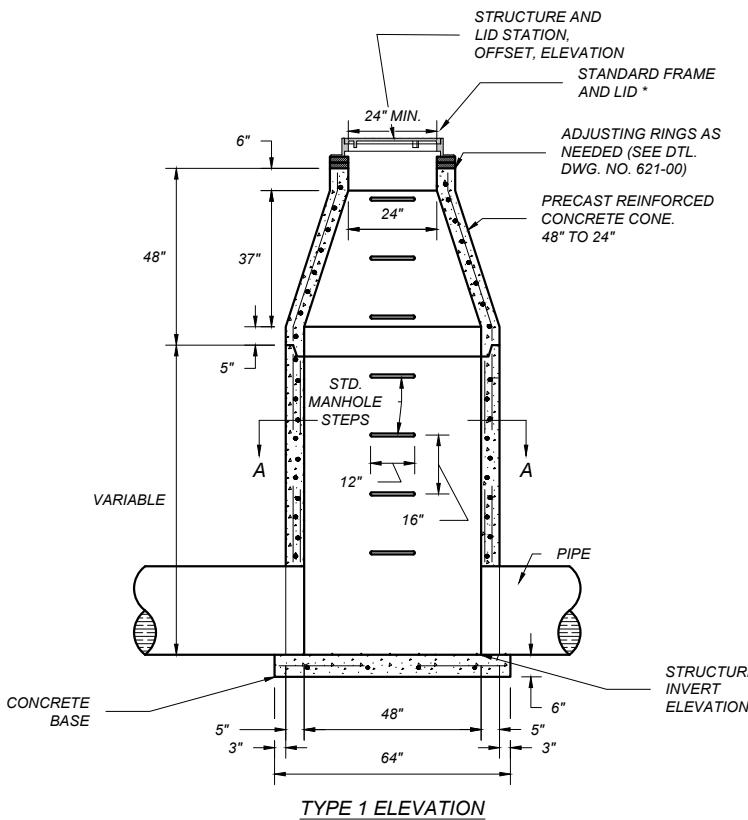


TYPE 1 ELEVATION

TYPE 1 MANHOLE


* MINIMUM WEIGHT FOR FRAME AND LID IS 400 LB.
* TOOL RING AND COVER TO A MACHINE FIT. A LIGHTER
FRAME AND LID MAY BE USED IF APPROVED BY THE
FACILITY OWNER RESPONSIBLE FOR MAINTENANCE OF
THE MANHOLE. SEE QUALIFIED PRODUCTS LIST FOR
APPROVED LIDS.

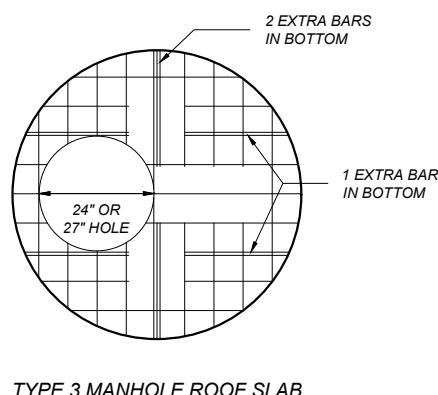

TYPE 3 MANHOLE ROOF SLAB

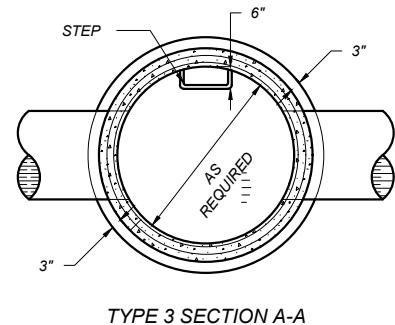

TYPE 3 SECTION A-A

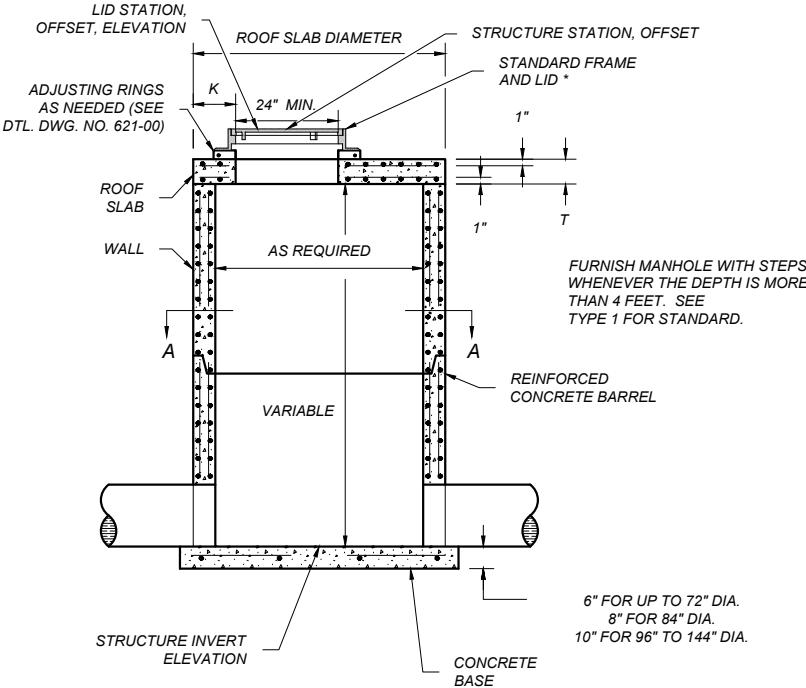

TYPE 3 MANHOLE

NOTES:

- ① UPPER PART IS A CONE TO REDUCE DIAMETER FROM 48" TO 24". CUT BOTTOM OF LOWER SECTION SQUARE TO FIT BASE. GROUT JOINT BETWEEN BASE AND WALL. A GROUT CONSISTING OF ONE PART PORTLAND CEMENT AND TWO PARTS APPROVED SAND MAY BE USED; AN APPROVED PREMIXED GROUT, AVAILABLE COMMERCIALLY, MAY BE USED.
- ② THE CONSTRUCTION AND REINFORCEMENT OF THE BASE FOR EACH TYPE MUST BE COMPATIBLE WITH THE CONDITIONS AND THE WEIGHT OF THE SUPER-STRUCTURE. AASHTO M 199 PROVIDES FOR 4000 PSI CONCRETE. THE MIX CALLS FOR 6 SACKS OF CEMENT PER CUBIC YARD. REINFORCEMENT SHOWN IS ILLUSTRATIVE ONLY. SEE AASHTO M 199.
- ③ THE ECCENTRIC CONE TRANSITION WILL BE PERMITTED WHEN ITS USE WILL BE AS GOOD OR BETTER THAN THE ONES SHOWN, OR IF IT IS MORE ADAPTABLE TO EXISTING CONDITIONS.
- ④ IN MANHOLES, USE STEPS THAT ARE METALLIC AND COATED WITH COPOLYMER POLYPROPYLENE, OR AN APPROVED EQUAL. THE MINIMUM DESIGN LIVE LOAD FOR A SINGLE CONCENTRATED LOAD IS 300 POUNDS.

INLET AND TYPE 3 MANHOLE ROOF SLAB					
BARREL DIA. #	SLAB DIA.	T	K ##	BOTTOM BARS	TOP BARS
48"	58"	6"	6"	#4 AT 6"	~
60"	72"	8"	7"	#4 AT 6"	#3 AT 6"
72"	86"	8"	8"	#4 AT 6"	#3 AT 6"
84"	100"	8"	9"	#4 AT 4"	#4 AT 4"
96"	114"	8"	9"	#5 AT 4"	#4 AT 4"
108"	128"	8"	9"	#5 AT 4"	#4 AT 4"
120"	142"	8"	9"	#5 AT 4"	#4 AT 4"
144"	168"	8"	9"	#5 AT 4"	#4 AT 4"

AVAILABLE MANHOLE AND INLET BARREL DIAMETERS.
K DOES NOT APPLY TO DROP INLETS AND CURB INLETS.
CENTER THE OPENING IN THE BARREL.

DETAILED DRAWINGS					
REFERENCE	STANDARD SPEC.	DWG. NO.			
SECTION 604,711					



CONCRETE MANHOLE

EFFECTIVE: JAN 23, 2020




TYPE 3 MANHOLE

-REVISED-
JUN 27, 2024
JAN 15, 2026

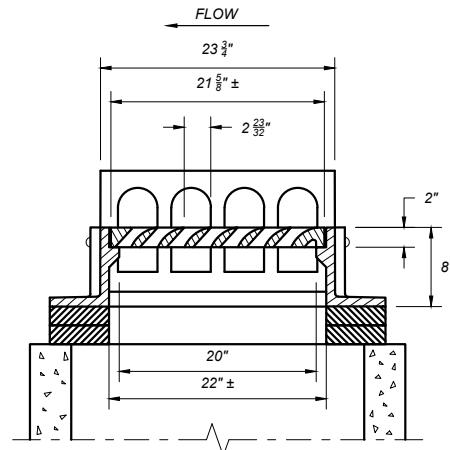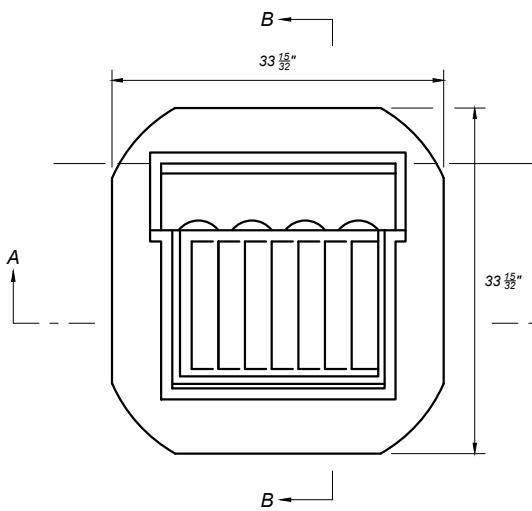

SECTION A-A

PLAN

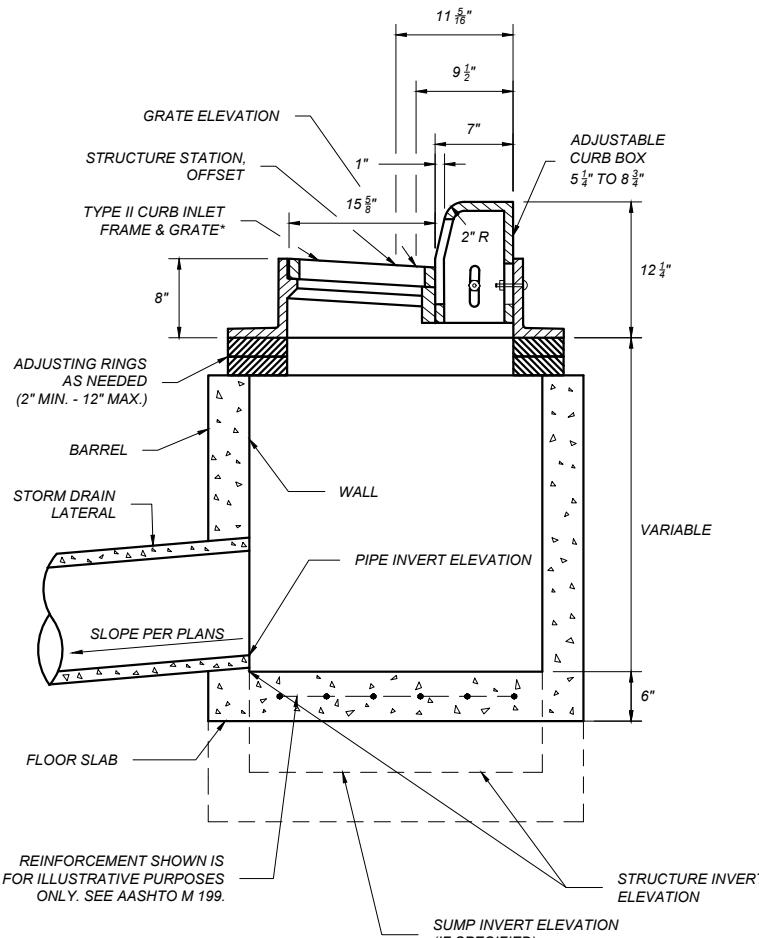

SECTION B-B


NOTES:

SEE PLANS FOR LOCATIONS AND QUANTITIES.

SET ALL FINAL INLET GRATE ELEVATIONS TO ENSURE THAT POSITIVE DRAINAGE IS PROVIDED FROM THE FLOWLINE OF THE CURB AND GUTTER SECTION INTO THE INLET.

ALL CONCRETE IS CLASS GENERAL OR APPROVED EQUAL.

* SEE QUALIFIED PRODUCTS LIST FOR APPROVED GRATES.
DIMENSIONS SHOW BASED ON NEENAH R-3286-8V.

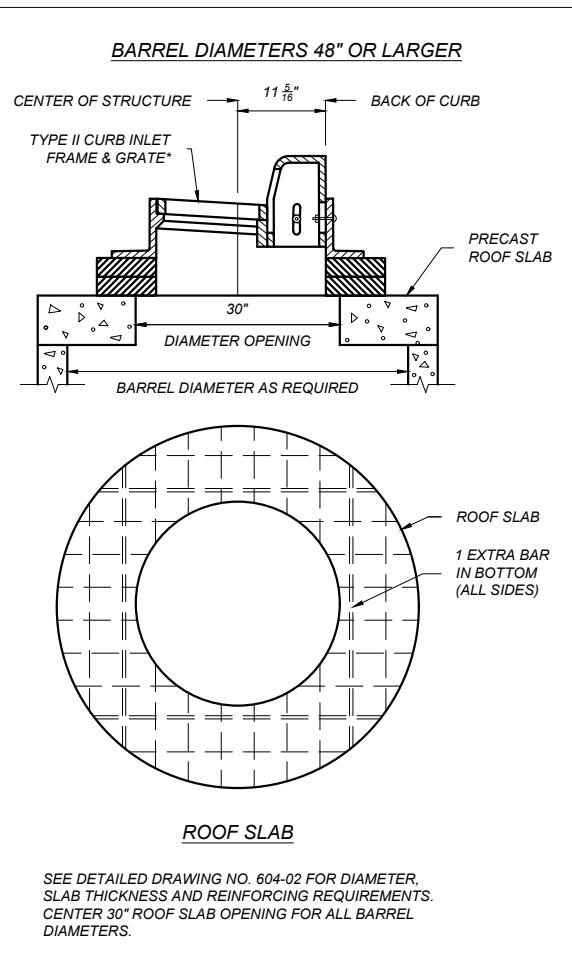

SEE DETAILED DRAWING NO. 604-02 FOR DIAMETER, SLAB THICKNESS AND REINFORCING REQUIREMENTS. CENTER 30" ROOF SLAB OPENING FOR ALL BARREL DIAMETERS.

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 604,708

DWG. NO.
604-03

CURB INLET TYPE II

EFFECTIVE: JAN 23, 2020







MONTANA

Department of Transportation

--REVISED--
JAN 15, 2026

12/12/2025 10:48 AM

STDDRD604003.DWG

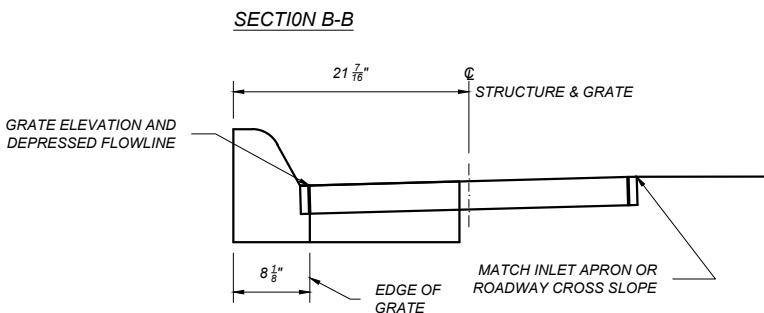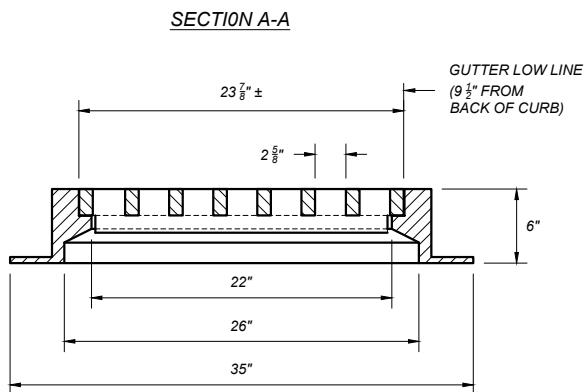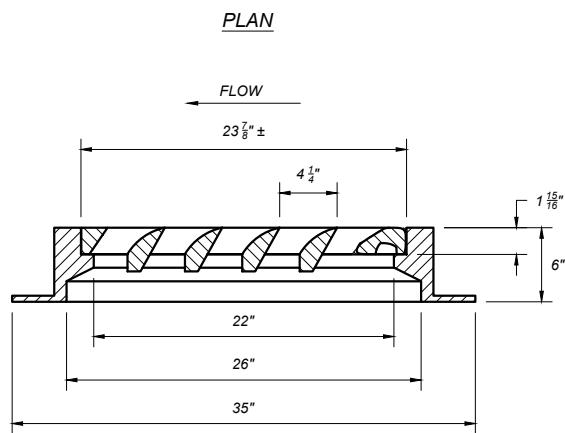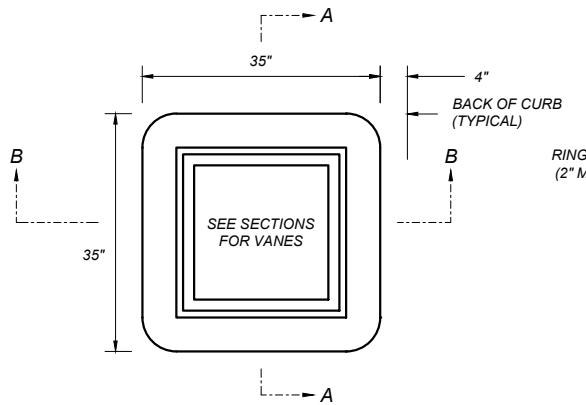

CURB TO GRATE


NOTES:

SEE PLANS FOR LOCATIONS AND QUANTITIES.


SET ALL FINAL INLET GRATE ELEVATIONS TO ENSURE THAT POSITIVE DRAINAGE IS PROVIDED FROM THE FLOWLINE OF THE CURB AND GUTTER SECTION INTO THE INLET.

ALL CONCRETE IS CLASS GENERAL OR APPROVED EQUAL

* SEE QUALIFIED PRODUCTS LIST FOR APPROVED GRATES.
DIMENSIONS SHOWN BASED ON NEENAH R-3210-L.

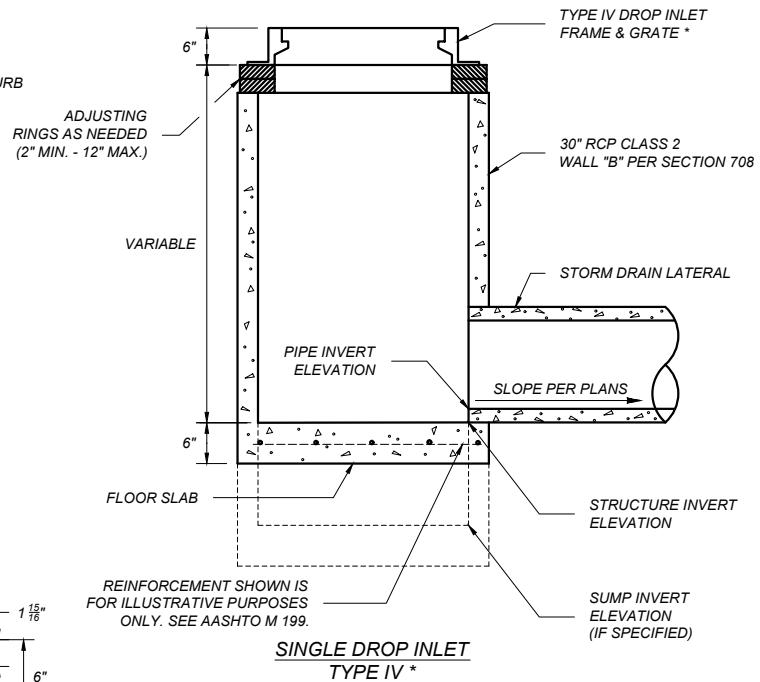

**SINGLE DROP INLET
TYPE IV***

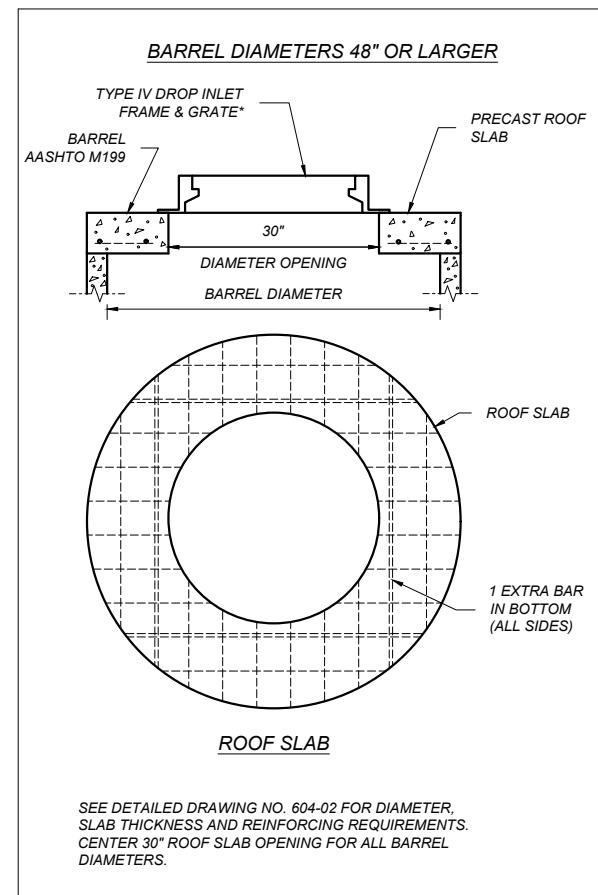

SEE DETAILED DRAWING NO. 604-02 FOR DIAMETER, SLAB THICKNESS AND REINFORCING REQUIREMENTS. CENTER 30" ROOF SLAB OPENING FOR ALL BARREL DIAMETERS.

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 604,708

DWG. NO.
604-04

DROP INLET TYPE IV


EFFECTIVE: JAN 23, 2020




--REVISED--
JAN 15, 2026

12/12/2025 10:50 AM


STDDRD604004.DWG

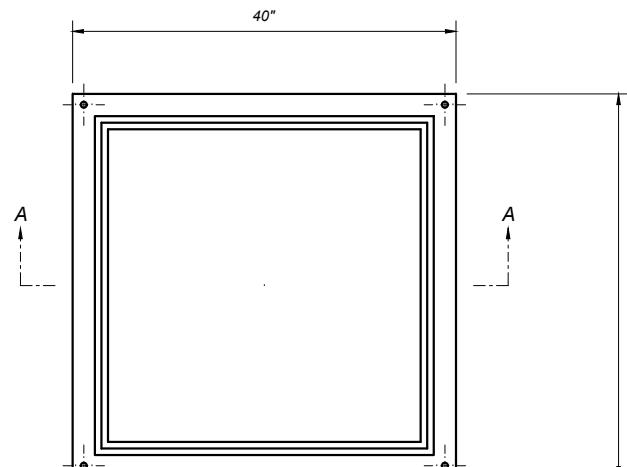


PLAN - FRAME

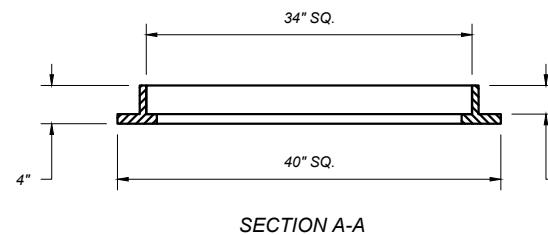


SECTION A-A

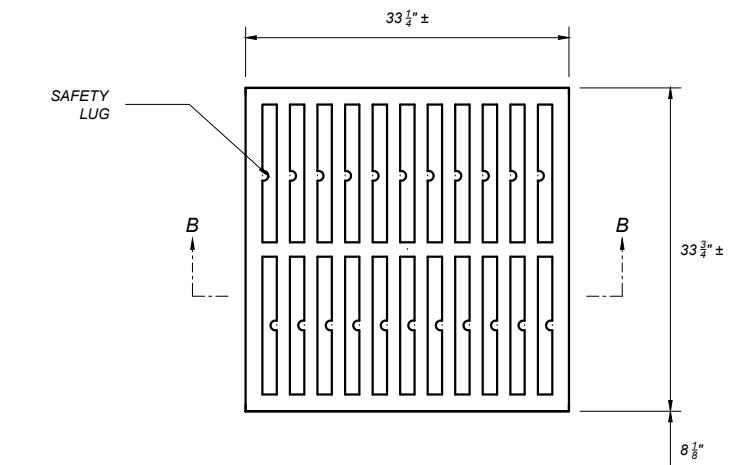

8 1/8"

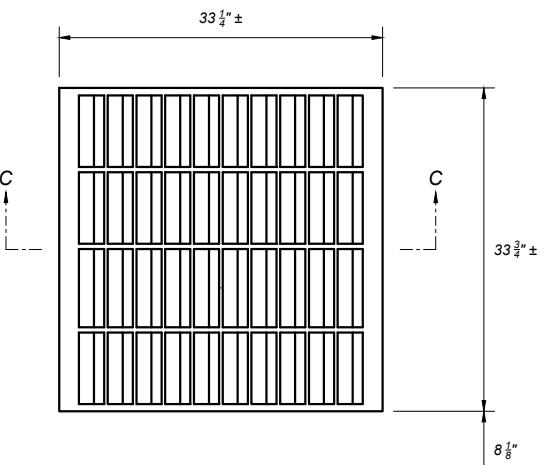


8 1/8"

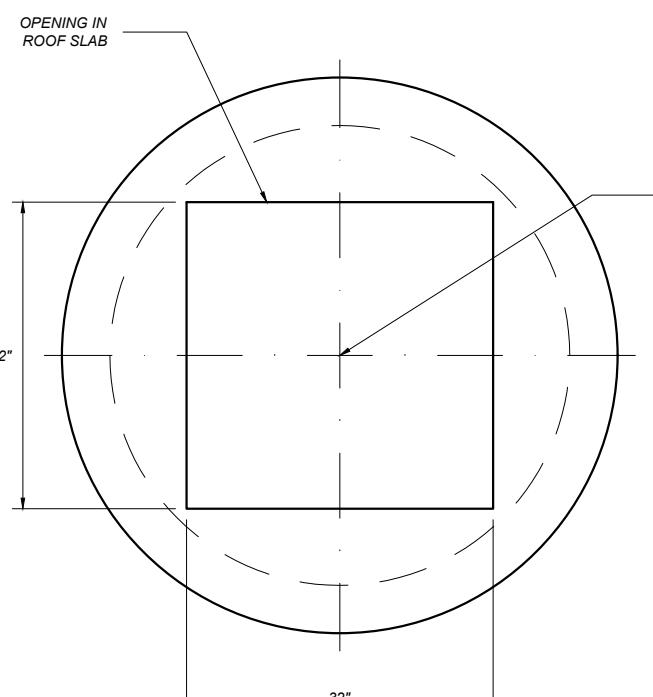

ROOF SLAB **

TYPE I AND V DROP INLET

SUMP INVERT ELEVATION
(IF SPECIFIED)

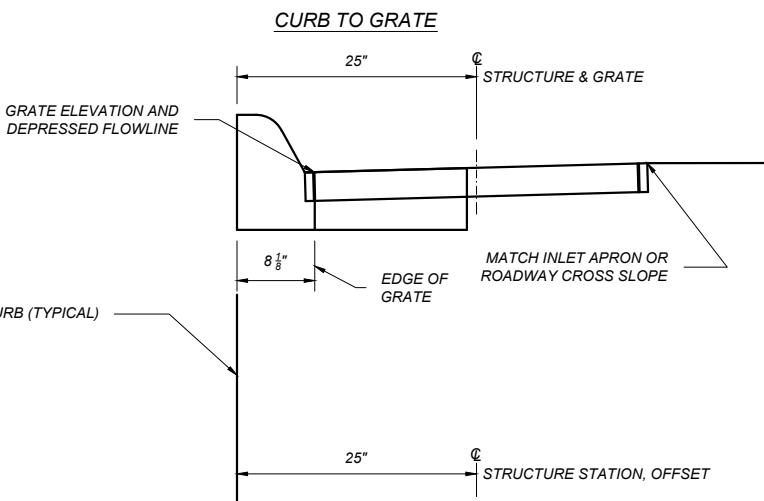


CURB TO GRATE

STRUCTURE & GRATE

EDGE OF
GRATE

MATCH INLET APRON OR
ROADWAY CROSS SLOPE

STRUCTURE STATION, OFFSET

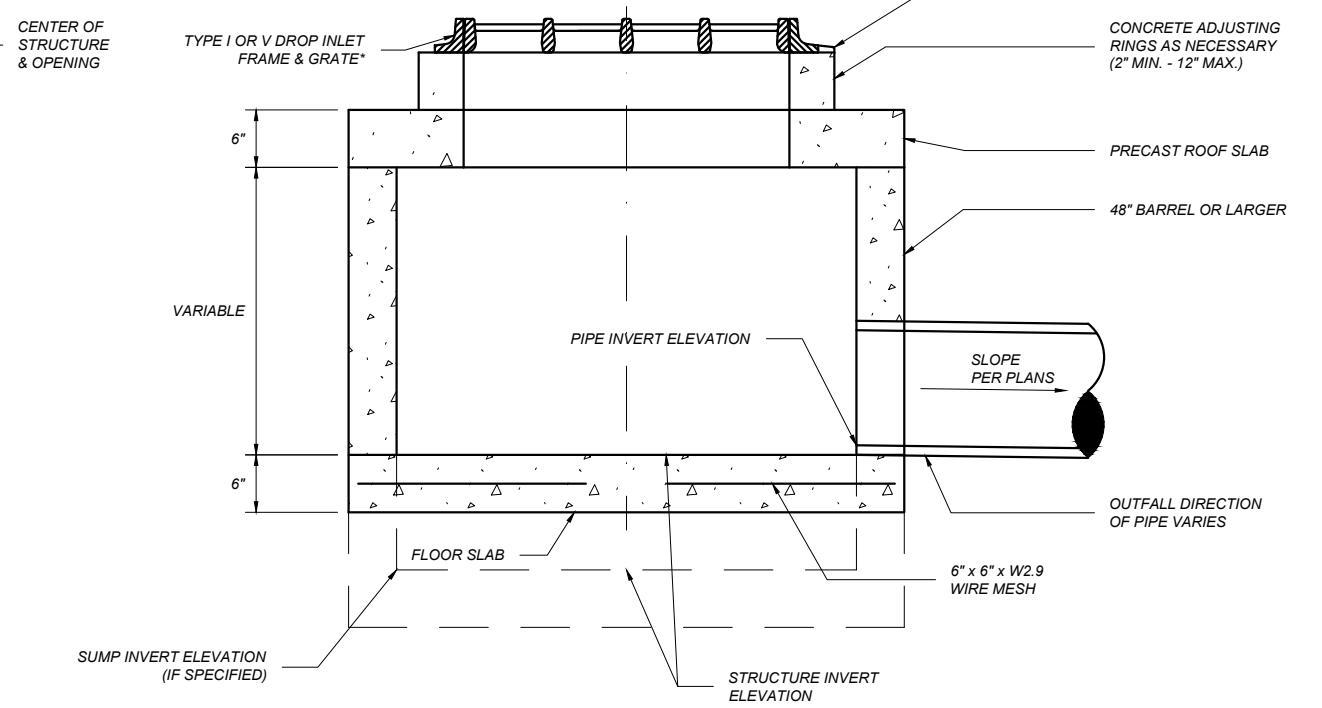

SECTION VIEW

SECTION B-B
STRAIGHT BAR GRATE
TYPE I *

IF NO APRON IS USED SHIM
GRATE AS NECESSARY TO
MATCH ROADWAY CROSS SLOPE.

CONCRETE ADJUSTING
RINGS AS NECESSARY
(2" MIN. - 12" MAX.)

PRECAST ROOF SLAB

48" BARREL OR LARGER

SLOPE
PER PLANS

OUTFALL DIRECTION
OF PIPE VARIES

6" x 6" x W2.9
WIRE MESH

STRUCTURE INVERT
ELEVATION

NOTES:

ALL CONCRETE IS CLASS GENERAL OR APPROVED EQUAL.

SEE PLANS FOR LOCATIONS AND QUANTITIES.

SET ALL FINAL INLET GRATE ELEVATIONS TO ENSURE
THAT POSITIVE DRAINAGE IS PROVIDED FROM THE
FLOWLINE OF THE CURB AND GUTTER SECTION INTO
THE INLET.

STANDARD UNLESS OTHERWISE NOTED ON PLANS.

TYPE I AND TYPE V GRATES ARE INTERCHANGEABLE
WITH THE SAME FRAME AND HAVE THE ABILITY TO BE
ROTATED 90 DEGREES IN ANY DIRECTION. INSTALL
GRATE TO MATCH FLOW DIRECTION SHOWN.

PROVIDE SAFETY LUG ON STRAIGHT BAR GRATE
BETWEEN EACH BAR.

*SEE QUALIFIED PRODUCTS LIST FOR APPROVED GRATES.
DIMENSIONS SHOWN BASED ON D&L I-342101 AND D&L
I-3421-02.

**SEE NOTE 2 ON DETAILED DRAWING NO. 604-02 FOR ROOF
SLAB REQUIREMENTS. CENTER THE SQUARE 32" ROOF
SLAB OPENING FOR ALL BARREL DIAMETERS.

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 604

DWG. NO.
604-14

DROP INLETS TYPE I AND V


EFFECTIVE: JAN 23, 2020




12/12/2025 10:51 AM

STDDRD604014.DWG


REVISED--
JAN 15, 2026

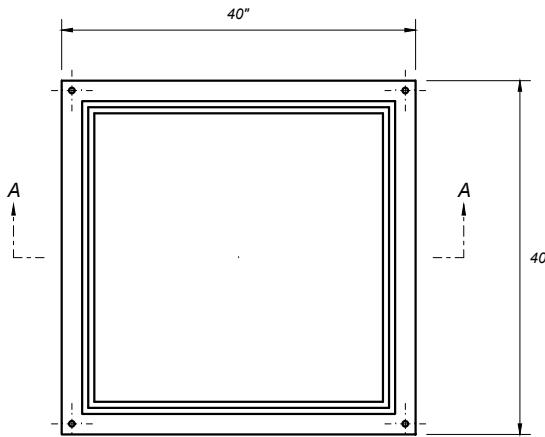


PLAN - FRAME

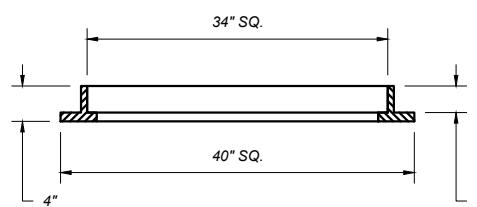


SECTION A-A

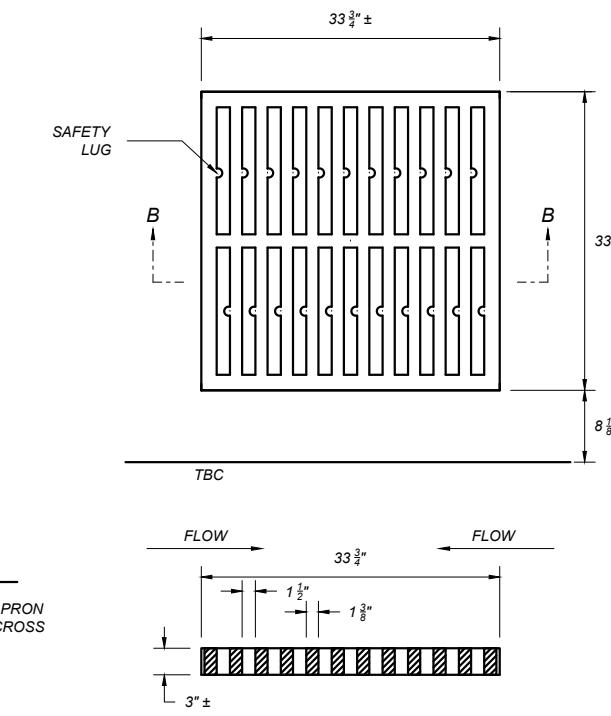


SECTION B-B

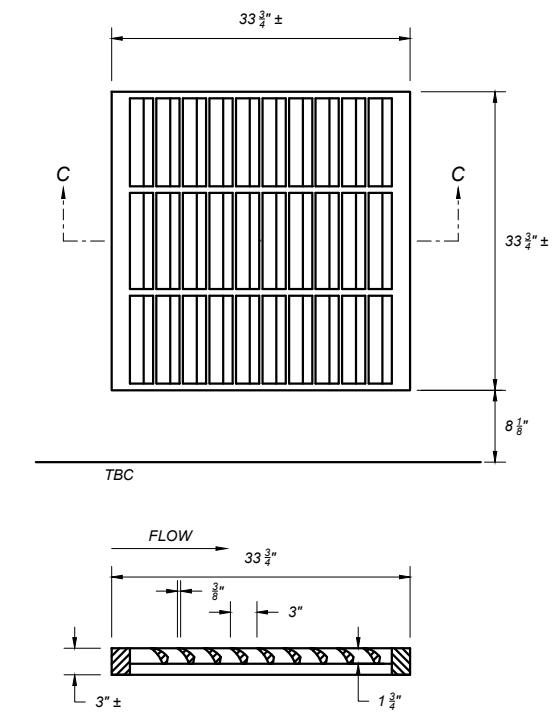

SECTION C-C

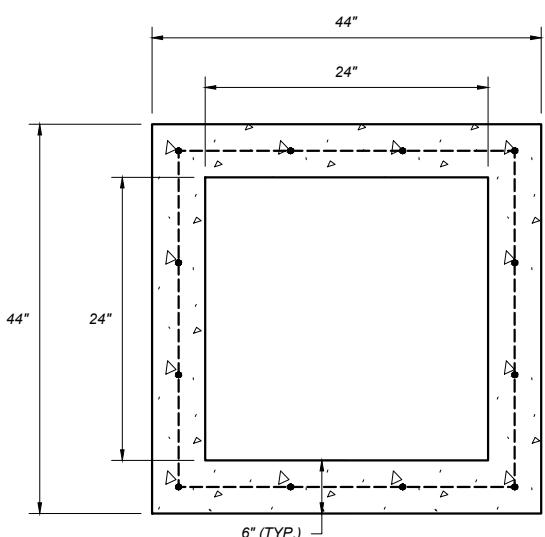

TOP VIEW

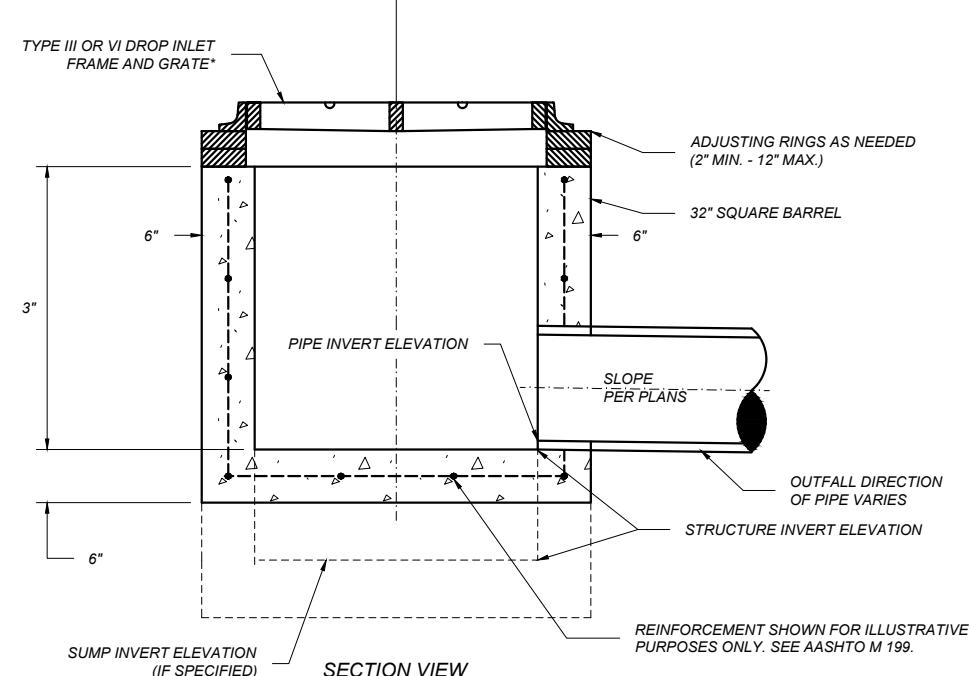

SECTION VIEW

TYPE III AND VI DROP INLET

NOTES:

SEE PLANS FOR LOCATIONS AND QUANTITIES.

SET ALL FINAL INLET GRATE ELEVATIONS TO ENSURE THAT POSITIVE DRAINAGE IS PROVIDED FROM THE FLOWLINE OF THE CURB AND GUTTER SECTION INTO THE INLET.

TYPE III AND TYPE VI GRATES ARE INTERCHANGEABLE WITH THE SAME FRAME AND HAVE THE ABILITY TO BE ROTATED 90 DEGREES IN ANY DIRECTION. INSTALL GRATE TO MATCH FLOW DIRECTION SHOWN.

PROVIDE SAFETY LUG ON STRAIGHT BAR GRATE BETWEEN EACH BAR.

* SEE QUALIFIED PRODUCTS LIST FOR APPROVED GRATES.
DIMENSIONS SHOWN BASED ON D&L I-3421-01 AND D&L I-3421-02.

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 604

DWG. NO.
604-16

DROP INLETS TYPE III AND VI




EFFECTIVE: JAN 23, 2020





REVISED--
JAN 15, 2026

12/12/2025 11:03 AM


STDDRD604016.DWG

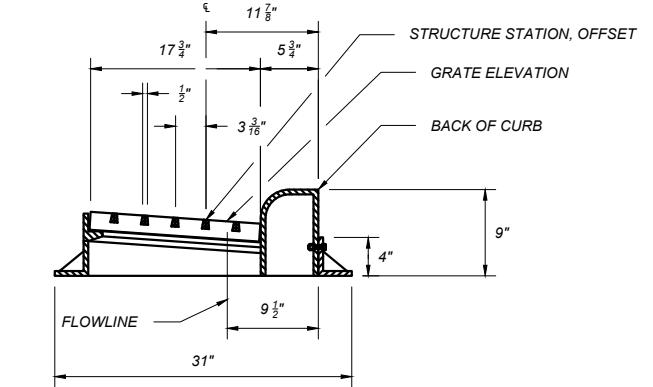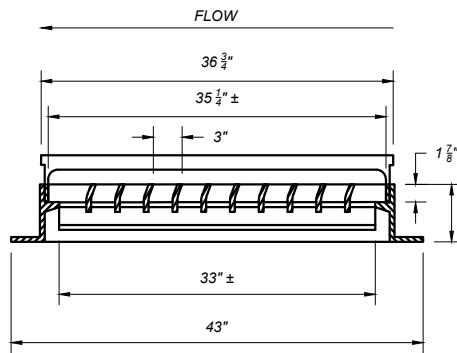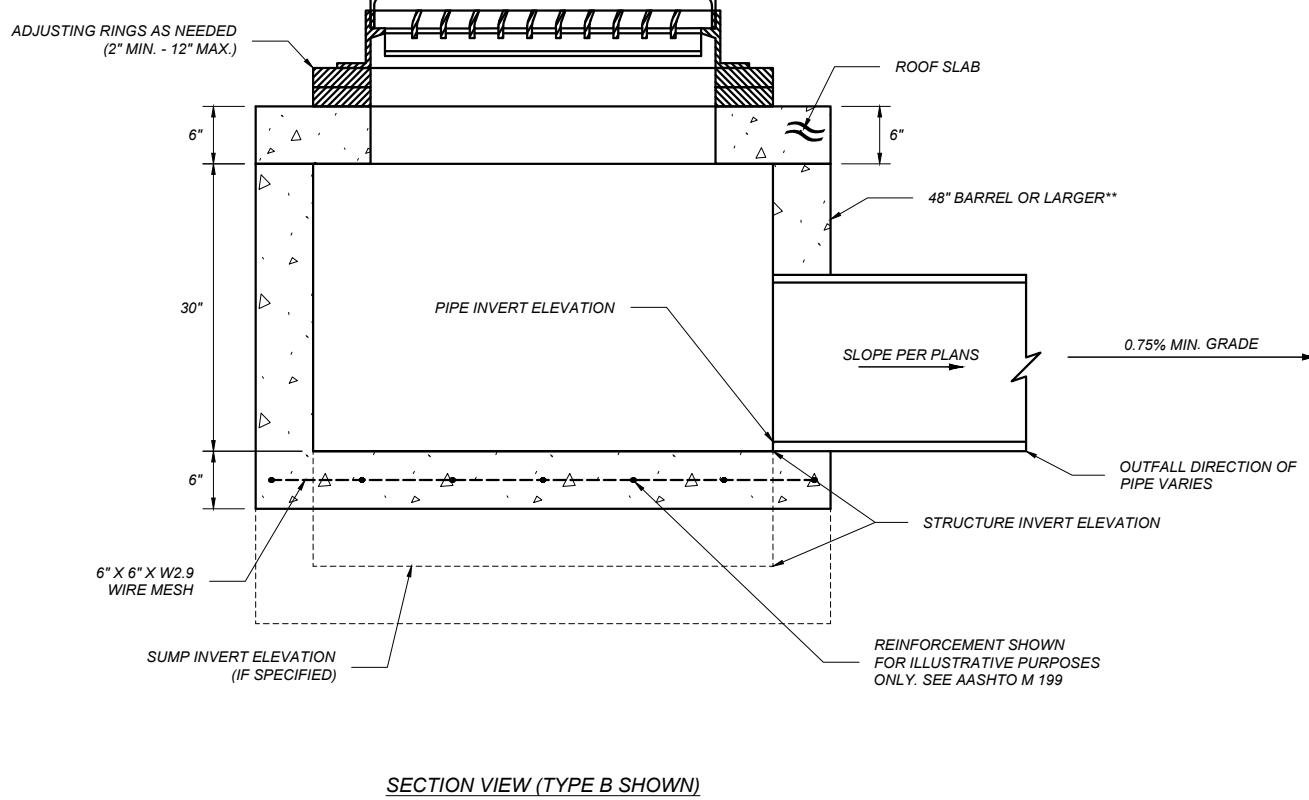

TYPE B
CURVED VANE STYLE *

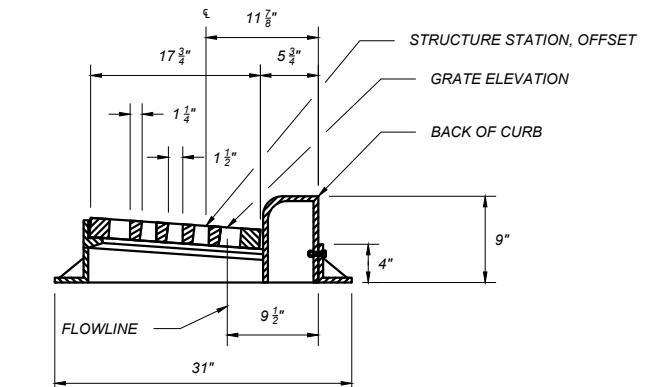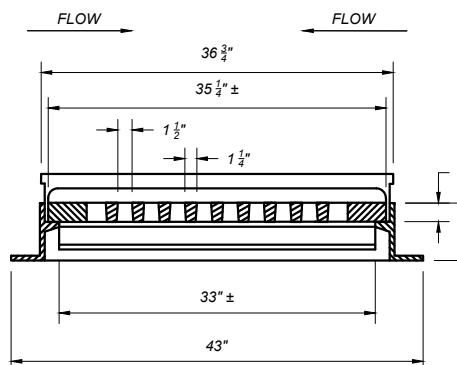

TYPE A
STRAIGHT BAR STYLE *

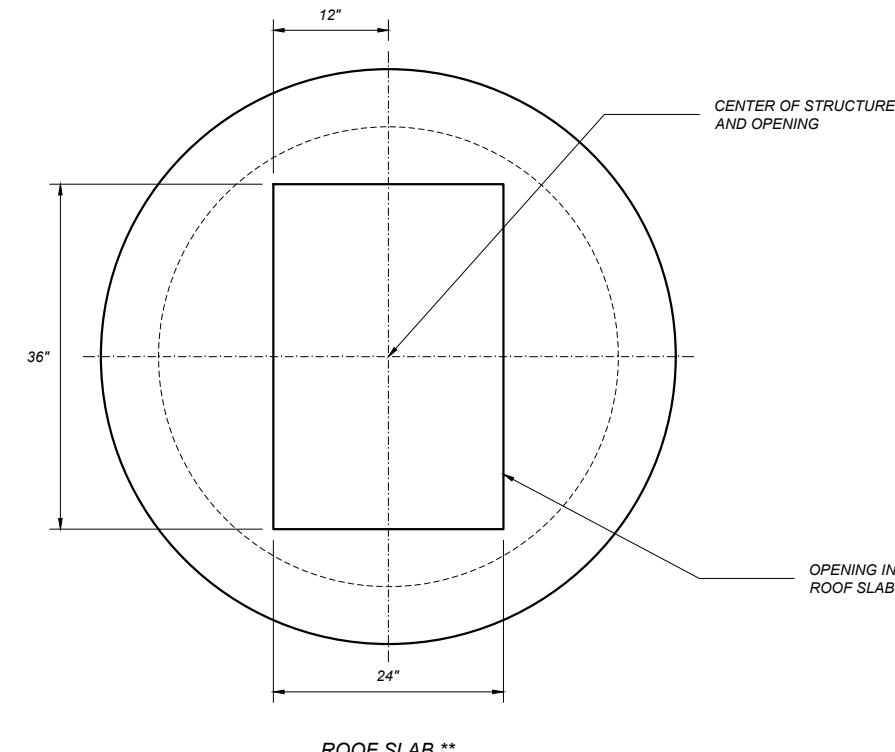

NOTES:
SEE PLANS FOR LOCATIONS AND QUANTITIES.
SET ALL FINAL INLET GRATE ELEVATIONS TO ENSURE THAT POSITIVE DRAINAGE IS PROVIDED FROM THE FLOWLINE OF THE CURB AND GUTTER SECTION INTO THE INLET.
ALL CONCRETE IS CLASS GENERAL OR APPROVED EQUAL.
* SEE QUALIFIED PRODUCTS LIST FOR APPROVED GRATES.
DIMENSIONS SHOWN BASED ON NEENAH R-3067 AND R-3067-L
** SEE DETAILED DRAWING NO. 604-02 FOR DIAMETER, SLAB THICKNESS AND REINFORCING REQUIREMENTS. CENTER THE RECTANGULAR 36"X24" ROOF SLAB OPENING FOR ALL BARREL DIAMETERS.


DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 604	DWG. NO. 604-18


TYPE A AND B CURB INLETS

EFFECTIVE: JAN 23, 2020



-REVISED-
JAN 15, 2026

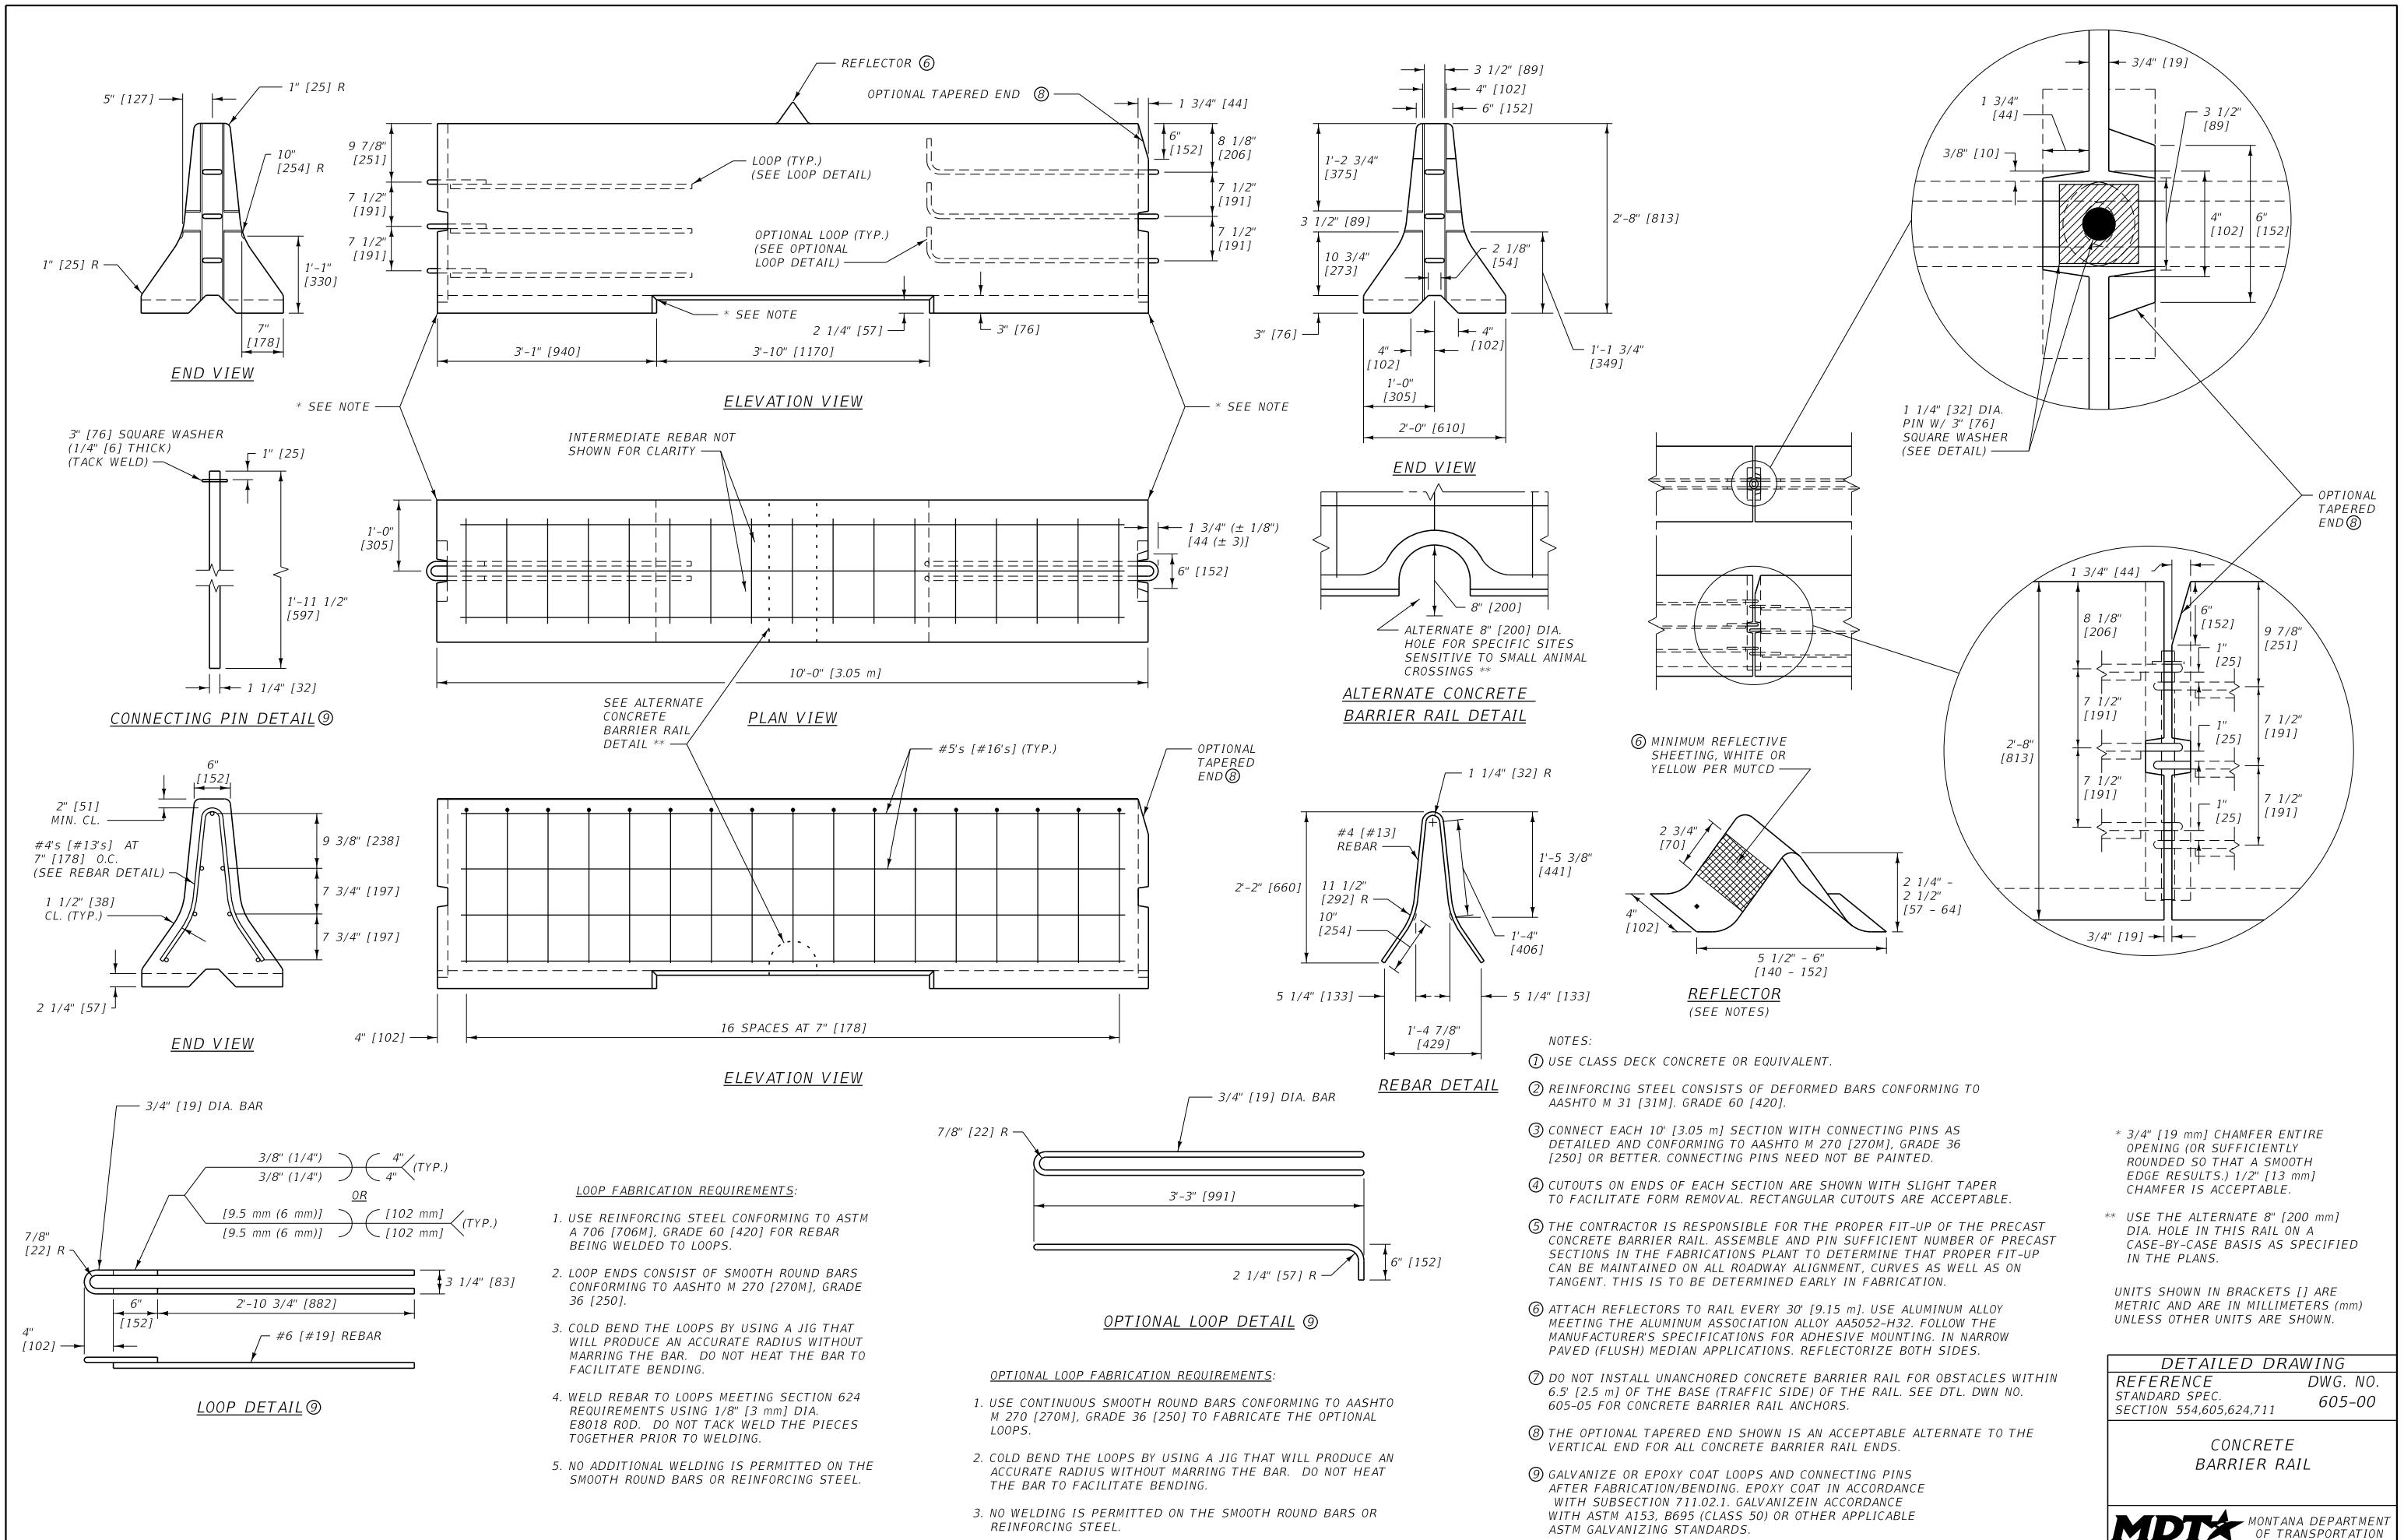


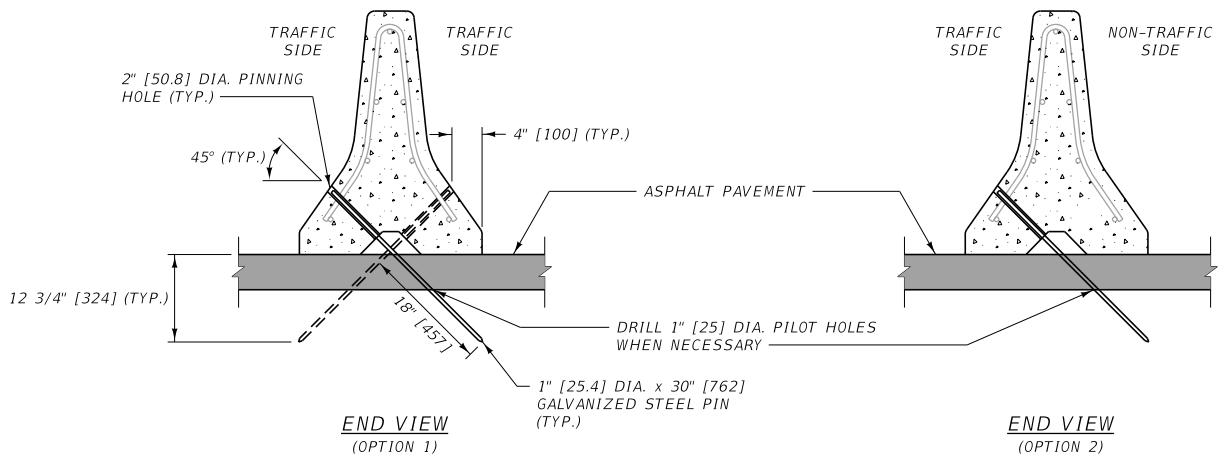

END VIEW
(OPTION 1)

END VIEW
(OPTION 2)


OPTION 1 = TRAFFIC ON BOTH SIDES OF C.B.R.
OPTION 2 = TRAFFIC ON ONE SIDE OF C.B.R.

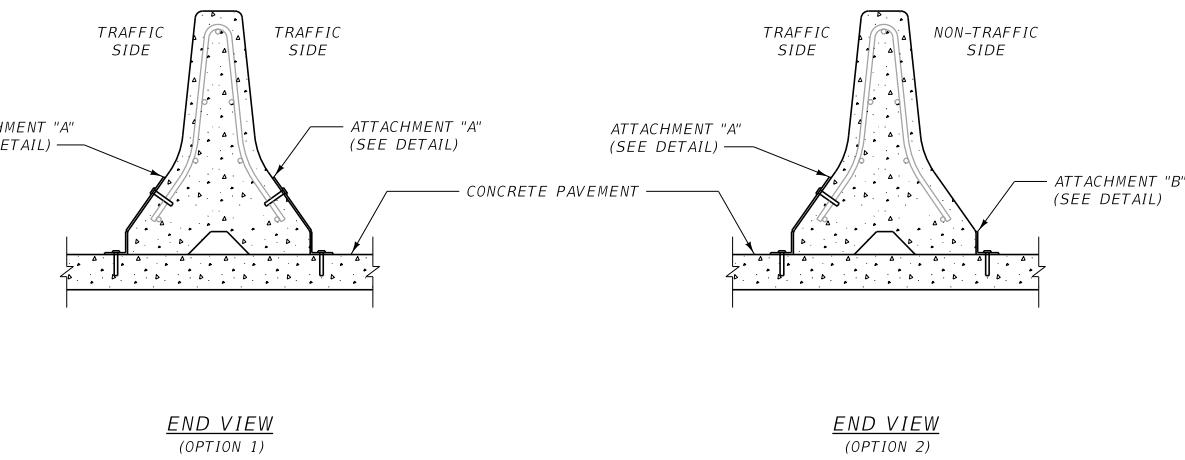


END VIEW
(OPTION 1)

END VIEW
(OPTION 2)

TYPE 1 ANCHOR
(FOR TEMPORARY OR PERMANENT CONCRETE BARRIER
RAIL INSTALLATIONS ON ASPHALT PAVEMENT)

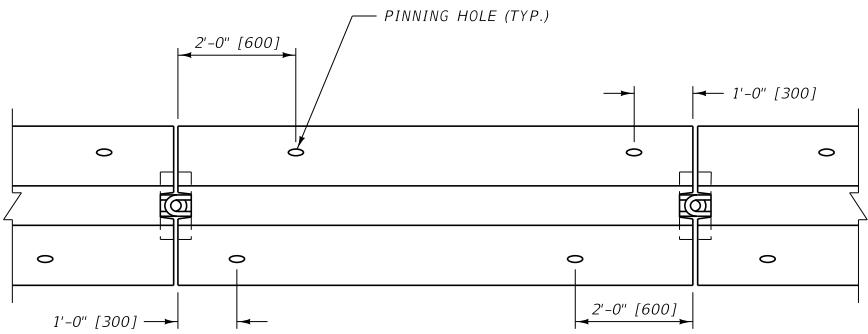


TYPE 1 ANCHOR
PLAN VIEW

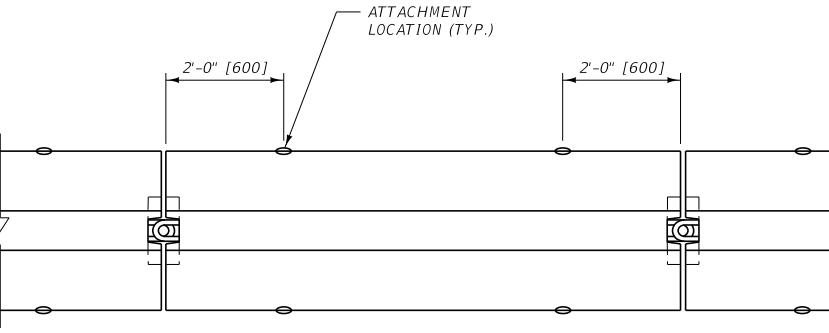

TYPE 2 ANCHOR
PLAN VIEW

TYPE 2 & 3 ANCHORS
(FOR TEMPORARY CONCRETE BARRIER RAIL
INSTALLATIONS ON CONCRETE PAVEMENT)

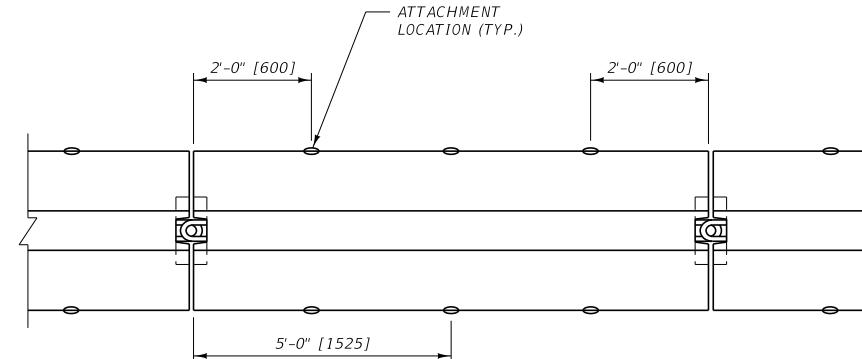


TYPE 3 ANCHOR
PLAN VIEW


NOTES:

- ① USE THESE ANCHORS WITH STANDARD CONCRETE BARRIER RAIL (C.B.R.), AS SHOWN IN DTL. DWG. NO. 605-00, WHEN DEFLECTION OF THE SYSTEM NEEDS TO BE LIMITED.
- ② CAST THE PINNING HOLES INTO THE C.B.R. USING 2" [50.8] I.D. STEEL PIPE. DO NOT DRILL THE PINNING HOLES.
- ③ USE STEEL CONFORMING TO AASHTO M 270 [270M], GRADE 36 [250] OR BETTER FOR PINS AND ATTACHMENT ANGLES. GALVANIZE IN ACCORDANCE WITH SUBSECTION 711.08.
- ④ USE TYPE 2 ANCHORS WHEN A DEEPER EMBEDMENT (5 1/2" [140]) INTO THE BRIDGE DECK OR CONCRETE PAVEMENT IS PERMISSIBLE.
- ⑤ ADJUST THE LOCATION OF THE TYPE 2 OR TYPE 3 ANCHORS TO AVOID THE MAIN REINFORCING WHEN PLACED ON BRIDGE DECK.
- ⑥ USE SHIMS TO PROPERLY FIT THE TYPE 2 AND TYPE 3 ANCHORS TO THE BARRIER AND ROADWAY SURFACES.
- ⑦ AFTER REMOVING TYPE 2 OR TYPE 3 ANCHORS, CLEAN THE HOLES IN THE CONCRETE PAVEMENT AND FILL WITH AN APPROVED NON-SHRINK OR EPOXY GROUT.
- ⑧ REMOVE TYPE 1 ANCHORS BY FIRST DRIVING THE STEEL PINS DOWN THROUGH THE BARRIER TO ALLOW LIFTING OF THE BARRIER WITHOUT INTERFERENCE. THEN REMOVE THE PINS FROM THE PAVEMENT AND FILL THE PINNING HOLES WITH AN APPROVED SEALANT.
- ⑨ DO NOT INSTALL ANCHORED CONCRETE BARRIER RAIL FOR OBSTACLES WITHIN 3.5' [1.1 m] OF THE BASE (TRAFFIC SIDE) OF THE RAIL.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

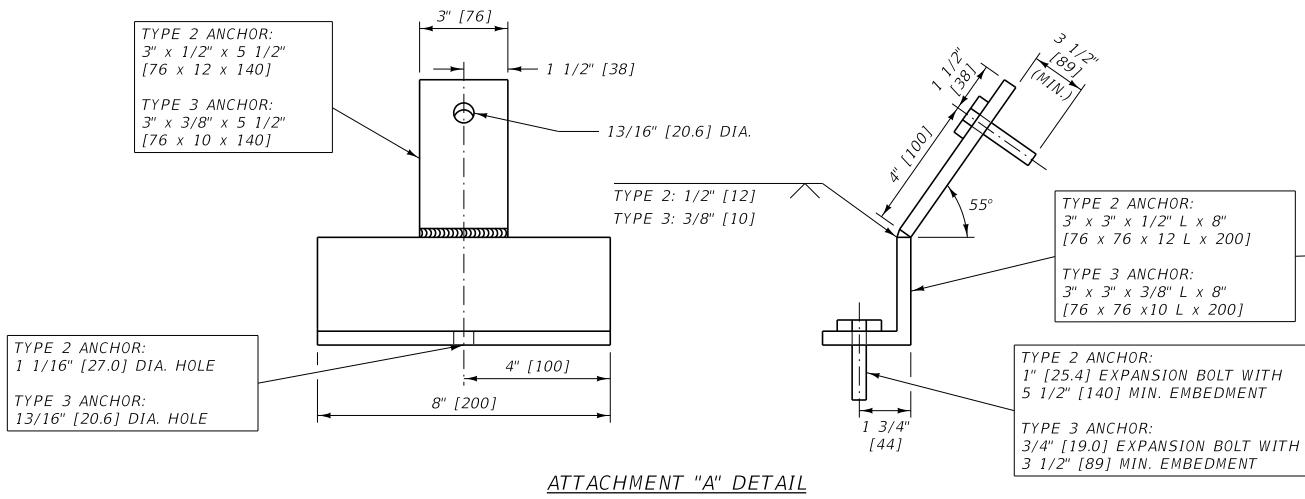


ATTACHMENT "A" DETAIL

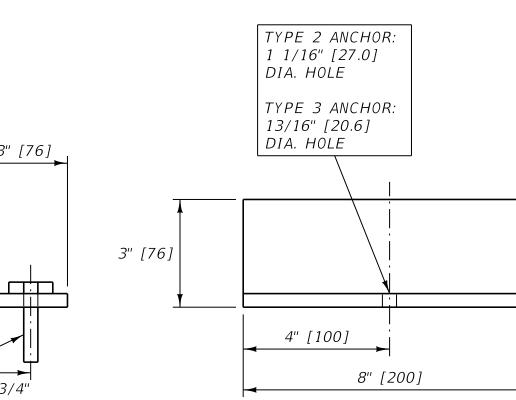


ATTACHMENT "B" DETAIL


DETAINED DRAWING	REFERENCE	DWG. NO.
STANDARD SPEC.	SECTION	605-05

CONCRETE BARRIER RAIL
ANCHORS

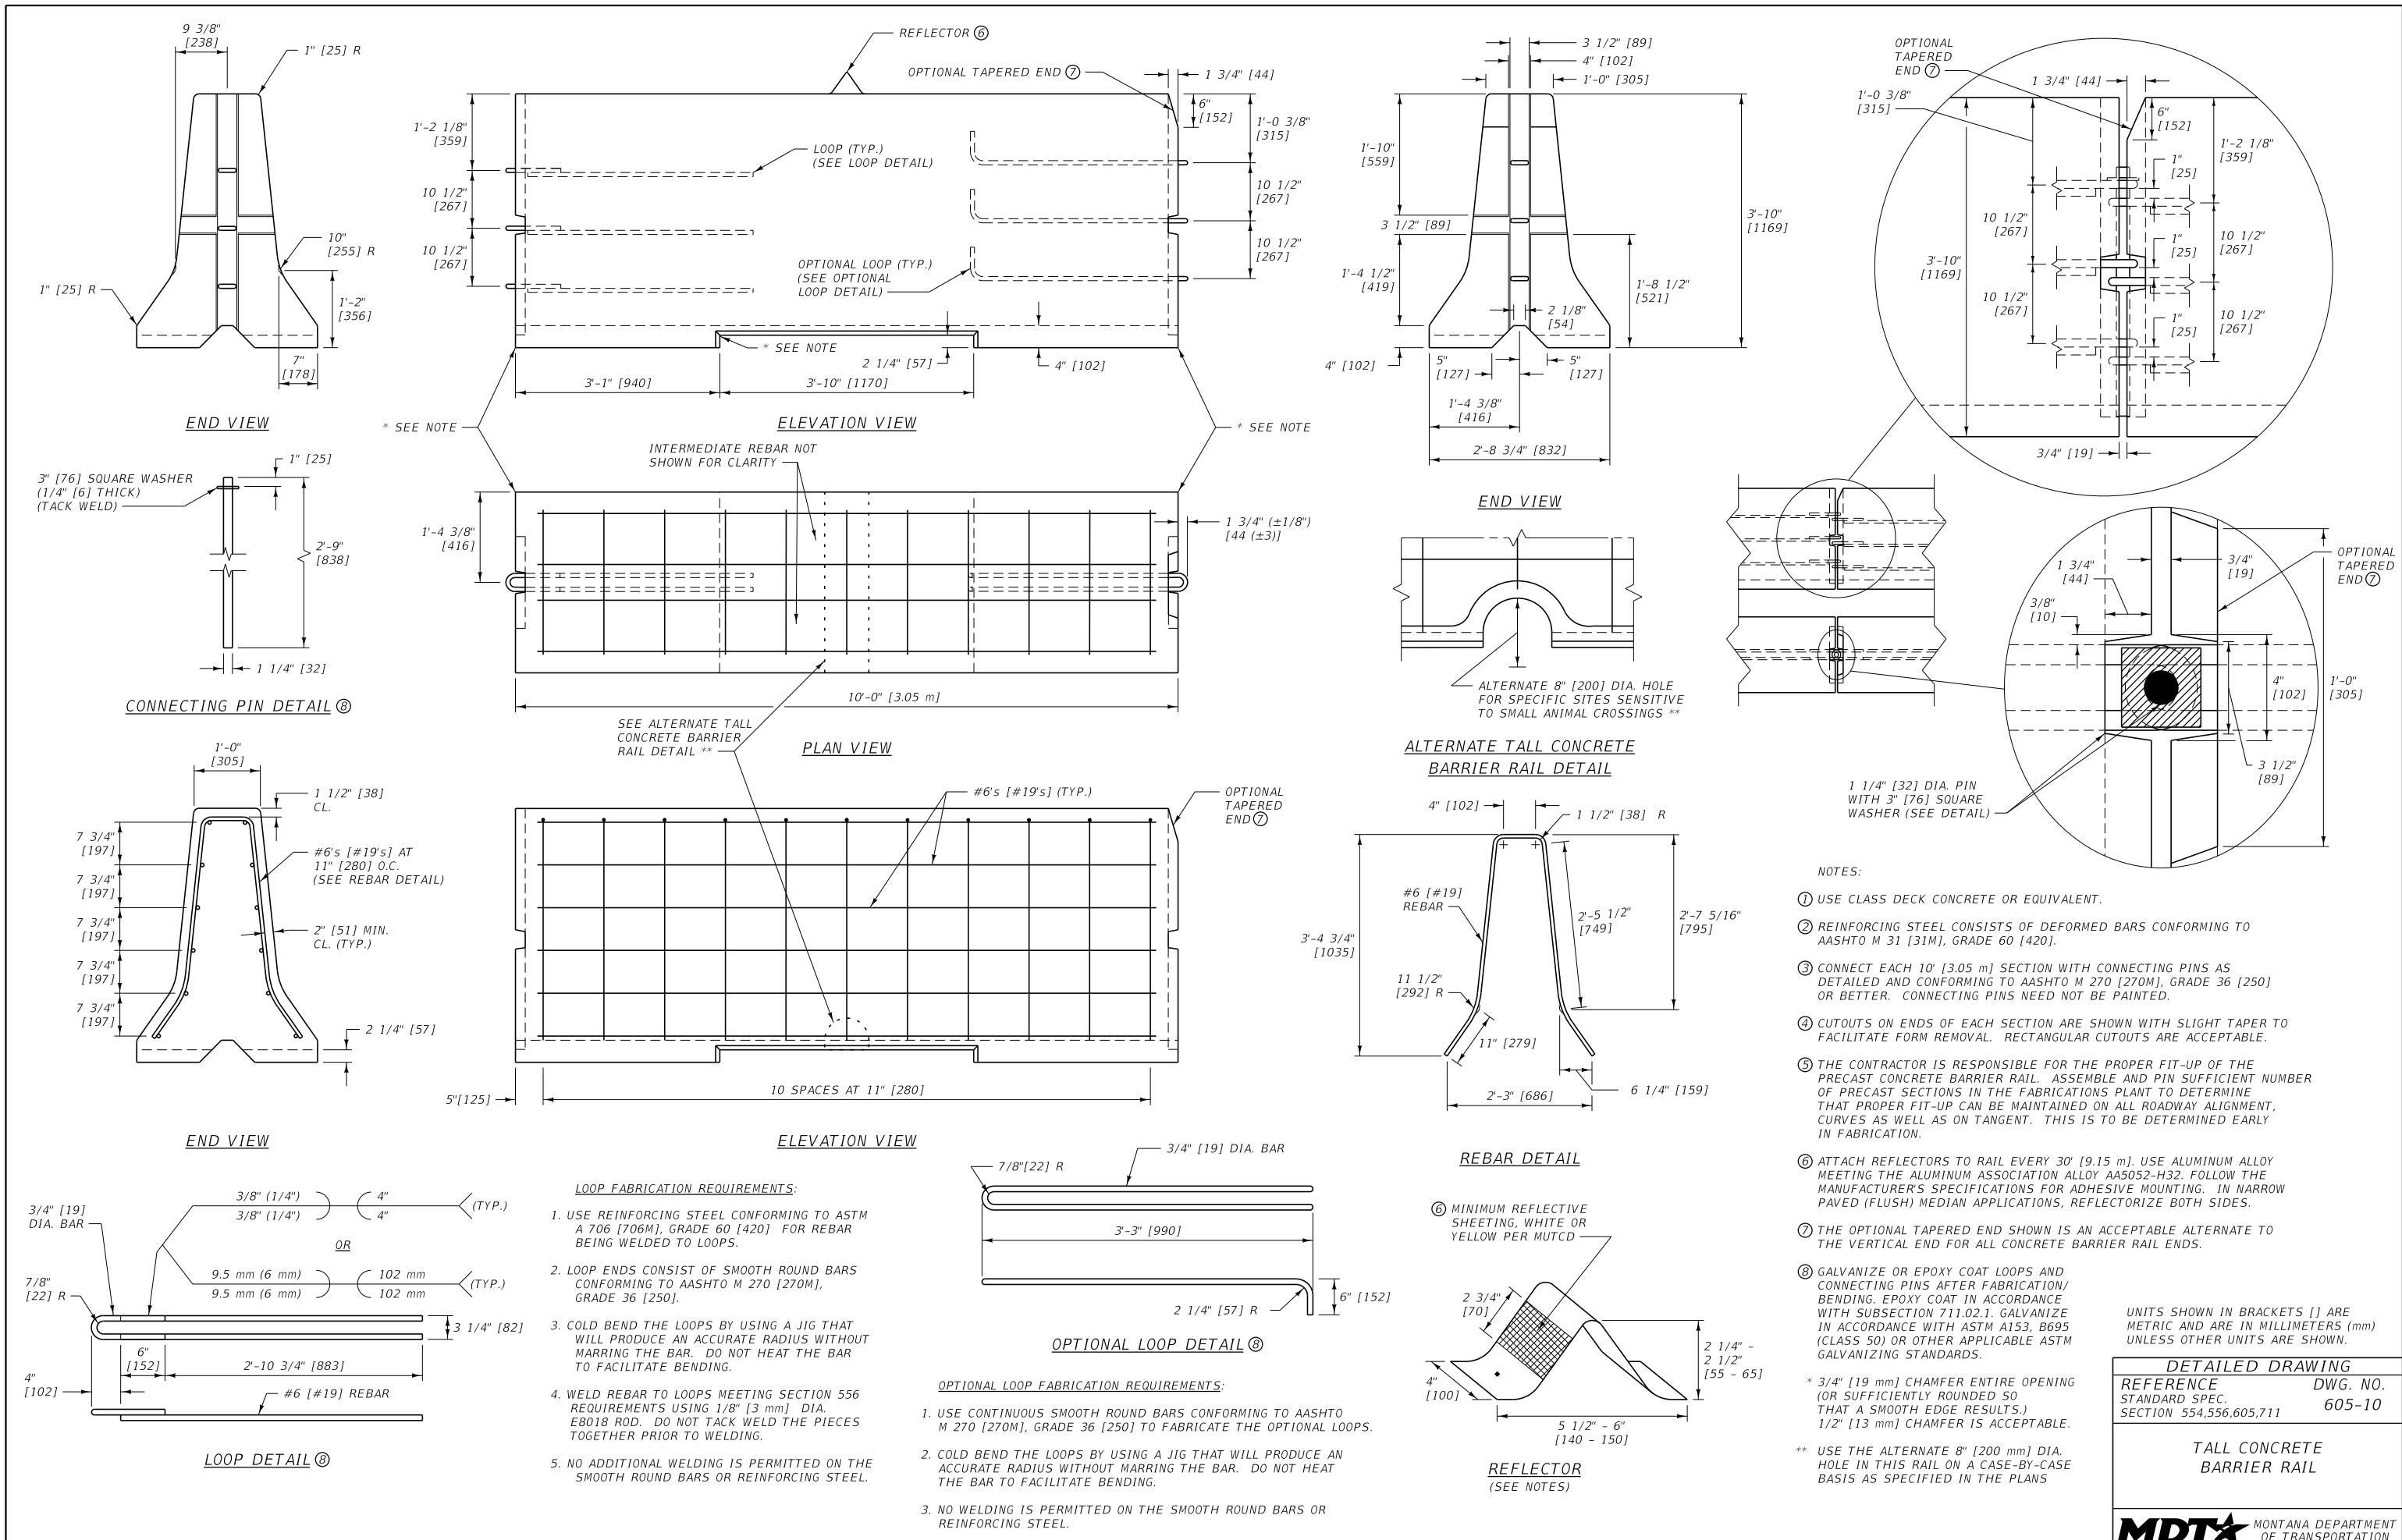


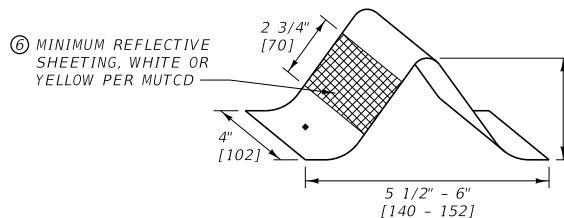

REFLECTOR
(SEE NOTES)

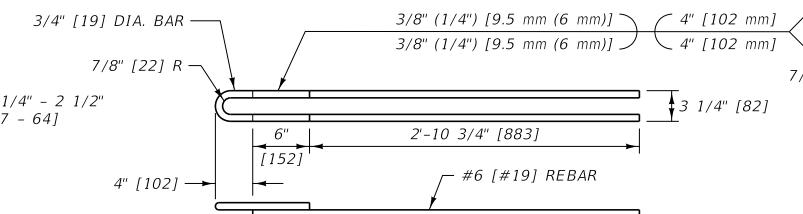

LOOP DETAIL ⑧

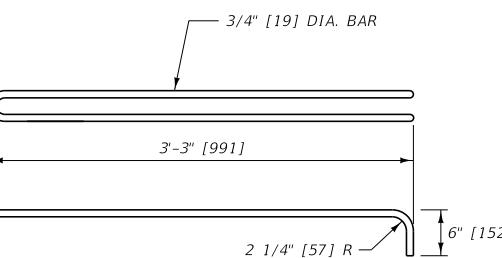


OPTIONAL LOOP DETAIL ⑧

LOOP FABRICATION REQUIREMENTS:


1. USE REINFORCING STEEL CONFORMING TO ASTM A 706 [706M], GRADE 60 [420] FOR REBAR BEING WELDED TO LOOPS.
2. LOOP ENDS CONSIST OF SMOOTH ROUND BARS CONFORMING TO AASHTO M 270 [270M], GRADE 36 [250].
3. COLD BEND THE LOOPS BY USING A JIG THAT WILL PRODUCE AN ACCURATE RADIUS WITHOUT MARRING THE BAR. DO NOT HEAT THE BAR TO FACILITATE BENDING.
4. WELD REBAR TO LOOPS MEETING SECTION 556 REQUIREMENTS USING 1/8" [3] DIA. E8018 ROD. DO NOT TACK WELD THE PIECES TOGETHER PRIOR TO WELDING.
5. NO ADDITIONAL WELDING IS PERMITTED ON THE SMOOTH ROUND BARS OR REINFORCING STEEL.

OPTIONAL LOOP FABRICATION REQUIREMENTS:


1. USE CONTINUOUS SMOOTH ROUND BARS CONFORMING TO AASHTO M 270, [270M] GRADE 36 [250] TO FABRICATE THE OPTIONAL LOOPS.
2. COLD BEND THE LOOPS BY USING A JIG THAT WILL PRODUCE AN ACCURATE RADIUS WITHOUT MARRING THE BAR. DO NOT HEAT THE BAR TO FACILITATE BENDING.
3. NO ADDITIONAL WELDING IS PERMITTED ON THE SMOOTH ROUND BARS OR REINFORCING STEEL.

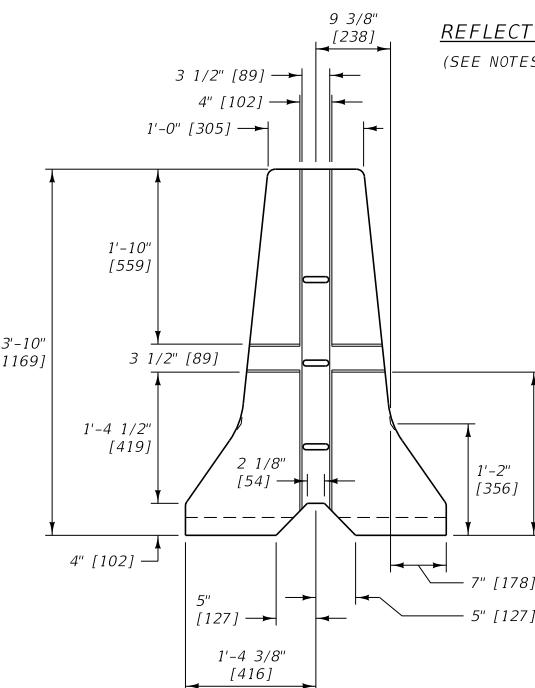

LEFT END VIEW

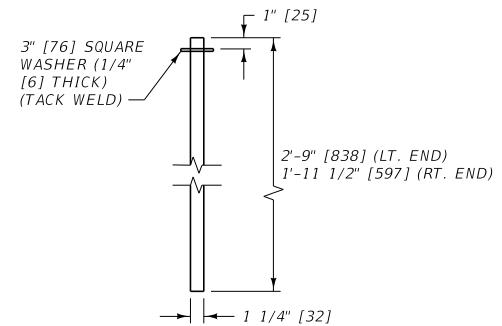


CONNECTING PIN DETAIL ⑧

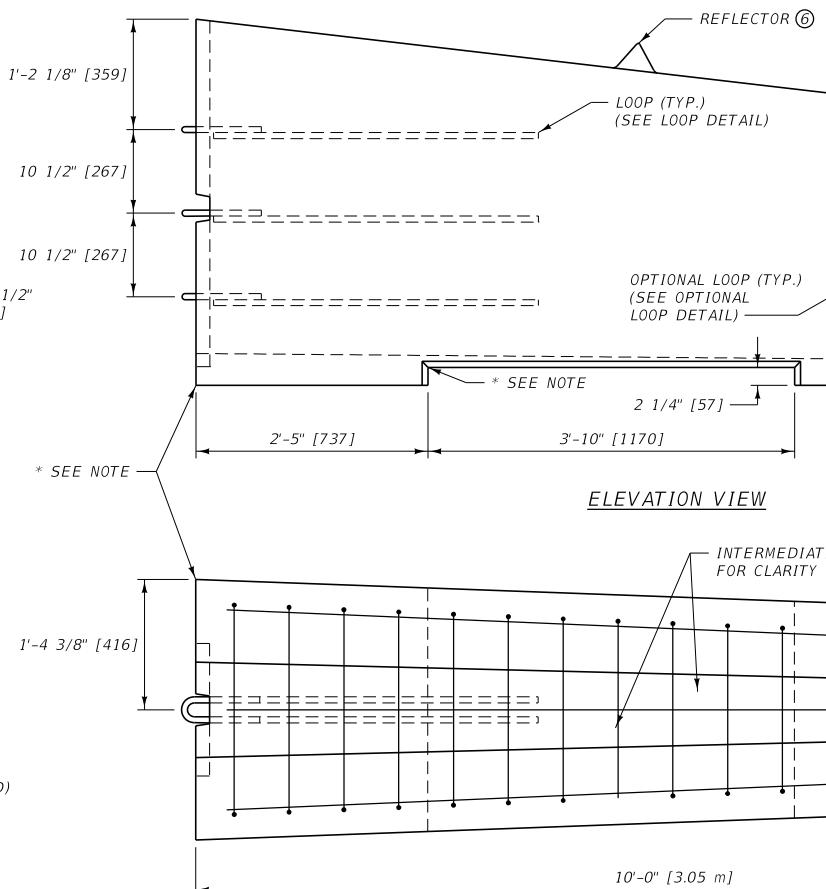


ELEVATION VIEW

INTERMEDIATE REBAR NOT SHOWN FOR CLARITY


PLAN VIEW

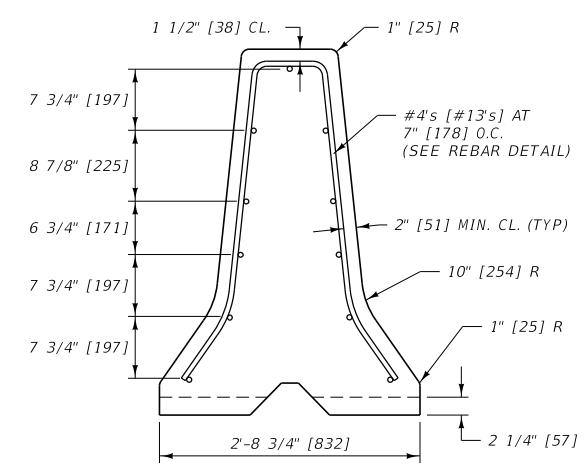


LEFT END VIEW

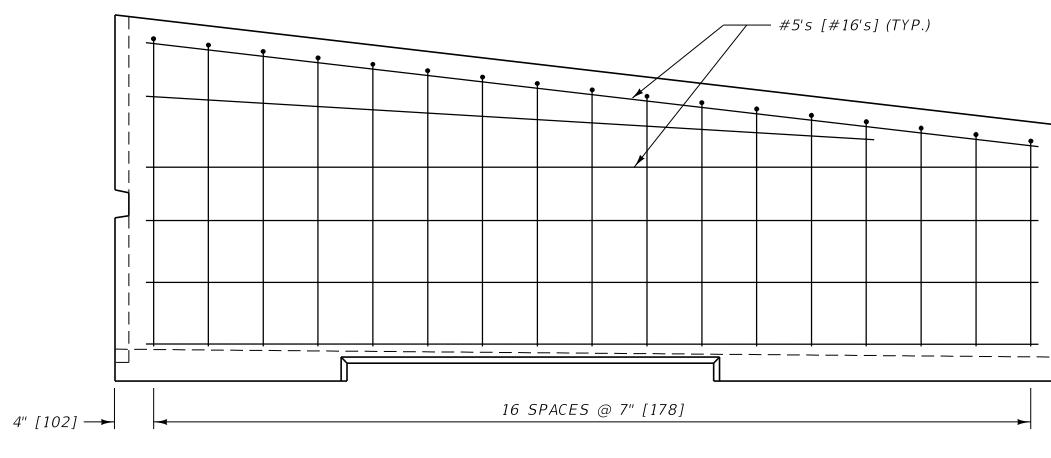

ELEVATION VIEW

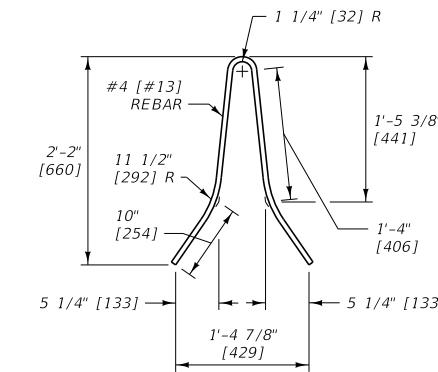

REBAR DETAIL RIGHT END

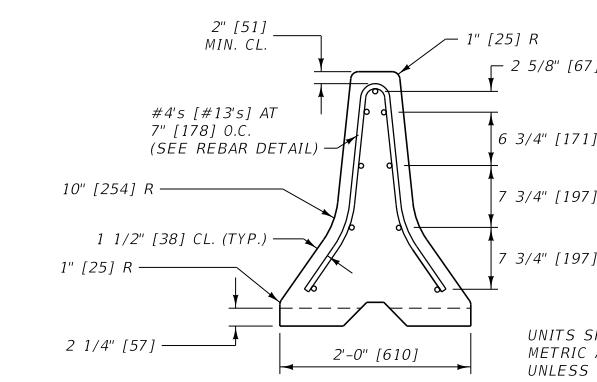






RIGHT END VIEW

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

REFERENCE STANDARD SPEC.	DWG. NO. 605-15
SECTION 554,556,605,711	

CONCRETE BARRIER RAIL TRANSITION


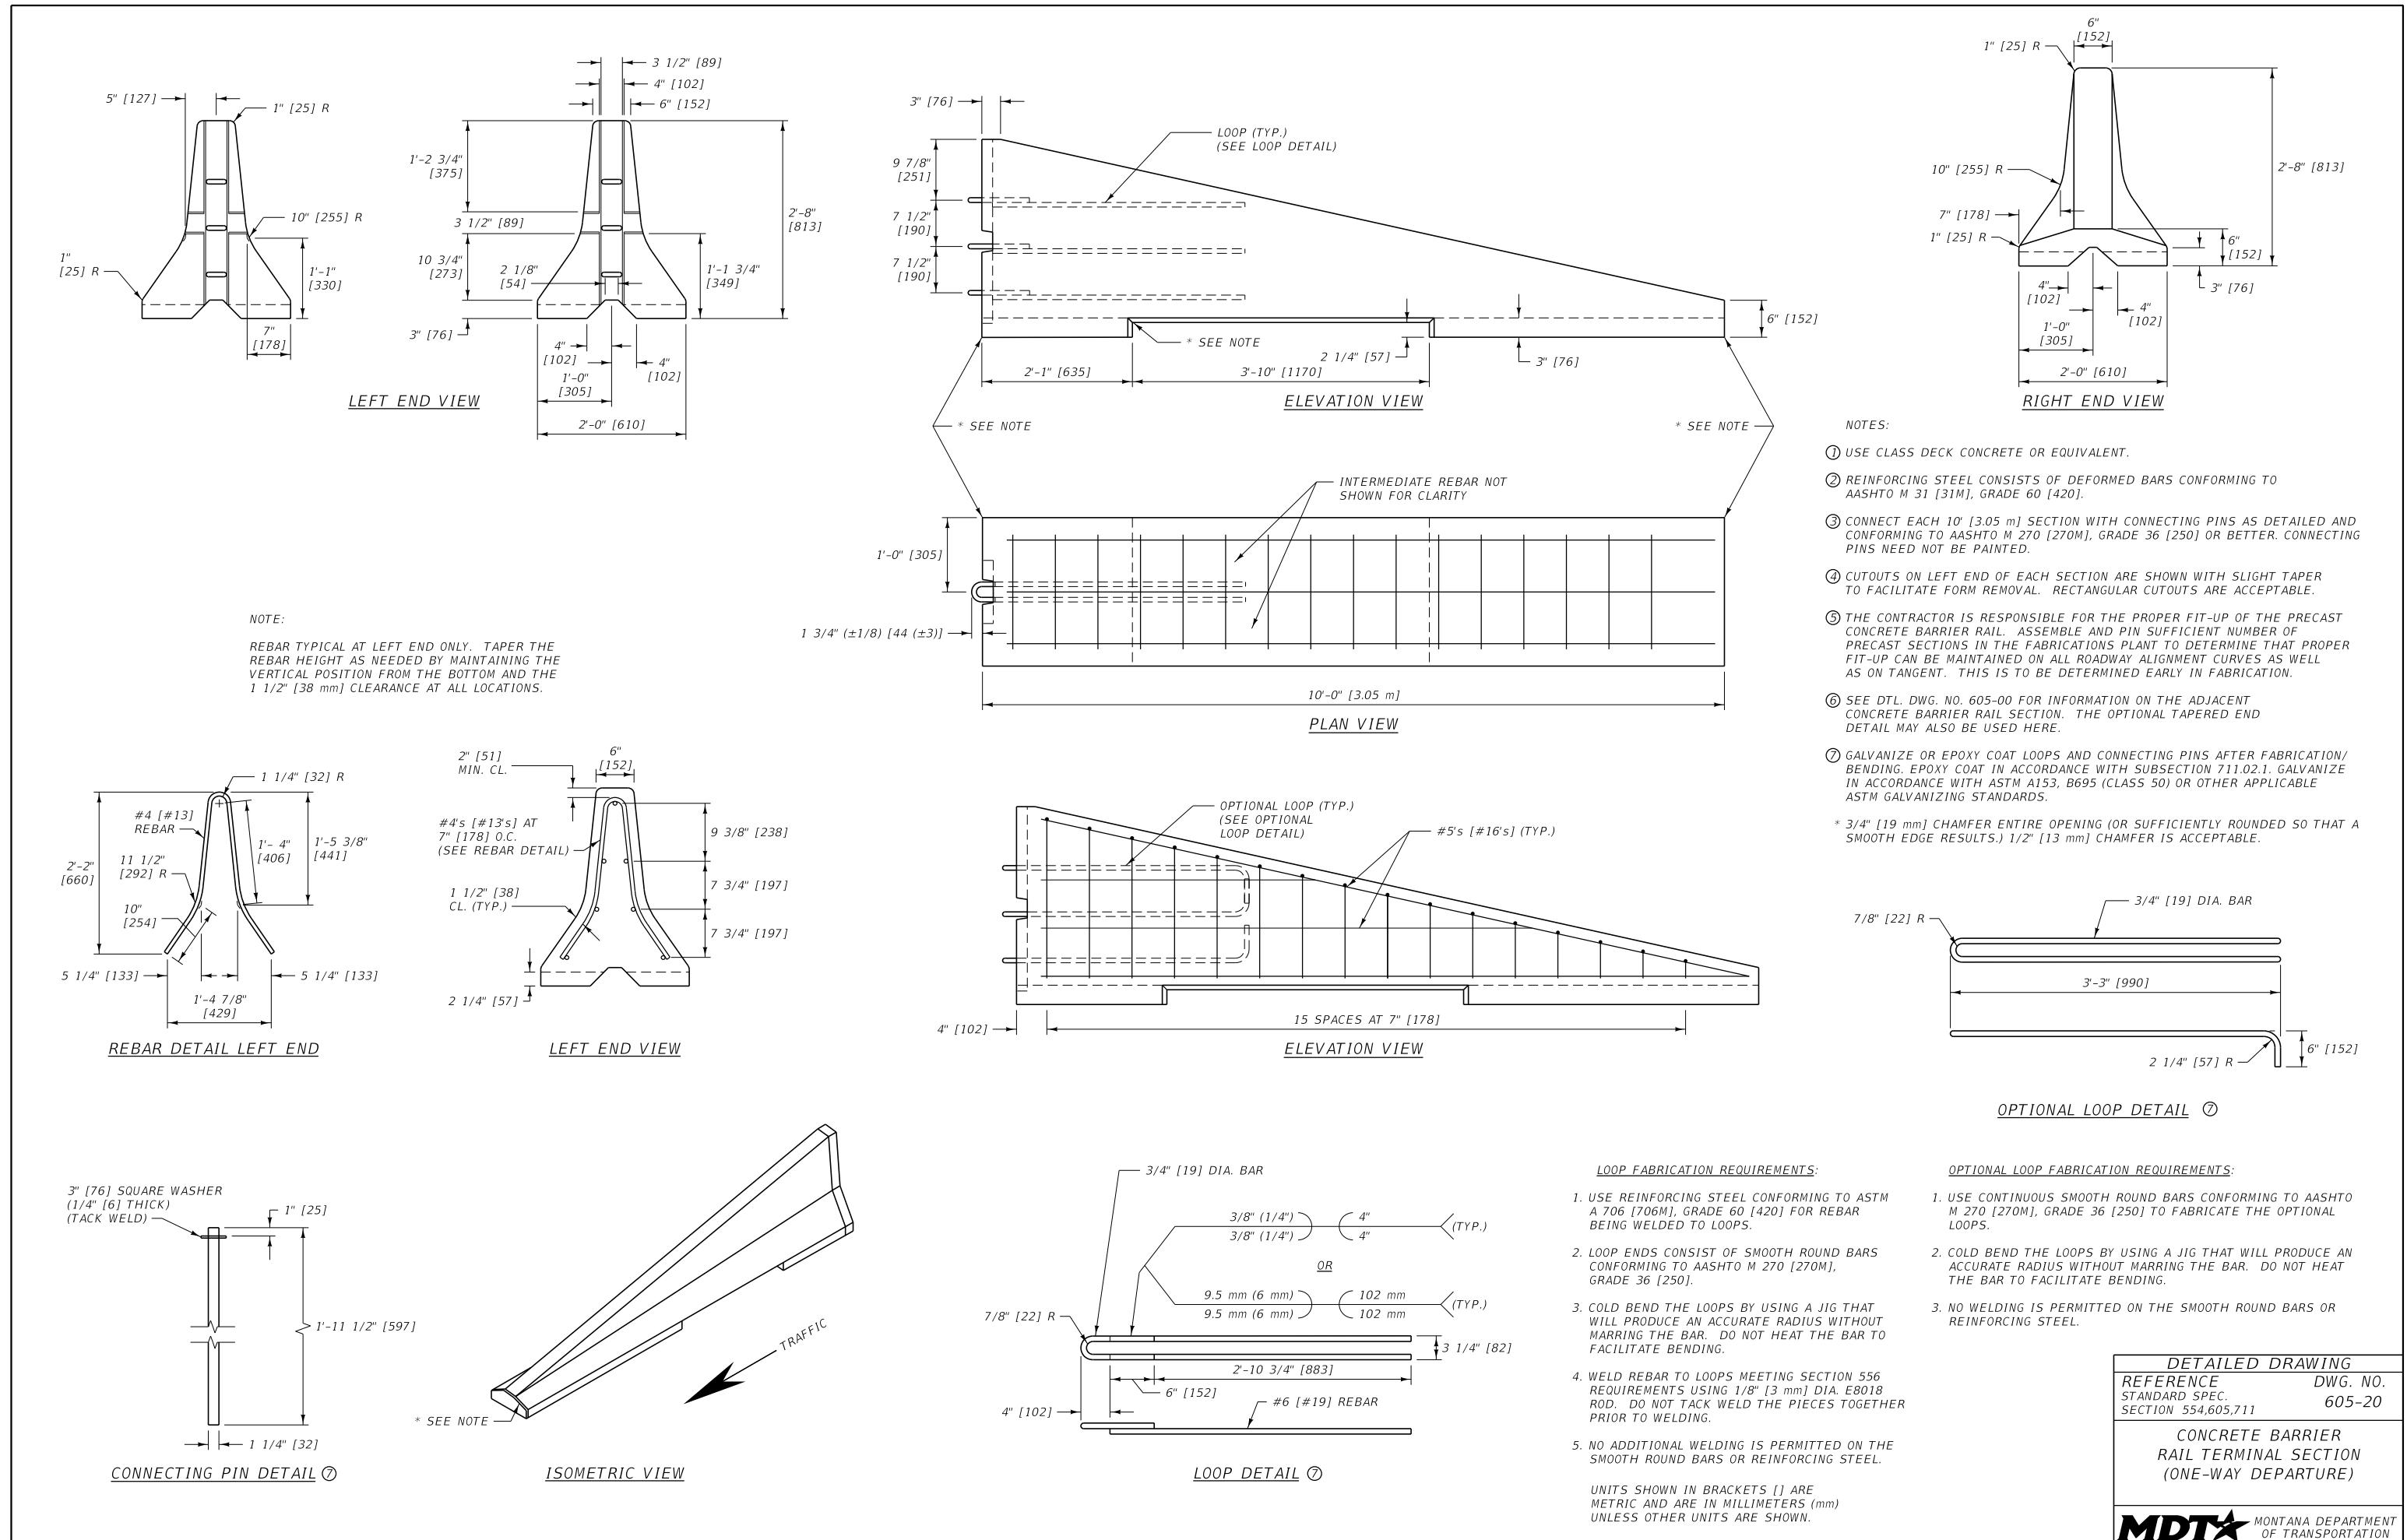


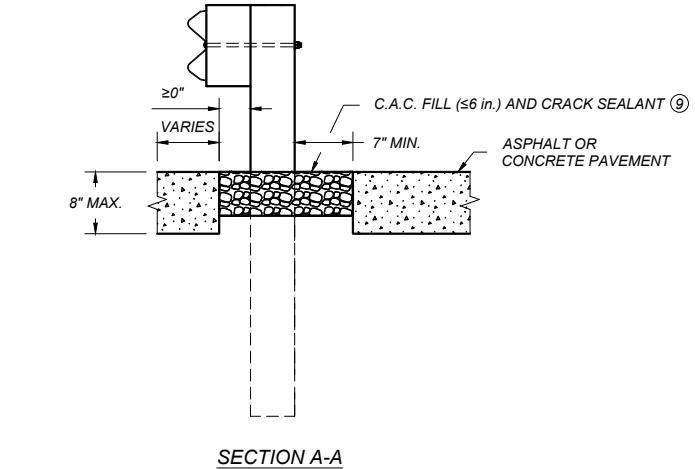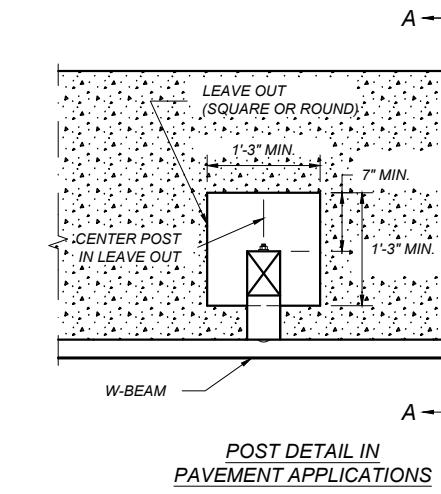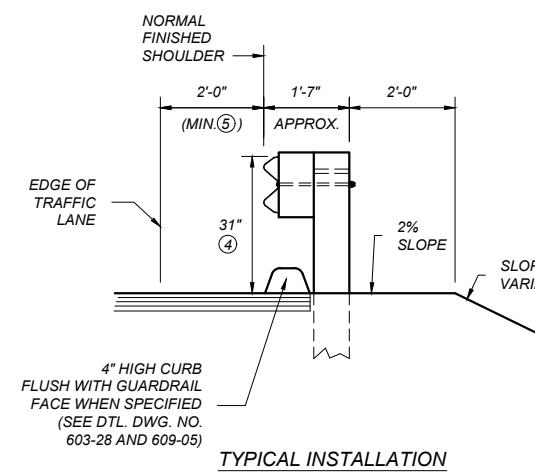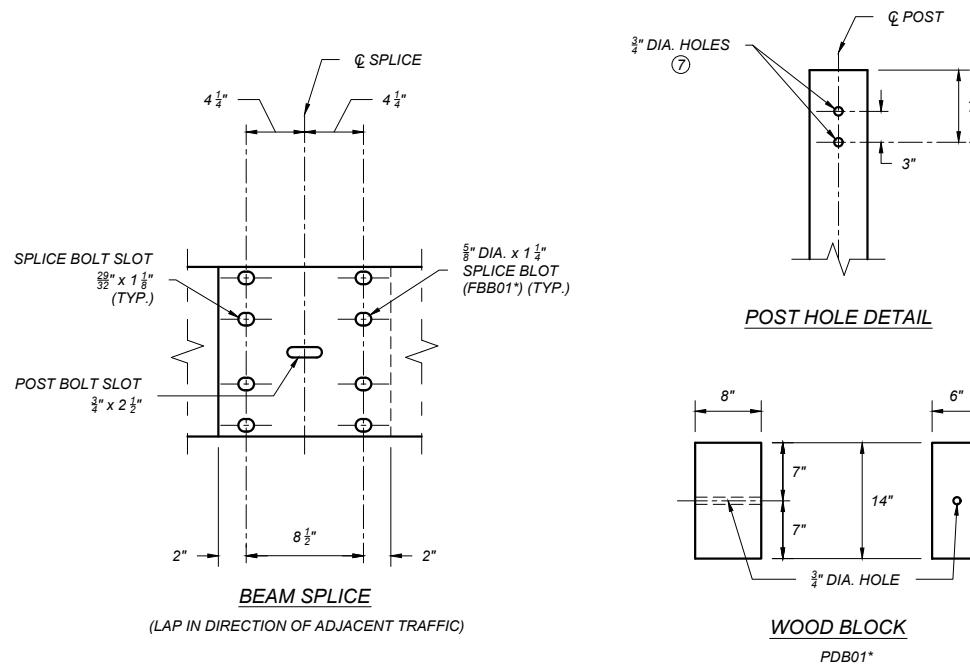

NOTES:


- ① INSTALL ALL BOLTS WITH HEADS ON TRAFFIC SIDE OF INSTALLATION.
- ② USE WOOD BLOCKS OR OTHER "MASH" APPROVED BLOCKS. AFFIX BLOCKS TO POSTS WITH TWO 16 PENNY GALV. NAILS OR 14 GAUGE WIRE WRAP.
- ③ ATTACH REFLECTORS TO POSTS EVERY 25 FEET, INCLUDING TERMINAL SECTIONS, WITH THE REFLECTORIZED SURFACE FACING ADJACENT TRAFFIC. FABRICATE REFLECTORS FROM 0.063" THICK ALUMINUM ALLOY PER SECTION 704 OR PLASTIC REFLECTORS WITH A URETHANE HINGE. FASTEN REFLECTOR TO WOOD POST USING TWO 16 PENNY RING-SHANKED GALVANIZED NAILS AND TWO 3/16" DIA. WASHERS IN PRE-DRILLED HOLES.
- ④ ON EXISTING GUARDRAIL INSTALLATIONS, THE MINIMUM RAIL HEIGHT IS 27 3/4".
- ⑤ WIDENING IS REQUIRED IF FINISHED SHOULDER IS LESS THAN 2'-0" FROM THE TRAFFIC LANE.
- ⑥ DO NOT INSTALL W-BEAM GUARDRAIL FOR OBSTACLES WITHIN 5.5' OF THE FACE OF THE RAIL.
- ⑦ USE LOWER HOLE ON NEW CONSTRUCTION INSTALLATIONS.
- ⑧ USE 6' POSTS FOR STANDARD INSTALLATIONS.
- ⑨ APPLY CRACK SEALANT PER SECTION 707 TO FULLY COVER THE C.A.C. IN LEAVE OUT AREAS.

* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.

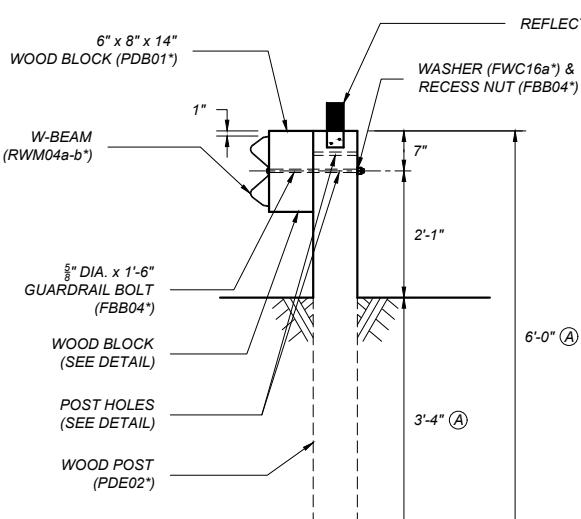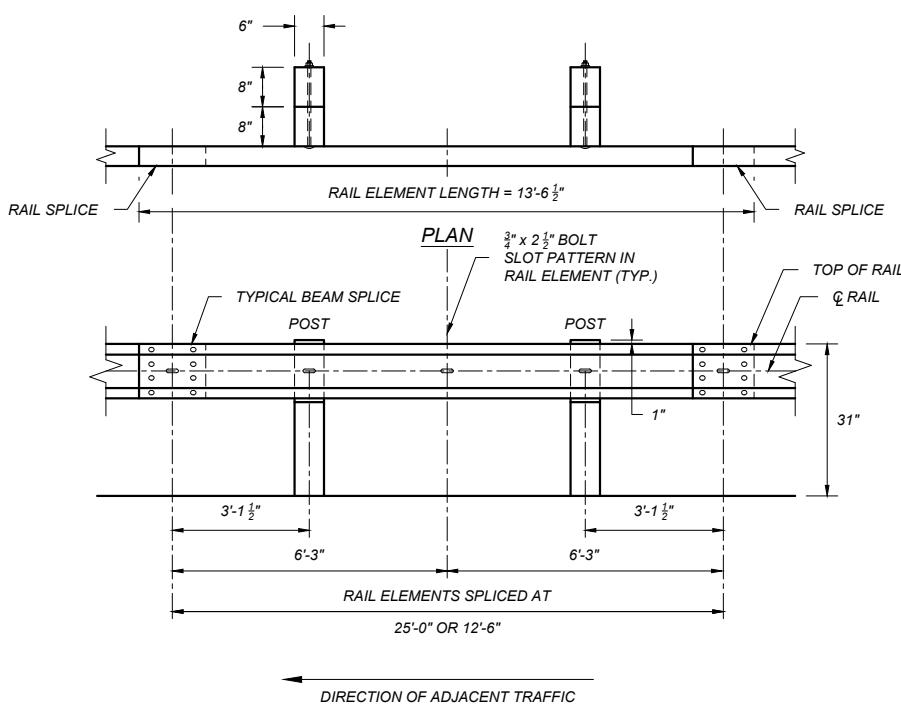

WOOD POST AND MOUNTING DETAIL

(A) STANDARD UNLESS SPECIFIED OTHERWISE IN PLANS.

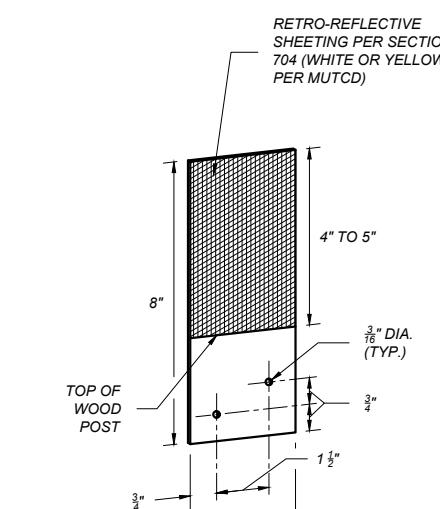

REFLECTOR
(SEE NOTE 3)

DETAILED DRAWINGS	REFERENCE STANDARD SPEC. SECTION 606, 704, 707	DWG. NO. 606-05A
-------------------	------------------------------------------------	------------------









METAL GUARDRAIL - WOOD POSTS (MGS)

EFFECTIVE: JAN 23, 2020



-REVISED--
JAN 15, 2026

12/12/2025 11:17 AM STDDRD60605A.DWG

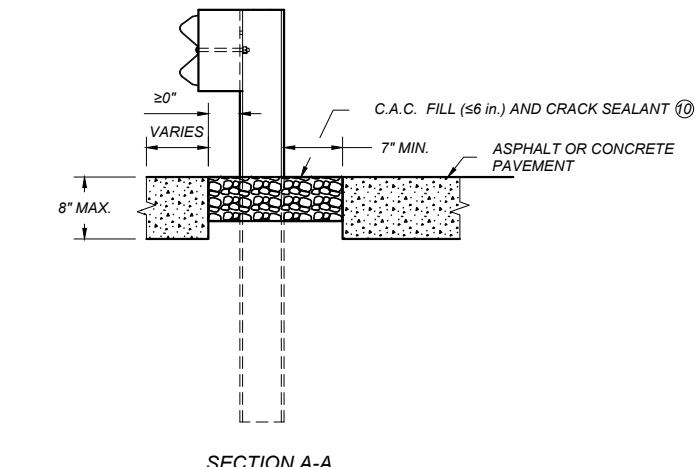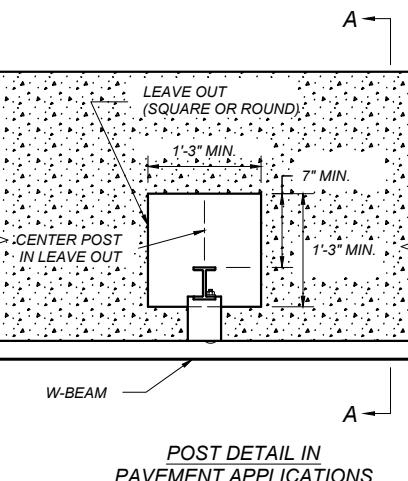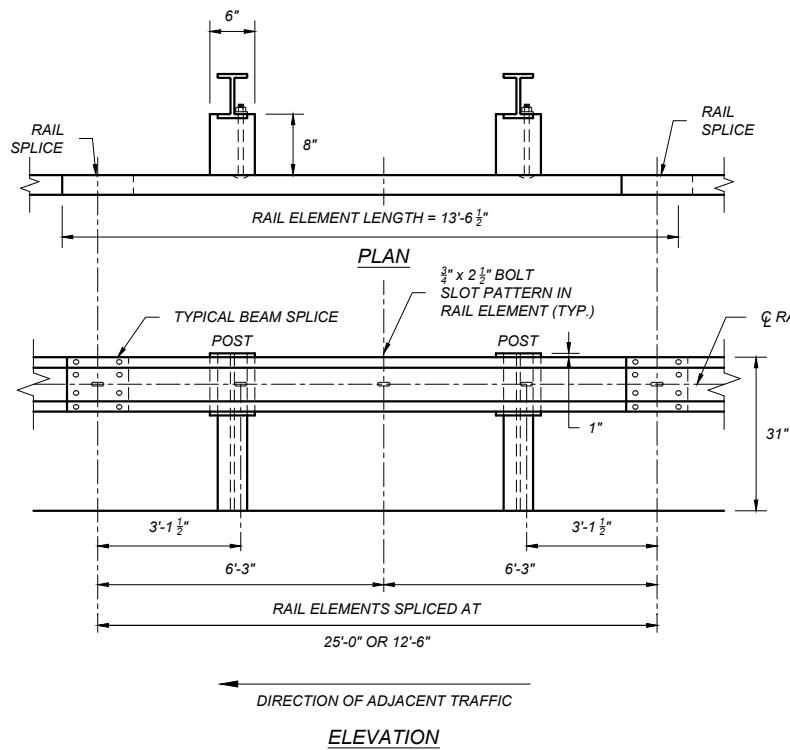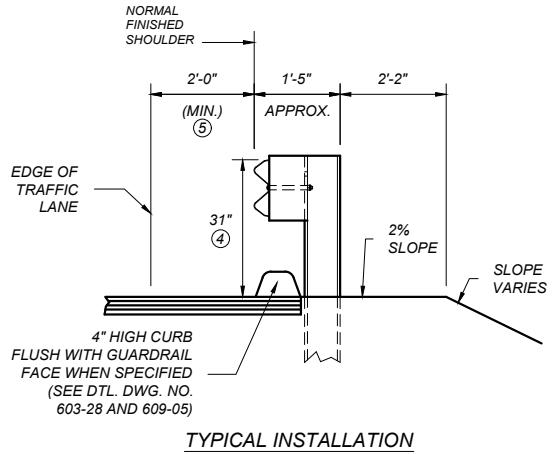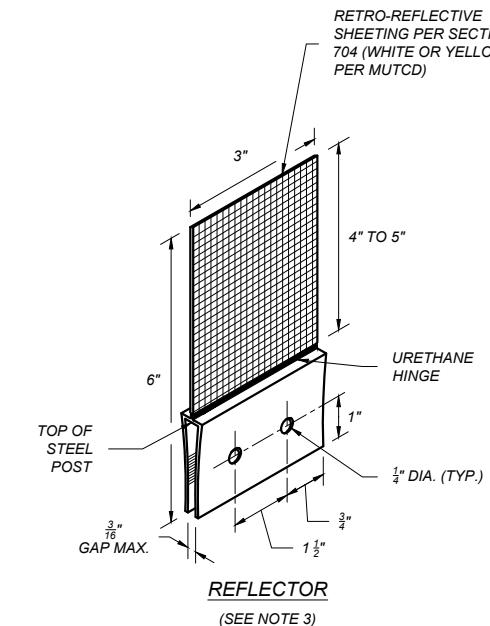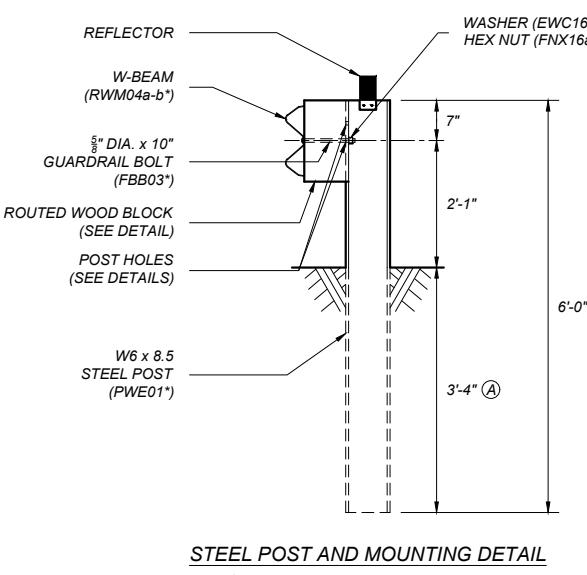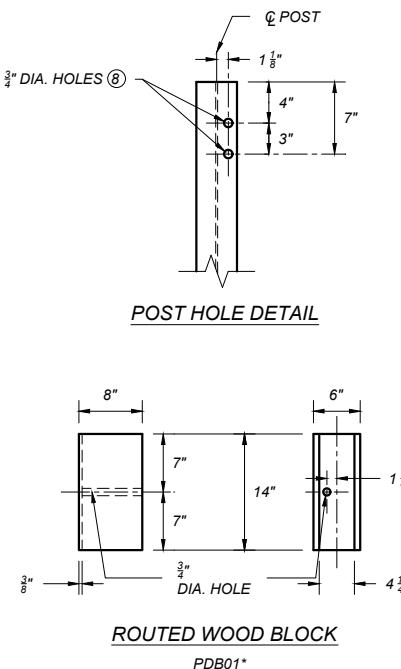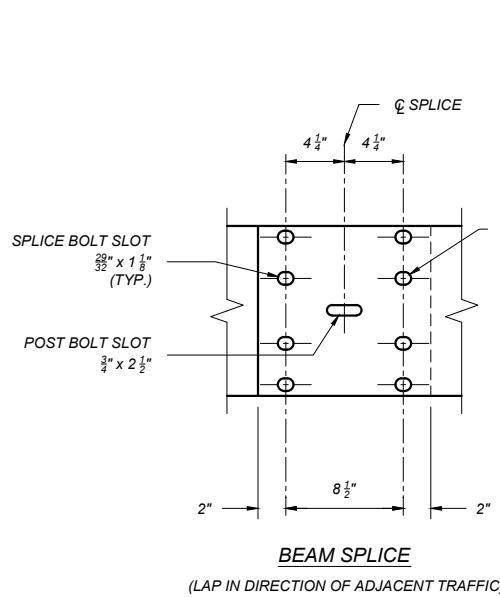

NOTES:

- ① INSTALL ALL BOLTS WITH HEADS ON TRAFFIC SIDE OF INSTALLATION.
- ② USE ROUTED WOOD BLOCKS OR OTHER "MASH" APPROVED BLOCKS.
- ③ ATTACH REFLECTORS TO POSTS EVERY 25 FEET, INCLUDING TERMINAL SECTIONS, WITH THE REFLECTORIZED SURFACE FACING ADJACENT TRAFFIC. FASTEN REFLECTOR TO STEEL POST USING AN APPROVED ADHESIVE. REFLECTORS MAY BE BOLTED TO POSTS PROVIDED HOLES IN POSTS ARE DRILLED BEFORE BEING GALVANIZED.
- ④ ON EXISTING GUARDRAIL INSTALLATIONS, THE MINIMUM RAIL HEIGHT IS 27 3/4".
- ⑤ WIDENING IS REQUIRED IF FINISHED SHOULDER IS LESS THAN 2'-0" FROM THE TRAFFIC LANE.
- ⑥ STEEL POSTS WITH OTHER POST HOLE CONFIGURATIONS MAY BE ACCEPTED, PROVIDED THEY HAVE AT LEAST THE HOLES DETAILED ON THIS DRAWING AND THEY MEET AASHTO'S PUBLICATION, "A GUIDE TO STANDARDIZED HIGHWAY BARRIER HARDWARE" AND "MASH" REQUIREMENTS.
- ⑦ DO NOT INSTALL W-BEAM GUARDRAIL FOR OBSTACLES WITHIN 5.5' OF THE FACE OF THE RAIL.
- ⑧ USE LOWER HOLE ON NEW CONSTRUCTION INSTALLATIONS.
- ⑨ USE 6" POSTS FOR STANDARD INSTALLATIONS.
- ⑩ APPLY CRACK SEALANT PER SECTION 707 TO FULLY COVER THE C.A.C. IN LEAVE OUT AREAS.

* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.


DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 606, 704, 707

DWG. NO. 606-05B


METAL GUARDRAIL - STEEL POSTS (MGS)

EFFECTIVE: JAN 23, 2020

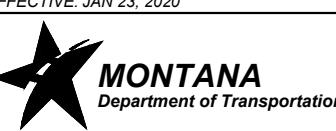

-REVISED-
JAN 15, 2026

12/12/2025 11:17 AM STDDRD606005B.DWG

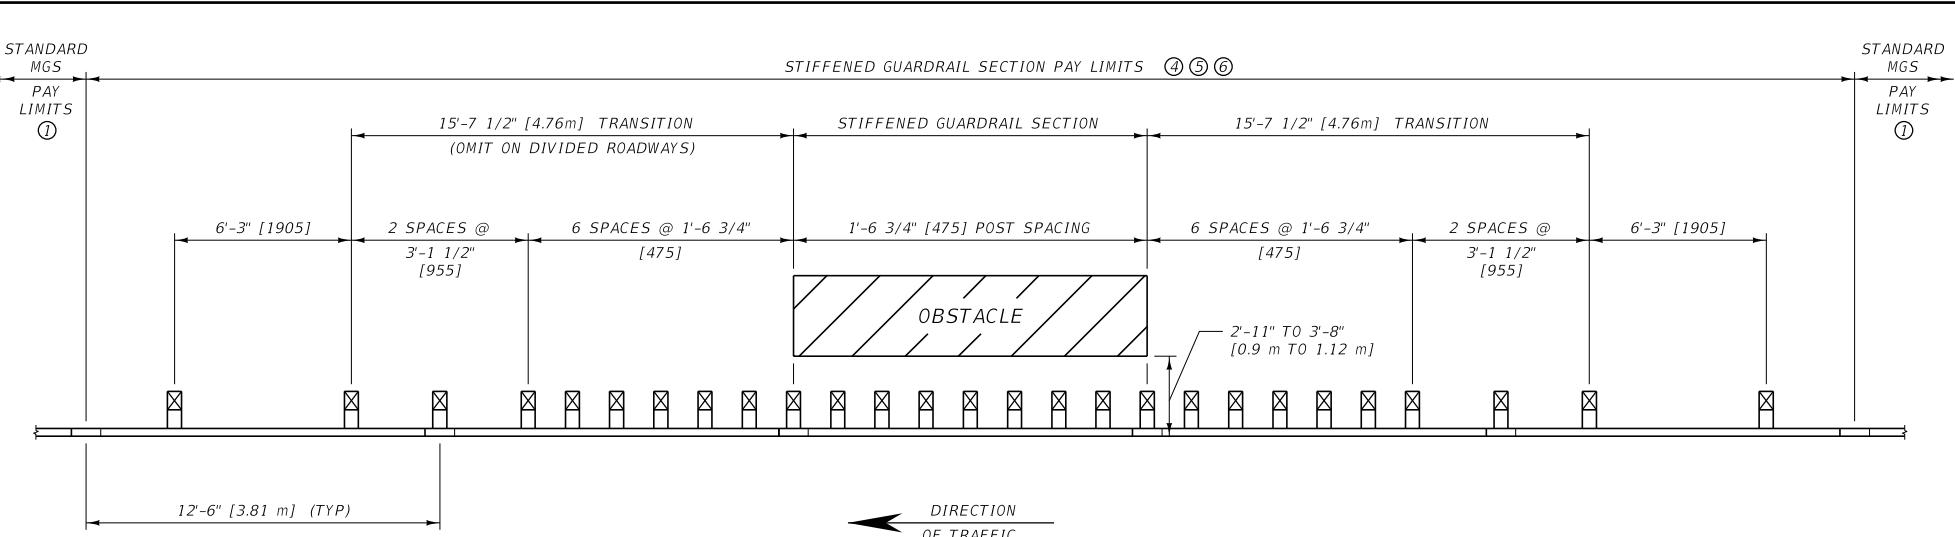

QUARTER POST SPACING

NOTES:

① SEE DTL. DWG. NO. 606-05A AND 606-05B FOR STANDARD MGS GUARDRAIL AND ASSOCIATED HARDWARE.

② OBSTACLES CLOSER TO THE FACE OF RAIL THAN THE INDICATED LIMITS REQUIRE THE USE OF A RIGID BARRIER SYSTEM WITH LITTLE TO NO DYNAMIC DEFLECTION.


③ LAP ALL RAIL IN THE DIRECTION OF ADJACENT TRAFFIC.

④ ALL POSTS AND BLOCKS ARE STANDARD DIMENSIONS AS PER DETAILED DRAWING NO. 606-05A AND 606-05B.

⑤ RAIL IS RWM08a-b*.

⑥ PAY LIMIT DEFINED BY RAILS CONTAINING A SECTION OF REDUCED POST SPACING. LIMITS SHOWN ARE FOR EXAMPLE ONLY, ACTUAL PAY LIMITS WILL DIFFER DEPENDING UPON SPLICING LOCATIONS.

* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.




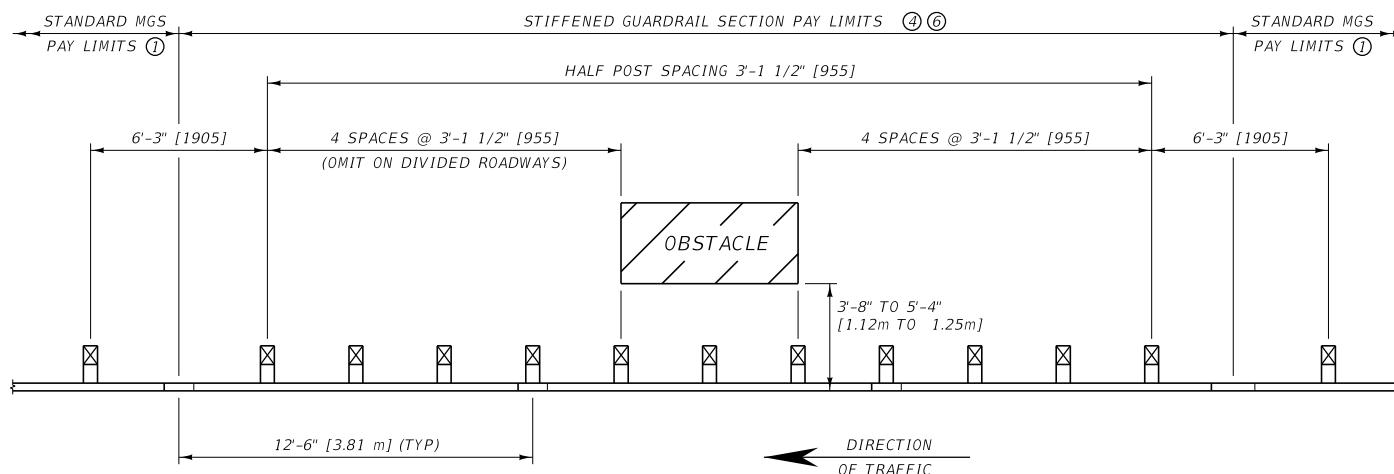


HALF POST SPACING



UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 606-07

STIFFENED GUARDRAIL SECTIONS (MGS)

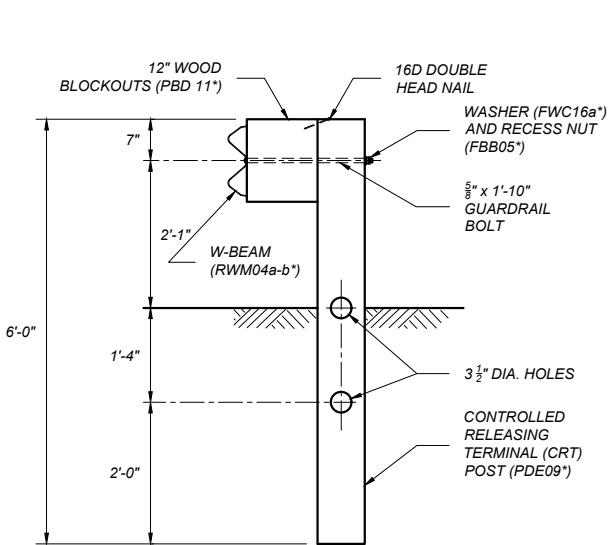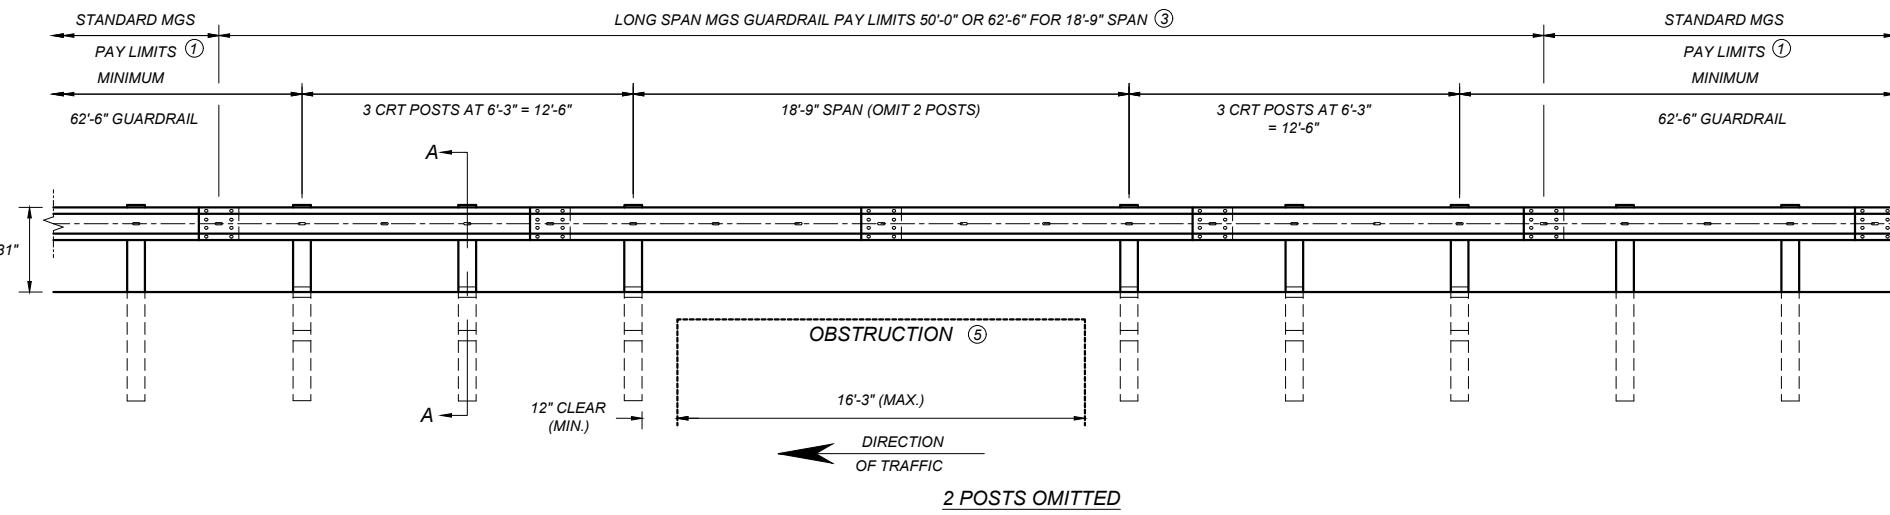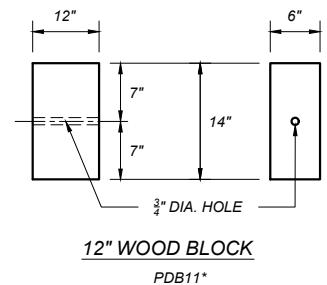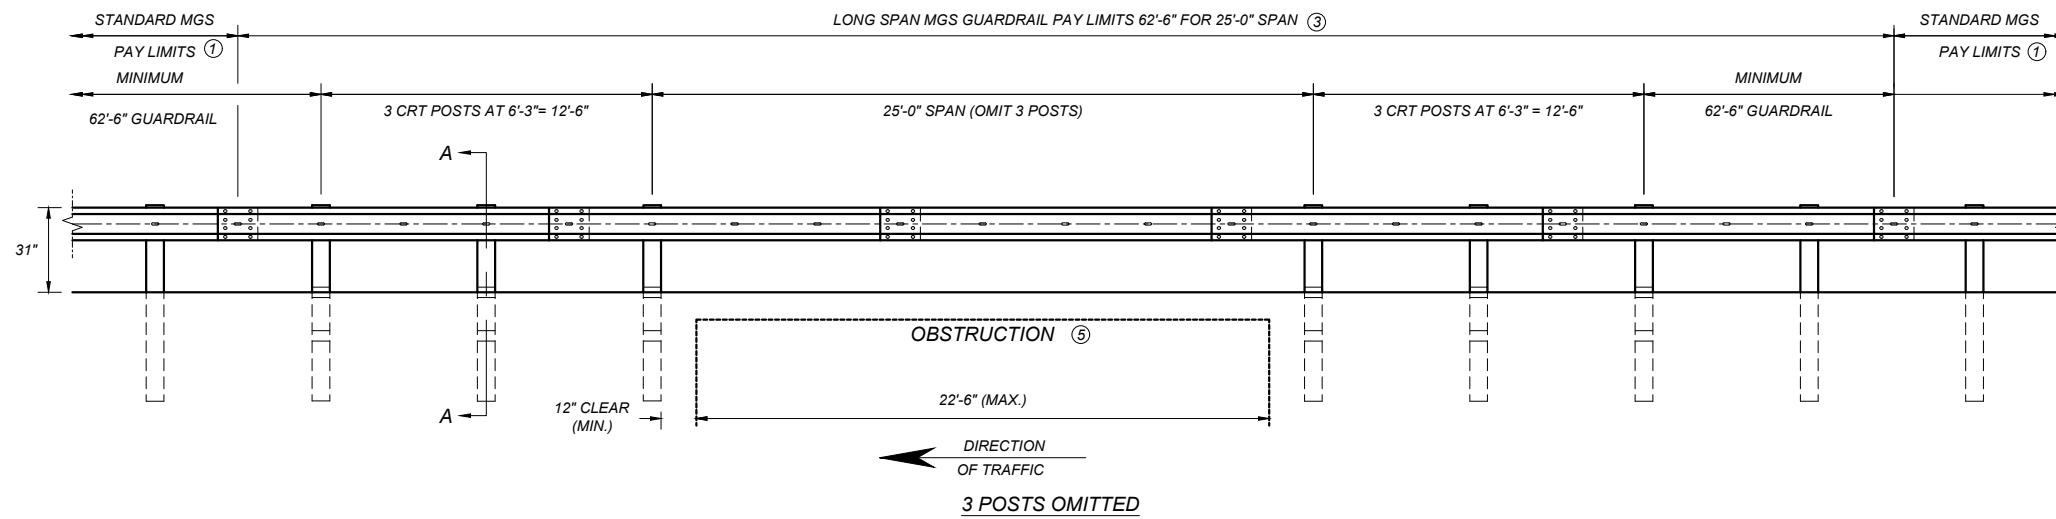

SECTION A-A

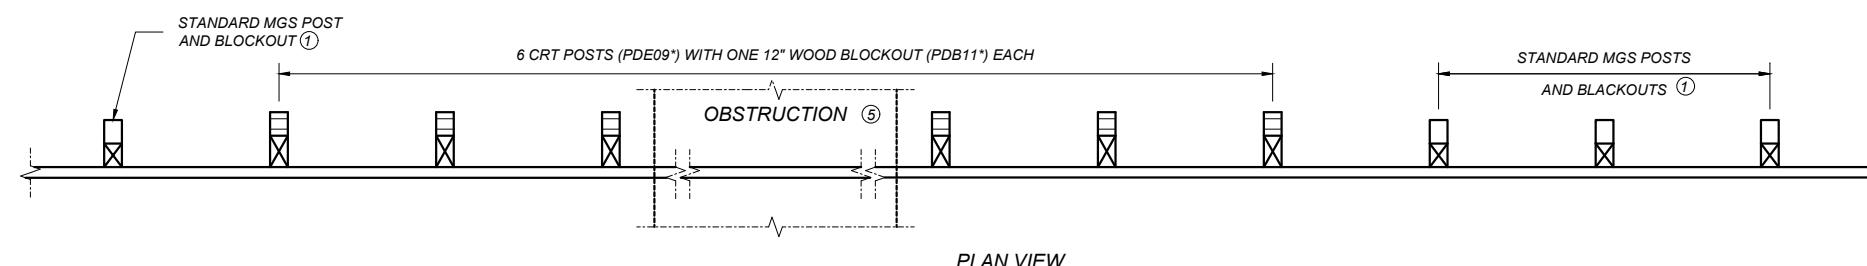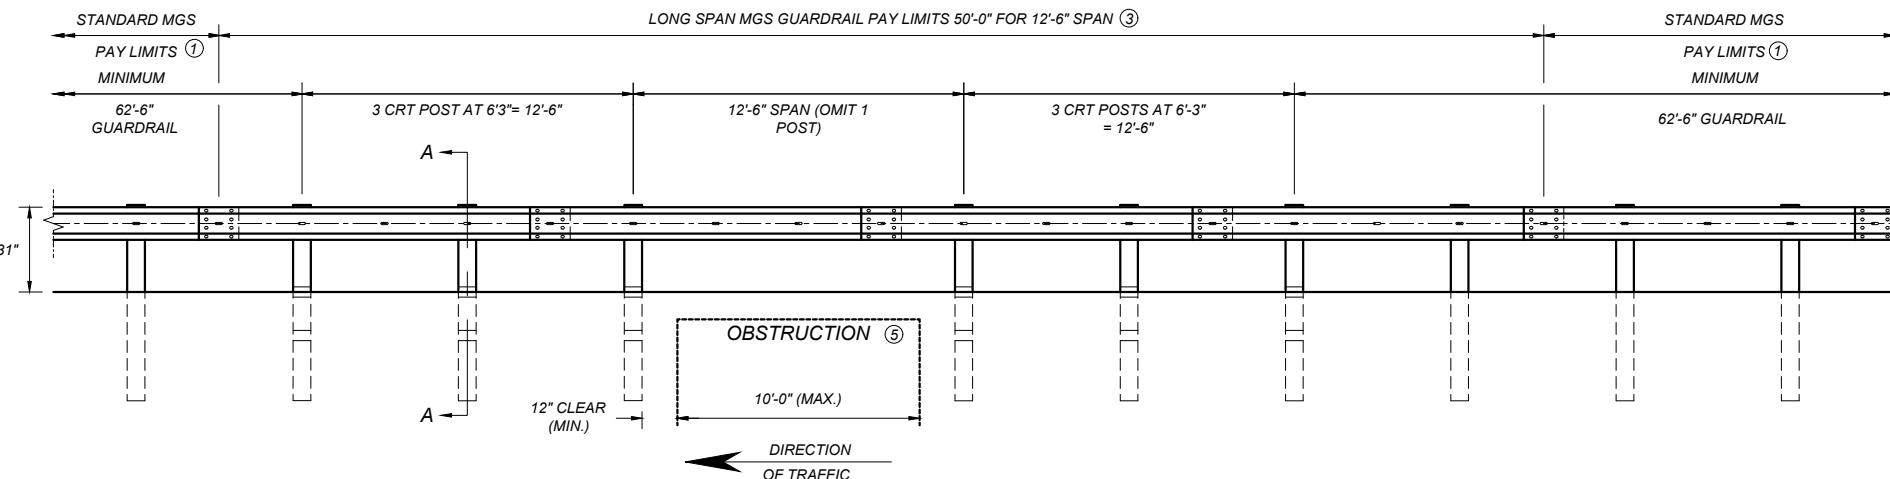

NOTES:
 ① SEE DTL. DWG. NO. 606-05A AND 606-05B FOR STANDARD MGS GUARDRAIL AND ASSOCIATED HARDWARE.

② LAP ALL RAIL IN THE DIRECTION OF ADJACENT TRAFFIC.

③ TYPICAL SPLICING LOCATIONS SHOWN, MAY VARY BASED ON ACTUAL RAIL SEGMENTS INSTALLED. PAY LIMITS NOT DEPENDENT ON SPLICE LOCATION.

④ DO NOT INSTALL MGS LONG SPAN GUARDRAIL FOR ABOVE-GRADE OBSTACLES WITHIN 9.7' OF THE FACE OF THE RAIL.

⑤ THE OBSTRUCTION (CULVERT OPENING OR EDGE OF BRIDGE DECK) MUST BE LOCATED AT OR BEYOND THE BACK OF THE CRT POSTS.

* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.

DETAILED DRAWINGS






REFERENCE DWG. NO.
STANDARD SPEC. 606-09
SECTION 606

LONG SPAN GUARDRAIL (MGS)


EFFECTIVE: JAN 23, 2020



REVISED--
JAN 15, 2026

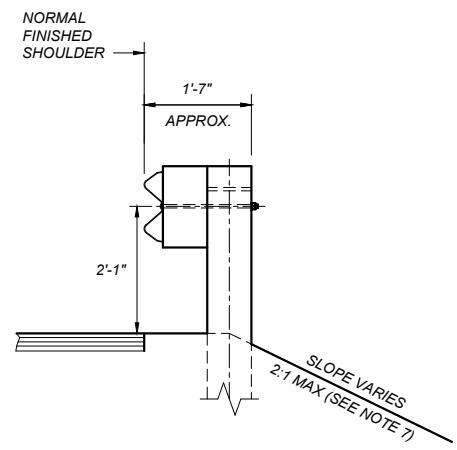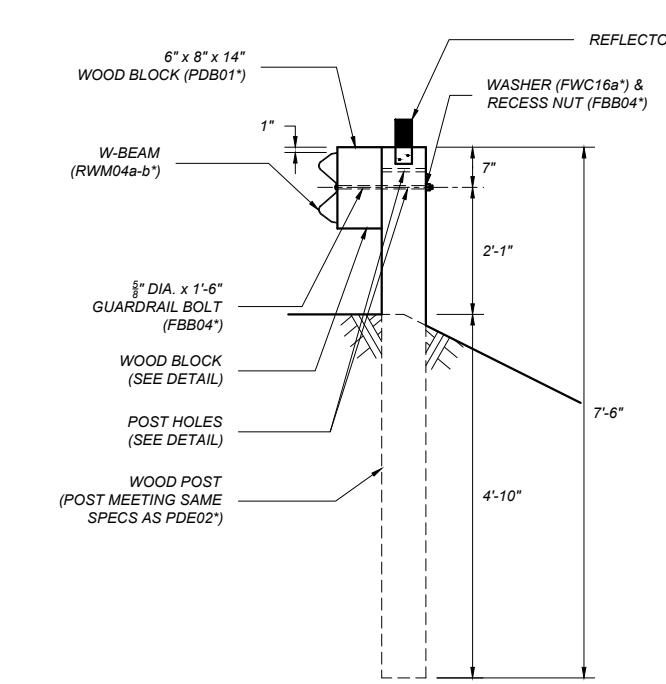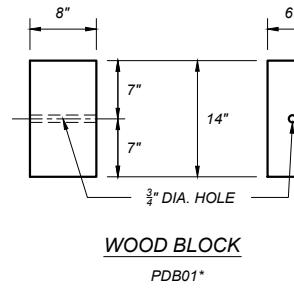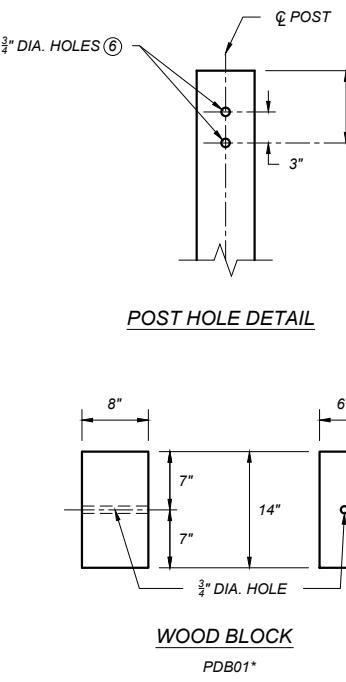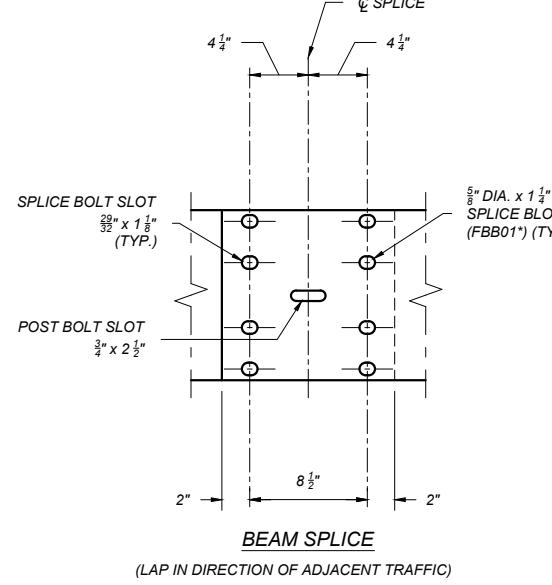


NOTE:
THIS GUARDRAIL SYSTEM IS USED WHEN
THE 2'-0" WIDENING BEHIND THE
POSTS CANNOT BE PROVIDED, AS PER
DTL. DWG. NO. 606-05A & 606-05B.

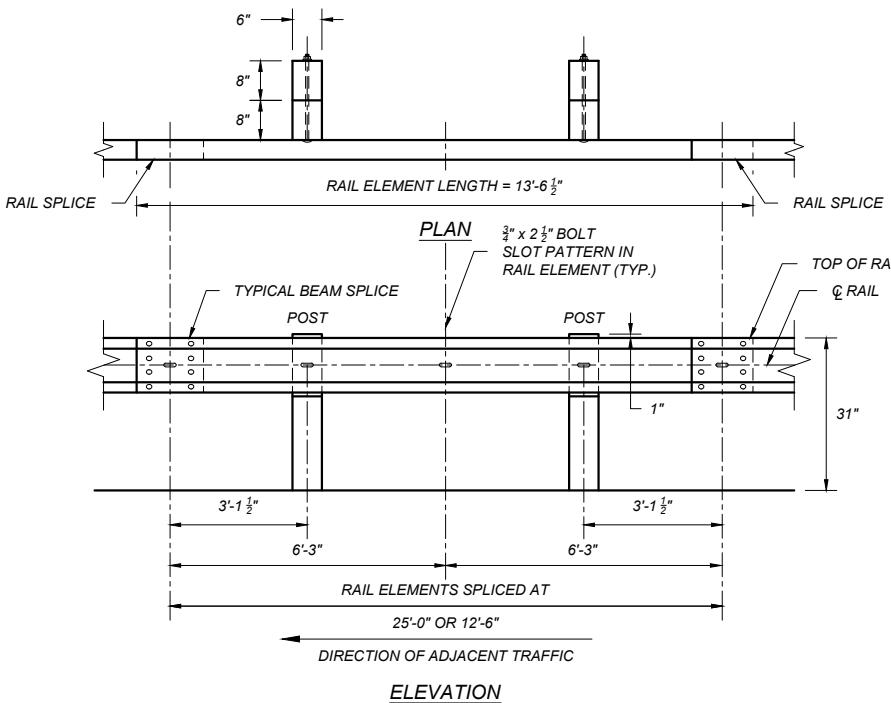

NOTES:

1. INSTALL ALL BOLTS WITH HEADS ON TRAFFIC SIDE OF INSTALLATION.
2. USE WOOD BLOCKS OR OTHER "MASH" APPROVED BLOCKS. AFFIX BLOCKS TO POSTS WITH TWO 16 PENNY GALV. NAILS OR 14 GAUGE WIRE WRAP.
3. ATTACH REFLECTORS TO POSTS EVERY 25', INCLUDING TERMINAL SECTIONS, WITH THE REFLECTORIZED SURFACE FACING ADJACENT TRAFFIC. FABRICATE REFLECTORS FROM 0.063" THICK ALUMINUM ALLOY PER SECTION 704 OR PLASTIC REFLECTORS WITH A URETHANE HINGE. FASTEN REFLECTORS TO WOOD POST USING TWO 16 PENNY RING-SHANKED GALVANIZED NAILS AND TWO 3/16" DIA. WASHERS IN PRE-DRILLED HOLES.
4. ON EXISTING GUARDRAIL INSTALLATIONS, THE MINIMUM RAIL HEIGHT IS 27 3/4".
5. DO NOT INSTALL LONG POST W-BEAM GUARDRAIL FOR OBSTACLES WITHIN 5.9' OF THE FACE OF THE RAIL.
6. USE LOWER HOLE ON NEW CONSTRUCTION INSTALLATIONS.
7. BEGIN INSLOPE BREAK AT CENTER OF POST.

* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.






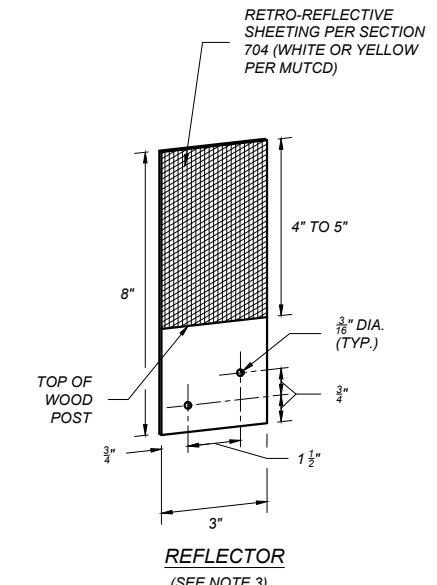


DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 606, 704	DWG. NO. 606-11A

**METAL GUARDRAIL - LONG
POSTS - WOOD (MGS)**

EFFECTIVE: JAN 23, 2020





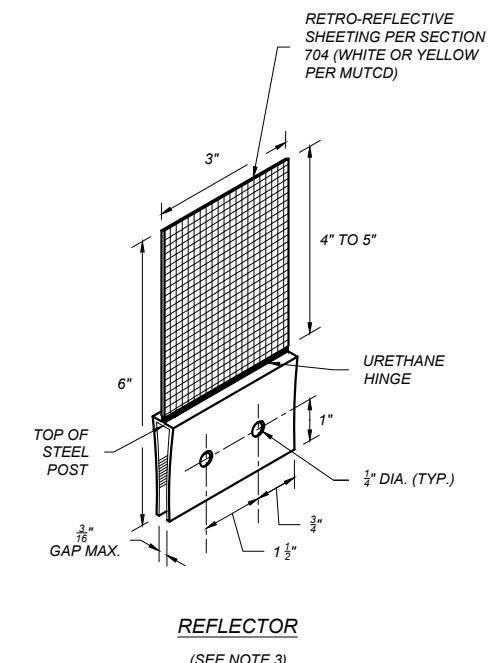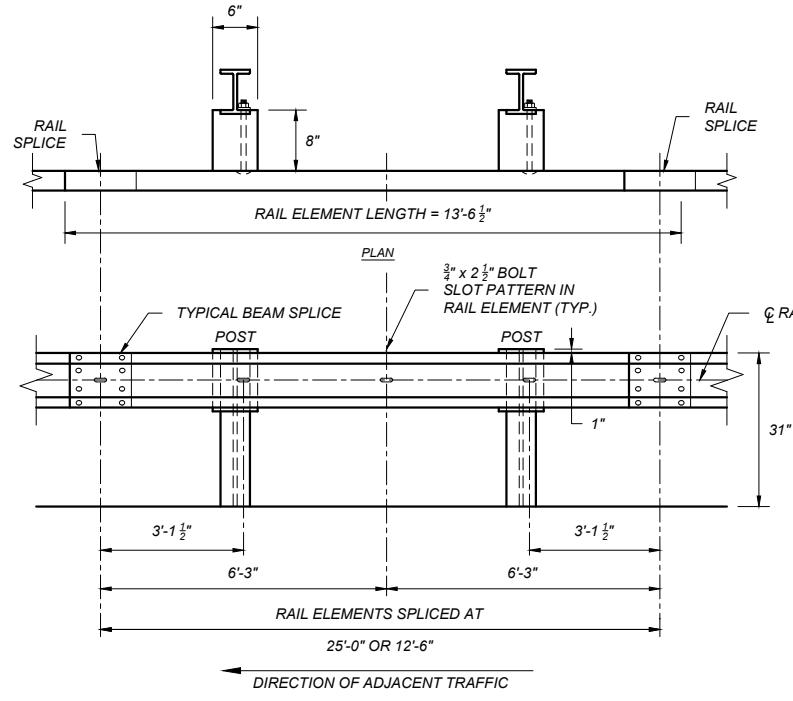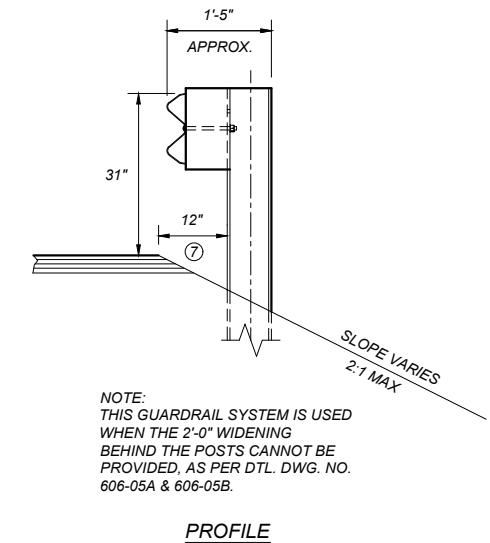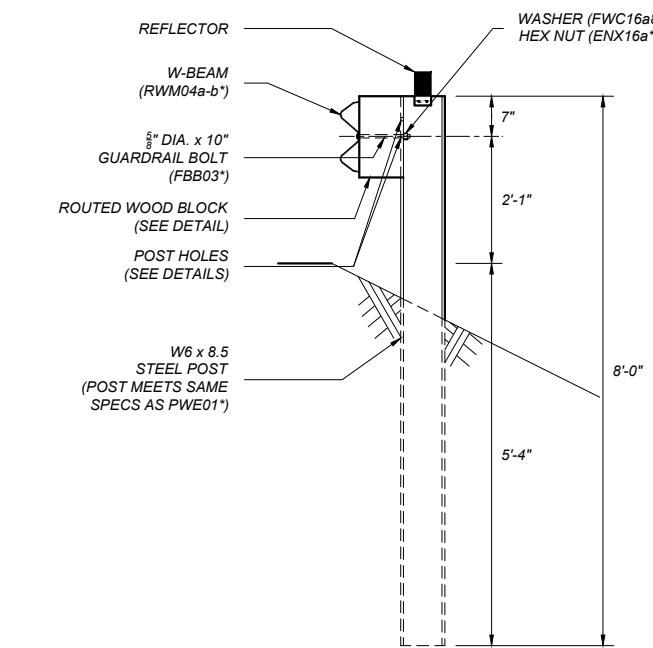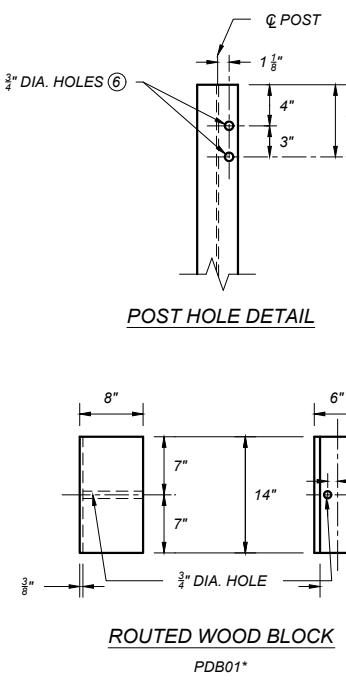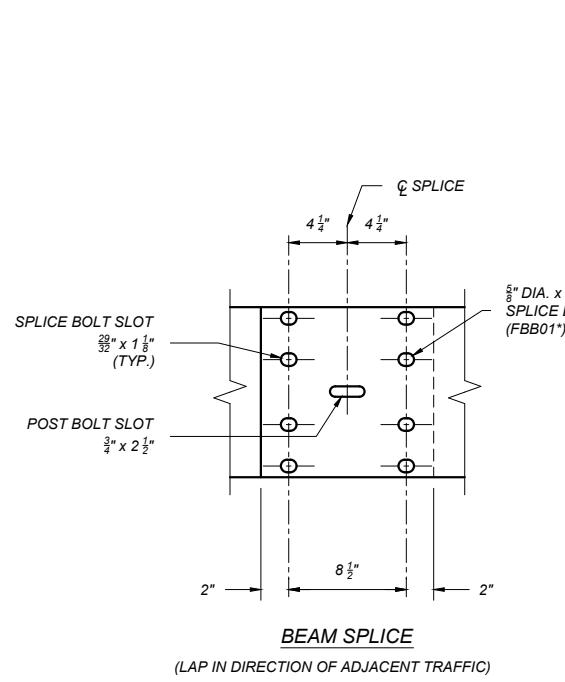

REFERENCE STANDARD SPEC.	DWG. NO.
SECTION 606, 704	606-11B

METAL GUARDRAIL - LONG POSTS - STEEL (MGS)

EFFECTIVE: JAN 23, 2020

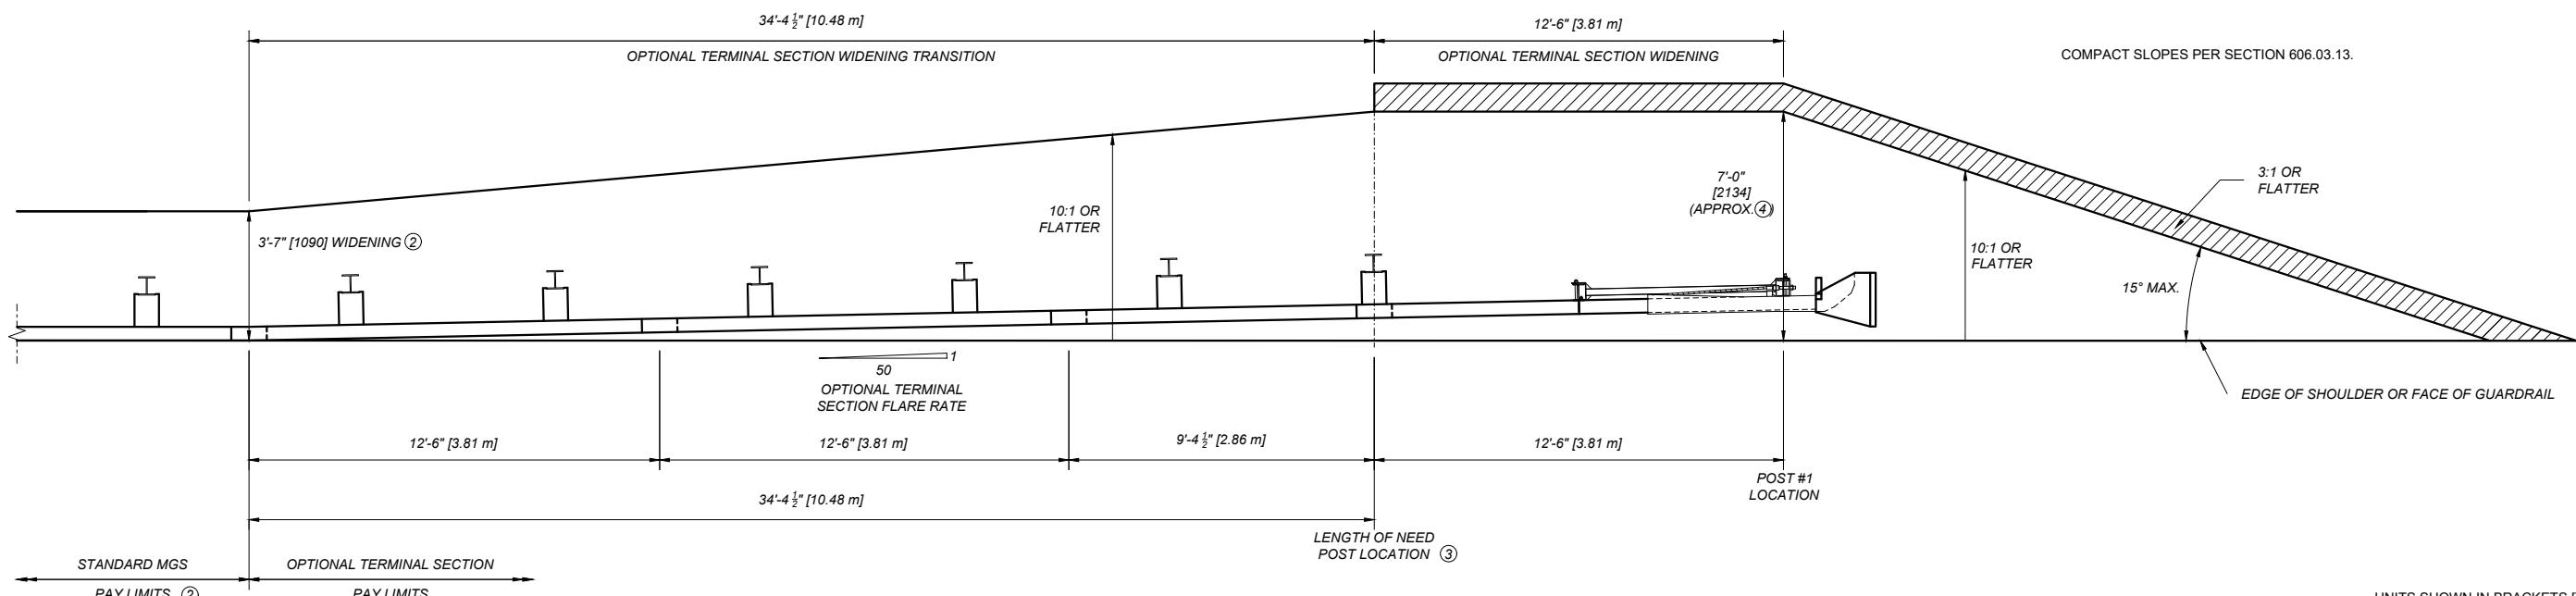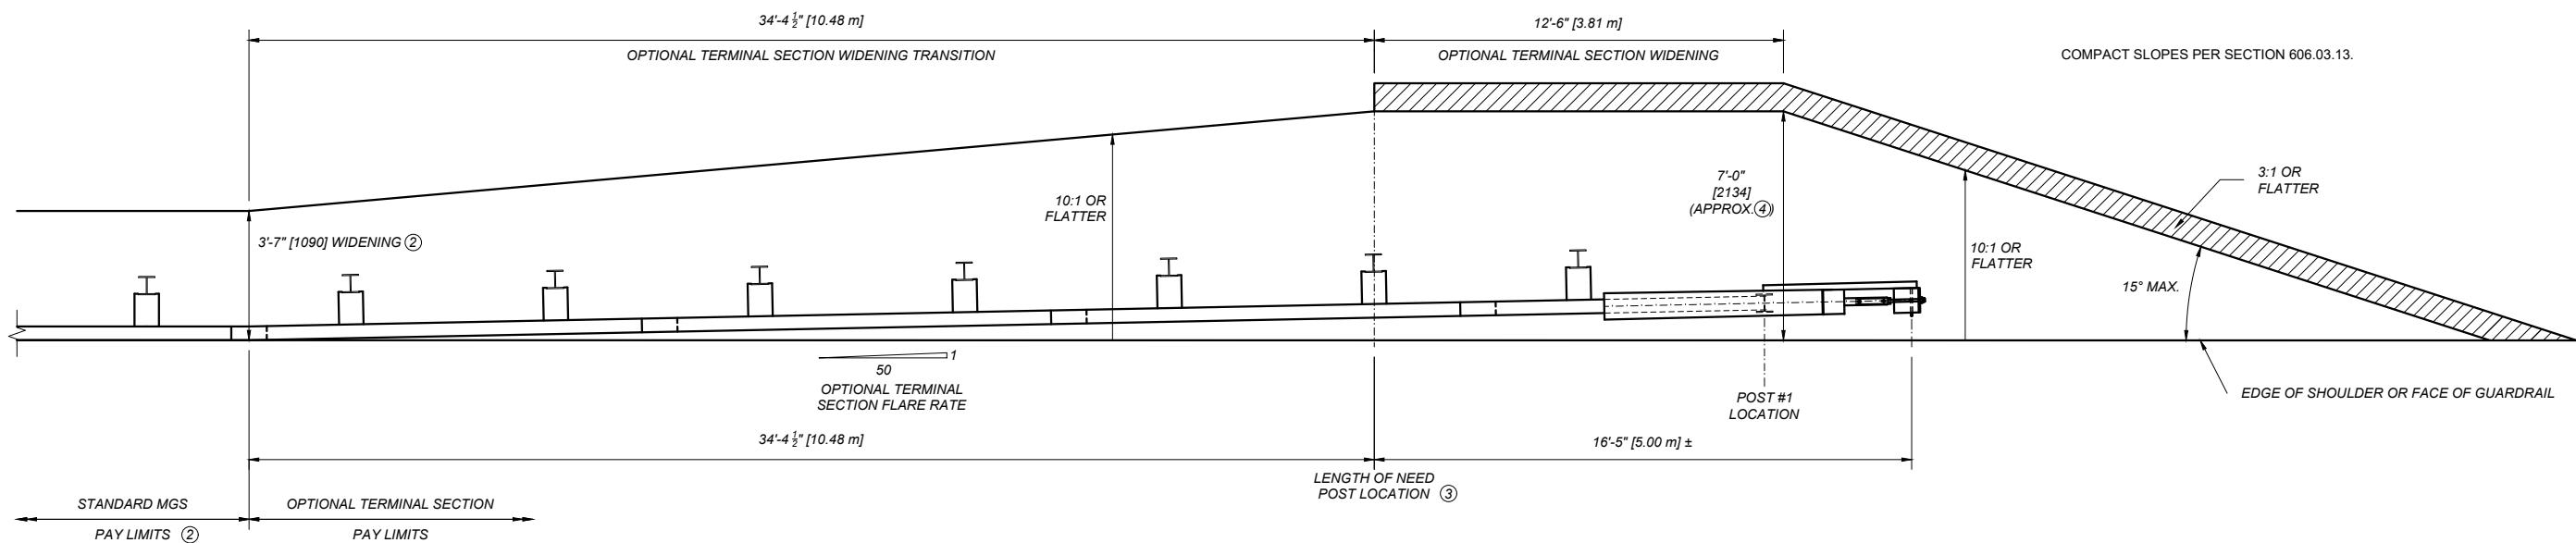

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

ROAD SYSTEMS MSKT WITH 9'-4 1/2" RAIL PANEL ①

① OPTIONAL TERMINAL SECTION SYSTEMS VARY. REFER TO
MANUFACTURER'S DETAIL AND ASSEMBLY INSTRUCTIONS.

② SEE DTL. DWG. NO. 606-05A AND 606-05B FOR MGS GUARDRAIL.
SEE DTL. DWG. NO. 606-20 IF CONNECTING TO EXISTING RAIL
THAT IS NOT WITHIN THE MANUFACTURER'S HEIGHT TOLERANCE.

③ LENGTH OF NEED POST LOCATION EQUALS STATION LIMITS
INDICATED IN THE PLANS.

④ 7'-0" [2.13m] WIDENING DIMENSION ALLOWS FOR OPTIONAL TERMINAL
SECTION FLARE AND SYSTEM WIDTH. A MINIMUM WIDENING
DISTANCE OF 5'-0" [1.52m] IS REQUIRED BEHIND POST LOCATION #1.

DETAILED DRAWINGS


REFERENCE DWG. NO.
STANDARD SPEC. 606-13
SECTION 606, 203


MASH OPTIONAL TERMINAL SECTIONS

EFFECTIVE: JAN 23, 2020




-REVISED--
JUN 27, 2024

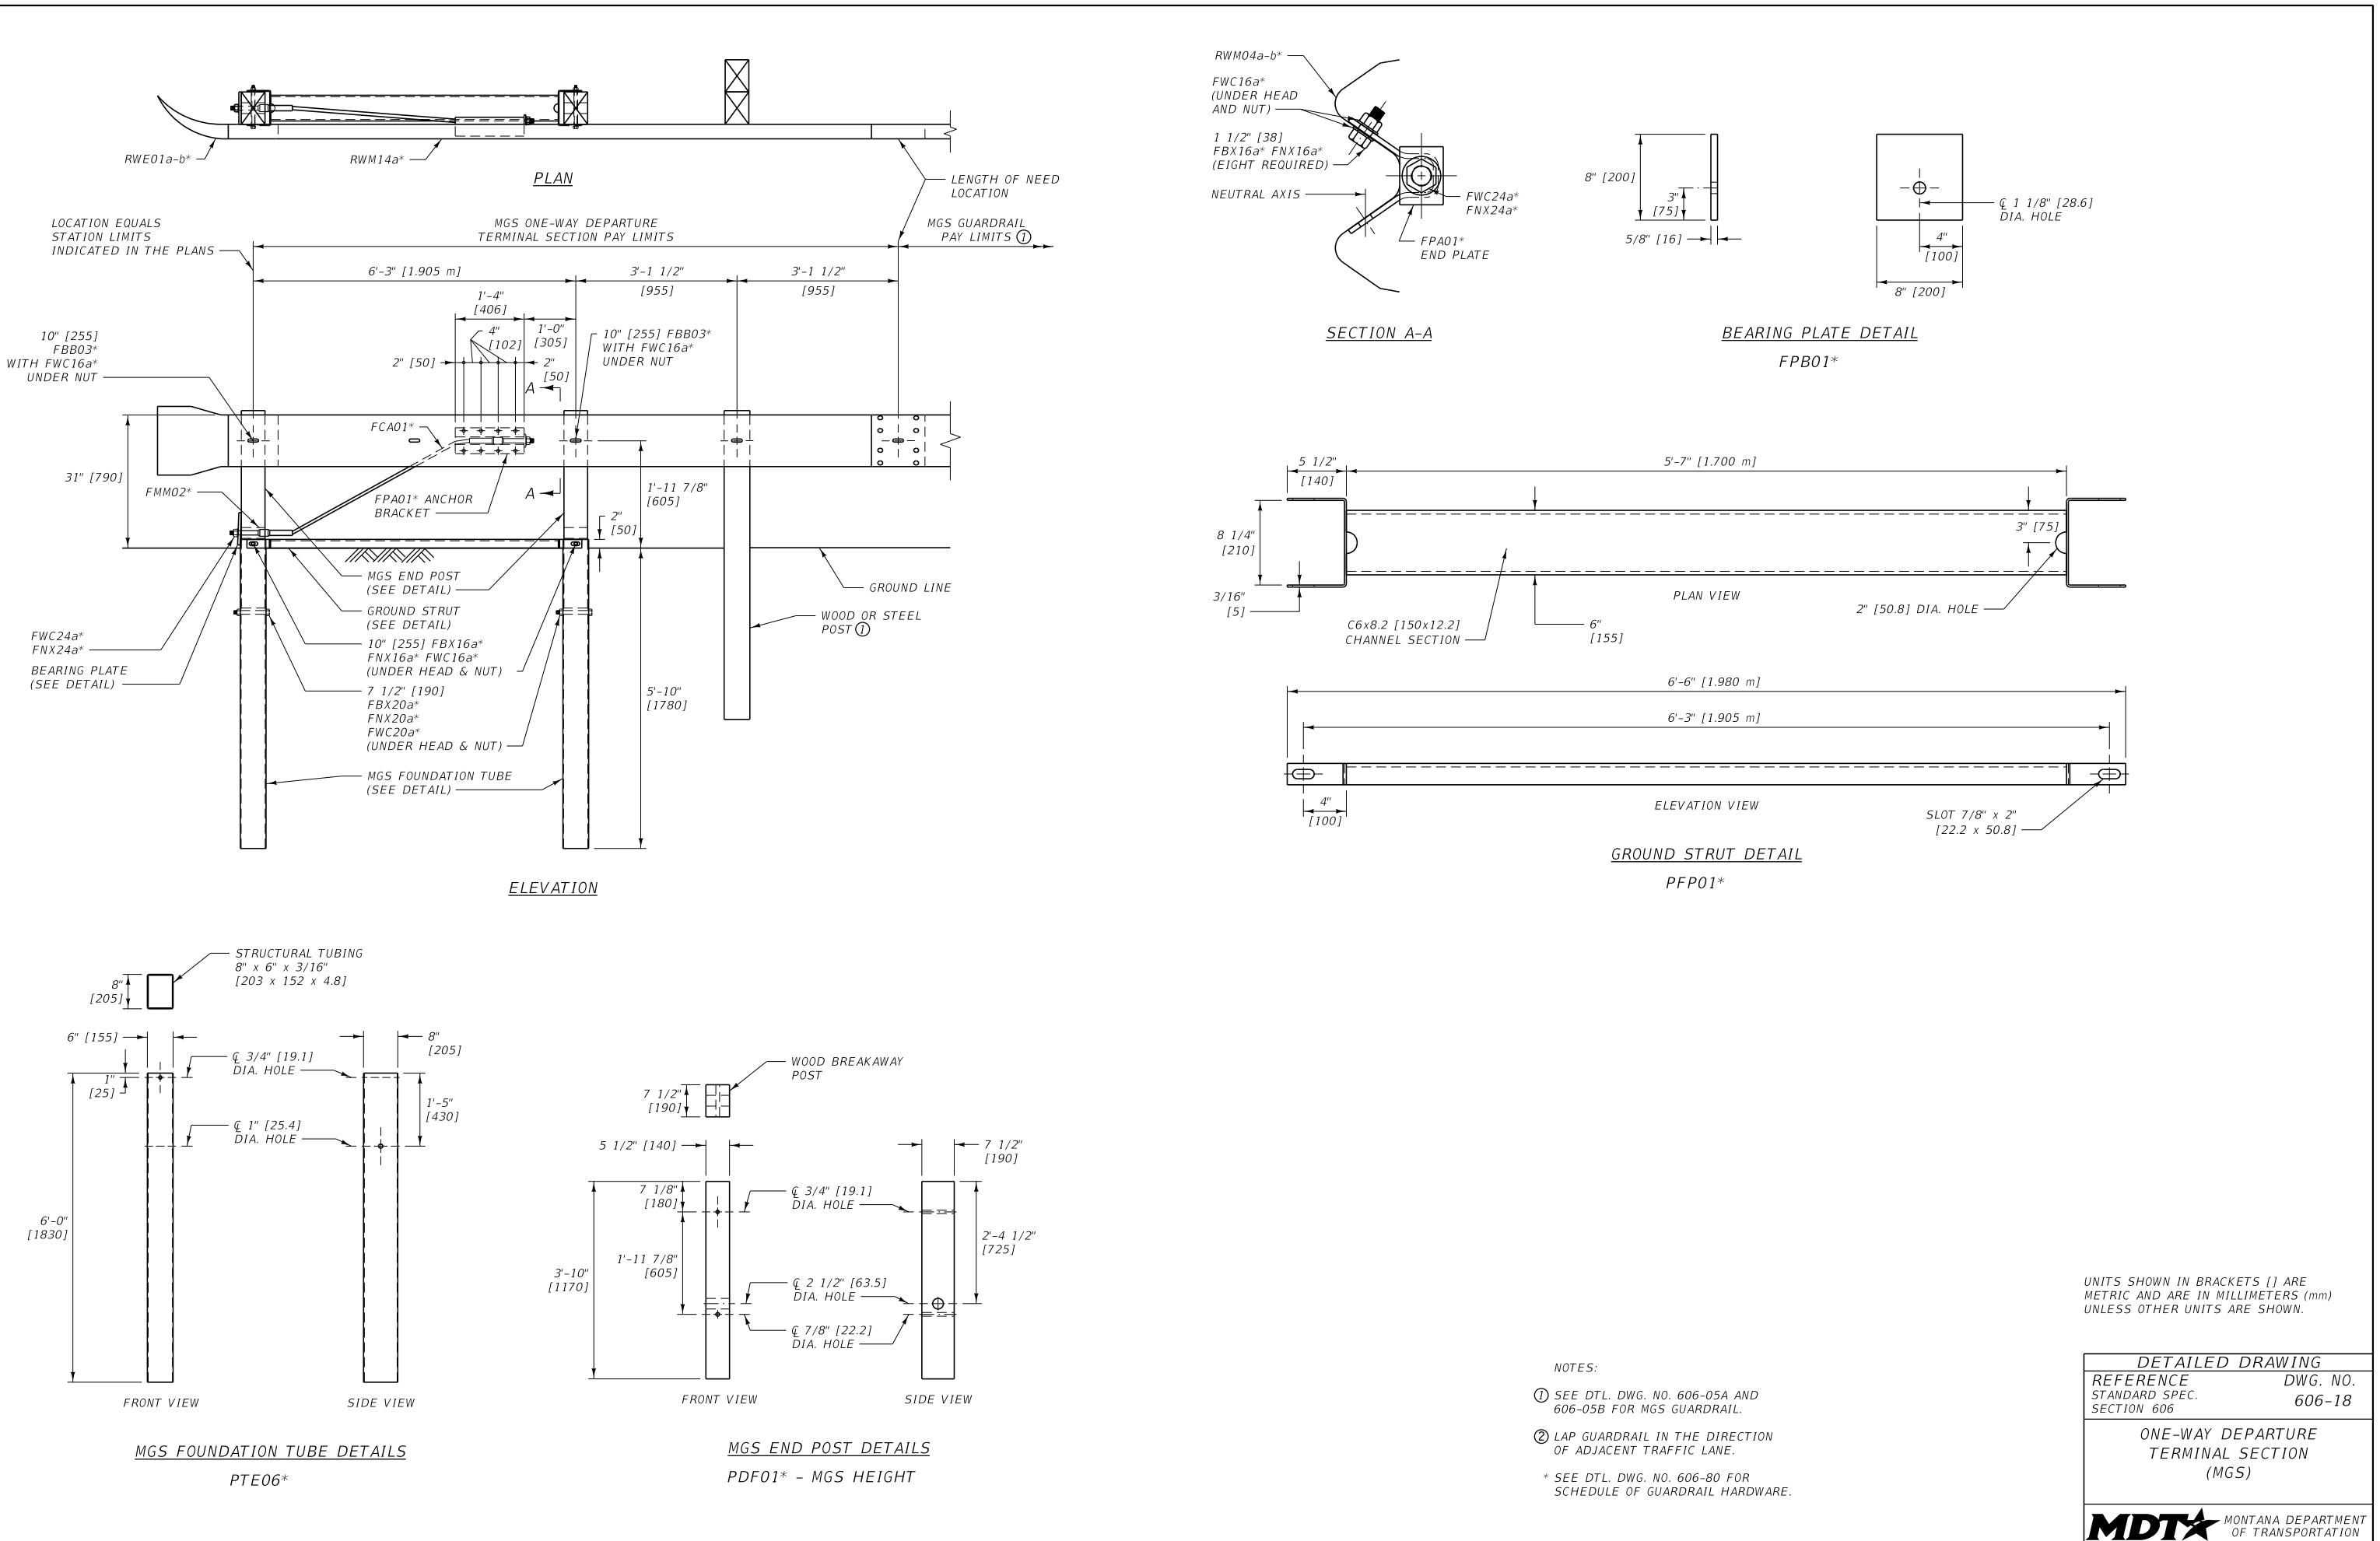

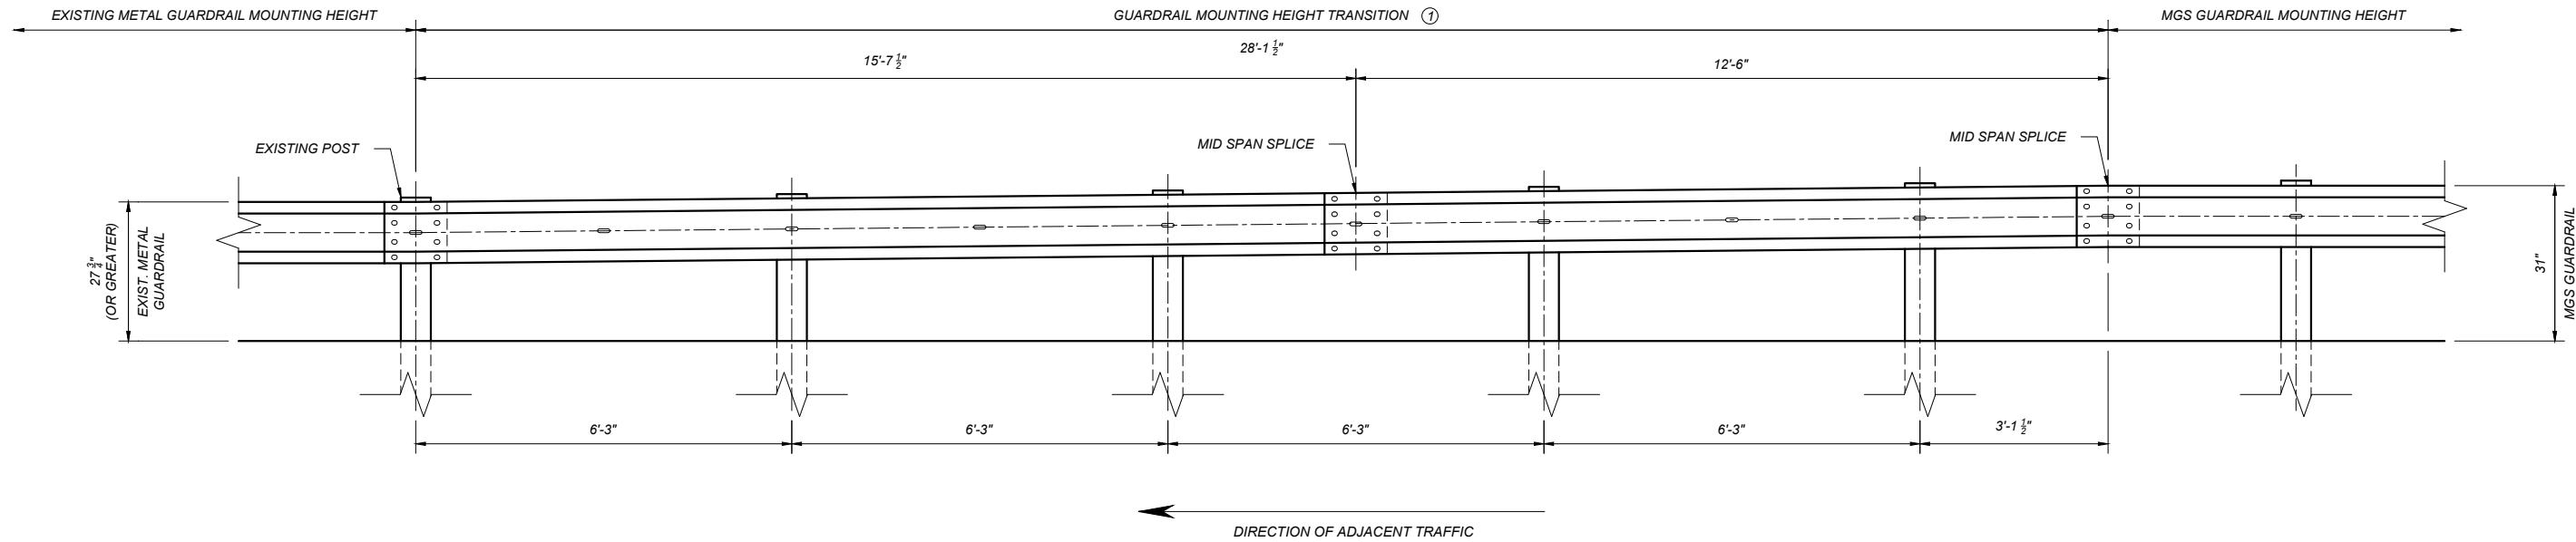

HEIGHT TRANSITION DETAIL - IRREGULAR RAIL OPTION
(TRANSITION FROM 27 3/4" (OR GREATER) TO 31" GUARDRAIL MOUNTING HEIGHT)

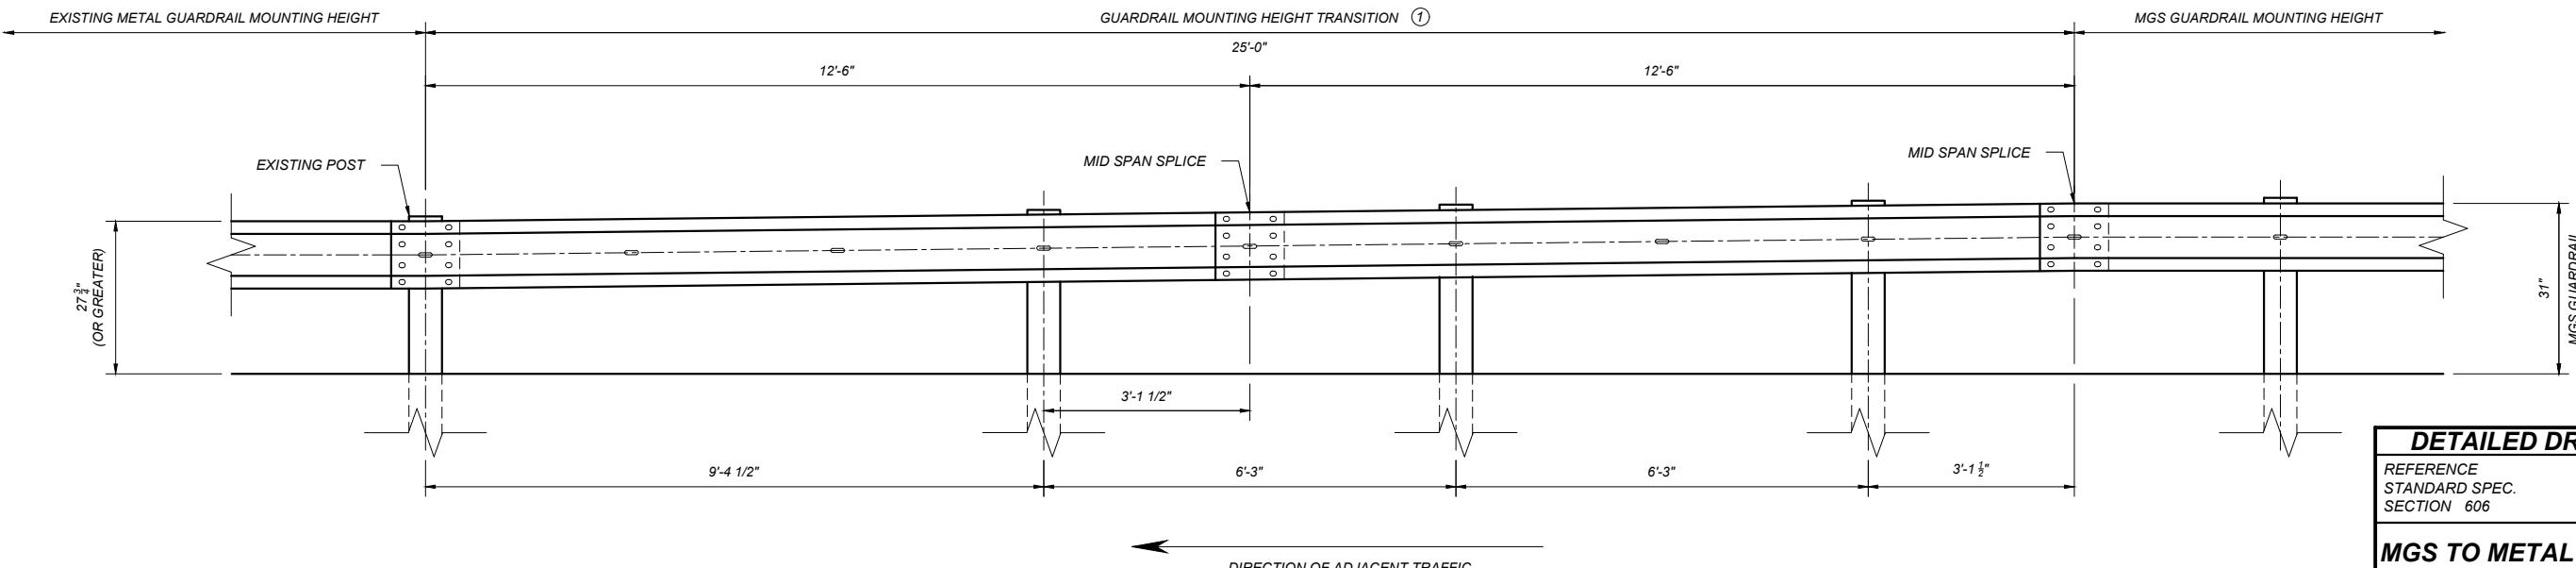

NOTES:

① THE MGS TO METAL GUARDRAIL TRANSITION IS PAID FOR AS LINEAR FEET OF MGS GUARDRAIL.

② SEE DTL DWG. NO. 606-05A, 606-05B, 606-11A, AND 606-11B FOR MGS GUARDRAIL AND ASSOCIATED HARDWARE.

③ LAP ALL W-BEAM RAIL IN THE DIRECTION OF ADJACENT TRAFFIC.

HEIGHT TRANSITION DETAIL - IRREGULAR POST SPACING OPTION
(TRANSITION FROM 27 3/4" (OR GREATER) TO 31" GUARDRAIL MOUNTING HEIGHT)


DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 606	DWG. NO. 606-20


MGS TO METAL GUARDRAIL TRANSITION


EFFECTIVE: JAN 23, 2020










-REVISED-
JAN 15, 2026

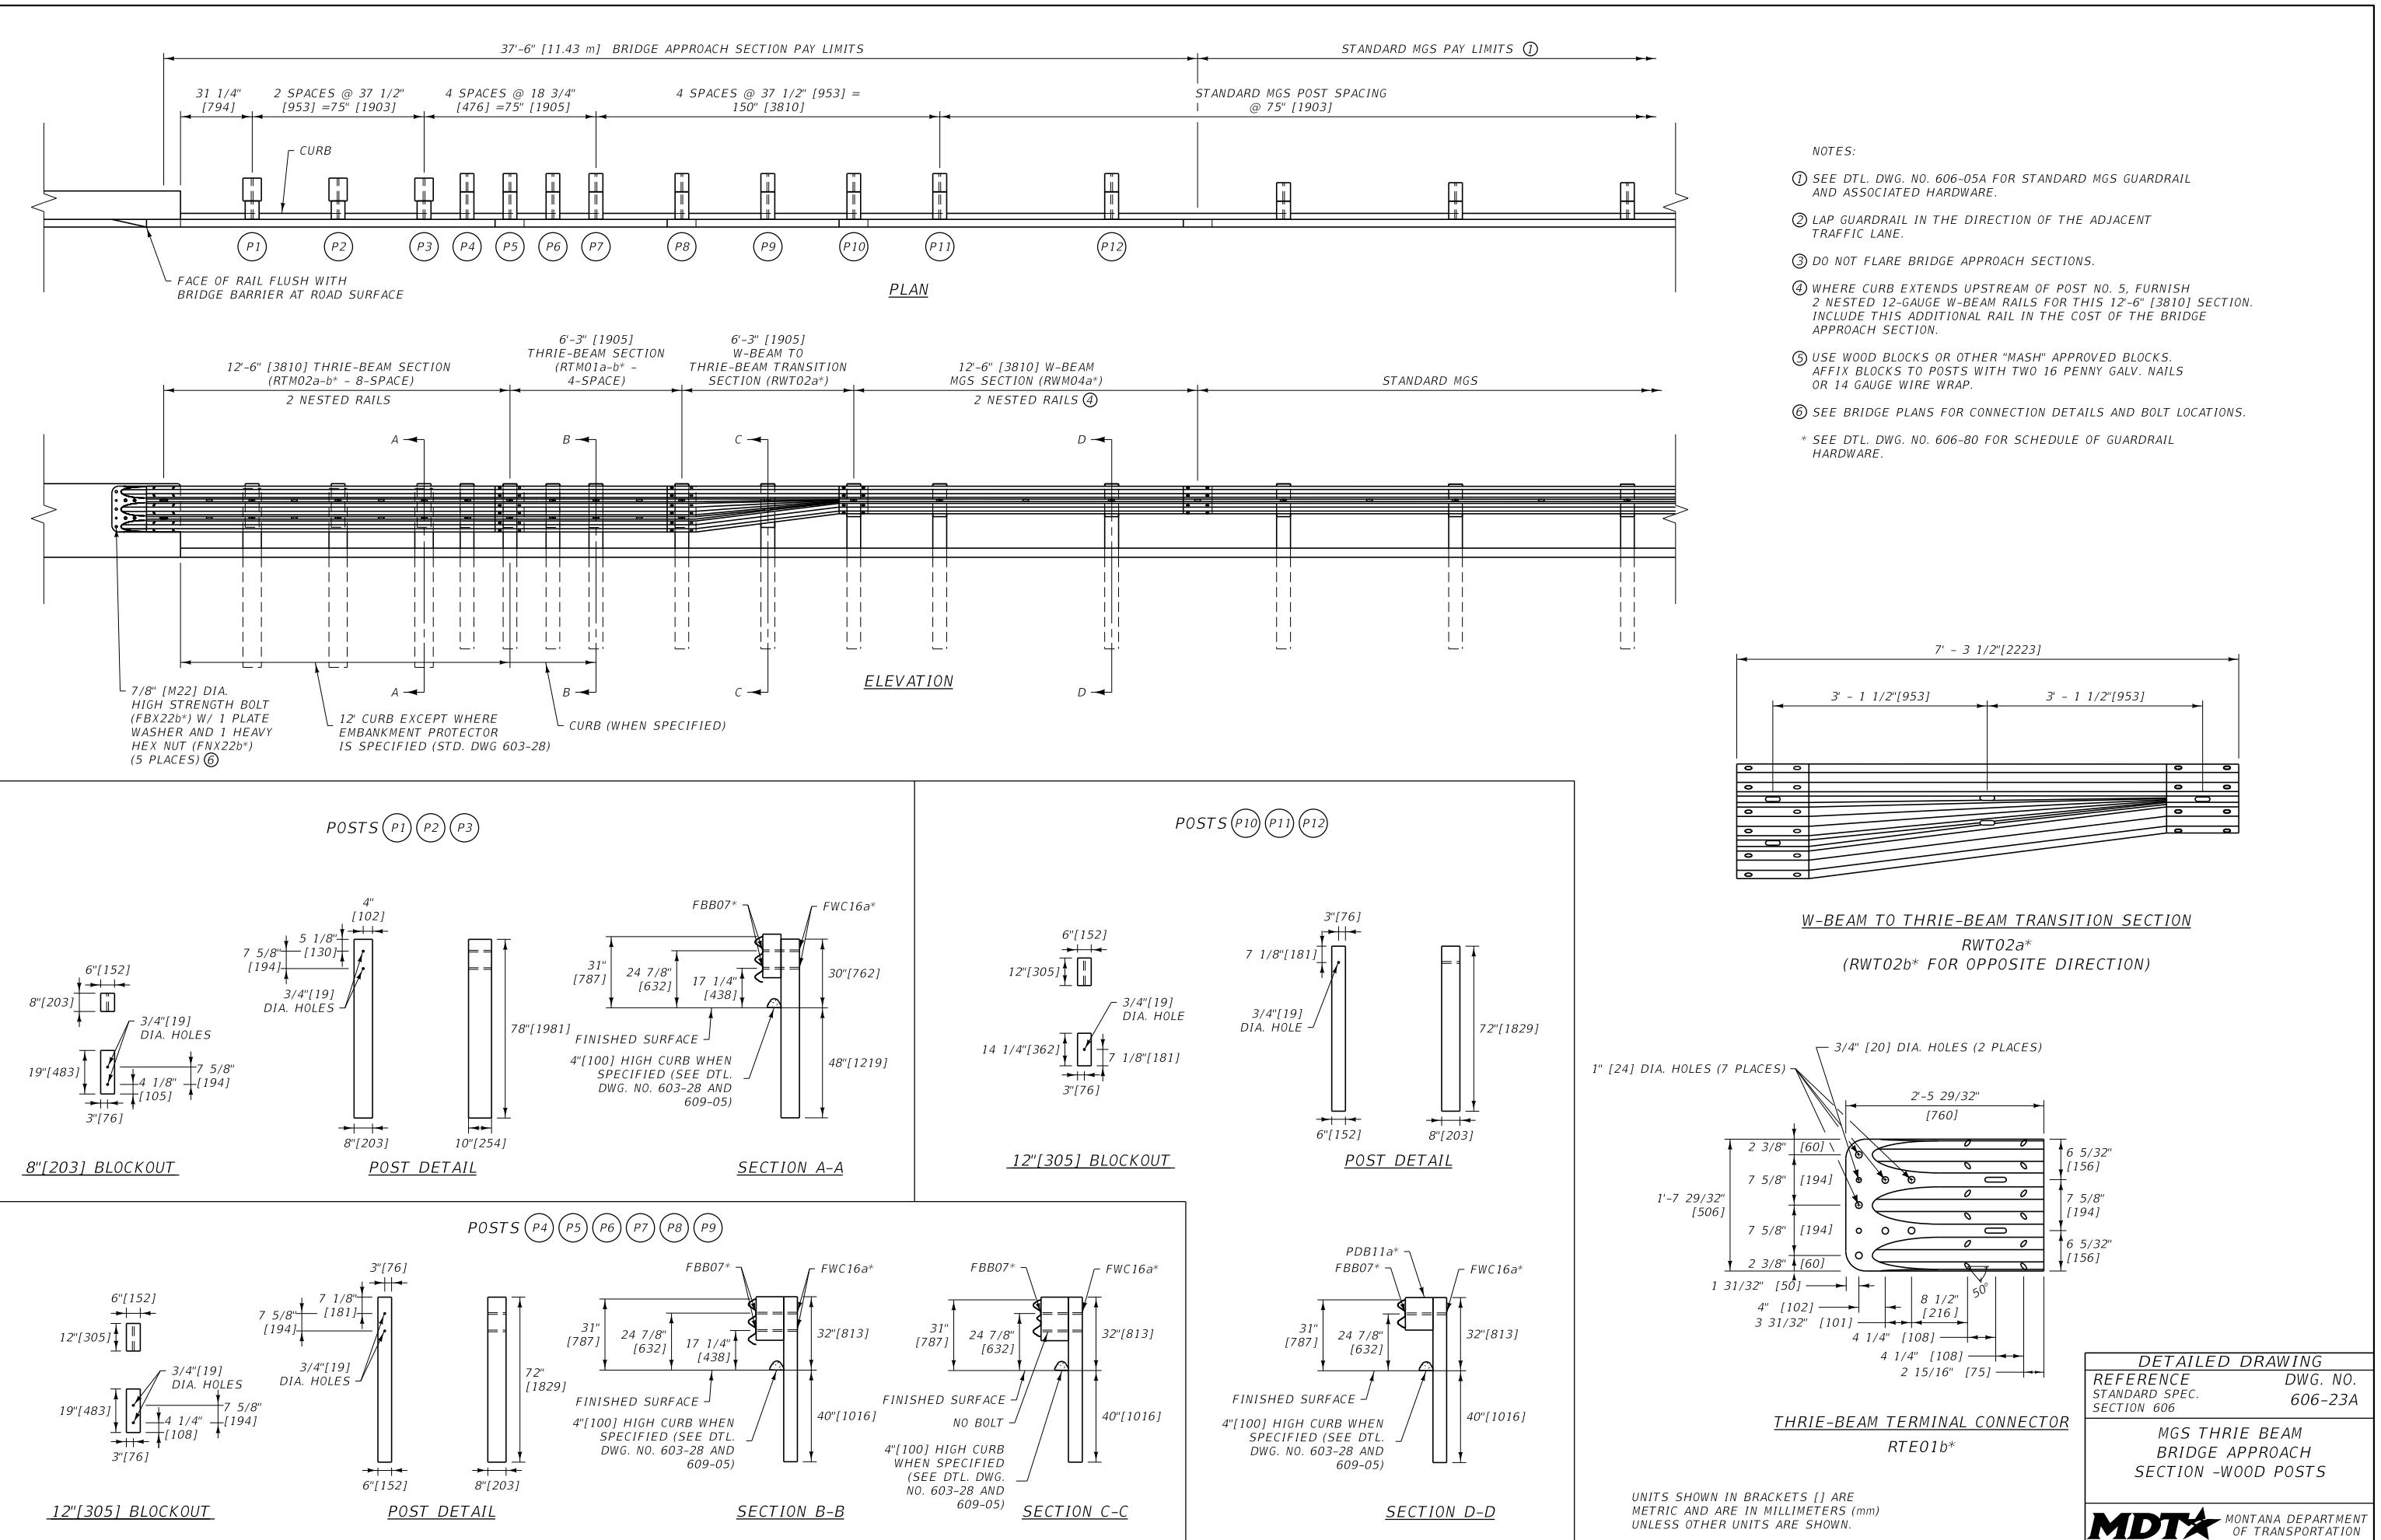

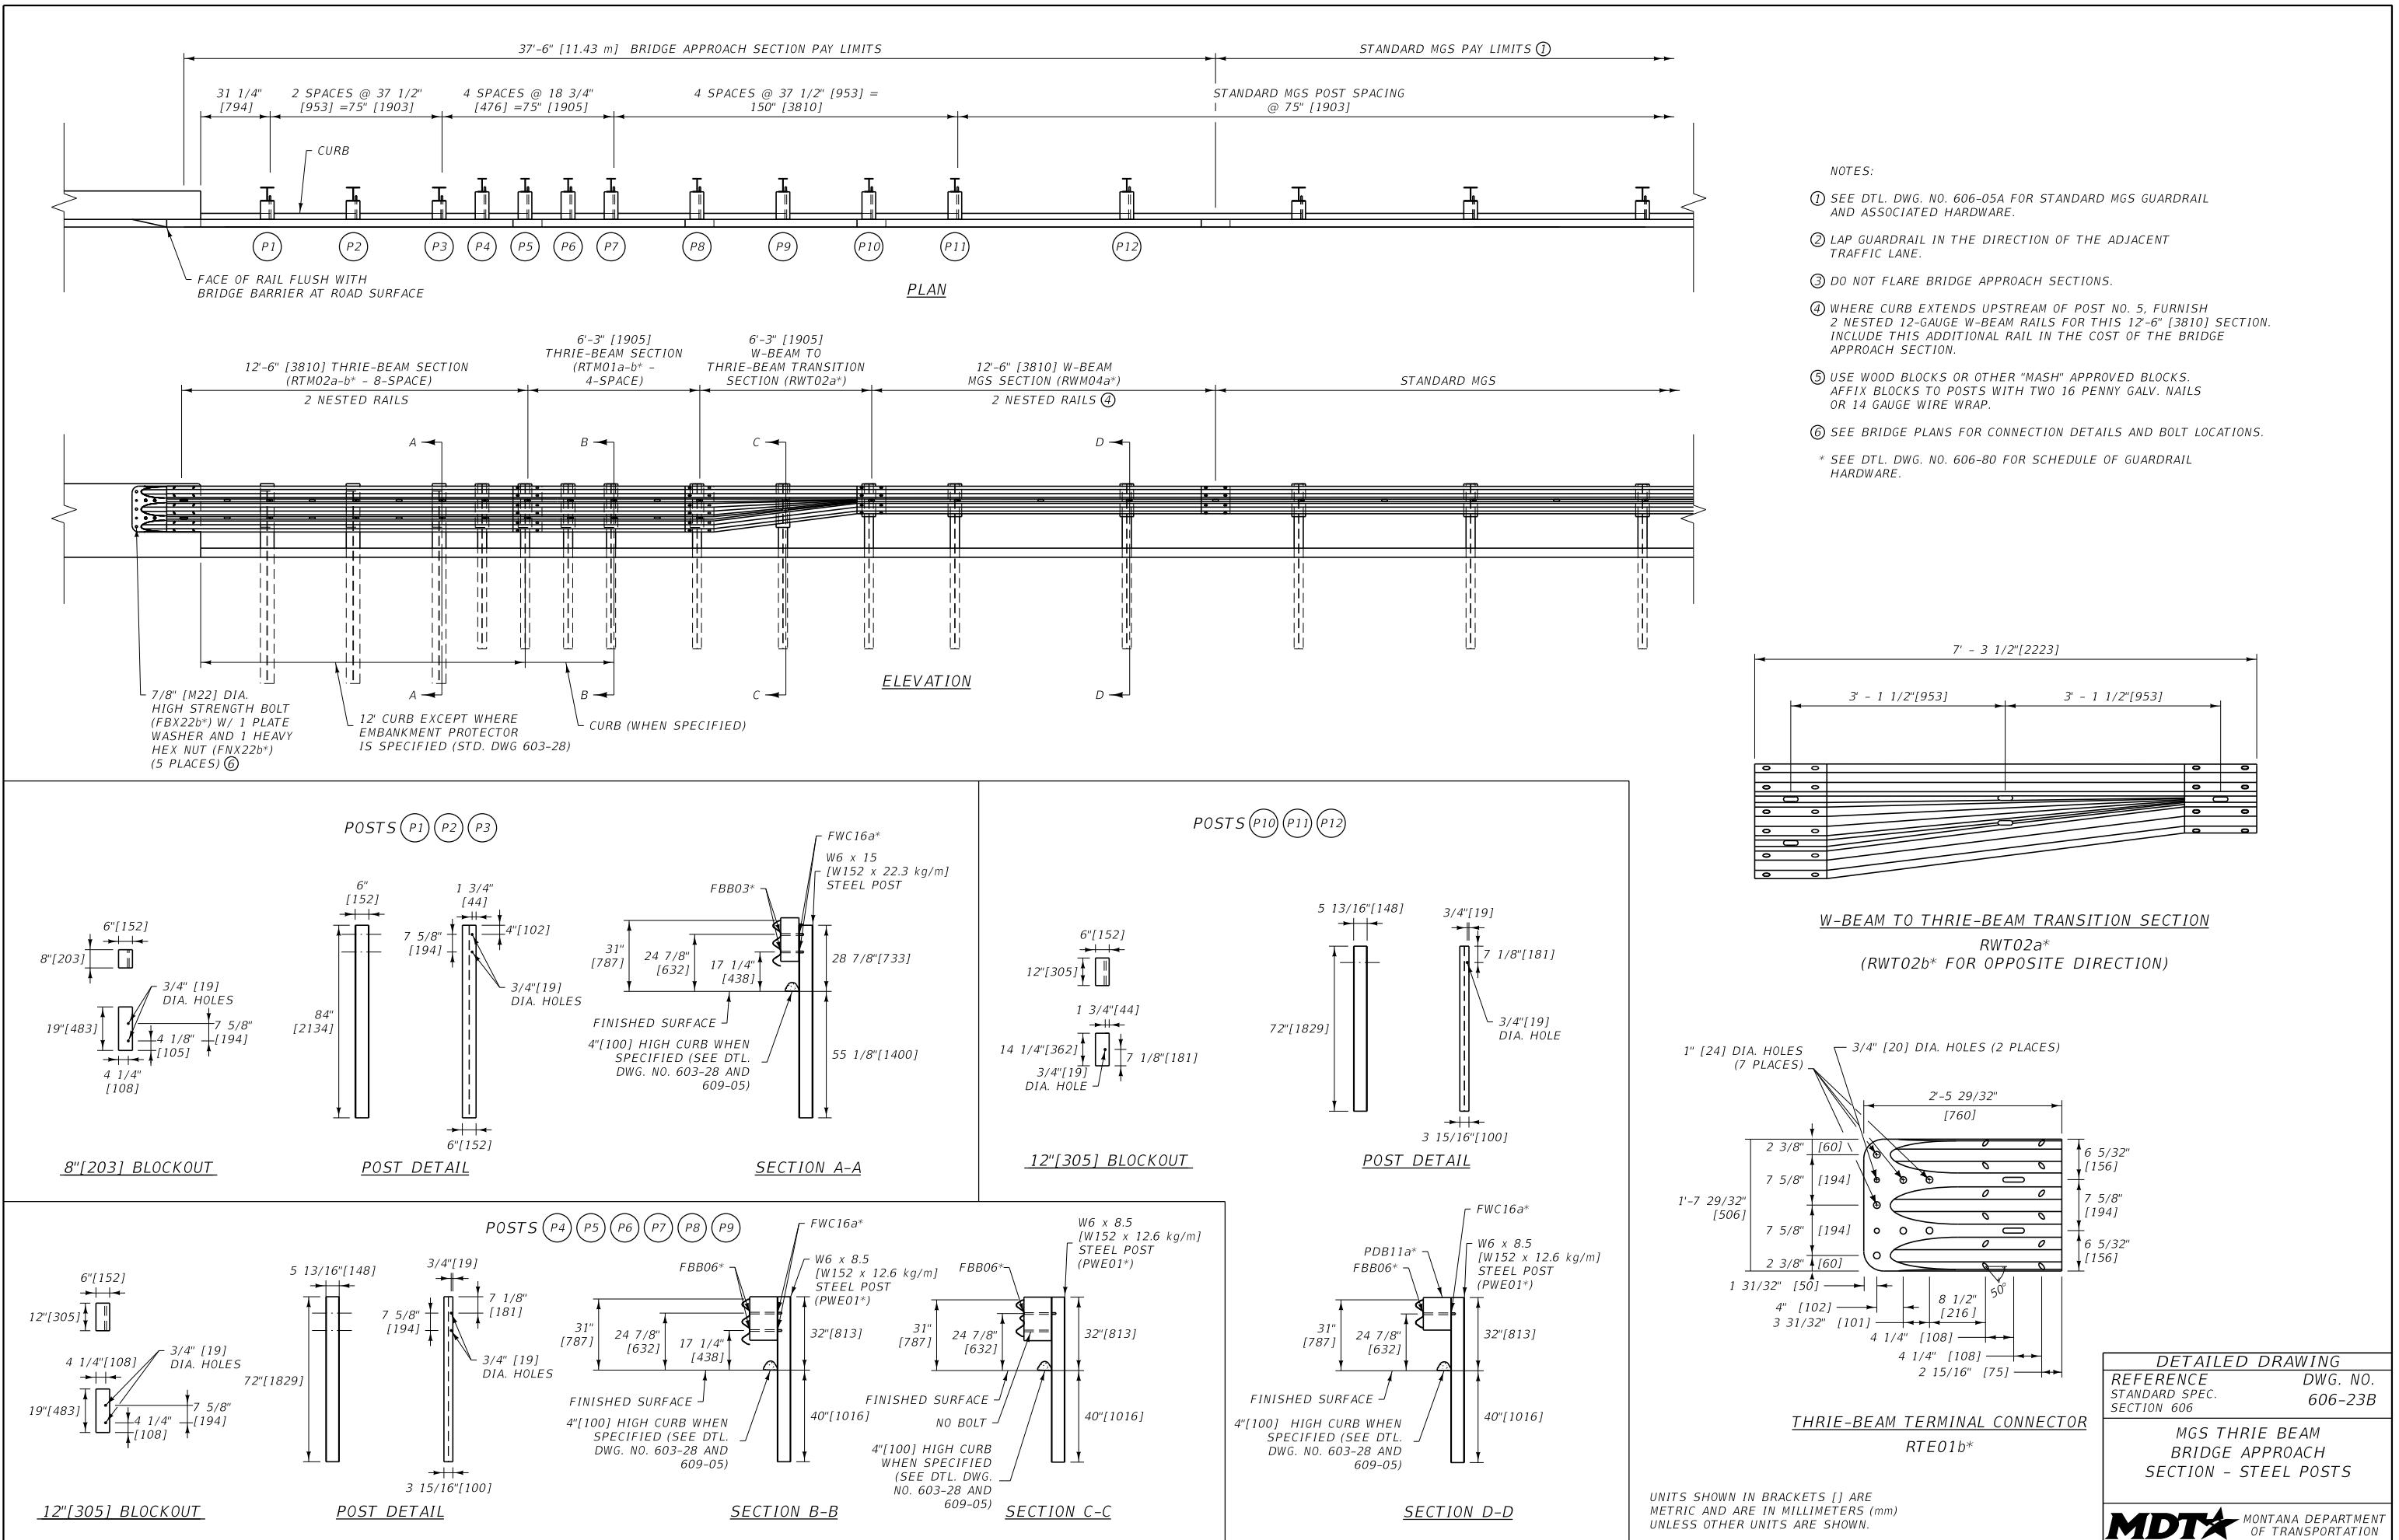

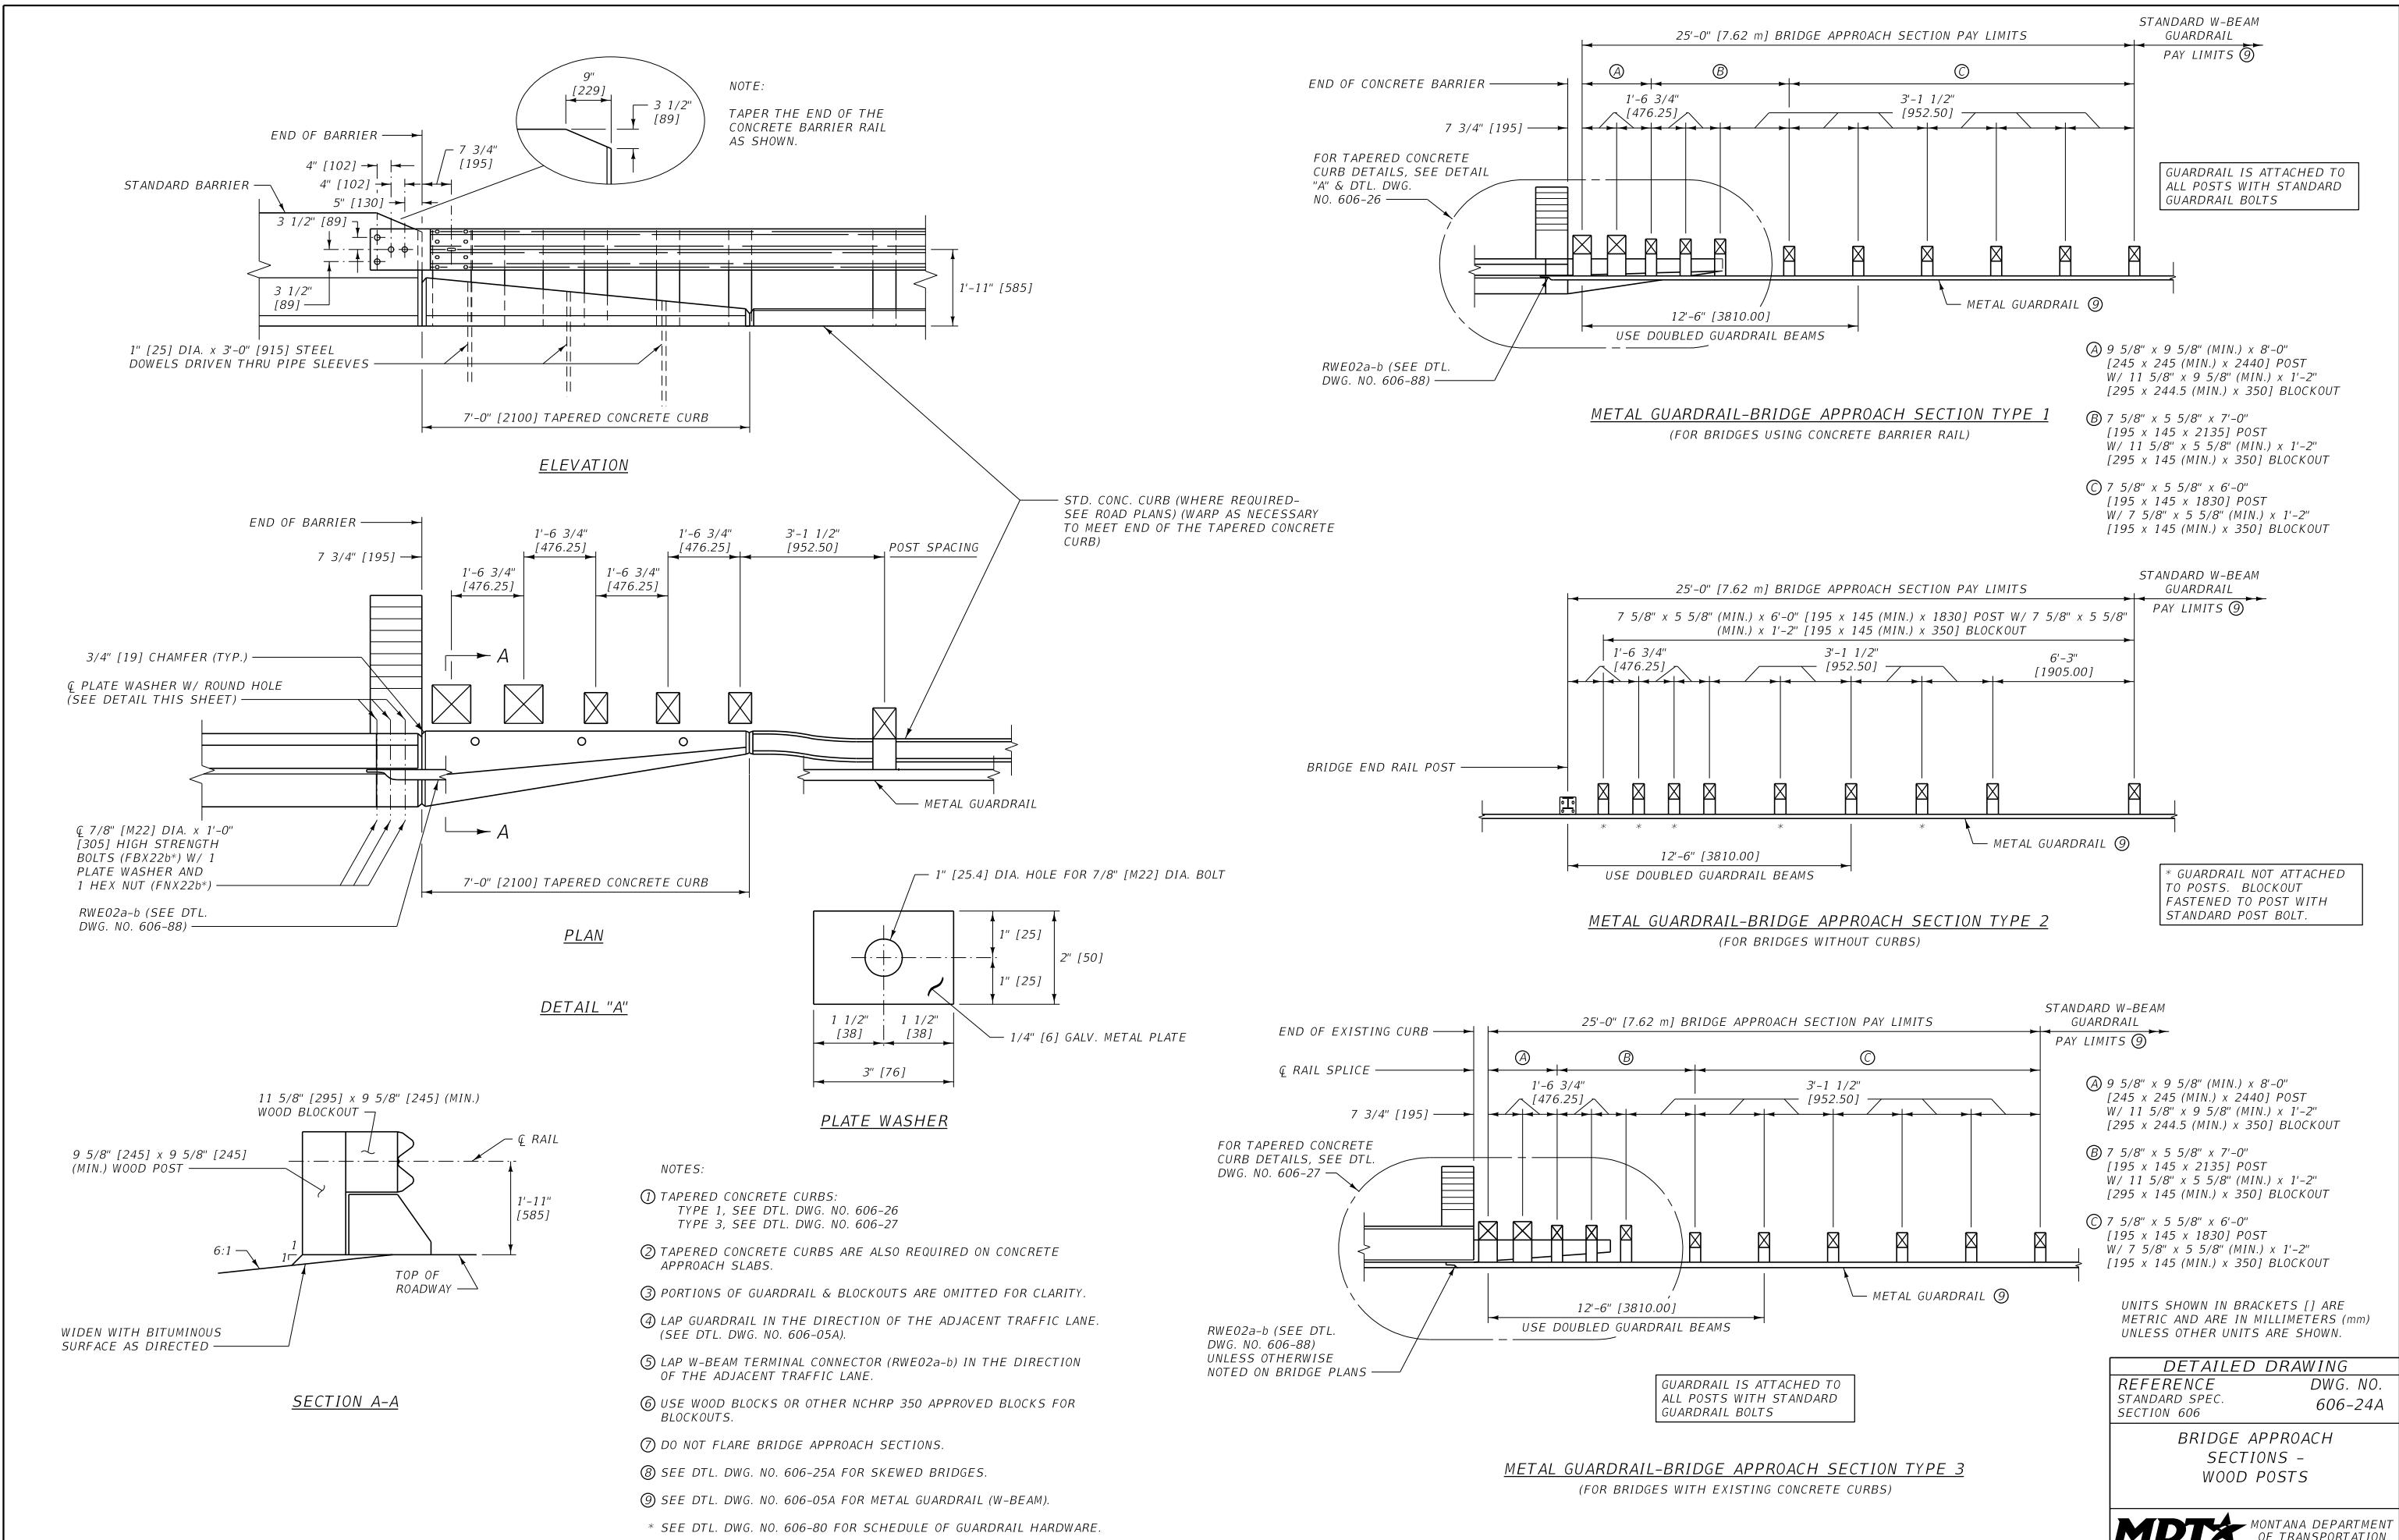

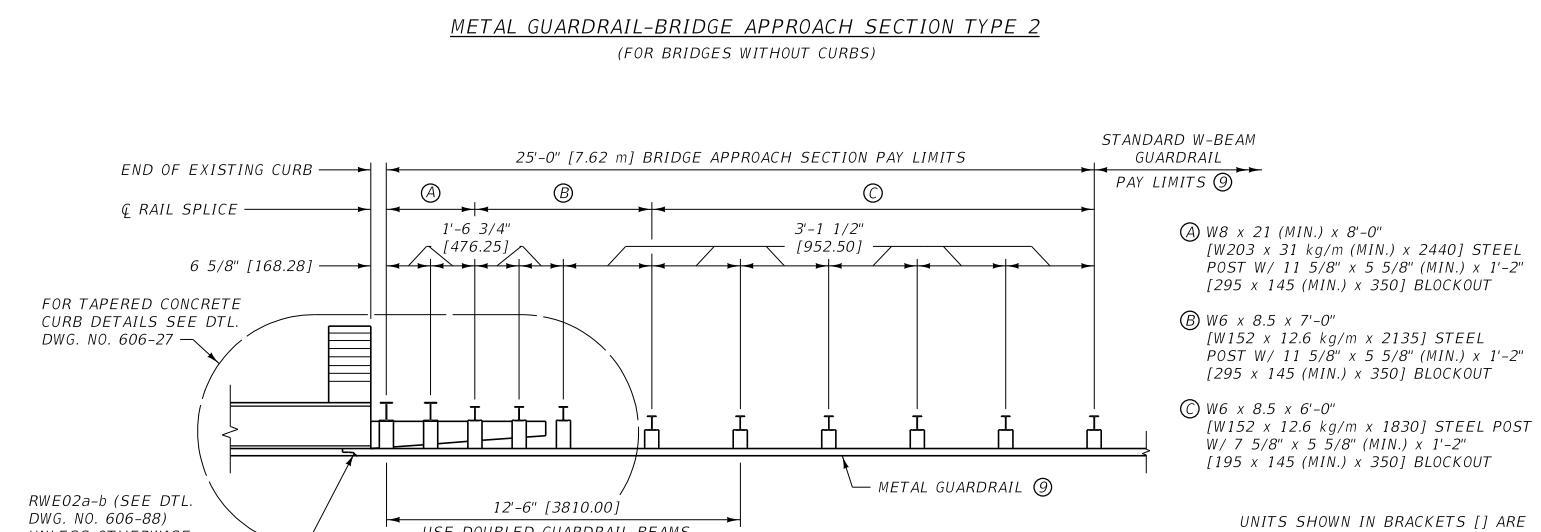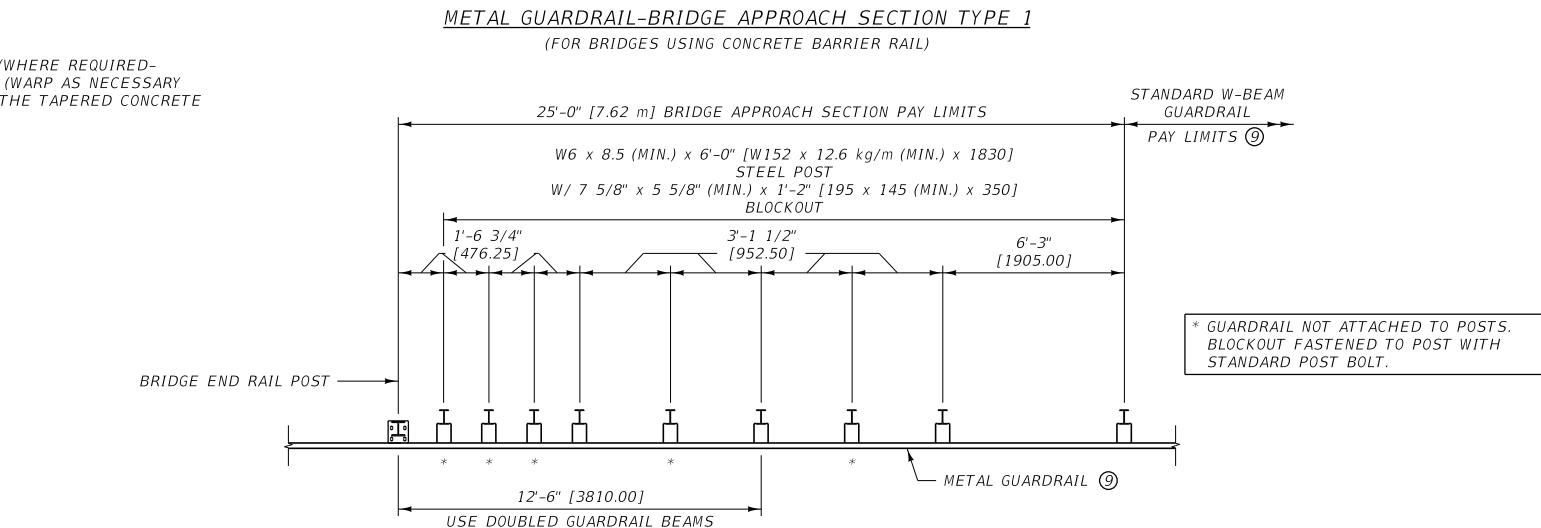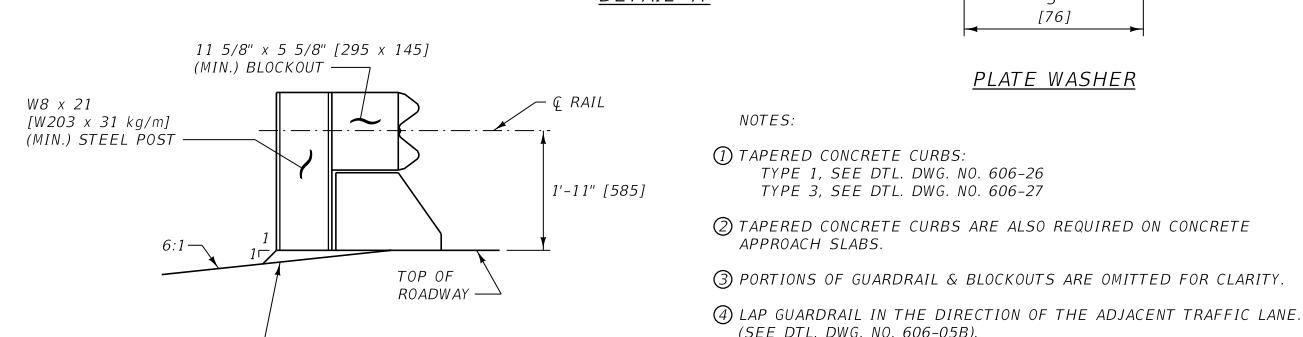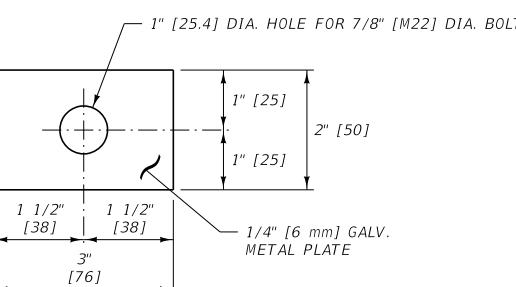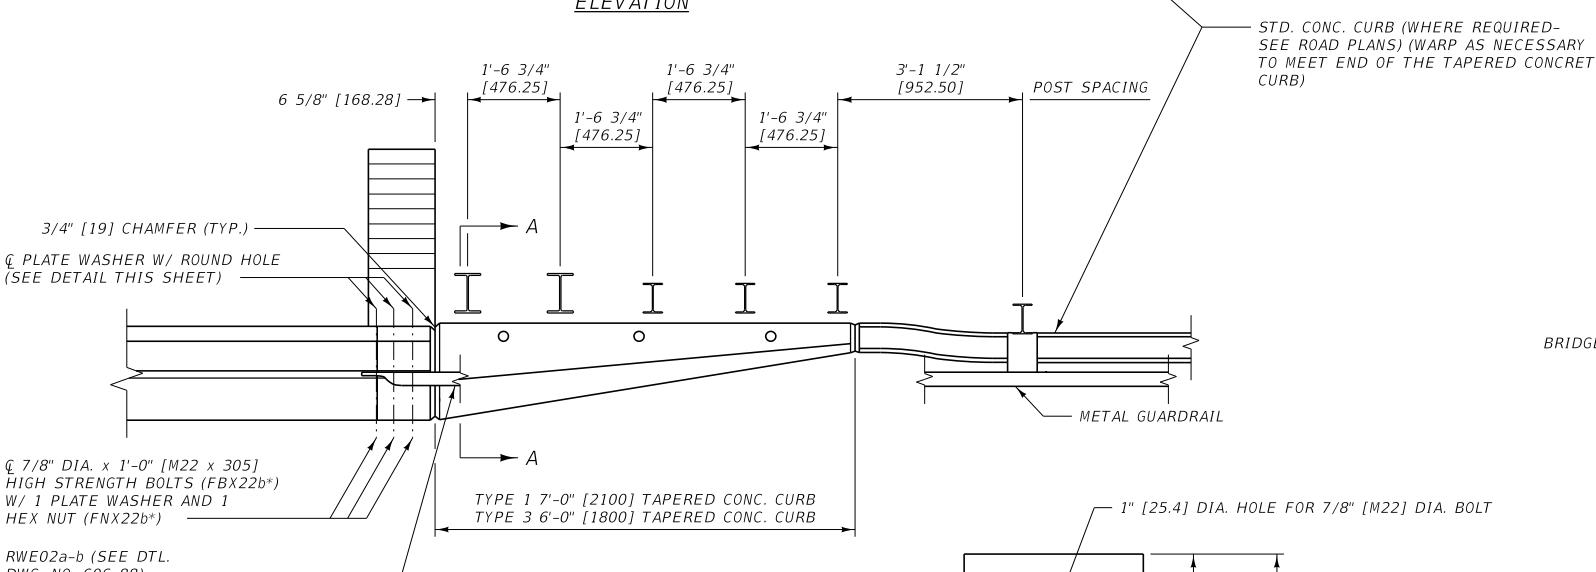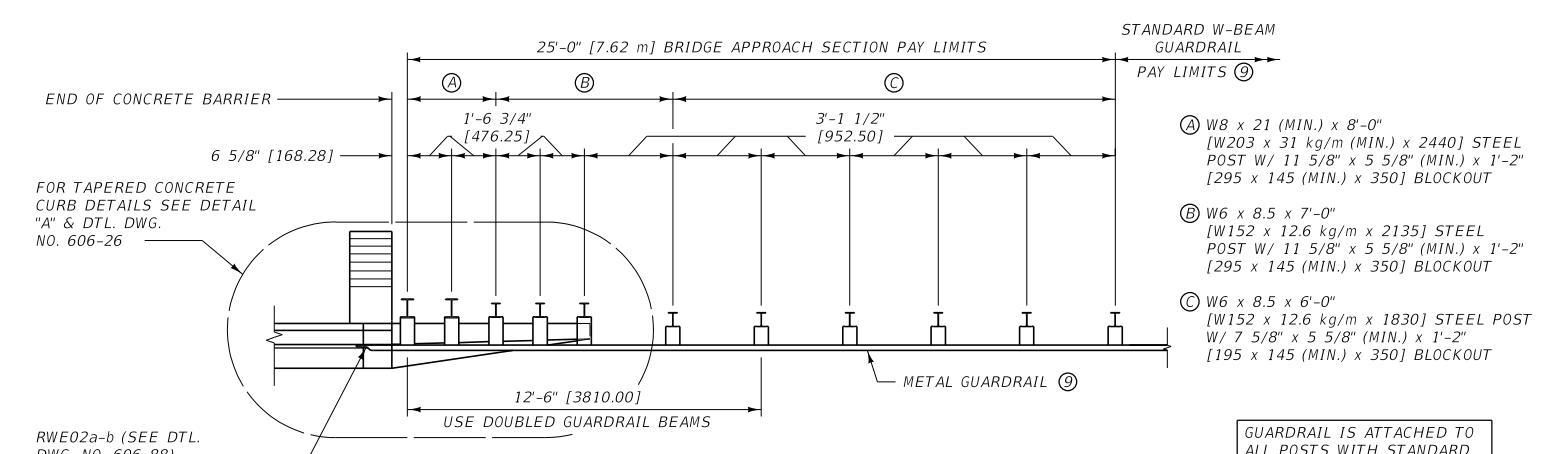
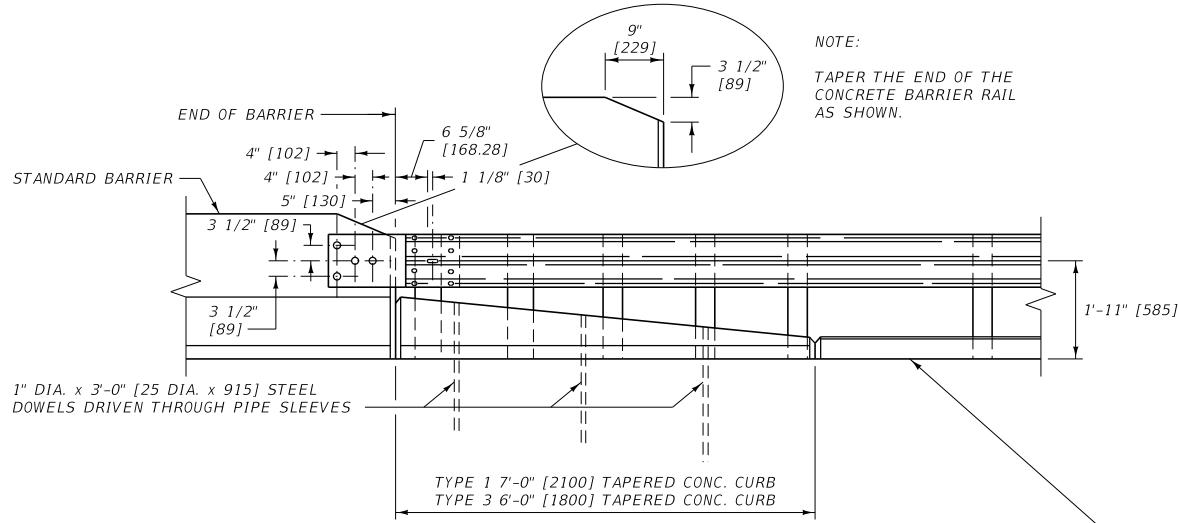


METAL GUARDRAIL-BRIDGE APPROACH SECTION TYPE 3
(FOR BRIDGES WITH EXISTING CONCRETE CURBS)

REFERENCE DWG. NO.	STANDARD SPEC.	SECTION 606
BRIDGE APPROACH SECTIONS - STEEL POSTS		

MDT MONTANA DEPARTMENT OF TRANSPORTATION

* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.

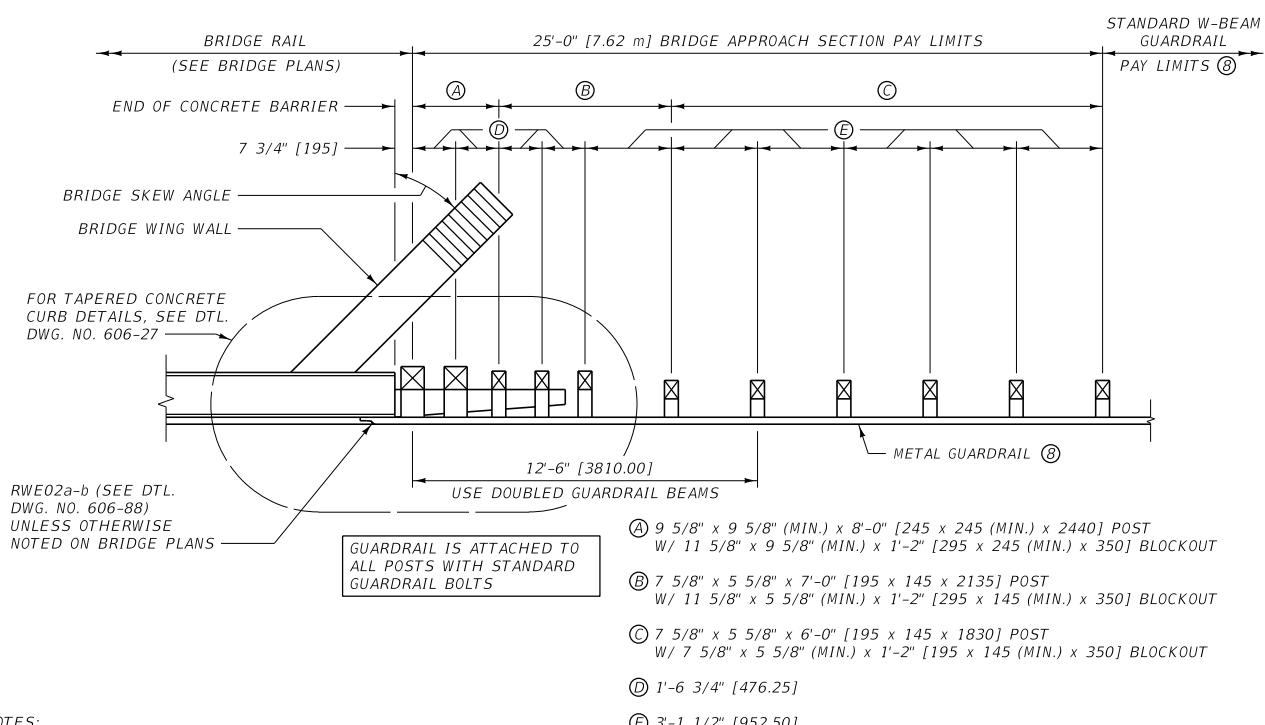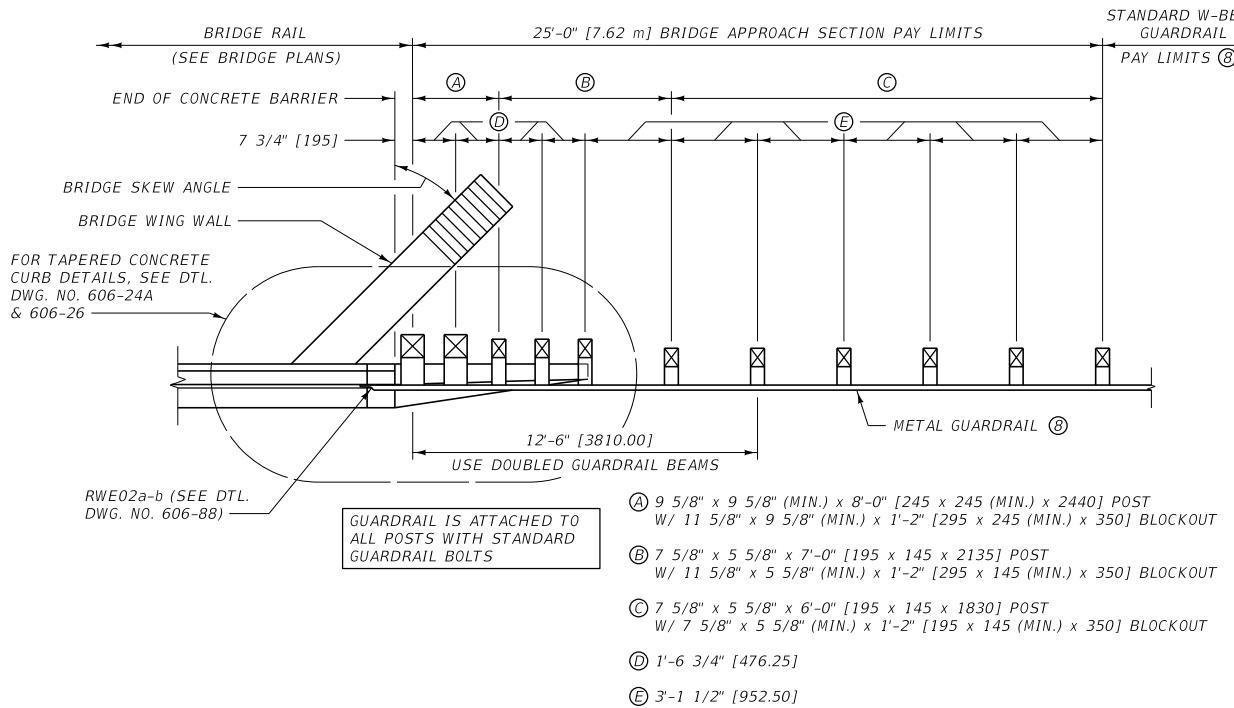

5 FT 1/2 [552.50] METAL GUARDRAIL-BRIDGE APPROACH SECTION TYPE 3

THE GUARDRAIL BRIDGE APPROACH SECTION (FOR SKEWED BRIDGES WITH EXISTING CONCRETE CURBS)

METAL GUARDRAIL
(FOR S)


- ① TAPERED CONCRETE CURBS:
TYPE 1, SEE DTL. DWG. NO. 606-26
TYPE 3, SEE DTL. DWG. NO. 606-27
- ② TAPERED CONCRETE CURBS ARE ALSO REQUIRED ON CONCRETE APPROACH SLABS.
- ③ LAP GUARDRAIL IN THE DIRECTION OF THE ADJACENT TRAFFIC LANE.
(SEE DTL. DWG. NO. 606-05A).
- ④ LAP W-BEAM TERMINAL CONNECTOR (RWE02a-b) IN THE DIRECTION OF THE ADJACENT TRAFFIC LANE.
- ⑤ USE WOOD BLOCKS OR OTHER NCHRP 350 APPROVED BLOCKS FOR BLOCKOUTS.
- ⑥ DO NOT FLARE BRIDGE APPROACH SECTIONS.
- ⑦ SEE DTL. DWG. NO. 606-24A FOR ADDITIONAL INFORMATION.
- ⑧ SEE DTL. DWG. NO. 606-05A FOR METAL GUARDRAIL (W-BEAM).

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING

REFERENCE	DWG. NO.
STANDARD SPEC.	606-25A
SECTION 606	

SKEWED BRIDGE
APPROACH SECTIONS -
WOOD POSTS

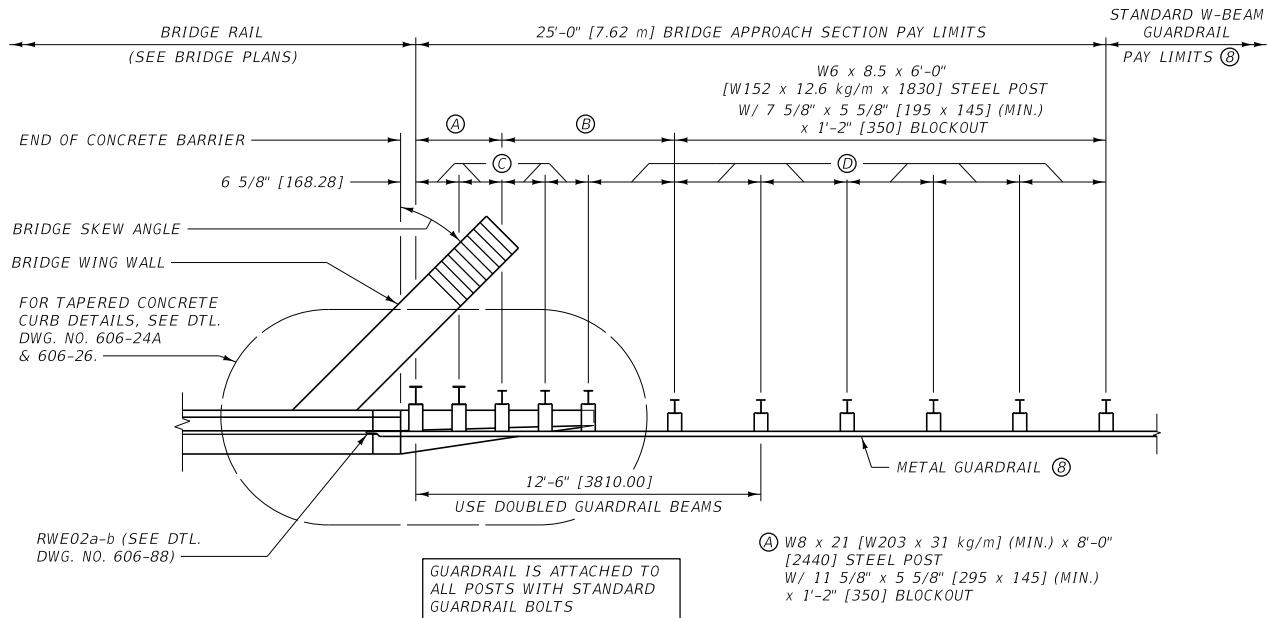


METAL GUARDRAIL-BRIDGE APPROACH SECTION TYPE 1
(FOR SKEWED BRIDGES USING CONCRETE BARRIER RAIL)

Ⓐ W8 x 21 [W203 x 31 kg/m] (MIN.) x 8'-0" [2440] STEEL POST
W/ 11 5/8" x 5 5/8" [295 x 145] (MIN.) x 1'-2" [350] BLOCKOUT

Ⓑ W6 x 8.5 x 7'-0" [W152 x 12.6 kg/m x 2135] STEEL POST W/ 11 5/8" x 5 5/8" [295 x 145] (MIN.) x 1'-2" [350] BLOCKOUT

Ⓒ 1'-6 3/4" [476.25] SPACING BETWEEN POSTS

Ⓓ 3'-1 1/2" [952.50] SPACING BETWEEN POSTS

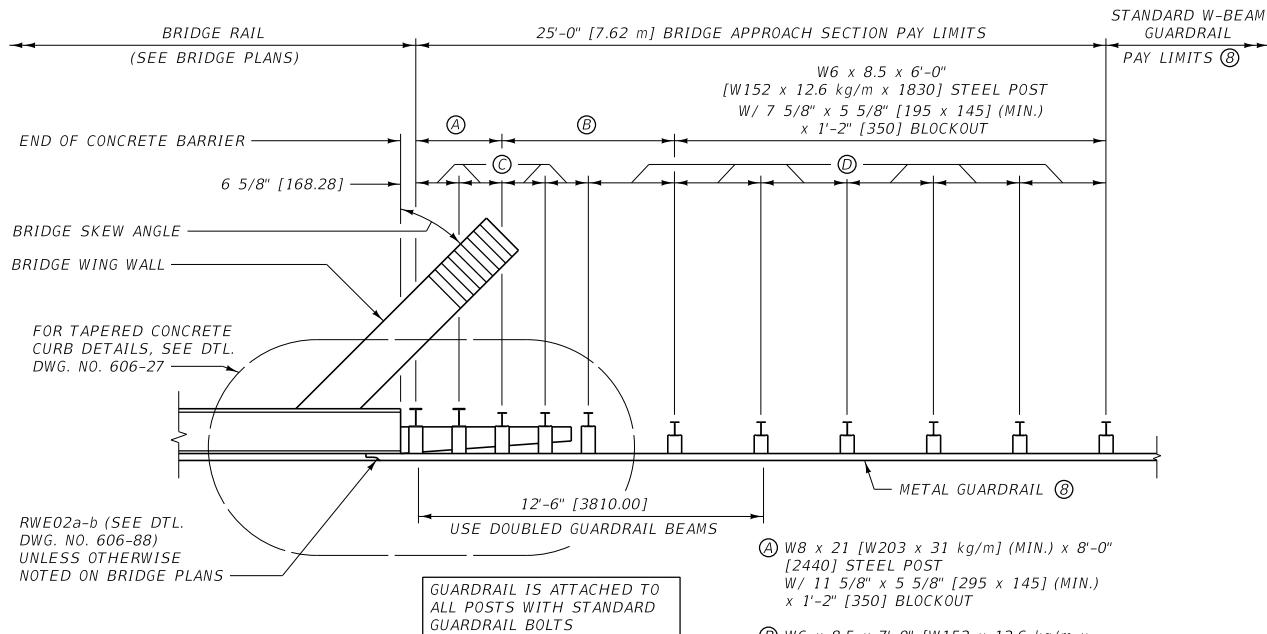

METAL GUARDRAIL-BRIDGE APPROACH SECTION TYPE 3
(FOR SKEWED BRIDGES WITH EXISTING CONCRETE CURBS)

Ⓐ W8 x 21 [W203 x 31 kg/m] (MIN.) x 8'-0" [2440] STEEL POST
W/ 11 5/8" x 5 5/8" [295 x 145] (MIN.) x 1'-2" [350] BLOCKOUT

Ⓑ W6 x 8.5 x 7'-0" [W152 x 12.6 kg/m x 2135] STEEL POST W/ 11 5/8" x 5 5/8" [295 x 145] (MIN.) x 1'-2" [350] BLOCKOUT

Ⓒ 1'-6 3/4" [476.25] SPACING BETWEEN POSTS


Ⓓ 3'-1 1/2" [952.50] SPACING BETWEEN POSTS

NOTES:


- ① TAPERED CONCRETE CURBS:
TYPE 1, SEE DTL. DWG. NO. 606-26
TYPE 3, SEE DTL. DWG. NO. 606-27
- ② TAPERED CONCRETE CURBS ARE ALSO REQUIRED ON CONCRETE APPROACH SLABS.
- ③ LAP GUARDRAIL IN THE DIRECTION OF THE ADJACENT TRAFFIC LANE.
(SEE DTL. DWG. NO. 606-05B).
- ④ LAP W-BEAM TERMINAL CONNECTOR (RWE02a-b) IN THE DIRECTION OF THE ADJACENT TRAFFIC LANE.
- ⑤ USE WOOD BLOCKS OR OTHER NCHRP 350 APPROVED BLOCKS FOR BLOCKOUTS.
- ⑥ DO NOT FLARE BRIDGE APPROACH SECTIONS.
- ⑦ SEE DTL. DWG. NO. 606-24B FOR ADDITIONAL INFORMATION.
- ⑧ SEE DTL. DWG. NO. 606-05B FOR METAL GUARDRAIL (W-BEAM).

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	606-25B
SECTION 606	
SKEWED BRIDGE APPROACH SECTIONS - STEEL POSTS	
 MONTANA DEPARTMENT OF TRANSPORTATION	

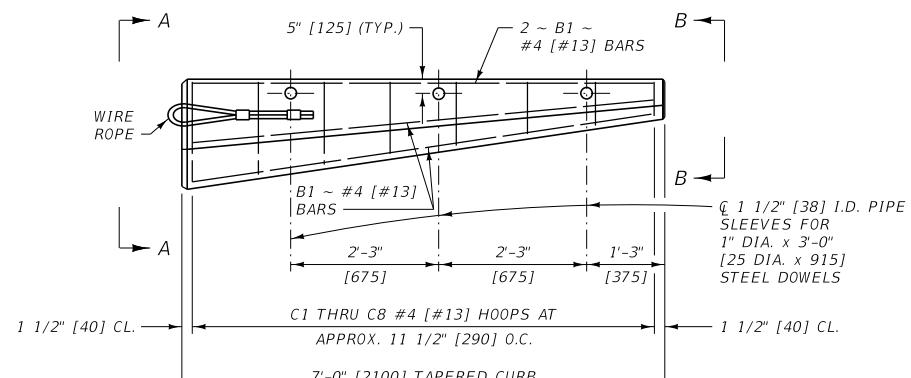


PLAN

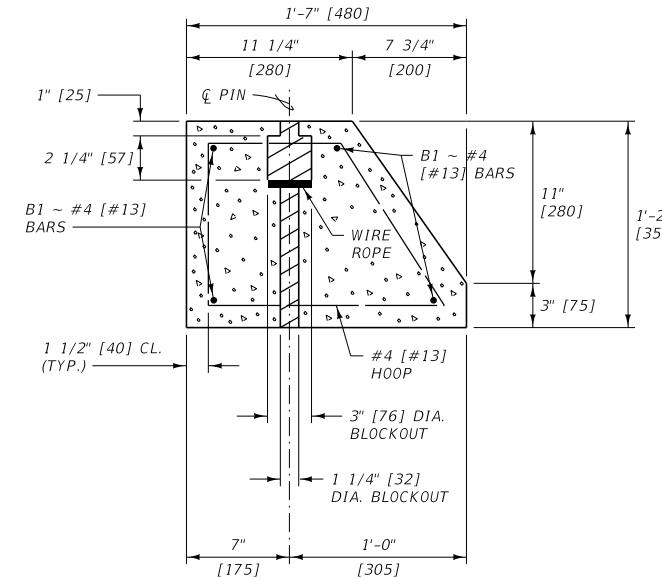


VIEW A-A

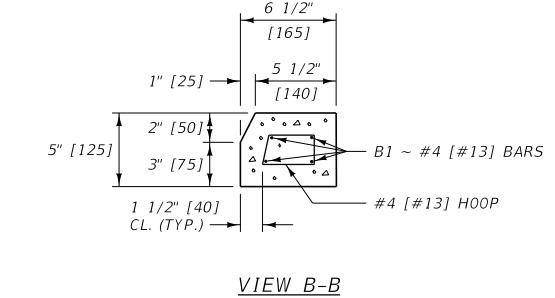

VIEW B-B

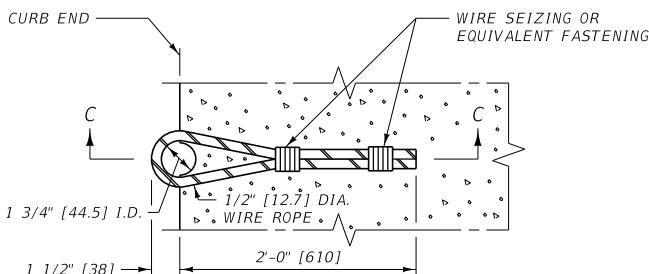

WIRE ROPE DETAIL

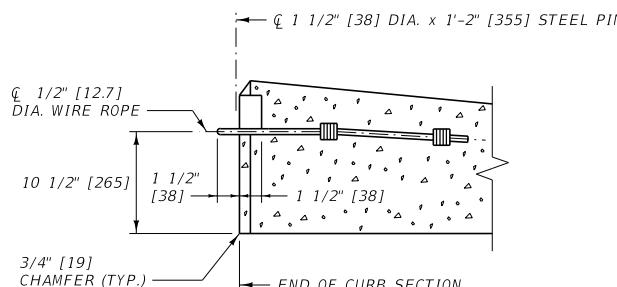

SECTION C-C

NOTES:


- ① TAPERED CONCRETE CURB IS USED WITH BRIDGE APPROACH SECTION TYPE 1 (SEE DTL. DWG. NO. 606-24A AND 606-24B).
- ② FURNISH WIRE ROPE MEETING SECTION 705.
- ③ FURNISH GRADE 60 [420] REINFORCING STEEL MEETING SECTION 711..
- ④ ALL CONCRETE IS CLASS GENERAL.
TOTAL CONCRETE PER 7' [2100 mm] TAPERED CURB EST. = 0.2 C.Y. [0.17 m³]
TOTAL REBAR WEIGHT PER 7' [2100 mm] TAPERED CURB EST. = 34 LB [15.1 kg].

BILL OF REINFORCING STEEL (ONE SECTION ONLY)								
TYPE 1								
BENT BARS (ALL DIMENSIONS ARE OUT TO OUT)								
MARK	SIZE	NO.	TYPE	LENGTH	A	B	C	D
C1	#4	1	1	4'-8"	11"	1'-4"	1'-1"	9"
C2				4'-2"	9 1/2"	1'-2"	11 1/2"	8"
C3				3'-9"	8 1/2"	1'-1/2"	10"	7"
C4				3'-3"	7"	10 1/2"	8"	6 1/2"
C5				2'-11"	6"	9"	7"	6"
C6				2'-4"	4"	7"	5"	5"
C7				2'-0"	3 1/2"	5 1/2"	3 1/2"	4 1/2"
C8		1	1	1'-6"	2"	3 1/2"	2"	3 1/2"
B1	#4	4	STRAIGHT	6'-9"	~	~	~	~

METRIC BILL OF REINFORCING STEEL (ONE SECTION ONLY)								
TYPE 1								
BENT BARS (ALL DIMENSIONS ARE OUT TO OUT IN mm)								
MARK	SIZE	NO.	TYPE	LENGTH	A	B	C	D
C1	#13	1	1	1360	270	395	330	205
C2				1225	240	350	290	185
C3				1090	205	310	255	160
C4				955	175	265	215	140
C5				820	145	220	175	120
C6				695	115	180	140	100
C7				555	80	135	100	80
C8		1	1	415	50	90	60	55
B1	#13	4	STRAIGHT	2020	~	~	~	~

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE SECTION 606	DWG. NO. 606-26
TAPERED CONCRETE CURB DETAIL	

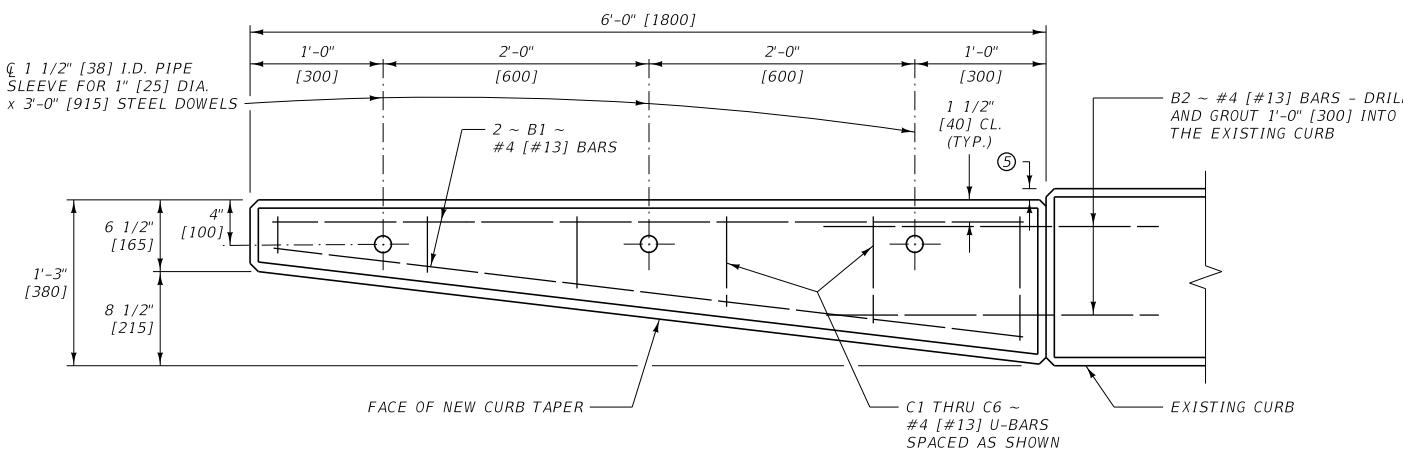


NOTES:

- ① REMOVE THE EXISTING SURFACE UNDER THE NEW TAPERED CONCRETE CURB AS APPROVED BY THE PROJECT MANAGER. EMBED THE TAPERED CONCRETE CURB A MINIMUM OF 4" [100] BELOW THE GRADE MEASURED AT THE INSIDE FACE OF THE TAPER.
- ② FURNISH GRADE 60 [420] REINFORCING STEEL MEETING SECTION 555 AND 711.
- ③ ALL CONCRETE IS CLASS GENERAL.
TOTAL CONCRETE PER 6' [1800] TAPERED CURB EST. = 0.2 C.Y. [0.16 m³]
TOTAL REBAR WEIGHT PER 6' [1800] TAPERED CURB EST. = 27 LB. [11.7 kg]
- ④ TAPERED CONCRETE CURB IS USED WITH BRIDGE APPROACH SECTION TYPE 3 (SEE DTL. DWG. NO. 606-24A AND 606-24B).
- ⑤ ADJUST DIMENSION TO MATCH EXISTING CURB.

PLAN

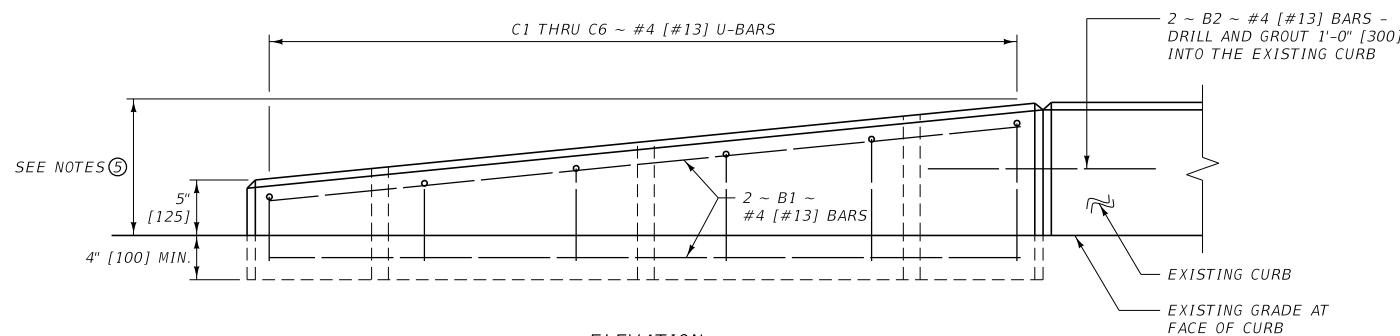

ELEVATION

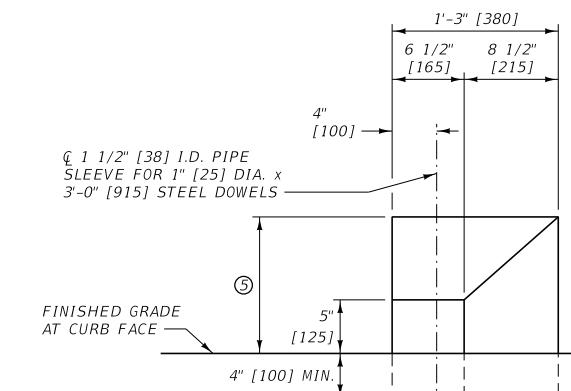


END VIEW

BILL OF REINFORCING STEEL (ONE SECTION ONLY)						
TYPE 1						
BENT BARS (ALL DIMENSIONS ARE OUT TO OUT)						
MARK	SIZE	NO.	TYPE	LENGTH	A	B
C1	#4	1	1	1'-4"	6"	4"
C2				1'-8"	7"	6"
C3				1'-11"	8"	7"
C4				2'-3"	9"	9"
C5				2'-6"	10"	10"
C6		1	1	2'-10"	11"	1'-0"
B1		4	STRAIGHT	5'-8"	~	~
B2	#4	2	STRAIGHT	2'-0"	~	~


METRIC BILL OF REINFORCING STEEL (ONE SECTION ONLY)						
TYPE 1						
BENT BARS (ALL DIMENSIONS ARE OUT TO OUT)						
MARK	SIZE	NO.	TYPE	LENGTH (mm)	A (mm)	B (mm)
C1	#13	1	1	390	150	90
C2				480	175	130
C3				570	200	170
C4				665	225	215
C5				755	250	255
C6		1	1	845	270	295
B1		4	STRAIGHT	1720	~	~
B2	#13	2	STRAIGHT	600	~	~

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	REFERENCE	DWG. NO.
	STANDARD SPEC.	606-27
SECTION 606		
TAPERED CONCRETE CURB DETAIL		
MDT MONTANA DEPARTMENT OF TRANSPORTATION		

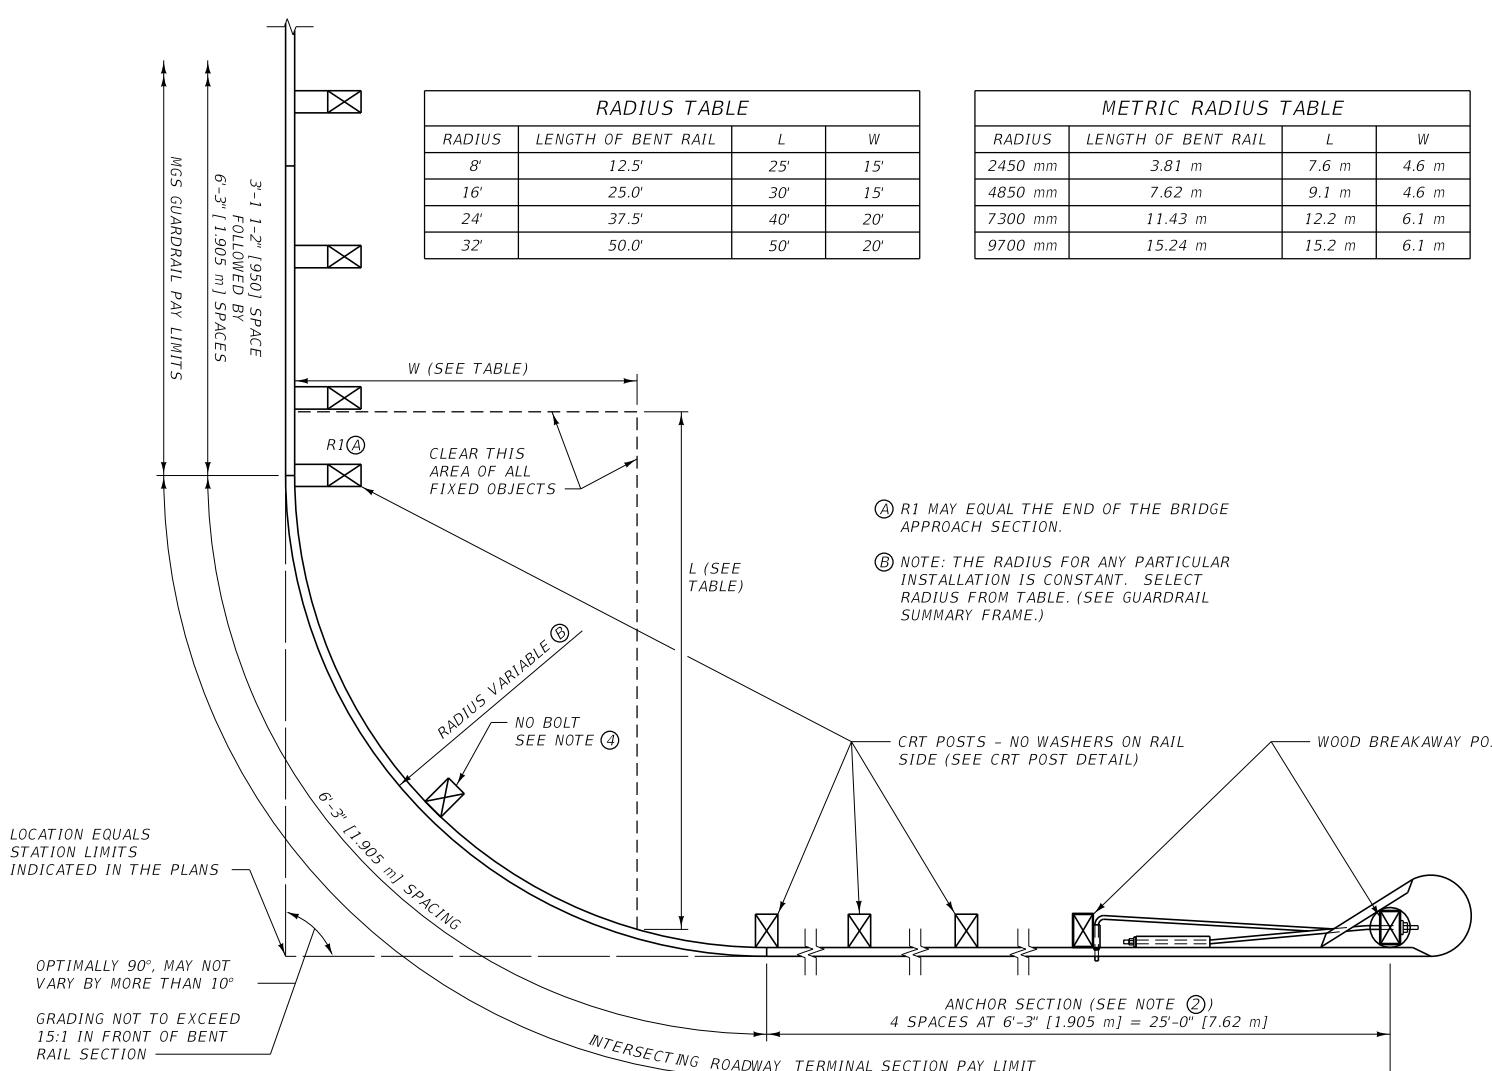

PLAN

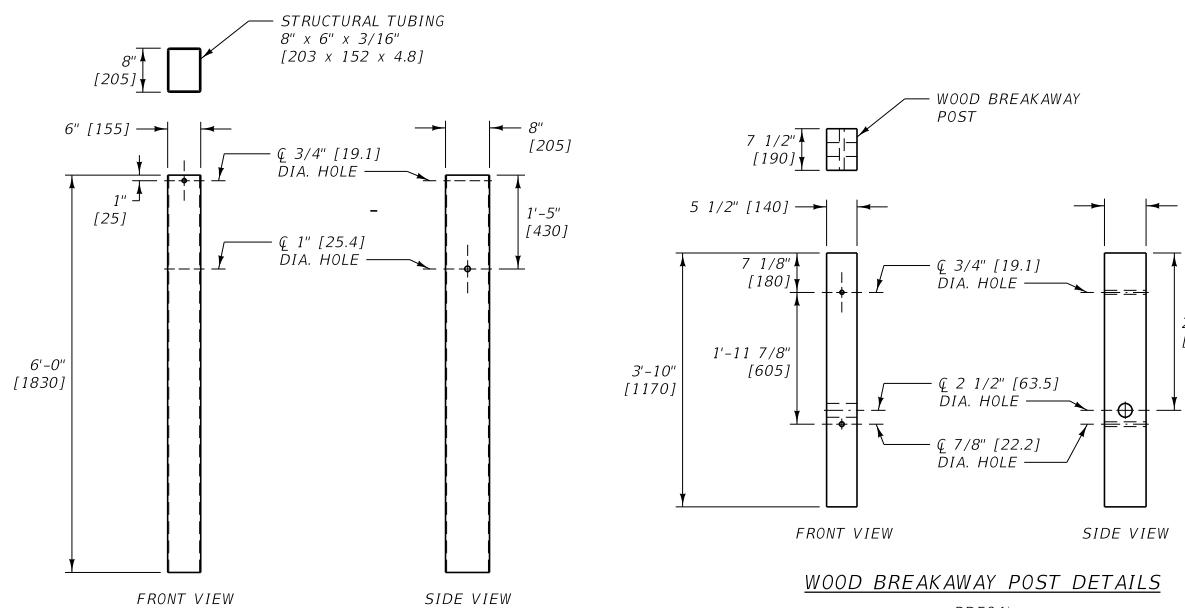

MGS FOUNDATION TUBE DETAILS

PTE06*

RADIUS TABLE			
RADIUS	LENGTH OF BENT RAIL	L	W
8'	12.5'	25'	15'
16'	25.0'	30'	15'
24'	37.5'	40'	20'
32'	50.0'	50'	20'

METRIC RADIUS TABLE			
RADIUS	LENGTH OF BENT RAIL	L	W
2450 mm	3.81 m	7.6 m	4.6 m
4850 mm	7.62 m	9.1 m	4.6 m
7300 mm	11.43 m	12.2 m	6.1 m
9700 mm	15.24 m	15.2 m	6.1 m

Ⓐ R1 MAY EQUAL THE END OF THE BRIDGE APPROACH SECTION.

⑧ NOTE: THE RADIUS FOR ANY PARTICULAR INSTALLATION IS CONSTANT. SELECT RADIUS FROM TABLE. (SEE GUARDRAIL SUMMARY FRAME.)

LOCATION EQUALS
STATION LIMITS
INDICATED IN THE

OPTIMALLY 90°, MAY NOT VARY BY MORE THAN 10°

4 SPACES AT 6"

CABLES TO HAVE LESS THAN 1 1/2" [38] OF SAG AFTER INSTALLATION

THREADED CABLE END TOWARD TRAFFIC

FCA01*

18" [455]

1' - 0" [305] **1' - 4" [406]** **4" [102]** **2" [50]**

FPA01* ANCHOR BRACKET

FBB02* (OR FBX16a* BOLT AND FNX16a* NUT WITH FWC24a* WASHER UNDER HEAD AND NUT)

6 ~ 3/4" [19.1] CABLE CLIPS (TYP.)

4 1/2" [114] TYP.

U-BOLTS ON THIS CABLE

31" [787]

5" [125]

1/4" [6 mm] V

9 1/2" [241] FBX20a* FNX20a*

3/4" [19.1] DIA. CABLE, ONE END SWAGED

BOX BEAM, HSS 2 1/2" x 2 1/2" x 1/4" [64 x 64 x 6.4]

1/4" [6 mm] V

SOIL PLATE (SEE DETAIL RIGHT)

3 3/8" [85]

WOOD BREAK-AWAY POST (SEE DETAIL)

STEEL TUBE

FMM02* FWC24a* FNX24a* BEARING PLATE (SEE DETAIL RIGHT)

TWO 8" [203] FB TWO FNX20a* (TWO FWC20a* WASHERS EACH)

CBT POST DETAIL

REF ID:

- ① DO NOT INSTALL ON SLOPES STEEPER THAN 2:1.
- ② DO NOT OMIT OR SHORTEN ANCHOR SECTION.
- ③ SEE DTL. DWG. NO. 606-05A FOR GUARDRAIL WIDENING REQUIREMENTS.
- ④ DO NOT BOLT THE RAIL TO THE CRT POST LOCATED AT THE CENTER OF THE BENT RAIL.



SEE RTI DWI NO 506 00 503 GOURVIL 25 GUARDIAN HARVARD

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING

INTERSECTING ROADWAY TERMINAL SECTION (MGS)



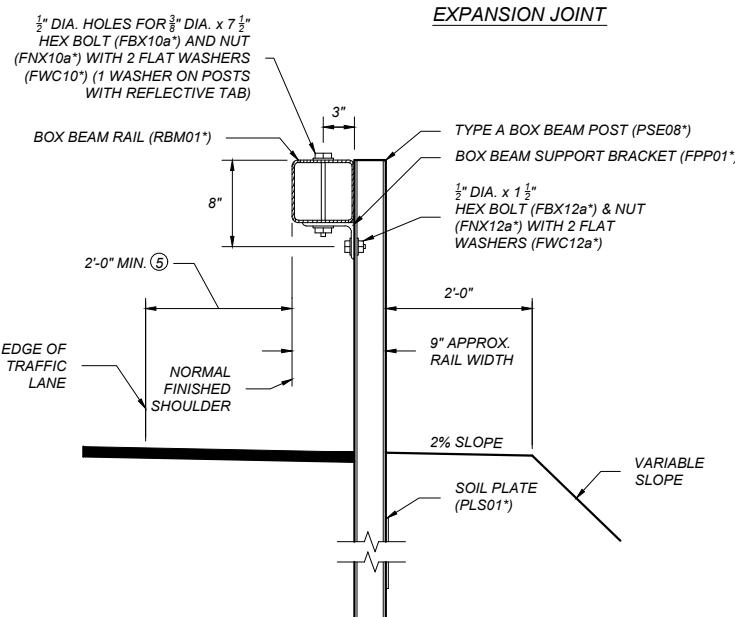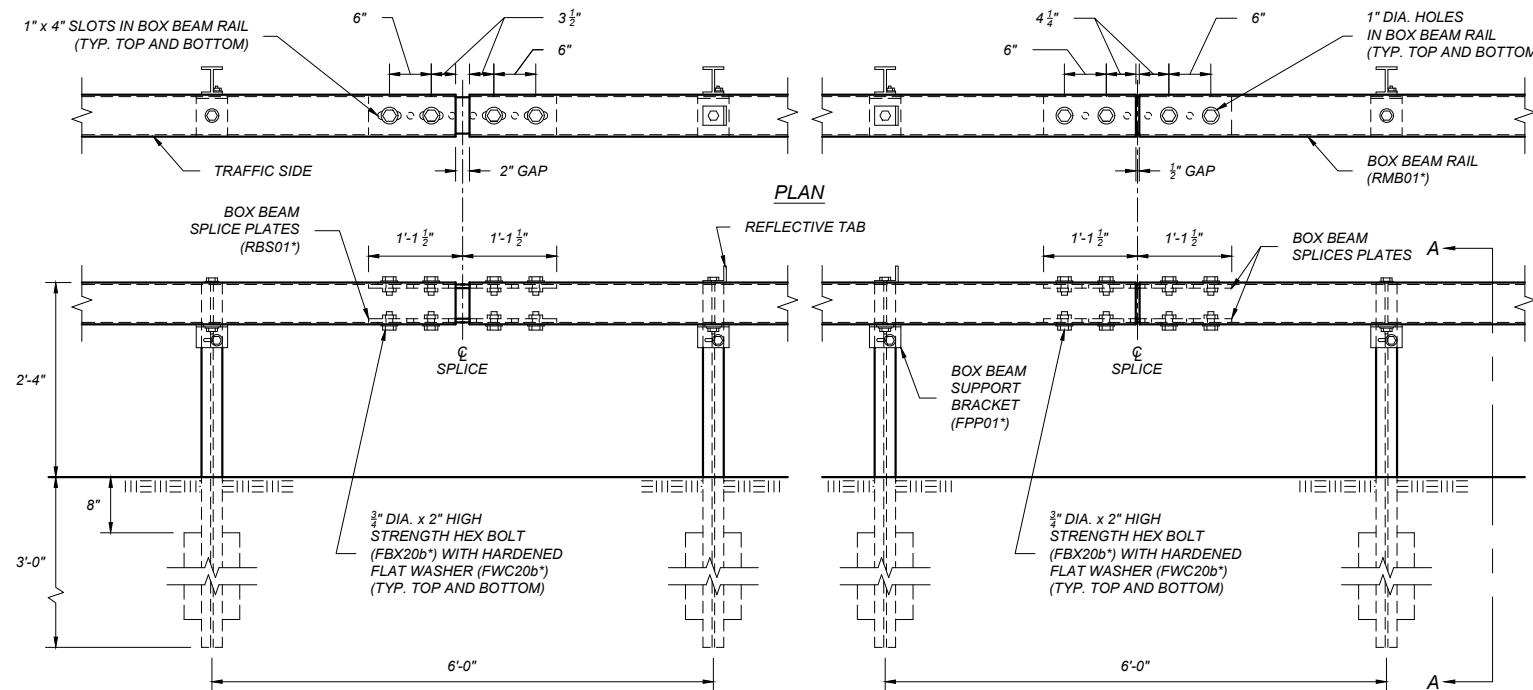


ELEVATION

NOTES:

- 1 USE BOX BEAM RAIL IN MINIMUM NOMINAL LENGTHS OF 18 FEET UNLESS APPROVED BY THE PROJECT MANAGER.
- 2 INSTALL EXPANSION JOINTS ON ALL BOX BEAM GUARDRAIL INSTALLATIONS GREATER THAN 300 FEET IN LENGTH AT INTERVALS NOT TO EXCEED 500 FEET.
- 3 ATTACH REFLECTIVE TABS TO EVERY FOURTH POST (24 FEET TYP.). ANGLE TABS SLIGHTLY TOWARDS TRAFFIC. DO NOT USE REFLECTIVE TABS ON WY-BET TERMINALS. WY-BET TERMINALS RECEIVE REFLECTIVE CHANNELS.
- 4 DO NOT INSTALL BOX BEAM GUARDRAIL FOR OBSTACLES WITHIN 5.6' OF THE FACE OF THE RAIL.
- 5 WIDENING IS REQUIRED IF FINISHED SHOULDER IS LESS THAN 2'-0" FROM THE TRAFFIC LANE.
- 6 PROVIDE SHOP BENT BOX BEAM RAIL FOR ROADWAY CURVATURE WITH RADII OF LESS THAN 715 FEET.

* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.

SPLICE DETAIL

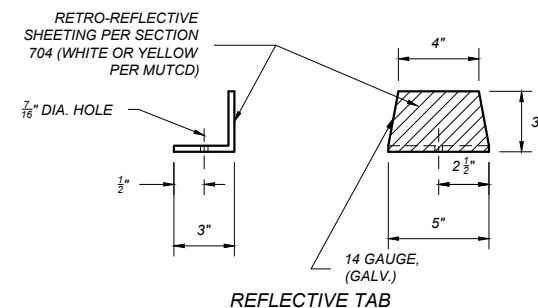

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 606, 704

DWG. NO.
606-50



BOX BEAM GUARDRAIL

EFFECTIVE: JAN 23, 2020



MONTANA
Department of Transportation

--REVISED--
JAN 15, 2026

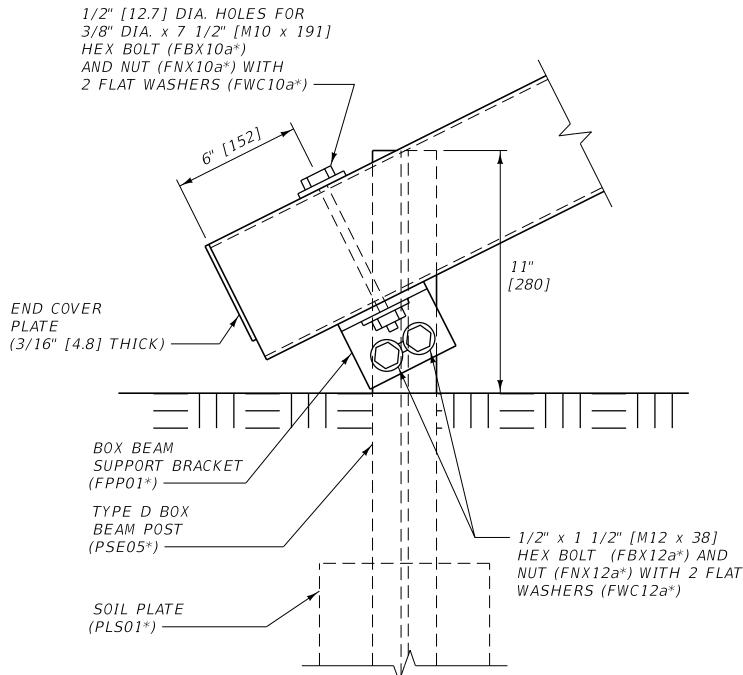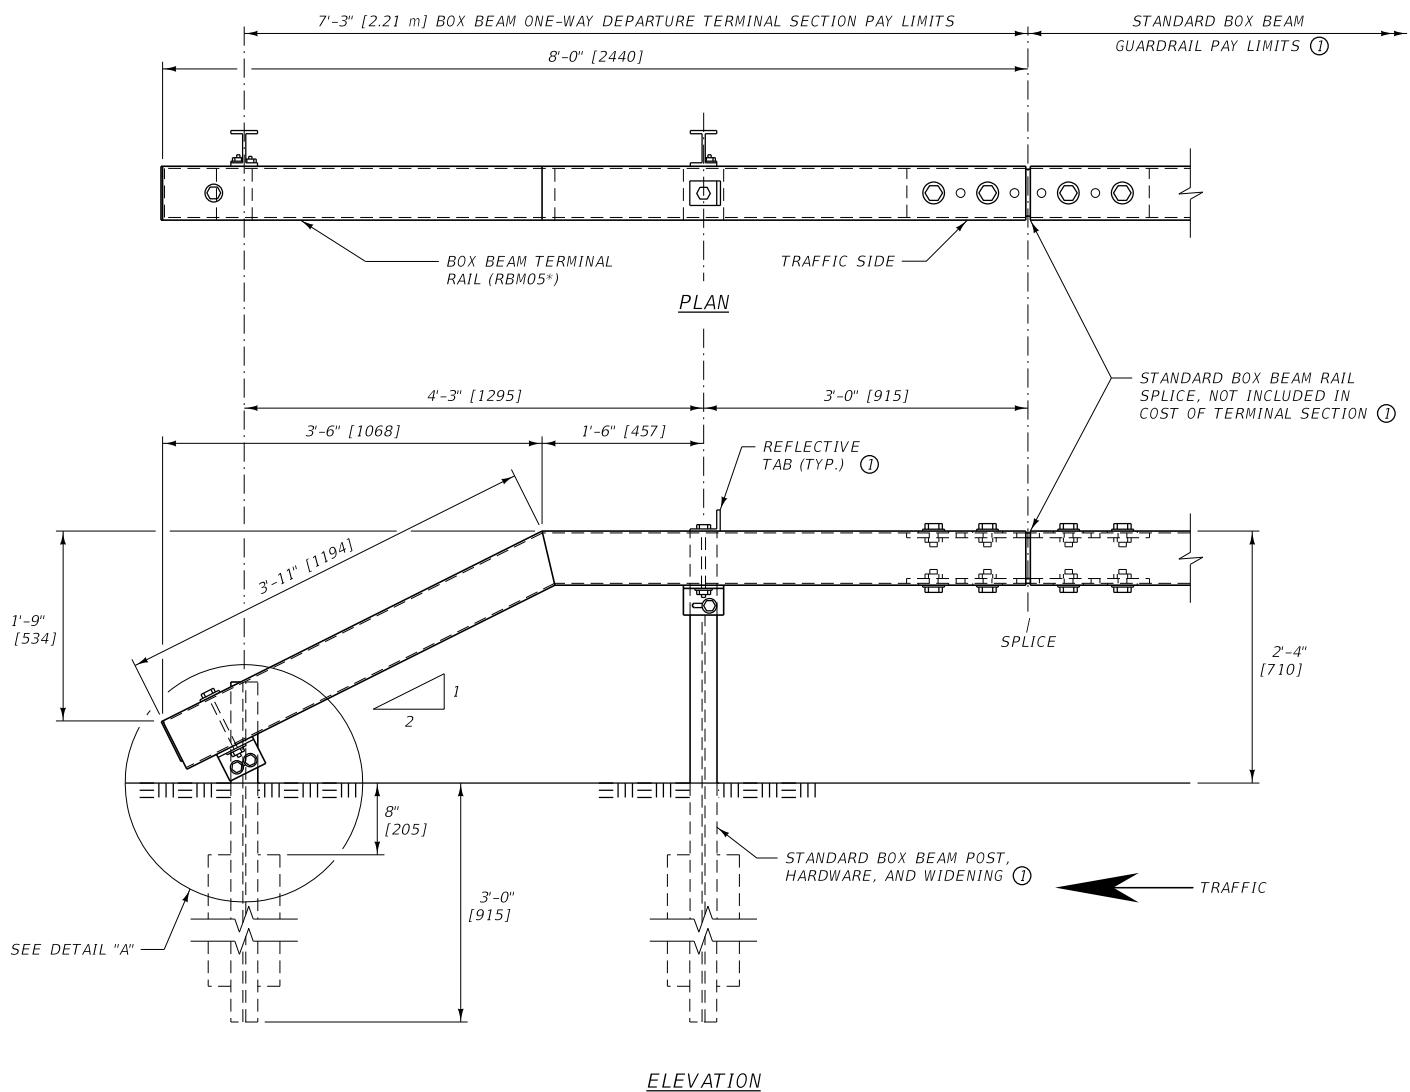


NOTES:


① SEE DTL. DWG. NO. 606-50 FOR STANDARD BOX BEAM GUARDRAIL AND ASSOCIATED DETAILS.


* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 606	DWG. NO. 606-52
BOX BEAM ONE-WAY DEPARTURE TERMINAL SECTION	
 MONTANA DEPARTMENT OF TRANSPORTATION	

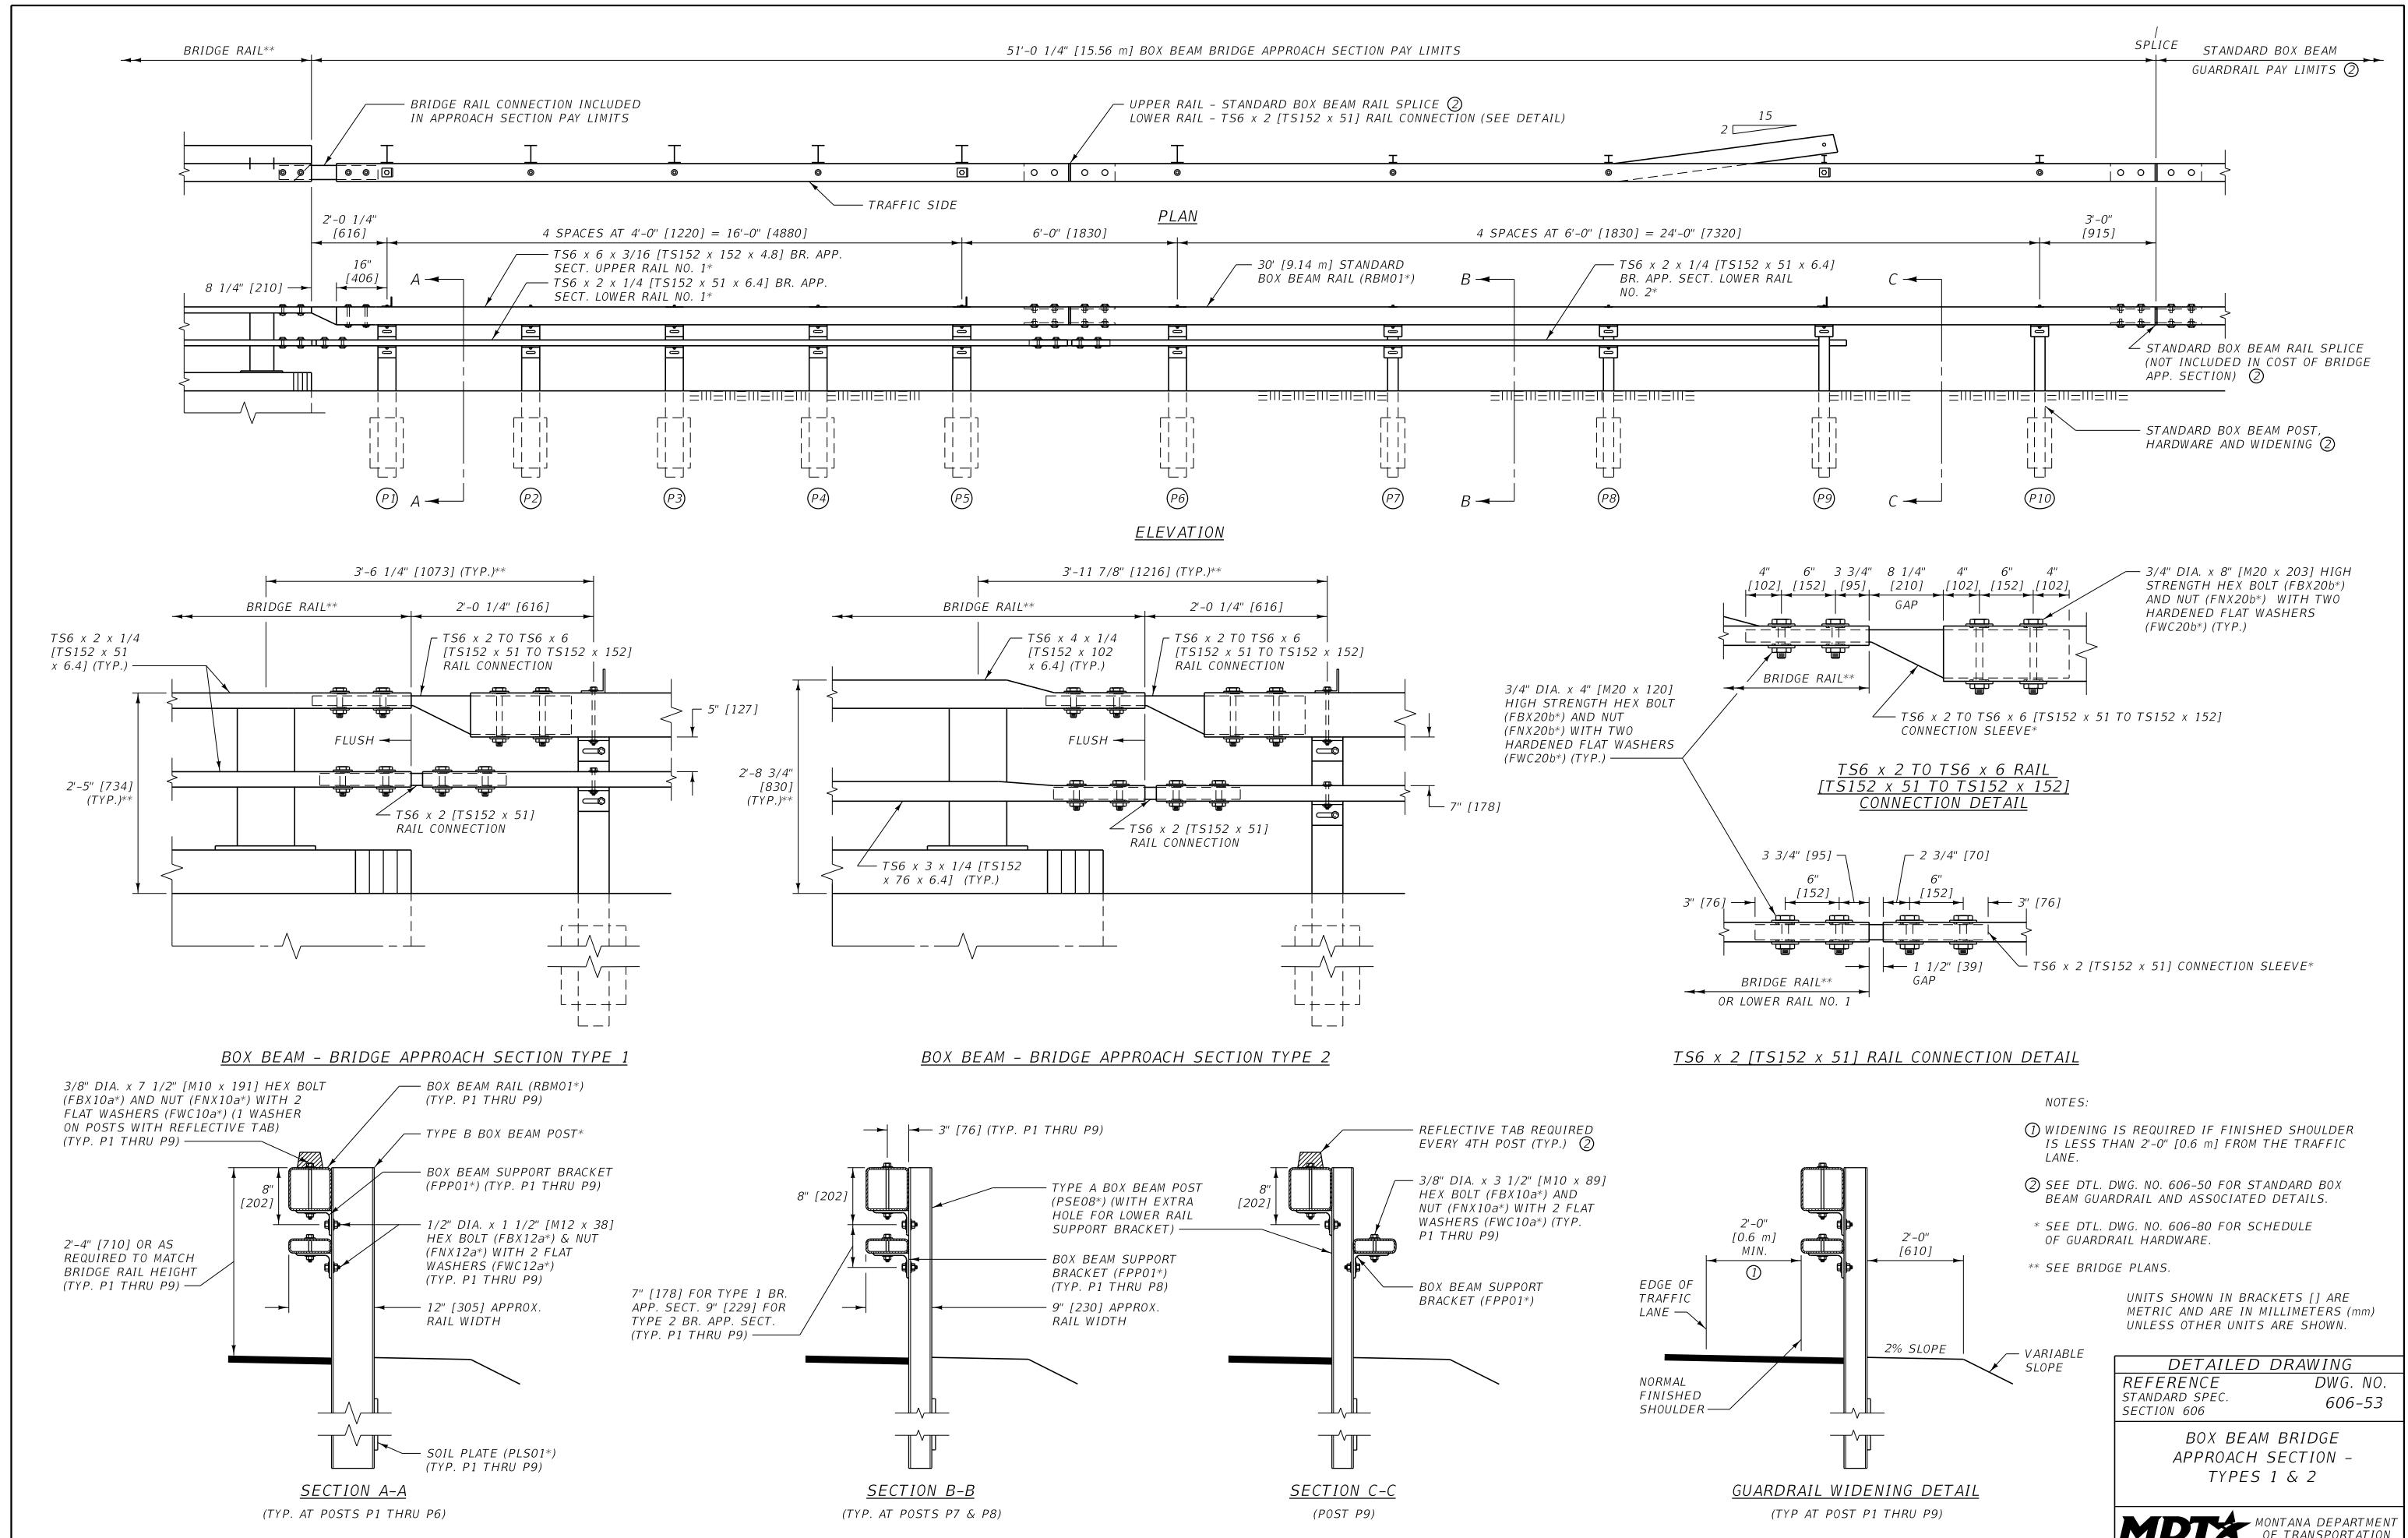

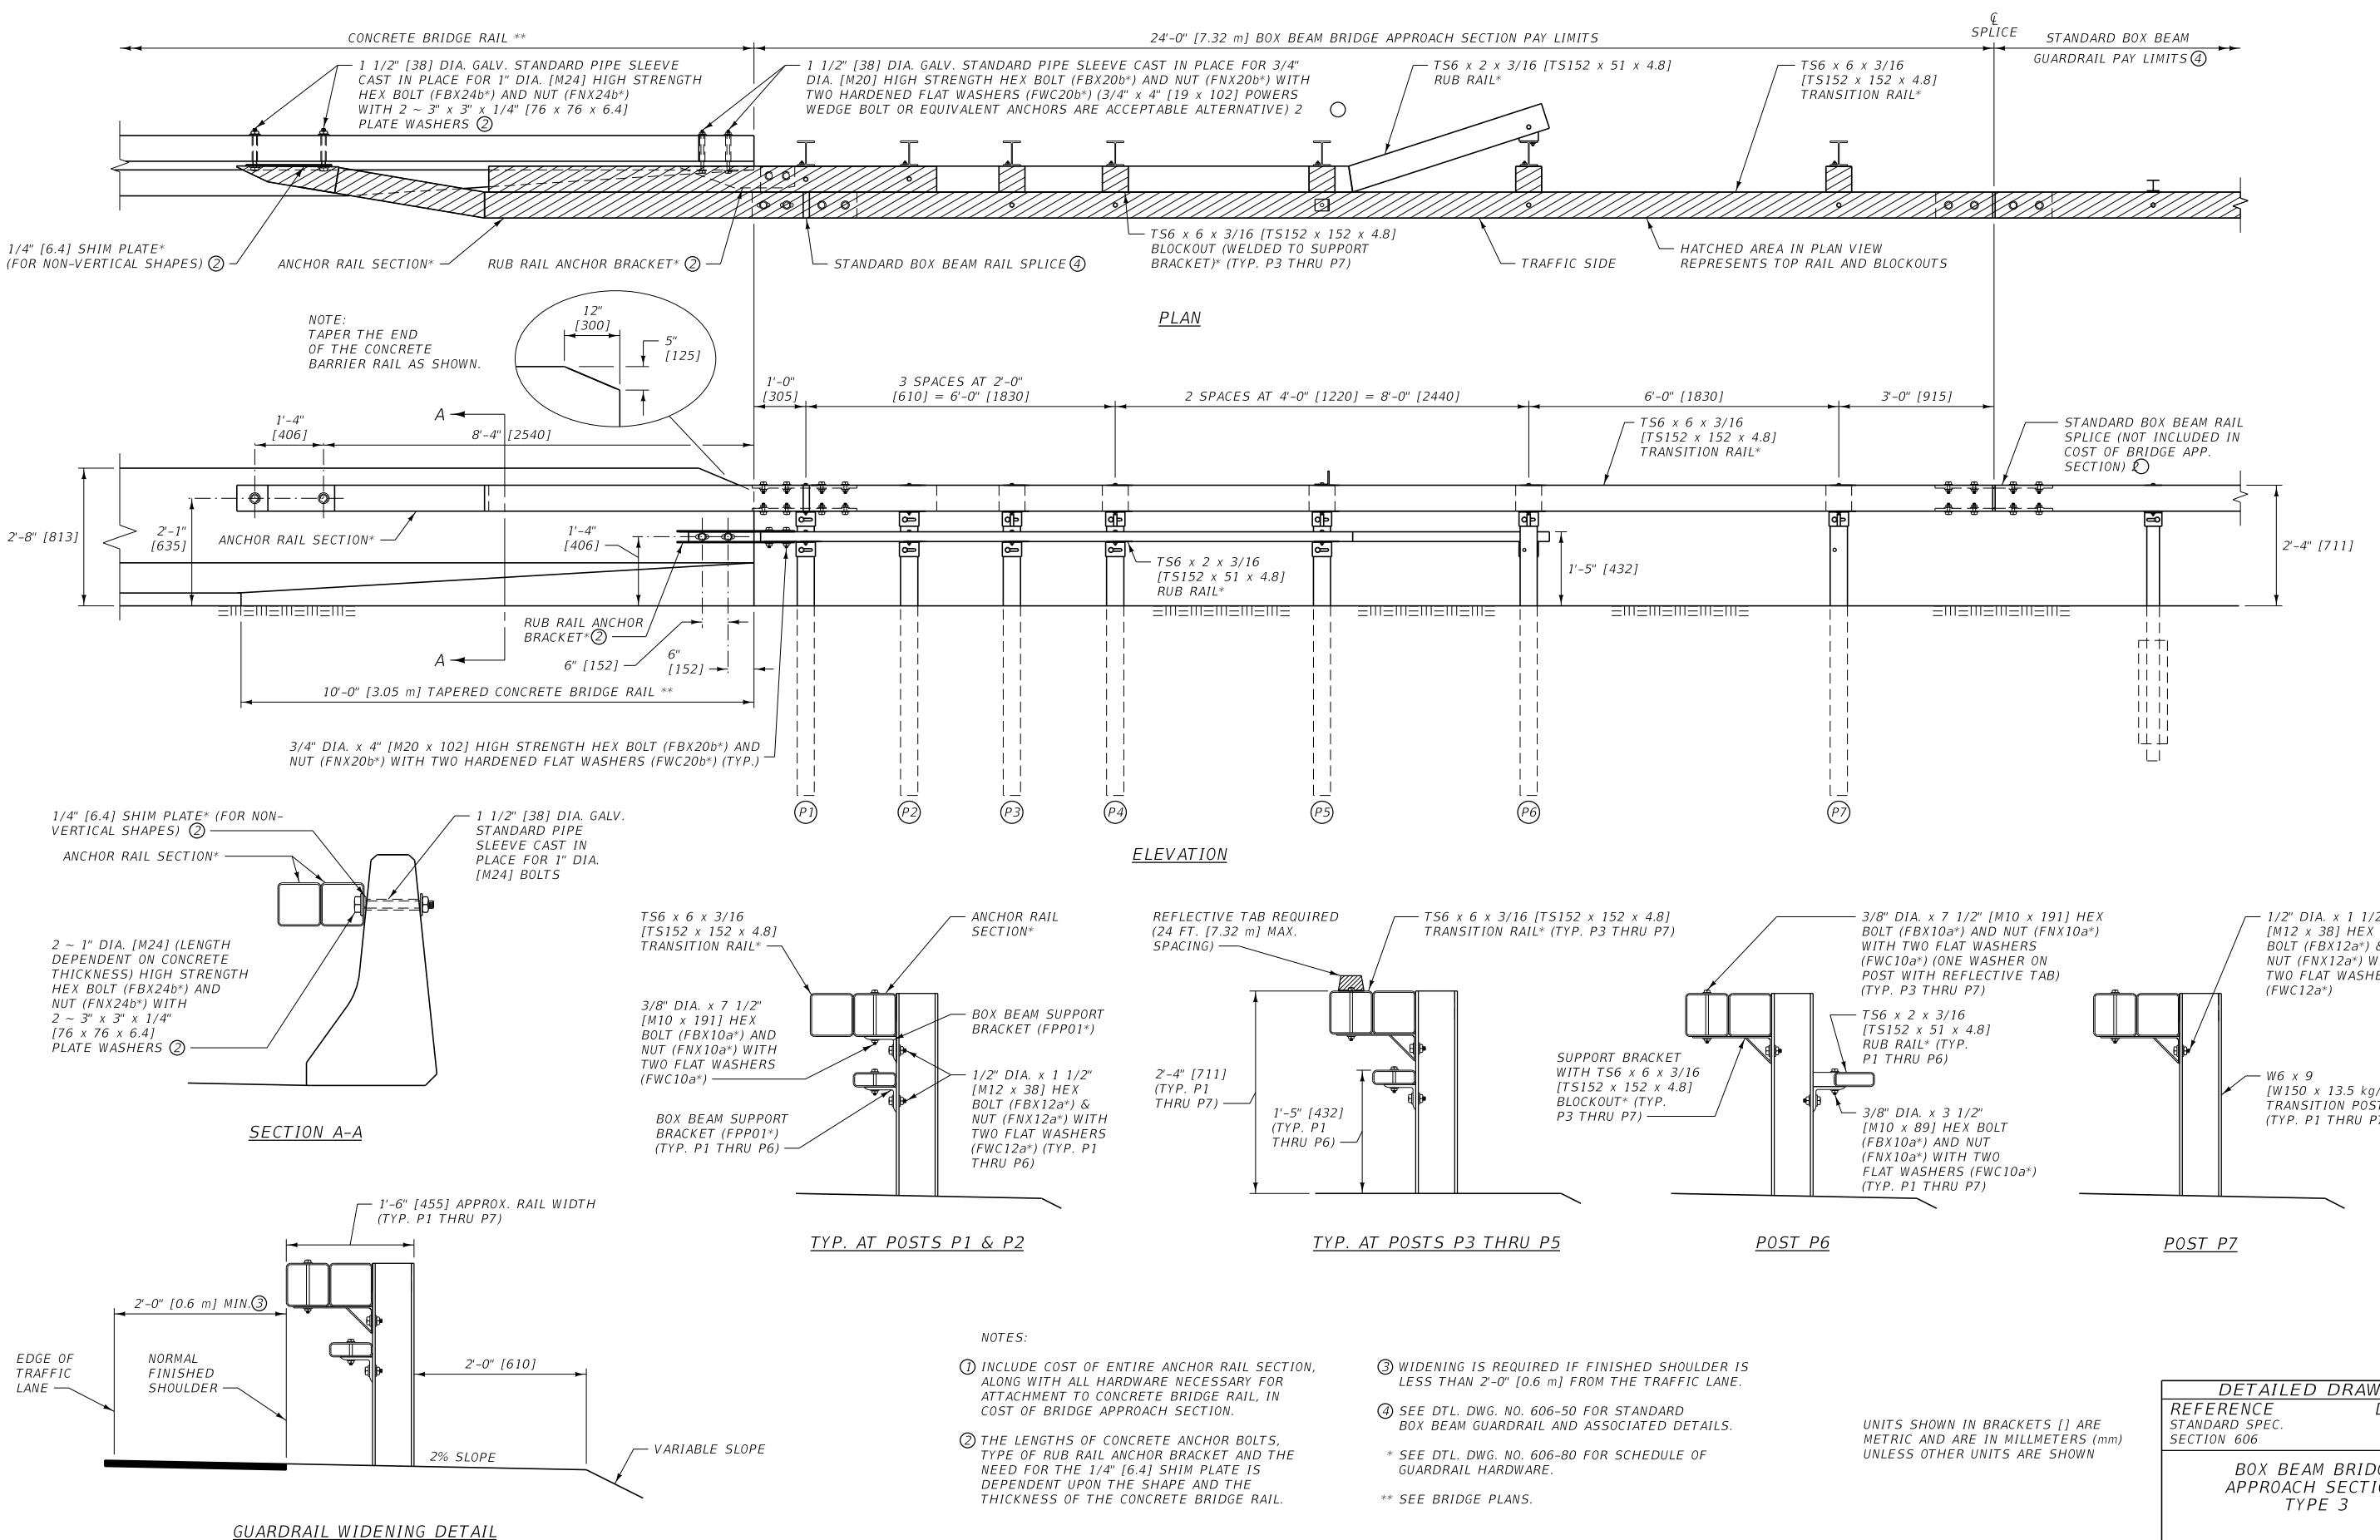


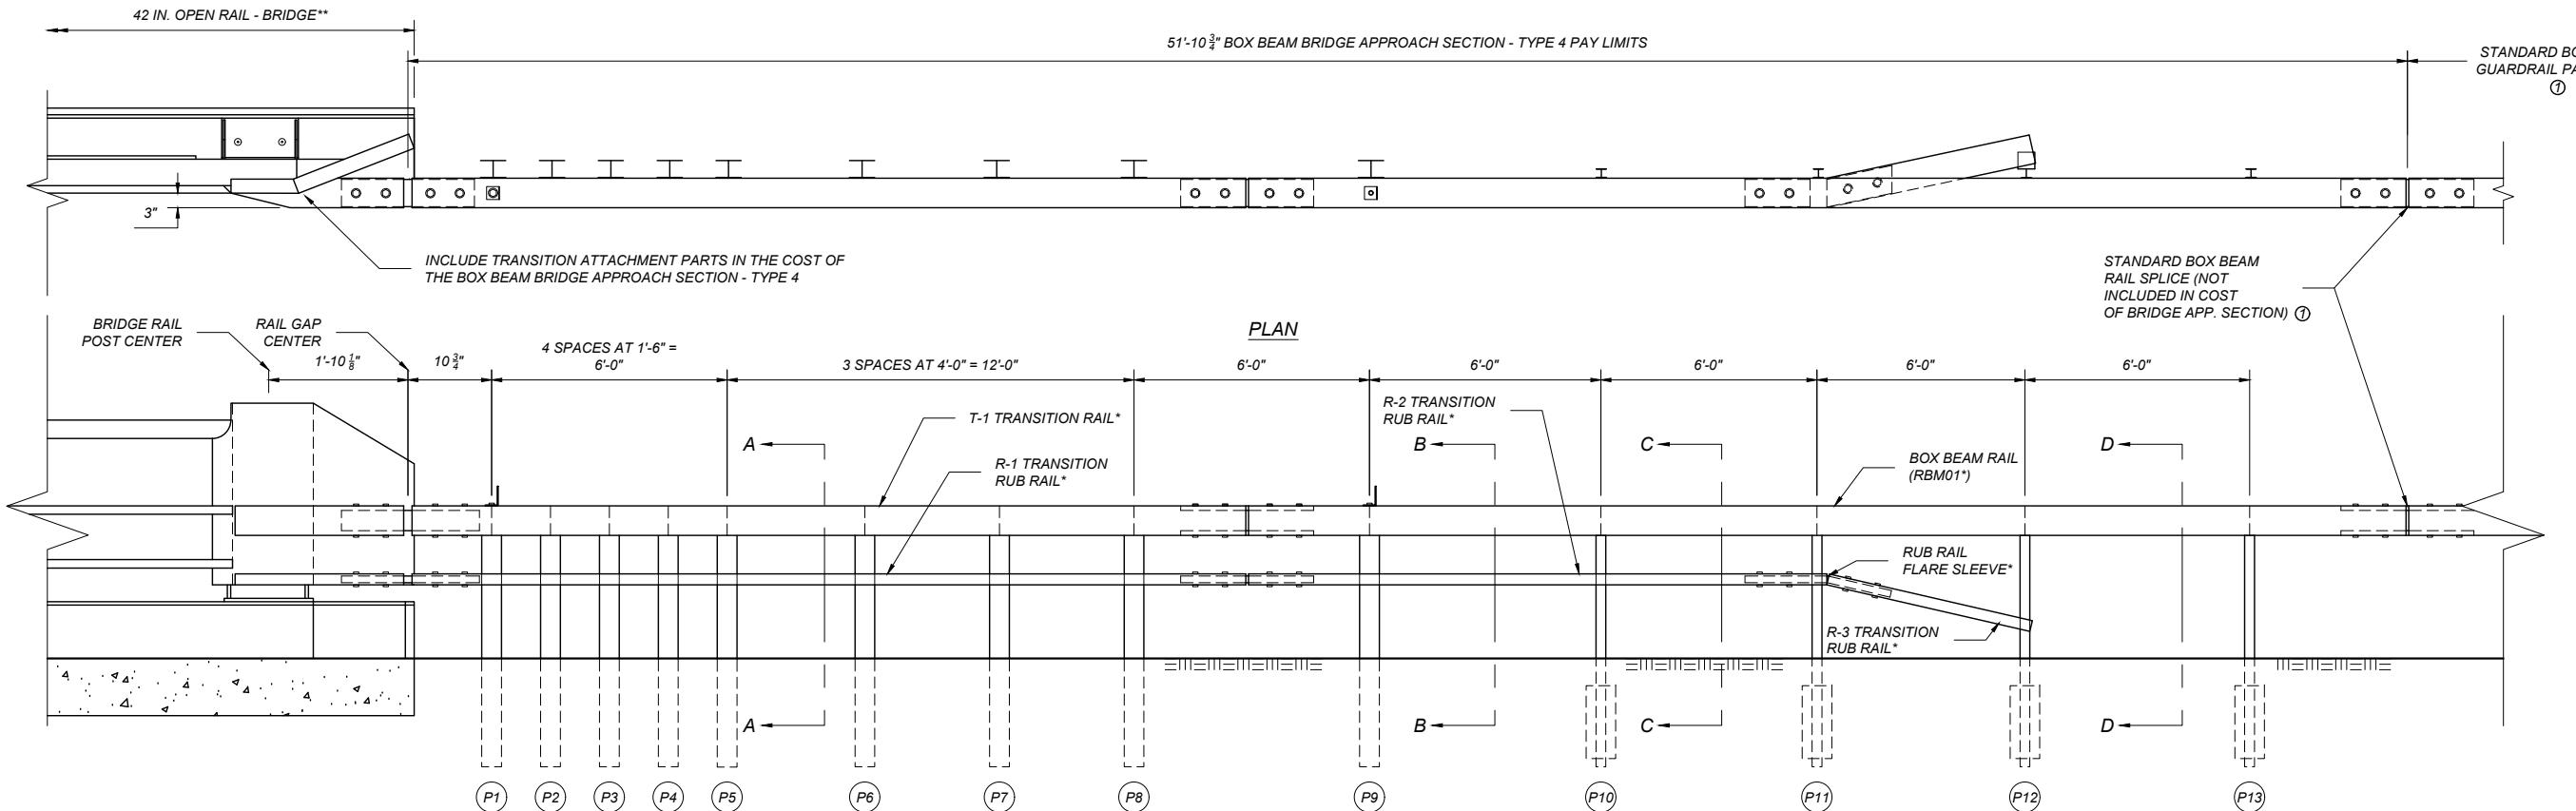


ELEVATION

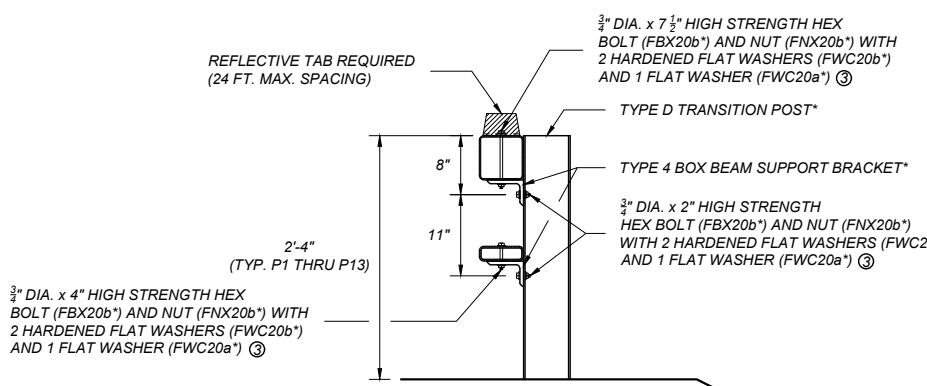

SECTION A-A
(TYP. AT POSTS P1 - P5)

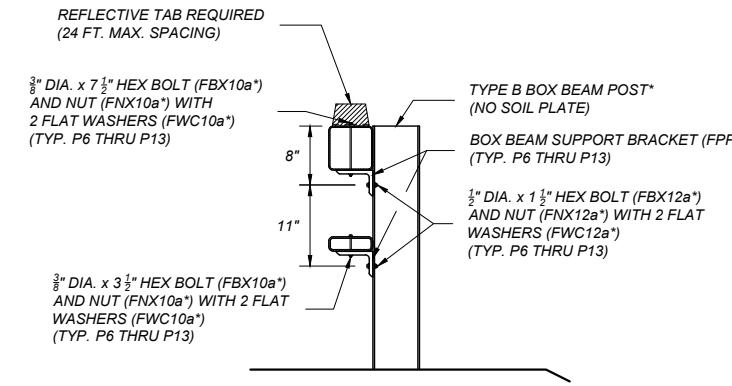


SECTION B-B
(TYP. AT POSTS P6 - P9)

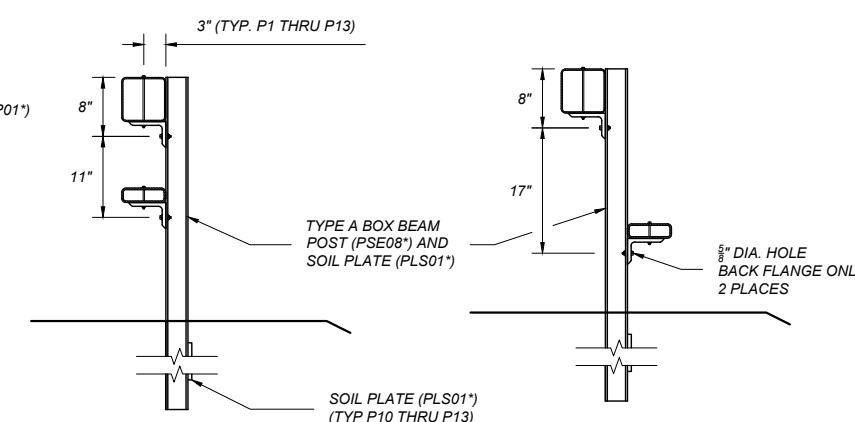


SECTION C-C
(TYP. AT POSTS P10 & P11)

SECTION D-D
(TYP. AT POST P12)

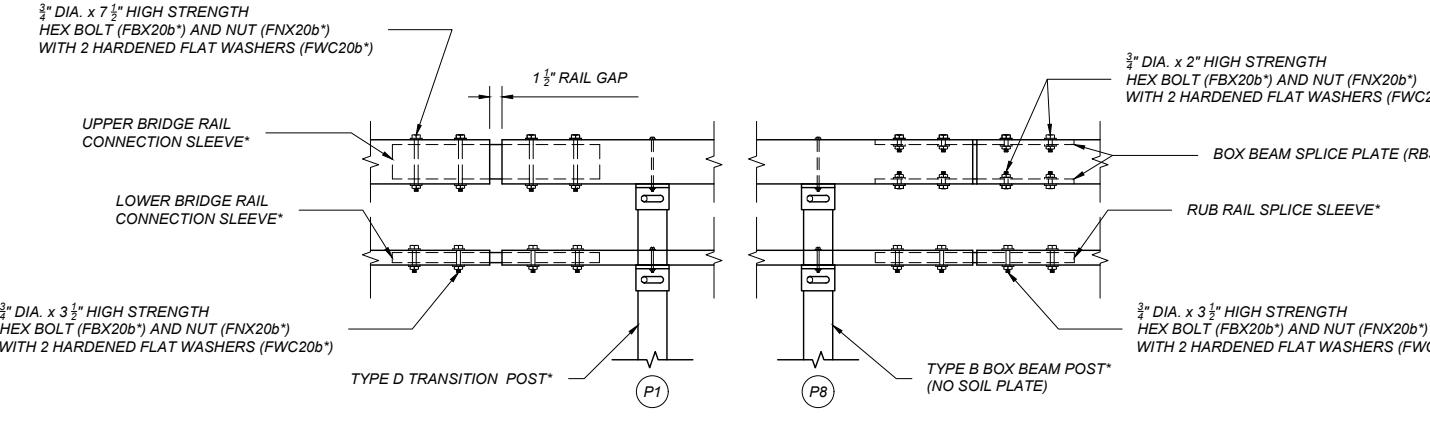

T-1 & R-1 RAIL CONNECTION DETAIL

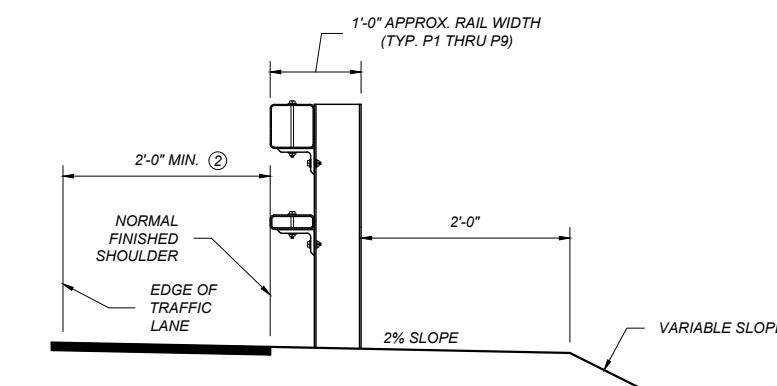

GUARDRAIL WIDENING DETAIL

NOTES:
 ① SEE DTL. DWG. NO. 606-50 FOR STANDARD BOX BEAM AND ASSOCIATED DETAILS.

② WIDENING IS REQUIRED IF FINISHED SHOULDER IS LESS THAN 2'-0" FROM THE TRAFFIC LANE.

③ PLACE HARDENED WASHERS (FWC20b*) UNDER BOLT HEAD AND NUT. ADD LARGER DIAMETER WASHER (FWC20a*) AGAINST BRACKET SLOT.

*SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.


**SEE BRIDGE PLANS

DETAILED DRAWINGS


REFERENCE DWG. NO.
STANDARD SPEC. 606-53B
SECTION 606

BOX BEAM BRIDGE APPROACH SECTION - TYPE 4

EFFECTIVE: JUN 27, 2024

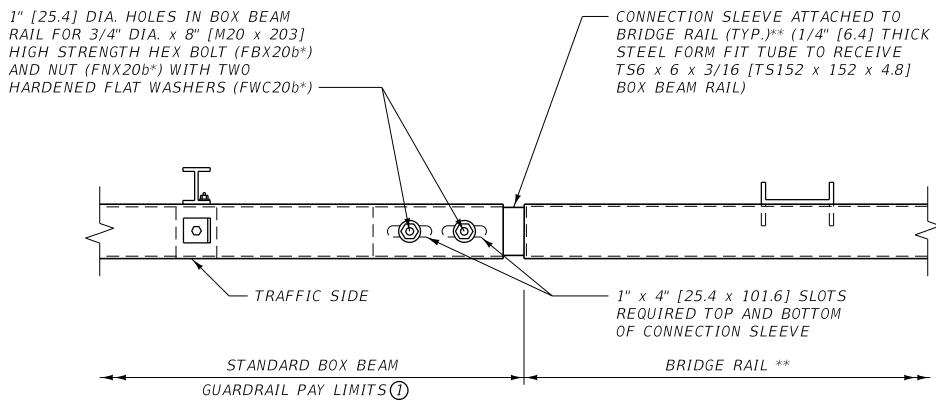

PLAN

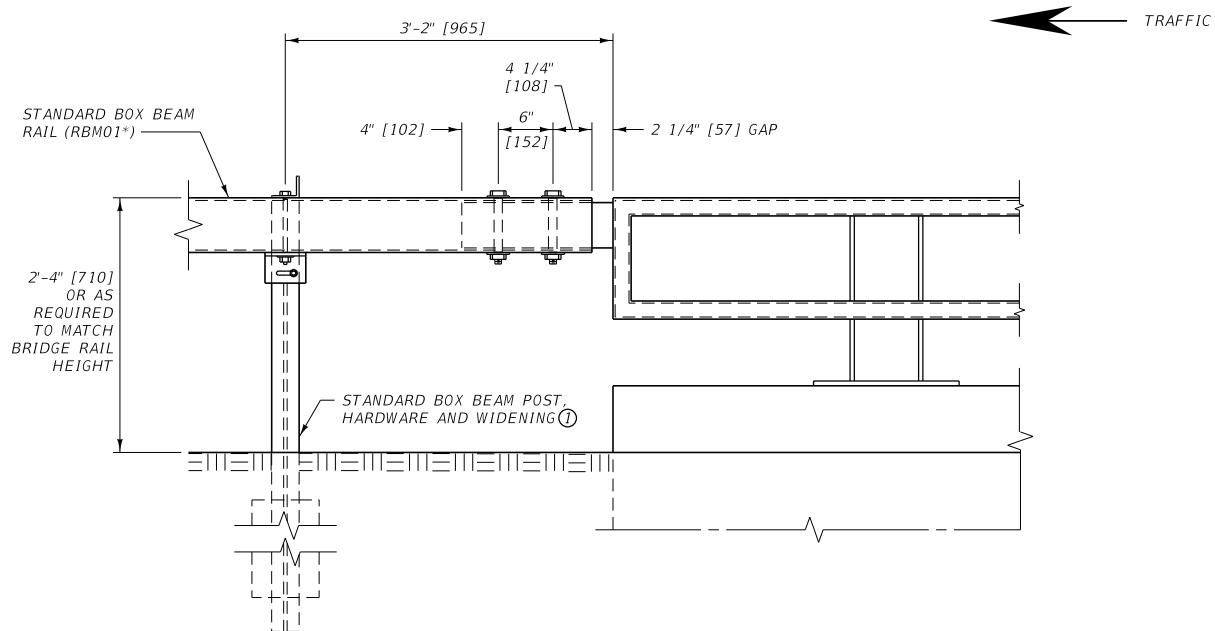

ELEVATION

NOTES:

① SEE DTL. DWG. NO. 606-50 FOR STANDARD BOX BEAM GUARDRAIL AND ASSOCIATED DETAILS.


② USE ON EXIT END OF ONE-WAY TRAFFIC BRIDGES ONLY.

* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.


** SEE BRIDGE PLANS FOR MORE DETAILED INFORMATION ON BRIDGE RAIL AND CONNECTION DETAILS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	606-54
SECTION 606	
BOX BEAM ONE-WAY BRIDGE DEPARTURE SECTION	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

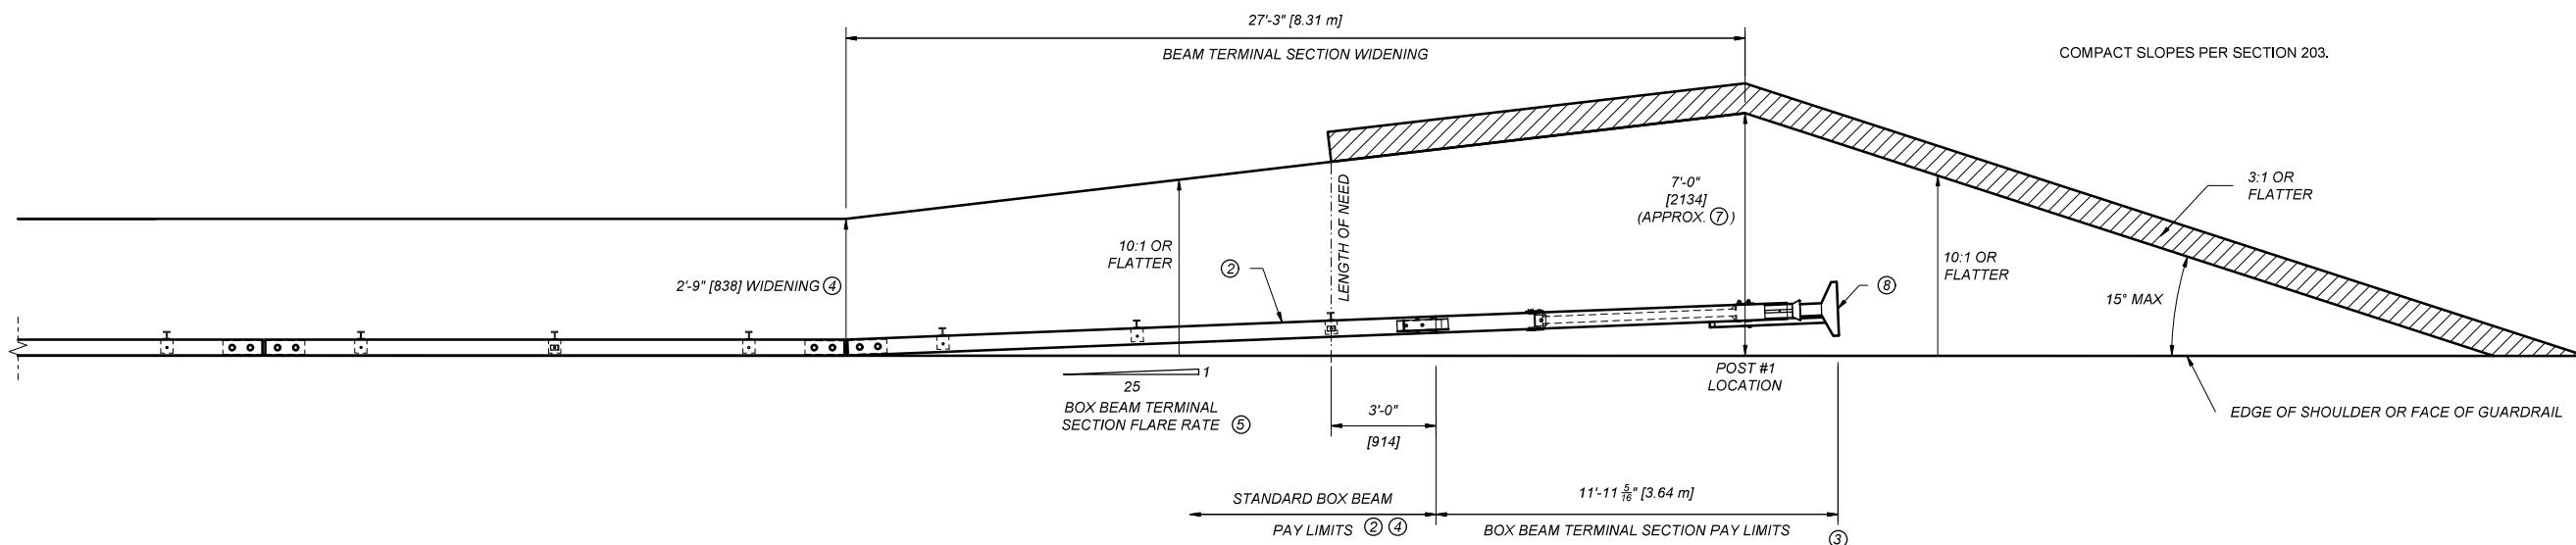

ROAD SYSTEMS MBEAT TERMINAL (FLARED) ①

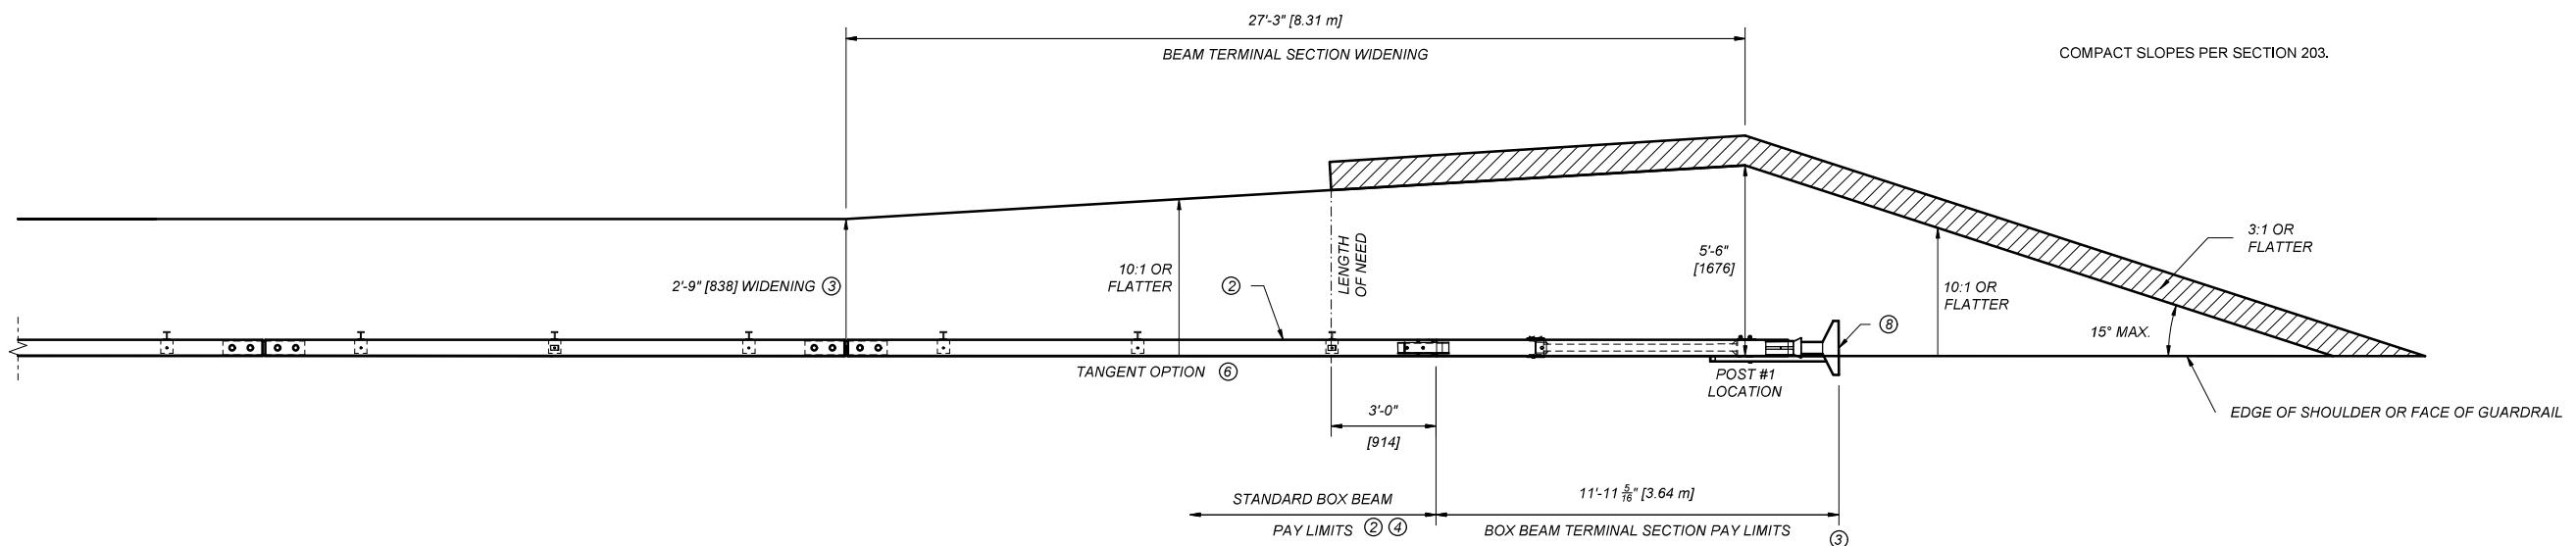

ROAD SYSTEMS MBEAT TERMINAL (TANGENT) ①

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

① REFER TO MANUFACTURER'S DETAIL AND ASSEMBLY INSTRUCTIONS.

② THE MBEAT REQUIRES AN 18'-0" [5.49 m] LONG (MINIMUM) SECTION OF STANDARD BOX BEAM RAIL FOR MASH TEST LEVEL 3 APPLICATIONS.

③ LOCATION EQUALS STATION LIMITS INDICATED IN THE PLANS.

④ SEE DTL. DWG. NO. 606-50 FOR STANDARD BOX BEAM GUARDRAIL AND ASSOCIATED DETAILS.

⑤ FLARE THE END SECTION AWAY FROM TRAFFIC AT A RATE OF 25:1 FOR 30 FEET [9.14 m] (ILLUSTRATED). FLARES OF 25:1 FOR 48 FEET [14.63 m] MAY ALSO BE USED.

⑥ THE FLARE MAY BE OMITTED ON ROADS WITH SHOULDERS GREATER THAN 2 FEET [0.6 m] IN WIDTH. DO NOT FLARE THE END SECTION ON INTERSTATE APPLICATIONS.

⑦ 7'-0" [2134] WIDENING DIMENSION ALLOWS FOR BOX BEAM TERMINAL SECTION FLARE AND SYSTEM WIDTH. A MINIMUM WIDENING DISTANCE OF 5'-0" [1524] IS REQUIRED BEHIND POST LOCATION #1.

⑧ PLACE A SELF-ADHESIVE OBJECT MARKER ON THE FACE OF THE NOSE ASSEMBLY, HAVING ALTERNATING RETRO-REFLECTIVE BLACK AND YELLOW STRIPES SLOPED DOWNWARD AT AN ANGLE OF 45° TOWARDS THE SIDE ON WHICH TRAFFIC IS TO PASS.

DETAILED DRAWINGS


REFERENCE DWG. NO.
STANDARD SPEC. 606-55
SECTION 606

BOX BEAM TERMINAL SECTION - MBEAT

EFFECTIVE: APR 28, 2022



REVISED--
JUN 27, 2024

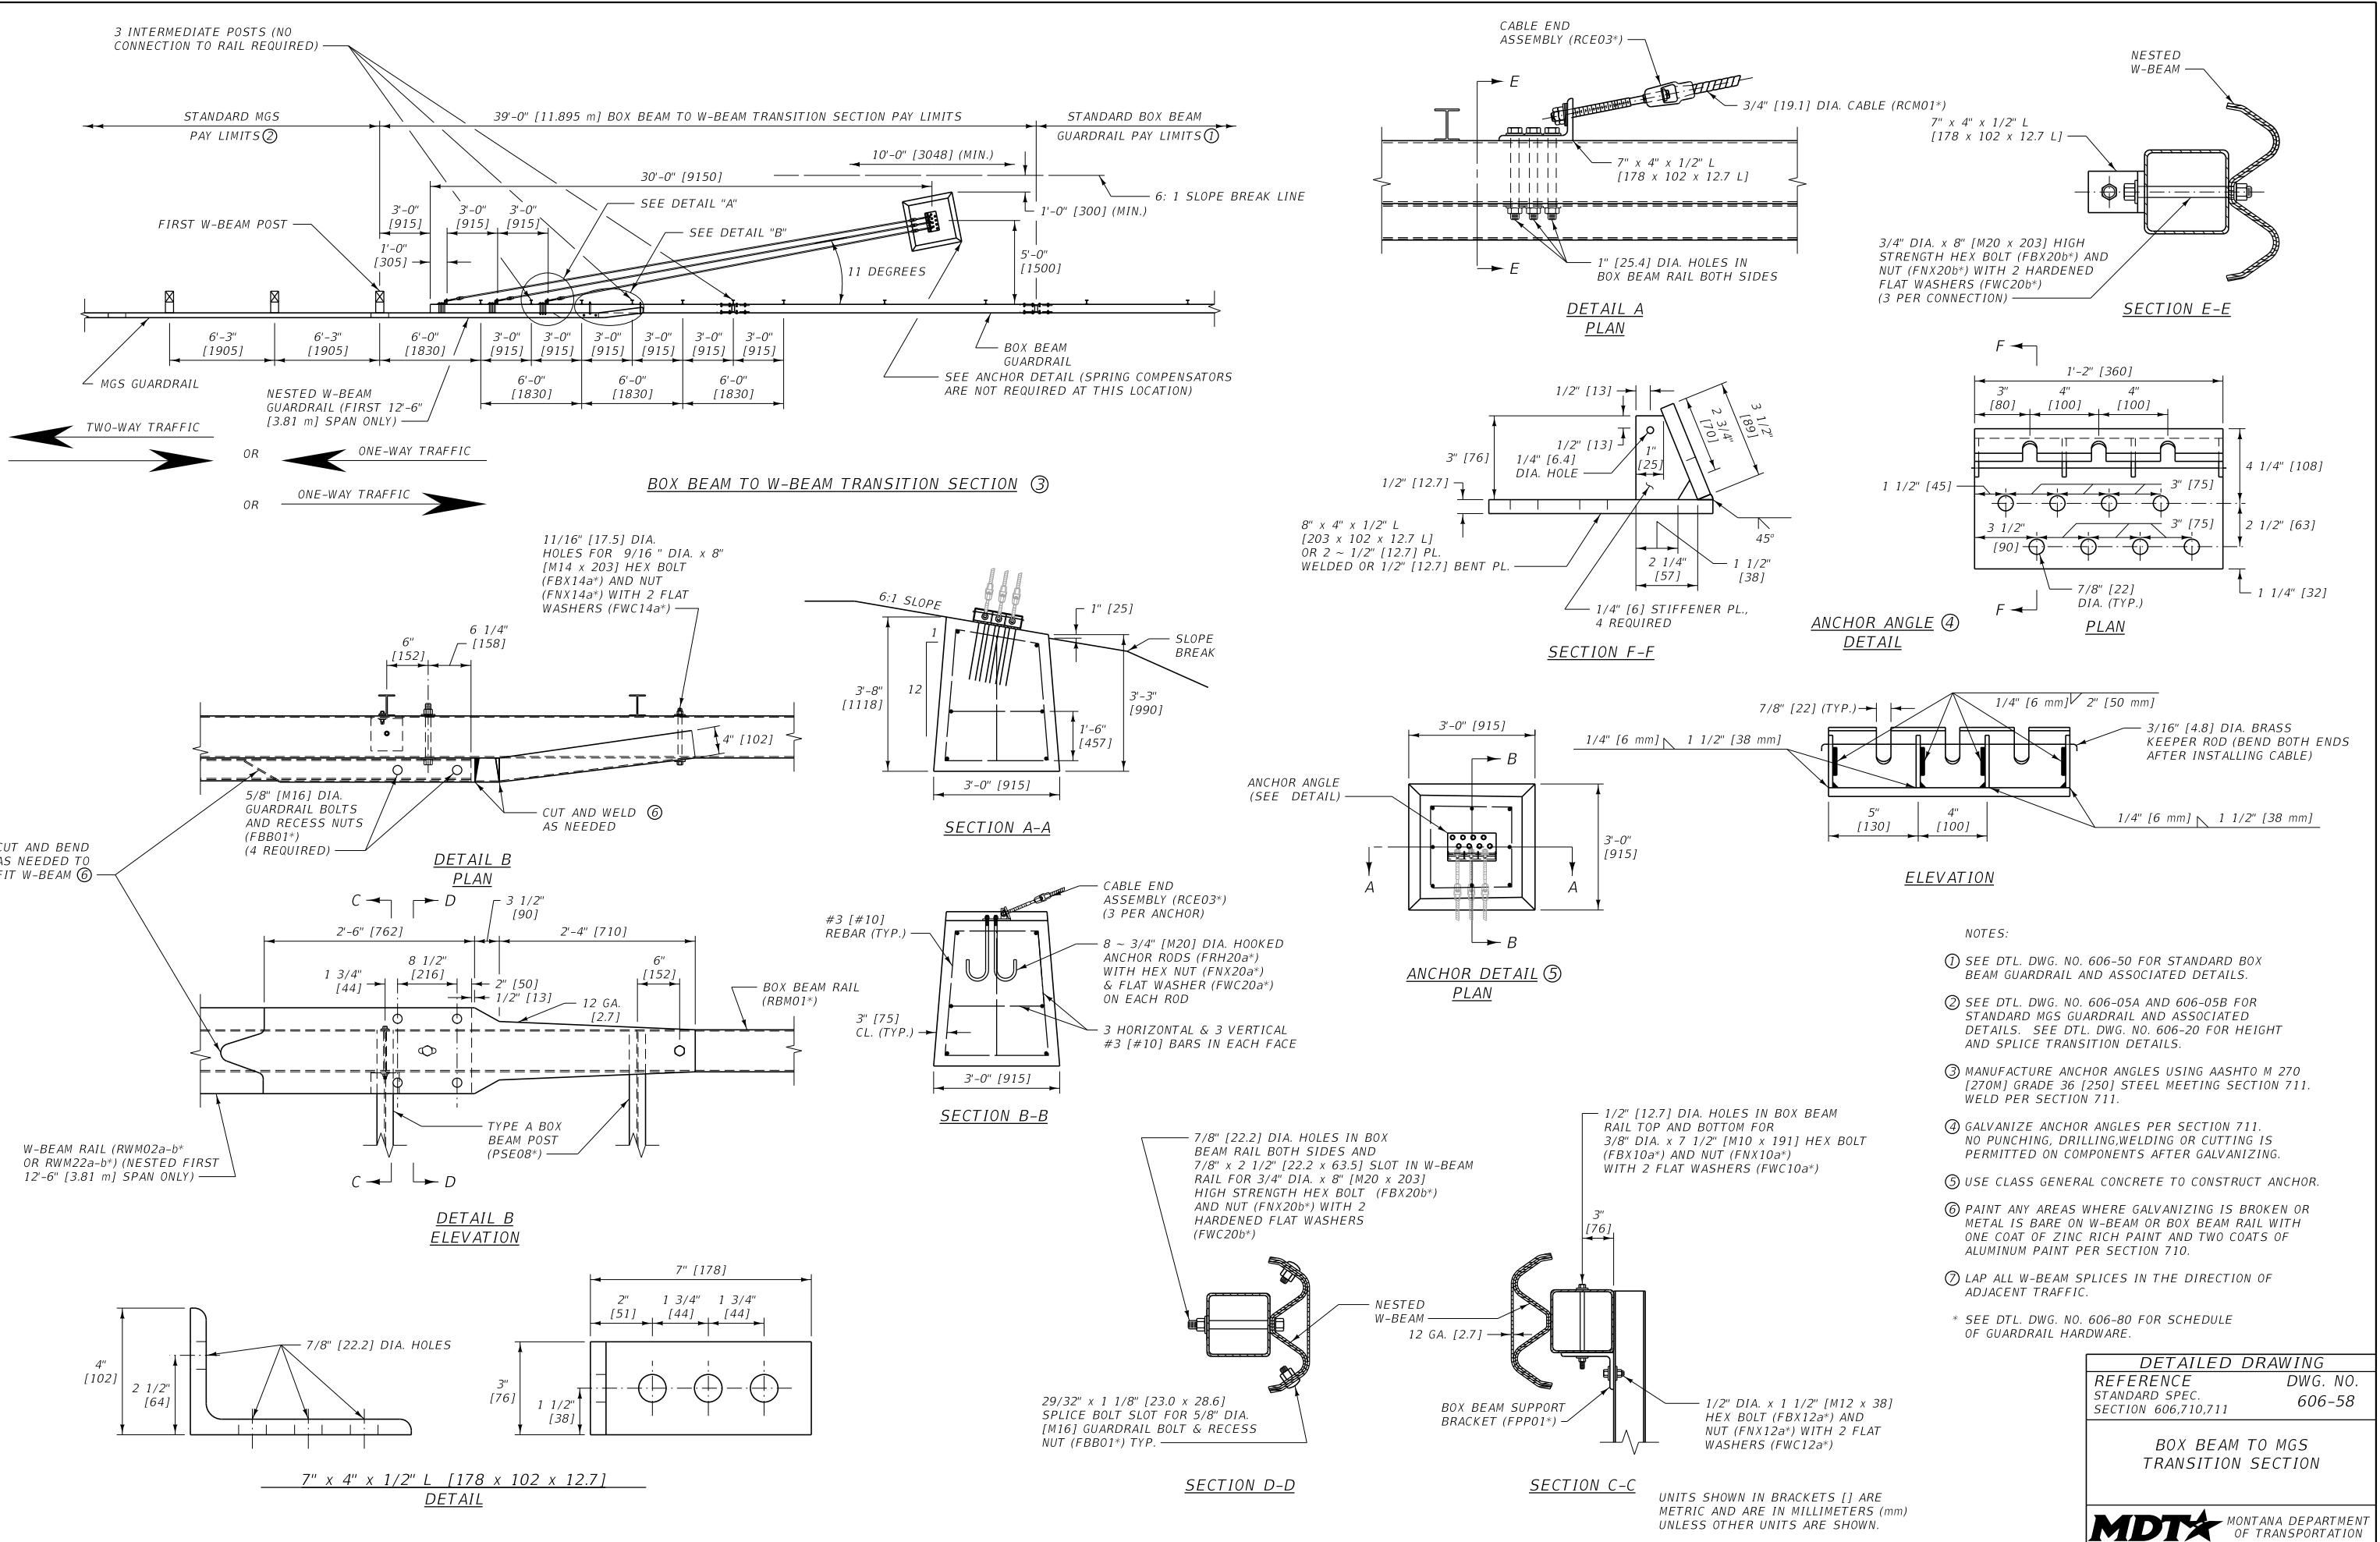

SCHEDULE OF GUARDRAIL HARDWARE				DTL. DWGS. WHERE PARTS USED																		
DESIGNATION ①	DESCRIPTION	DTL. DWG. NO. (606-###)	GUARDRAIL TYPE ②	606-05A	606-05B	606-07	606-09	606-11A	606-11B	606-18	606-23A	606-23B	606-24A	606-24B	606-46	606-50	606-52	606-53	606-54	606-58		
FBB01-05	5/8" DIA. GUARDRAIL BOLT & RECESS NUT	82	W	X		X	X								X				X			
FBB01-05	5/8" DIA. GUARDRAIL BOLT	82	W		X			X														
FBB06-07	5/8" DIA. GUARDRAIL BOLT & RECESS NUT	82	W							X	X											
FBX10a	3/8" DIA. HEX BOLT	82	B													X	X	X	X	X		
FBX12a	1/2" DIA. HEX BOLT	82	B												X	X	X	X	X			
FBX14a	9/16" DIA. HEX BOLT	82	B																	X		
FBX16a	5/8" DIA. HEX BOLT	82	W					X							X							
FBX20a	3/4" DIA. HEX BOLT	82	W							X					X		X	X	X	X		
FBX20b	3/4" DIA. HIGH STRENGTH HEX BOLT*	82	B							X												
FBX22b	7/8" DIA. HIGH STRENGTH HEX BOLT*	82	W							X	X	X	X									
FBX24b	1" DIA. HIGH STRENGTH HEX BOLT*	82	B																	X		
FCA01	CABLE ASSEMBLY	84	W					X							X							
FMM01	CABLE WEDGE	94	C																	X		
FMM02	POST SLEEVE	84	W					X							X							
FNS20	3/4" DIA. SQUARE NUT	82	C																	X		
FNX10a	3/8" DIA. HEX NUT	82	B												X	X	X	X	X	X		
FNX12a	1/2" DIA. HEX NUT	82	B												X	X	X	X	X	X		
FNX14a	9/16" DIA. HEX NUT	82	B																	X		
FNX16a	5/8" DIA. HEX NUT	82	W		X		X	X							X							
FNX20a	3/4" DIA. HEX NUT	82	C,W												X					X		
FNX20b	3/4" DIA. HIGH STRENGTH HEX NUT	82	B																X	X	X	X
FNX22b	7/8" DIA. HIGH STRENGTH HEX NUT	82	B								X	X	X	X								
FNX24a	1" DIA. HEX NUT	82	W					X											X			
FNX24b	1" DIA. HIGH STRENGTH HEX NUT	82	B																			X
FPA01	GUARDRAIL ANCHOR BRACKET & END PLATE	84	W							X												
FPP01	BEARING PLATE	18 & 46	W							X					X							
FPP01	BOX BEAM SUPPORT BRACKET	97	B												X	X	X	X	X	X		
FRH20a	3/4" DIA. HOOKED ANCHOR ROD	82	C																			X
FWC10a	3/8" DIA. FLAT WASHER	82	B												X	X	X	X	X	X		
FWC12a	1/2" DIA. FLAT WASHER	82	B												X	X	X	X	X	X		
FWC14a	9/16" DIA. FLAT WASHER	82	B																			X
FWC16a	5/8" DIA. FLAT WASHER	82	W	X	X		X	X	X	X					X							
FWC20a	3/4" DIA. FLAT WASHER	82	C,W												X					X	X	X
FWC20b	3/4" DIA. HARDENED FLAT WASHER	82	B												X					X	X	X
FWC24a	1" DIA. FLAT WASHER	82	W					X							X					X		
FWR03	RECTANGULAR PLATE WASHER	84	W					X														
PDB01	8" WOOD BLOCKOUT	05A & 05B, 11A & 11B	W	X	X		X	X														
PDB11	12" WOOD BLOCKOUT	09, 23A & 23B	W			X				X	X											
PDE02	WOOD GUARDRAIL POST	05A & 11A	W	X			X															
PDE09	CRT POST	46	W			X										X						
PDF01	WOOD BREAKAWAY POST	46	W							X					X							
PPF01	STRUT AND YOKE ASSEMBLY	18	W																			
PLS01	SOIL PLATE	92 & 97	B												X	X	X	X	X			
PLS03	SOIL PLATE	46	W												X							
PSE05	TYPE D BOX BEAM POST	97	B																			X
PSE08	TYPE A BOX BEAM POST	97	B																			X
PTE05	STEEL TUBE	46	W																			X
PTE06	STEEL TUBE	18	W							X												
PWE01	STEEL GUARDRAIL POST	05B	W		X		X								X							
RBM01	BOX BEAM RAIL	98	B																	X	X	X
RBM05	BOX BEAM TERMINAL RAIL	98	B																			X
RBS01	BOX BEAM SPLICE PLATE	98	B																			X
RCE03	CABLE END ASSEMBLY	94	C																			X
RCM01	3/4" DIA. CABLE	94	C																			X
RTE01b	THRIE-BEAM TERMINAL CONNECTOR	23A & 23B	W								X	X										
RTM01a-b	4-SPACE THRIE-BEAM (6'-3" LENGTH)	23A & 23B	W									X	X									
RTM02a-b	8-SPACE THRIE-BEAM (12'-6" LENGTH)	23A & 23B	W									X	X									
RWE01a-b	W-BEAM END SECTION (FLARED)	88	W									X										
RWE02a-b	W-BEAM TERMINAL CONNECTOR	88	W										X	X	X	X	X					
RWE03a-b	W-BEAM END SECTION (BUFFER)	88	W																			
RWM02a-b	2-SPACE W-BEAM (12'-6" LENGTH)	88	W																			X
RWM04a-b	4-SPACE W-BEAM (12'-6" LENGTH)	88	W	X	X		X	X	X	X												
RWM08a-b	8-SPACE W-BEAM (12'-6" LENGTH)	88	W			X																
RWM14a	BCT TERMINAL RAIL SECTION	18	W												X							
RWM22a-b	W-BEAM (25'-0" LENGTH)	88	W	X	X		X	X	X	X												
RWT02a-b	W-BEAM TO THRIE-BEAM TRANSITION SECTION (7'-3 1/2" LENGTH)	23A & 23B	W												X	X						

*FURNISH HIGH STRENGTH BOLTS IN ACCORDANCE WITH ASTM F3125 GRADE A325

NOTES:

① SEE AASHTO-AGC-ARTBA JOINT COMMITTEE
TASK FORCE 13 REPORT "A GUIDE TO
STANDARDIZED HIGHWAY BARRIER HARDWARE"
PUBLICATION FOR ADDITIONAL AND DETAILED
HARDWARE SPECIFICATIONS.

② GUARDRAIL TYPE CODES:


W = W-BEAM METAL GUARDRAIL
C = CABLE GUARDRAIL
B = BOX BEAM GUARDRAIL

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 606-80
SECTION 606

**SCHEDULE OF GUARDRAIL
HARDWARE**

EFFECTIVE: JAN 23, 2020

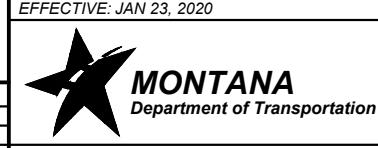

--REVISED--
JUN 27, 2024
JAN 15, 2026

11/29/2025 8:45 AM DRRD606080 - STD-8 .5X11-606080A.DWG

SCHEDULE OF GUARDRAIL HARDWARE		DTL DWG NO. (606-###)	GUARDRAIL TYPE ②	DTL DWGS. WHERE PARTS USED																		
DESIGNATIO N①	DESCRIPTION			606-054	606-055	606-07	606-09	606-11A	606-11B	606-18	606-23A	606-24A	606-24B	606-25A	606-25B	606-46	606-50	606-52	606-53	606-53A	606-53B	606-54
N/A	TYPE B BOX BEAM POST	97	B															X	X			
N/A	TYPE 4 BOX BEAM SUPPORT BRACKET	97	B																X			
N/A	SUPPORT BRACKET WITH TS6 x 6 x 3/16 BLOCKOUT	97	B																	X		
N/A	TRANSITION POST	97	B																	X		
N/A	TYPE D TRANSITION POST	97	B																	X		
N/A	TS6 x 6 x 3/16 BR. APP. SECT. UPPER RAIL NO. 1	98	B																	X		
N/A	TS6 x 2 x 1/4 BR. APP. SECT. LOWER RAIL NO. 1	98	B																X			
N/A	TS6 x 2 x 1/4 BR. APP. SECT. LOWER RAIL NO. 2	98	B																X			
N/A	TS6 x 2 TO TS6 x 6 CONNECTION SLEEVE	98	B																X			
N/A	TS6 x 2 CONNECTION SLEEVE	98	B															X				
N/A	TS6 x 6 x 3/16 TRANSITION RAIL	98	B																X			
N/A	T-1 TRANSITION RAIL	98A	B																X			
N/A	R-1 TRANSITION RUB RAIL	98A	B																X			
N/A	R-2 TRANSITION RUB RAIL	98A	B																X			
N/A	R-3 TRANSITION RUB RAIL	98A	B																X			
N/A	UPPER BRIDGE RAIL CONNECTION SLEEVE	98A	B																X			
N/A	LOWER BRIDGE RAIL CONNECTION SLEEVE	98A	B																X			
N/A	RUB RAIL SPLICE SLEEVE	98A	B																X			
N/A	RUB RAIL FLAIR SLEEVE	98A	B																X			
N/A	1/4" SHIM PLATE	99	B																X			
N/A	ANCHOR RAIL SECTION	99	B																X			
N/A	RUB RAIL ANCHOR BRACKET (JERSEY RAIL)	99	B																X			
N/A	RUB RAIL ANCHOR BRACKET (VERTICAL BRIDGE RAIL)	99	B																X			
N/A	TS6 x 2 x 3/16 RUB RAIL	99	B																X			
N/A	RUB RAIL FLARE SLEEVE	98A	B																X			
N/A	TYPE 4 TRANSITION ATTACHMENT (BENT PLATE)	99A	B																X			
N/A	TYPE 4 TRANSITION ATTACHMENT (TOP STIFFENER)	99A	B																X			
N/A	TYPE 4 TRANSITION ATTACHMENT (SIDE STIFFENER)	99A	B																X			
N/A	TYPE 4 TRANSITION ATTACHMENT (BOTTOM STIFFENER)	99A	B																X			
N/A	TYPE 4 TRANSITION ATTACHMENT (UPPER RAIL ATTACHMENT)	99A	B																X			
N/A	TYPE 4 TRANSITION ATTACHMENT (RUB RAIL ATTACHMENT)	99A	B																X			
N/A	TYPE 4 TRANSITION ATTACHMENT (MOUNTING TAB)	99A	B																X			
N/A	TYPE 4 TRANSITION ATTACHMENT (GUSSET)	99A	B																X			

* FURNISH HIGH STRENGTH BOLTS IN ACCORDANCE WITH ASTM F3125 GRADE A325

NOTES:


① SEE AASHTO-AGC-ARTBA JOINT COMMITTEE
TASK FORCE 13 REPORT "A GUIDE TO
STANDARDIZED HIGHWAY BARRIER HARDWARE"
PUBLICATION FOR ADDITIONAL AND DETAILED
HARDWARE SPECIFICATIONS.

② GUARDRAIL TYPE CODES:


W = W-BEAM METAL GUARDRAIL
C = CABLE GUARDRAIL
B = BOX BEAM GUARDRAIL

DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 606	DWG. NO. 606-80A
SCHEDULE OF GUARDRAIL HARDWARE	
EFFECTIVE: JAN 23, 2020	
 MONTANA Department of Transportation	
--REVISED-- JUN 27, 2024 JAN 15, 2026	11/29/2025 8:45 AM DRD606080 - STD-8 .5X11-606080A.DWG


GUARDRAIL HARDWARE

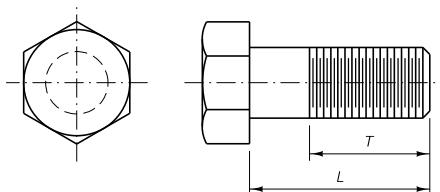

HEX BOLTS

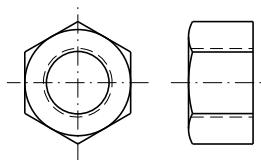

HEX NUT

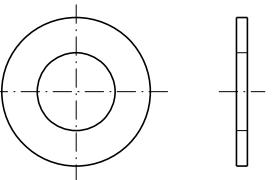


FLAT WASHERS

BOLT SIZE	DESIGNATION *	L	T (MIN.)
REGULAR HEX BOLTS			
3/8" DIA.	FBX10a	3 1/2"	1 1/2"
3/8" DIA.	FBX10a	7 1/2"	1 1/2"
1/2" DIA.	FBX12a	1 1/2"	FULL
1/2" DIA.	FBX12a	2 1/2"	1 3/4"
9/16" DIA.	FBX14a	8"	2"
5/8" DIA.	FBX16a	1 1/2"	FULL
3/4" DIA.	FBX20a	8"	2"
3/4" DIA.	FBX20a	9 1/2"	2"
HIGH STRENGTH HEX BOLTS			
3/4" DIA.	FBX20b	2"	1 1/2"
3/4" DIA.	FBX20b	4"	2"
3/4" DIA.	FBX20b	8"	2"
7/8" DIA.	FBX22b	1'-0"	AS REQUIRED
1" DIA.	FBX24b	AS REQUIRED	AS REQUIRED


NUT SIZE	DESIGNATION *
REGULAR HEX NUTS	
3/8" DIA.	FNX10a
1/2" DIA.	FNX12a
9/16" DIA.	FNX14a
5/8" DIA.	FNX16a
3/4" DIA.	FNX20a
1" DIA.	FNX24a
HIGH STRENGTH HEX NUTS	
3/4" DIA.	FNX20b
7/8" DIA.	FNX22b
1" DIA.	FNX24b

WASHER SIZE	DESIGNATION *
REGULAR FLAT WASHERS	
3/8" DIA.	FWC10a
1/2" DIA.	FWC12a
9/16" DIA.	FWC14a
5/8" DIA.	FWC16a
3/4" DIA.	FWC20a
1" DIA.	FWC24a
HARDENED FLAT WASHERS	
3/4" DIA.	FWC20b
7/8" DIA.	FWC22b
1" DIA.	FWC24b


METRIC GUARDRAIL HARDWARE

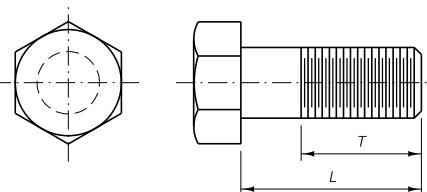

HEX BOLTS

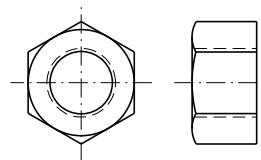

HEX NUT

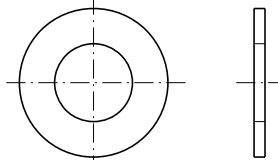


FLAT WASHERS

BOLT SIZE	DESIGNATION *	L	T (MIN.)
REGULAR HEX BOLTS			
M10	FBX10a	89	38
M10	FBX10a	191	38
M12	FBX12a	38	FULL
M12	FBX12a	63	44
M14	FBX14a	203	51
M16	FBX16a	38	FULL
M20	FBX20a	203	51
M20	FBX20a	241	51
HIGH STRENGTH HEX BOLTS			
M20	FBX20b	51	38
M20	FBX20b	102	51
M20	FBX20b	203	51
M22	FBX22b	305	AS REQUIRED
M24	FBX24b	AS REQUIRED	AS REQUIRED


NUT SIZE	DESIGNATION *
REGULAR HEX NUTS	
M10	FNX10a
M12	FNX12a
M14	FNX14a
M16	FNX16a
M20	FNX20a
M24	FNX24a
HARDENED FLAT WASHERS	
M20	FNX20b
M22	FNX22b
M24	FNX24b

WASHER SIZE	DESIGNATION *
REGULAR FLAT WASHERS	
M10	FWC10a
M12	FWC12a
M14	FWC14a
M16	FWC16a
M20	FWC20a
M24	FWC24a
HARDENED FLAT WASHERS	
M20	FWC20b

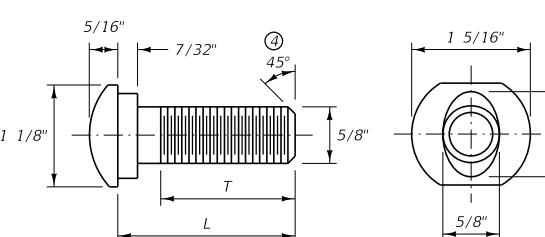

5/8" DIA. GUARDRAIL BOLT & RECESSED NUT

FBB01-07*

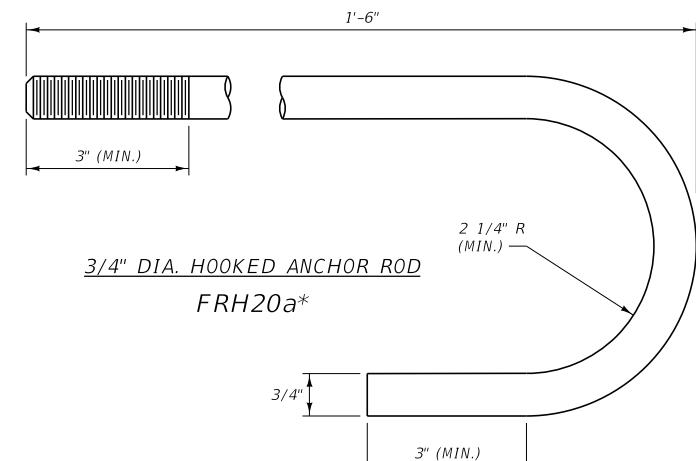


3/4" DIA. SQUARE NUT

FNS20*

3/4" DIA. HOOKED ANCHOR ROD


FRH20a*

DESIGNATION *	L	T (MIN.)
FBB01	1 1/4"	1 1/8"
FBB02	2"	1 3/4"
FBB03	10"	4"
FBB04	1'-6"	4"
FBB05	2'-1"	4"
FBB06	1'-2"	4 1/16"
FBB07	1'-9"	4 1/16"

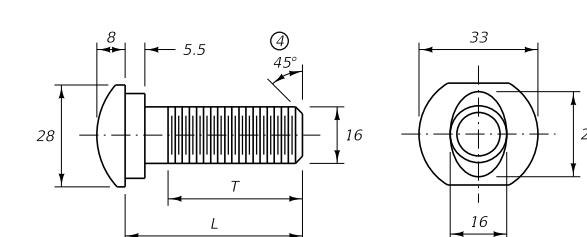


M16 GUARDRAIL BOLT & RECESSED NUT

FBB01-07*

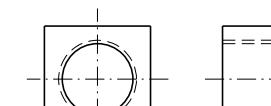

M20 SQUARE NUT

FNS20*

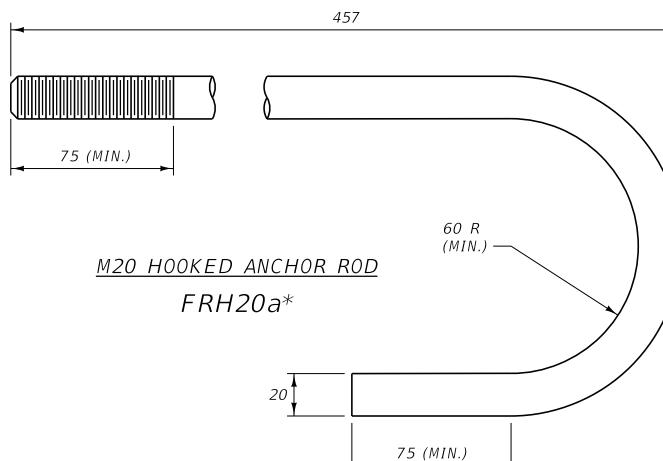

M20 HOOKED ANCHOR ROD

FRH20a*


NOTES:

- ① FURNISH BOLTS AND ANCHOR RODS MEETING THE REQUIREMENTS OF SUBSECTION 705.01.1.
- ② FURNISH HIGH STRENGTH BOLTS MEETING THE REQUIREMENTS OF SUBSECTION 711.06.
- ③ GALVANIZE BOLTS, NUTS AND WASHERS IN ACCORDANCE WITH SUBSECTION 705.01.1.
- ④ 35° THREAD ANGLE FOR BOLTS FBB06-07.

* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.

ALL DIMENSIONS ARE MILLIMETERS
(mm) UNLESS OTHERWISE NOTED.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 606-82
SECTION 606, 705, 711
GUARDRAIL HARDWARE
MDT MONTANA DEPARTMENT OF TRANSPORTATION

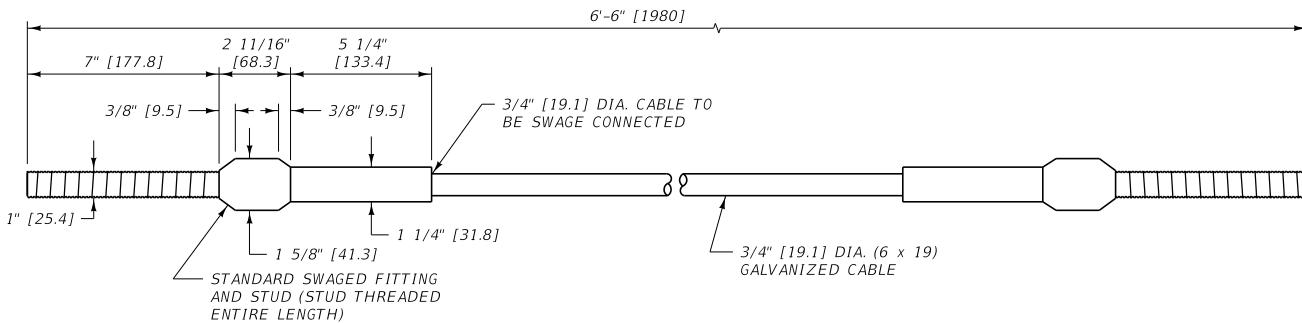


NOTES:

- ① FOR RELATED FASTENER HARDWARE SEE FWC24a*, FNX24a* AND FPA01*.
- ② MACHINE THE SWAGED FITTING FROM HOT-ROLLED CARBON STEEL CONFORMING TO THE REQUIREMENTS OF ASTM A576 [A576 M], GRADE 1035, AND ANNEAL SUITABLE FOR COLD SWAGING. GALVANIZE THE SWAGED FITTING IN ACCORDANCE WITH SUBSECTION 711.08 BEFORE SWAGING. DRILL A LOCHE PIN HOLE TO ACCOMMODATE A 1/4" [6.4 mm] PLATED SPRING STEEL PIN THROUGH THE HEAD OF THE SWAGED FITTING TO RETAIN THE STUD IN THE PROPER POSITION.
- ③ THE SWAGED FITTING, STUD AND NUT (FNX24a*) MUST DEVELOP THE BREAKING STRENGTH OF THE WIRE ROPE.
- ④ WIRE ROPE IS TO CONFORM TO THE REQUIREMENTS OF AASHTO M30 [M30M] AND BE 3/4" [19.1 mm] PREFORMED, 6 x 19, WIRE STRAND CORE OR INDEPENDENT WIRE ROPE CORE (IWRC), GALVANIZED, RIGHT REGULAR LAY, MANUFACTURED OF IMPROVED PLOW STEEL WITH A MINIMUM BREAKING STRENGTH OF 42,800 POUNDS [190.4 kN].
- ⑤ THE STUD IS TO CONFORM TO THE REQUIREMENTS OF ASTM F568 [F568M] CLASS 8.8 AND BE GALVANIZED IN ACCORDANCE WITH AASHTO M232 [M232M] (ASTM A153 [153M]). PRIOR TO GALVANIZING, MILL A 3/8" [9.5 mm] SLOT INTO THE STUD END FOR THE LOCKING PIN.


CABLE ASSEMBLY

FCA01*

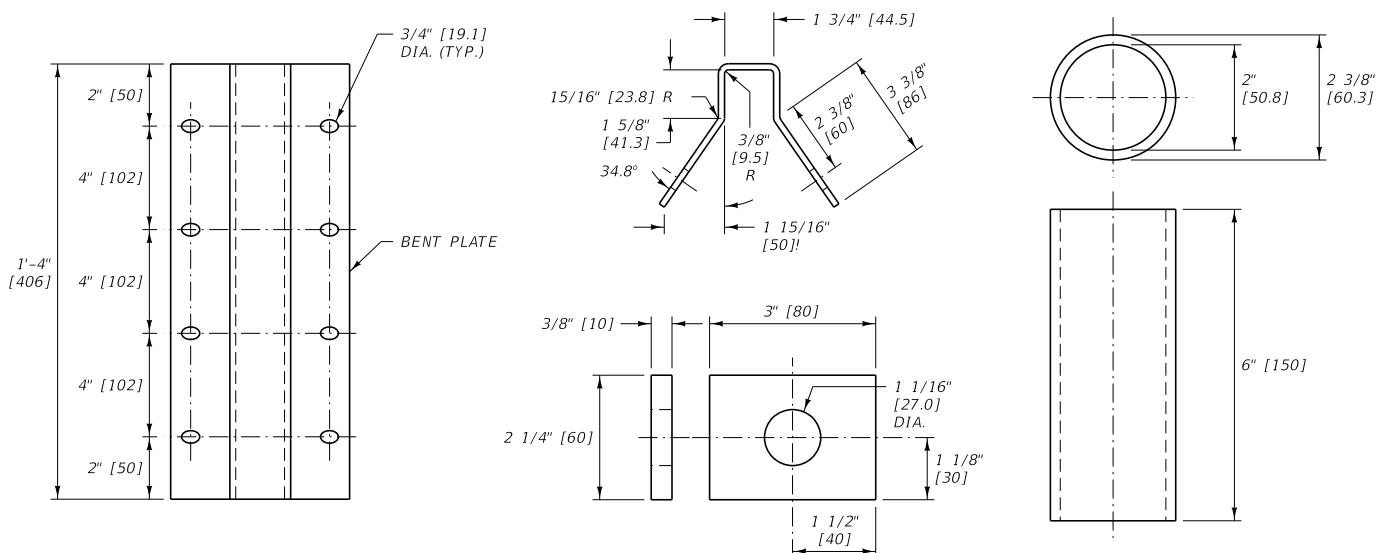

ANCHOR BRACKET & END PLATE

FPA01*

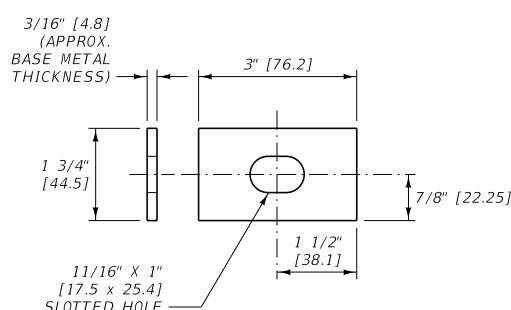

NOTES:

- ⑥ ANCHOR BRACKETS, END PLATES AND RECTANGULAR PLATE WASHERS ARE TO CONFORM TO THE REQUIREMENTS OF AASHTO M270 [M270M] (ASTM A709 [A709M]) GRADE 36 [250] STEEL PLATE. POST SLEEVES ARE TO CONFORM TO THE REQUIREMENTS OF ASTM A53 [A53M] GRADE B.
- ⑦ GALVANIZE FABRICATED PARTS IN ACCORDANCE WITH SUBSECTION 711.08. DO NOT PUNCH, DRILL, OR CUT AFTER GALVANIZING.

RECTANGULAR PLATE WASHER

FWR03*





FMM02*

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 606, 711	DWG. NO. 606-84
W-BEAM METAL GUARDRAIL HARDWARE	

MDT MONTANA DEPARTMENT OF TRANSPORTATION


* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.

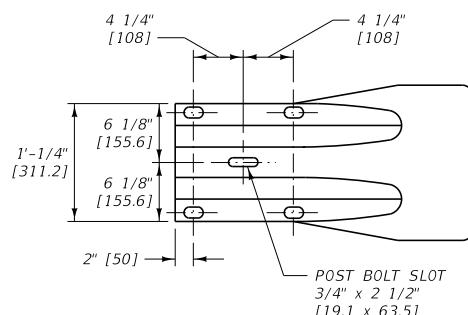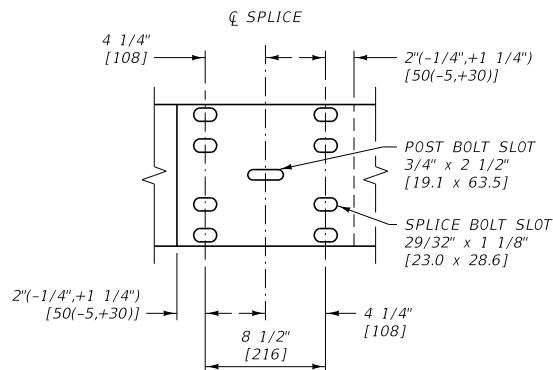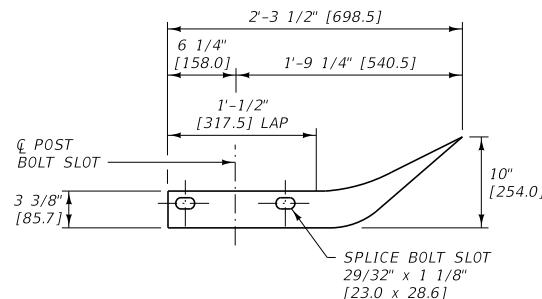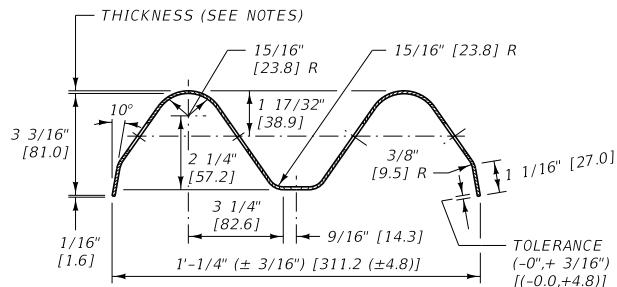


RWM02a-b*
RWM04a-b*
RWM08a-b*
 (12'-6" [3.81 m] LENGTH)

RWM22a-b*
 (25'-0" [7.62 m] LENGTH)

W-BEAM END SECTION (FLARED)
RWE01a-b*

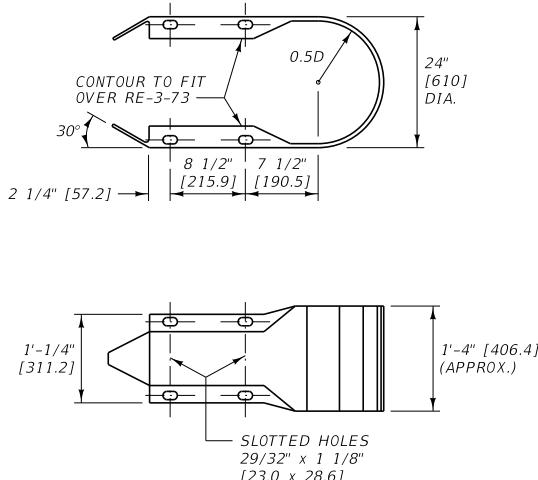

W-BEAM END SECTION (BUFFER)
RWE06a-b*

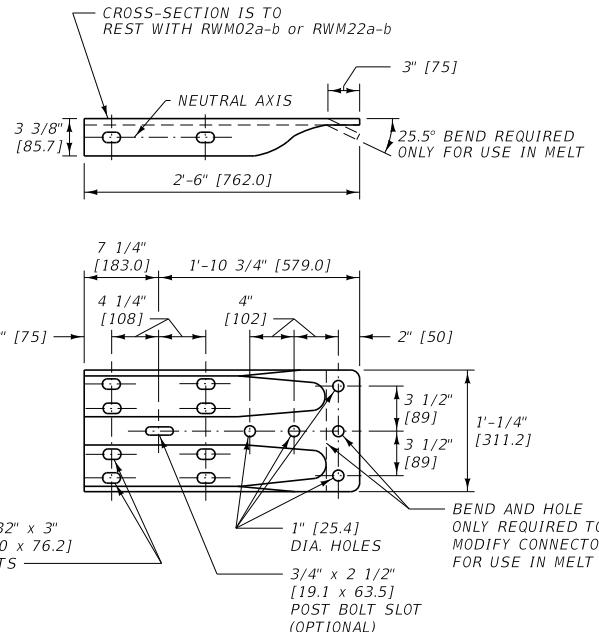

W-BEAM TERMINAL CONNECTOR
RWE02a-b*

NOTES:




* DESTINATION SUFFIX	METAL THICKNESS
a	12 GAUGE [2.7 mm]
b	10 GAUGE [3.5 mm]

* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 606-88
SECTION 606	
W-BEAM METAL GUARDRAIL HARDWARE	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

R.H. = RIGHT HAND
L.H. = LEFT HAND

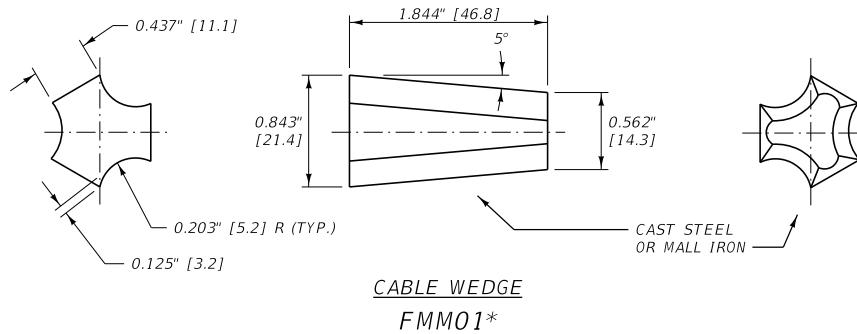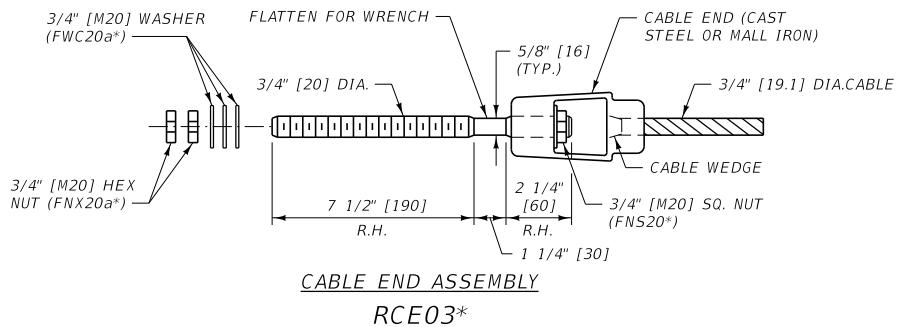

3/4" [19.1] DIA. - 3 x 7 WIRE ROPE

3/4" [19.1] DIA. CABLE

RCM01*


NOTES:

- ① WIRE ROPE AND CONNECTING HARDWARE ARE TO CONFORM TO THE REQUIREMENTS OF AASHTO M30 [M30M] TYPE 1 CLASS A, 3/4" [19.1] ROPE. CONNECTING HARDWARE MUST DEVELOP THE FULL STRENGTH OF A SINGLE CABLE (25,000 LB [111.2 kN]). CAST STEEL COMPONENTS ARE TO CONFORM TO THE REQUIREMENTS OF AASHTO M103 [M103M] (ASTM A27 [A27M]). MALLEABLE IRON CASTINGS ARE TO CONFORM TO THE REQUIREMENTS OF ASTM A47 [A47M].
- ② AT ALL LOCATIONS WHERE THE CABLE IS CONNECTED TO A CABLE SOCKET WITH A WEDGE TYPE CONNECTION, CRIMP ONE WIRE OF THE CABLE OVER THE BASE OF THE WEDGE TO HOLD IT FIRMLY IN PLACE.
- ③ DESIGN SOCKET BASKETS FOR USE WITH THE WEDGE DETAILED IN THIS DRAWING.
- ④ ALTERNATE HARDWARE DESIGNS WILL BE CONSIDERED FOR APPROVAL PROVIDED THEIR CONNECTION DETAILS, FOR THE PURPOSE OF MAINTENANCE SUBSTITUTIONS, ARE COMPATIBLE WITH THE DETAILS OF THIS DRAWING AND THEIR OPERATING CHARACTERISTICS ARE SIMILAR TO THOSE OF THE HARDWARE IN THIS DRAWING.


* SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF GUARDRAIL HARDWARE.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	606-94
SECTION 606	
LOW-TENSION CABLE GUARDRAIL HARDWARE	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

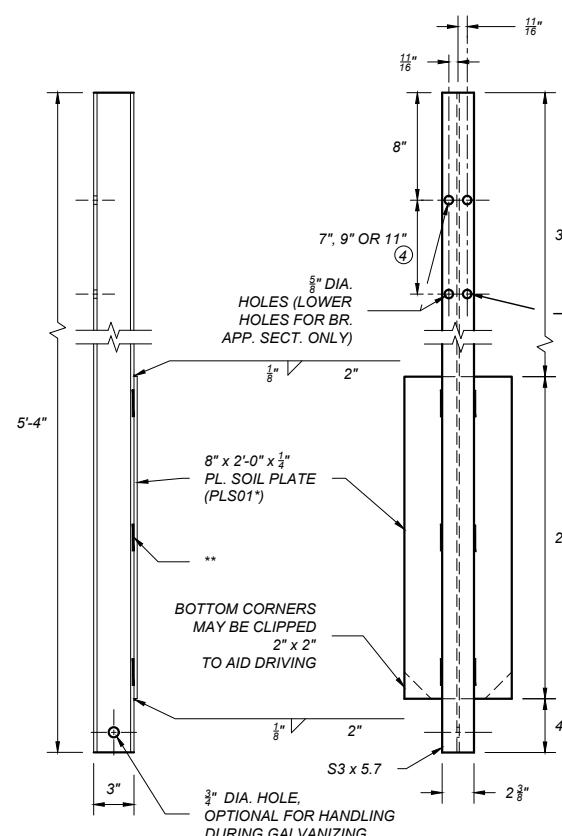


TYPE A BOX BEAM POST AND SOIL PLATE
PSE08* AND PLS01*

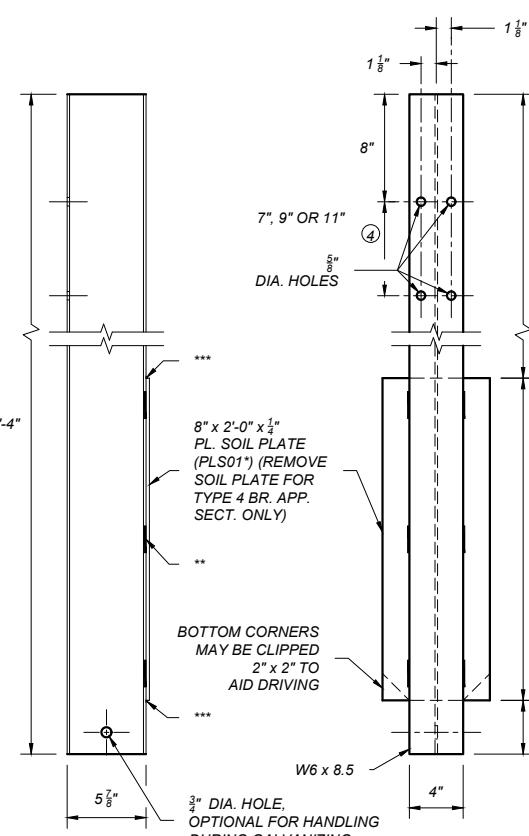


TYPE B BOX BEAM
POST AND SOIL PLATE

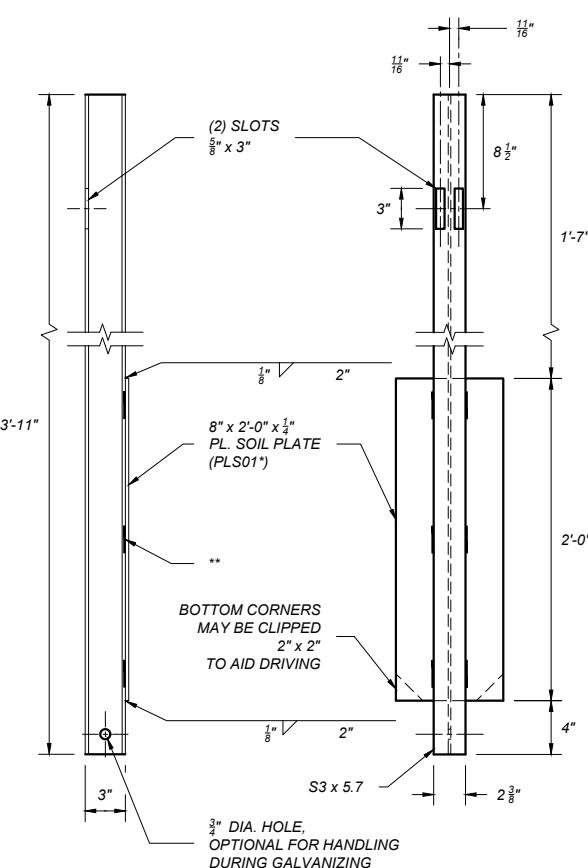


TYPE D BOX BEAM POST AND SOIL PLATE
PSE05* AND PLS01*

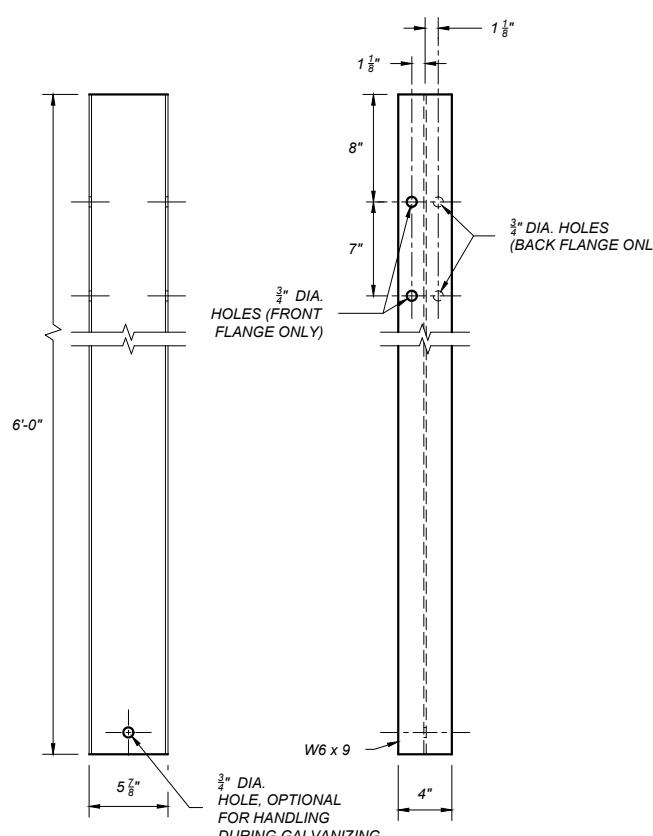

TRANSITION POST

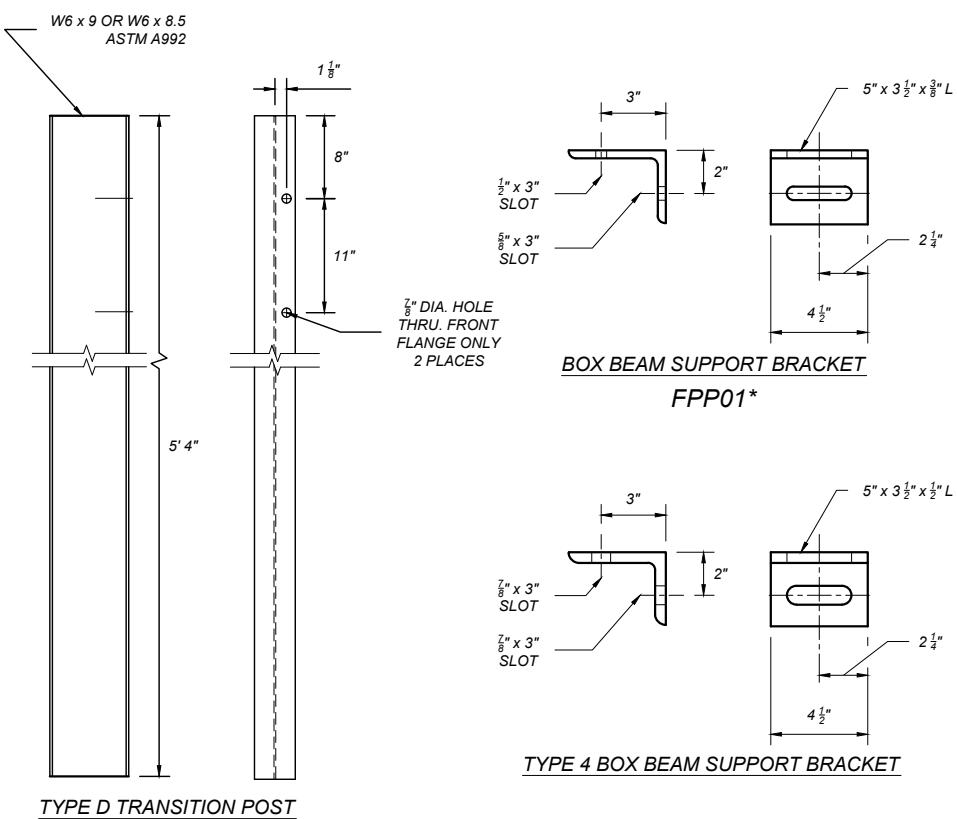

TYPE D TRANSITION POST

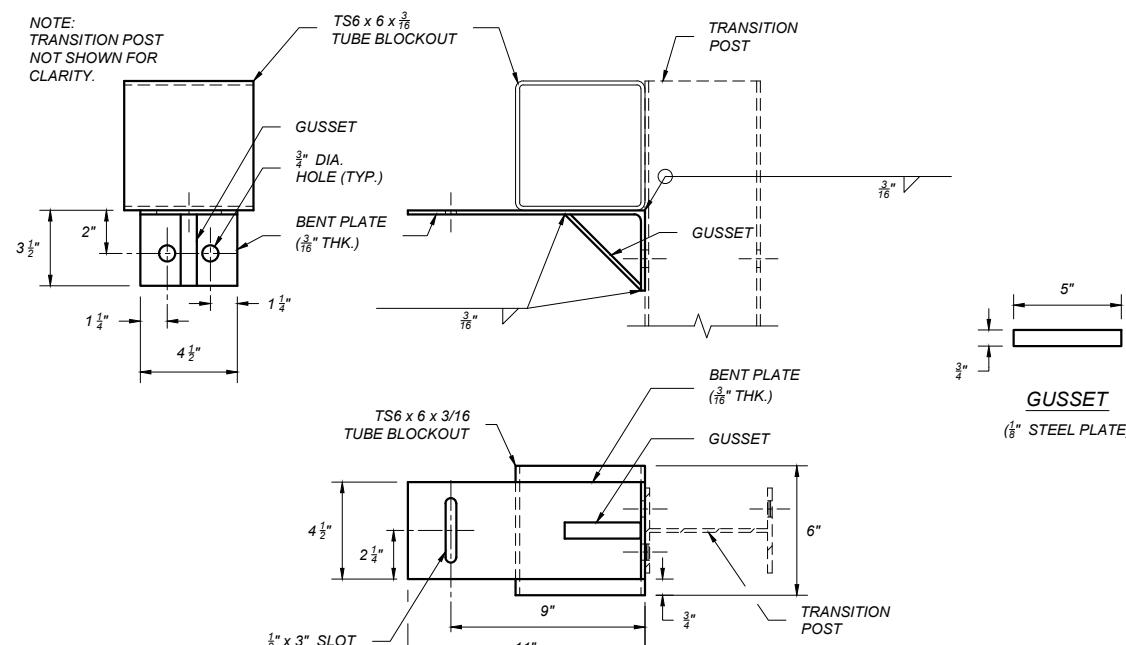

SUPPORT BRACKET W/BLOCKOUT

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 606

DWG. NO.
606-97


BOX BEAM GUARDRAIL HARDWARE


EFFECTIVE: JAN 23, 2020



20/2025 8:43 AM


29/2025 8:43 AM

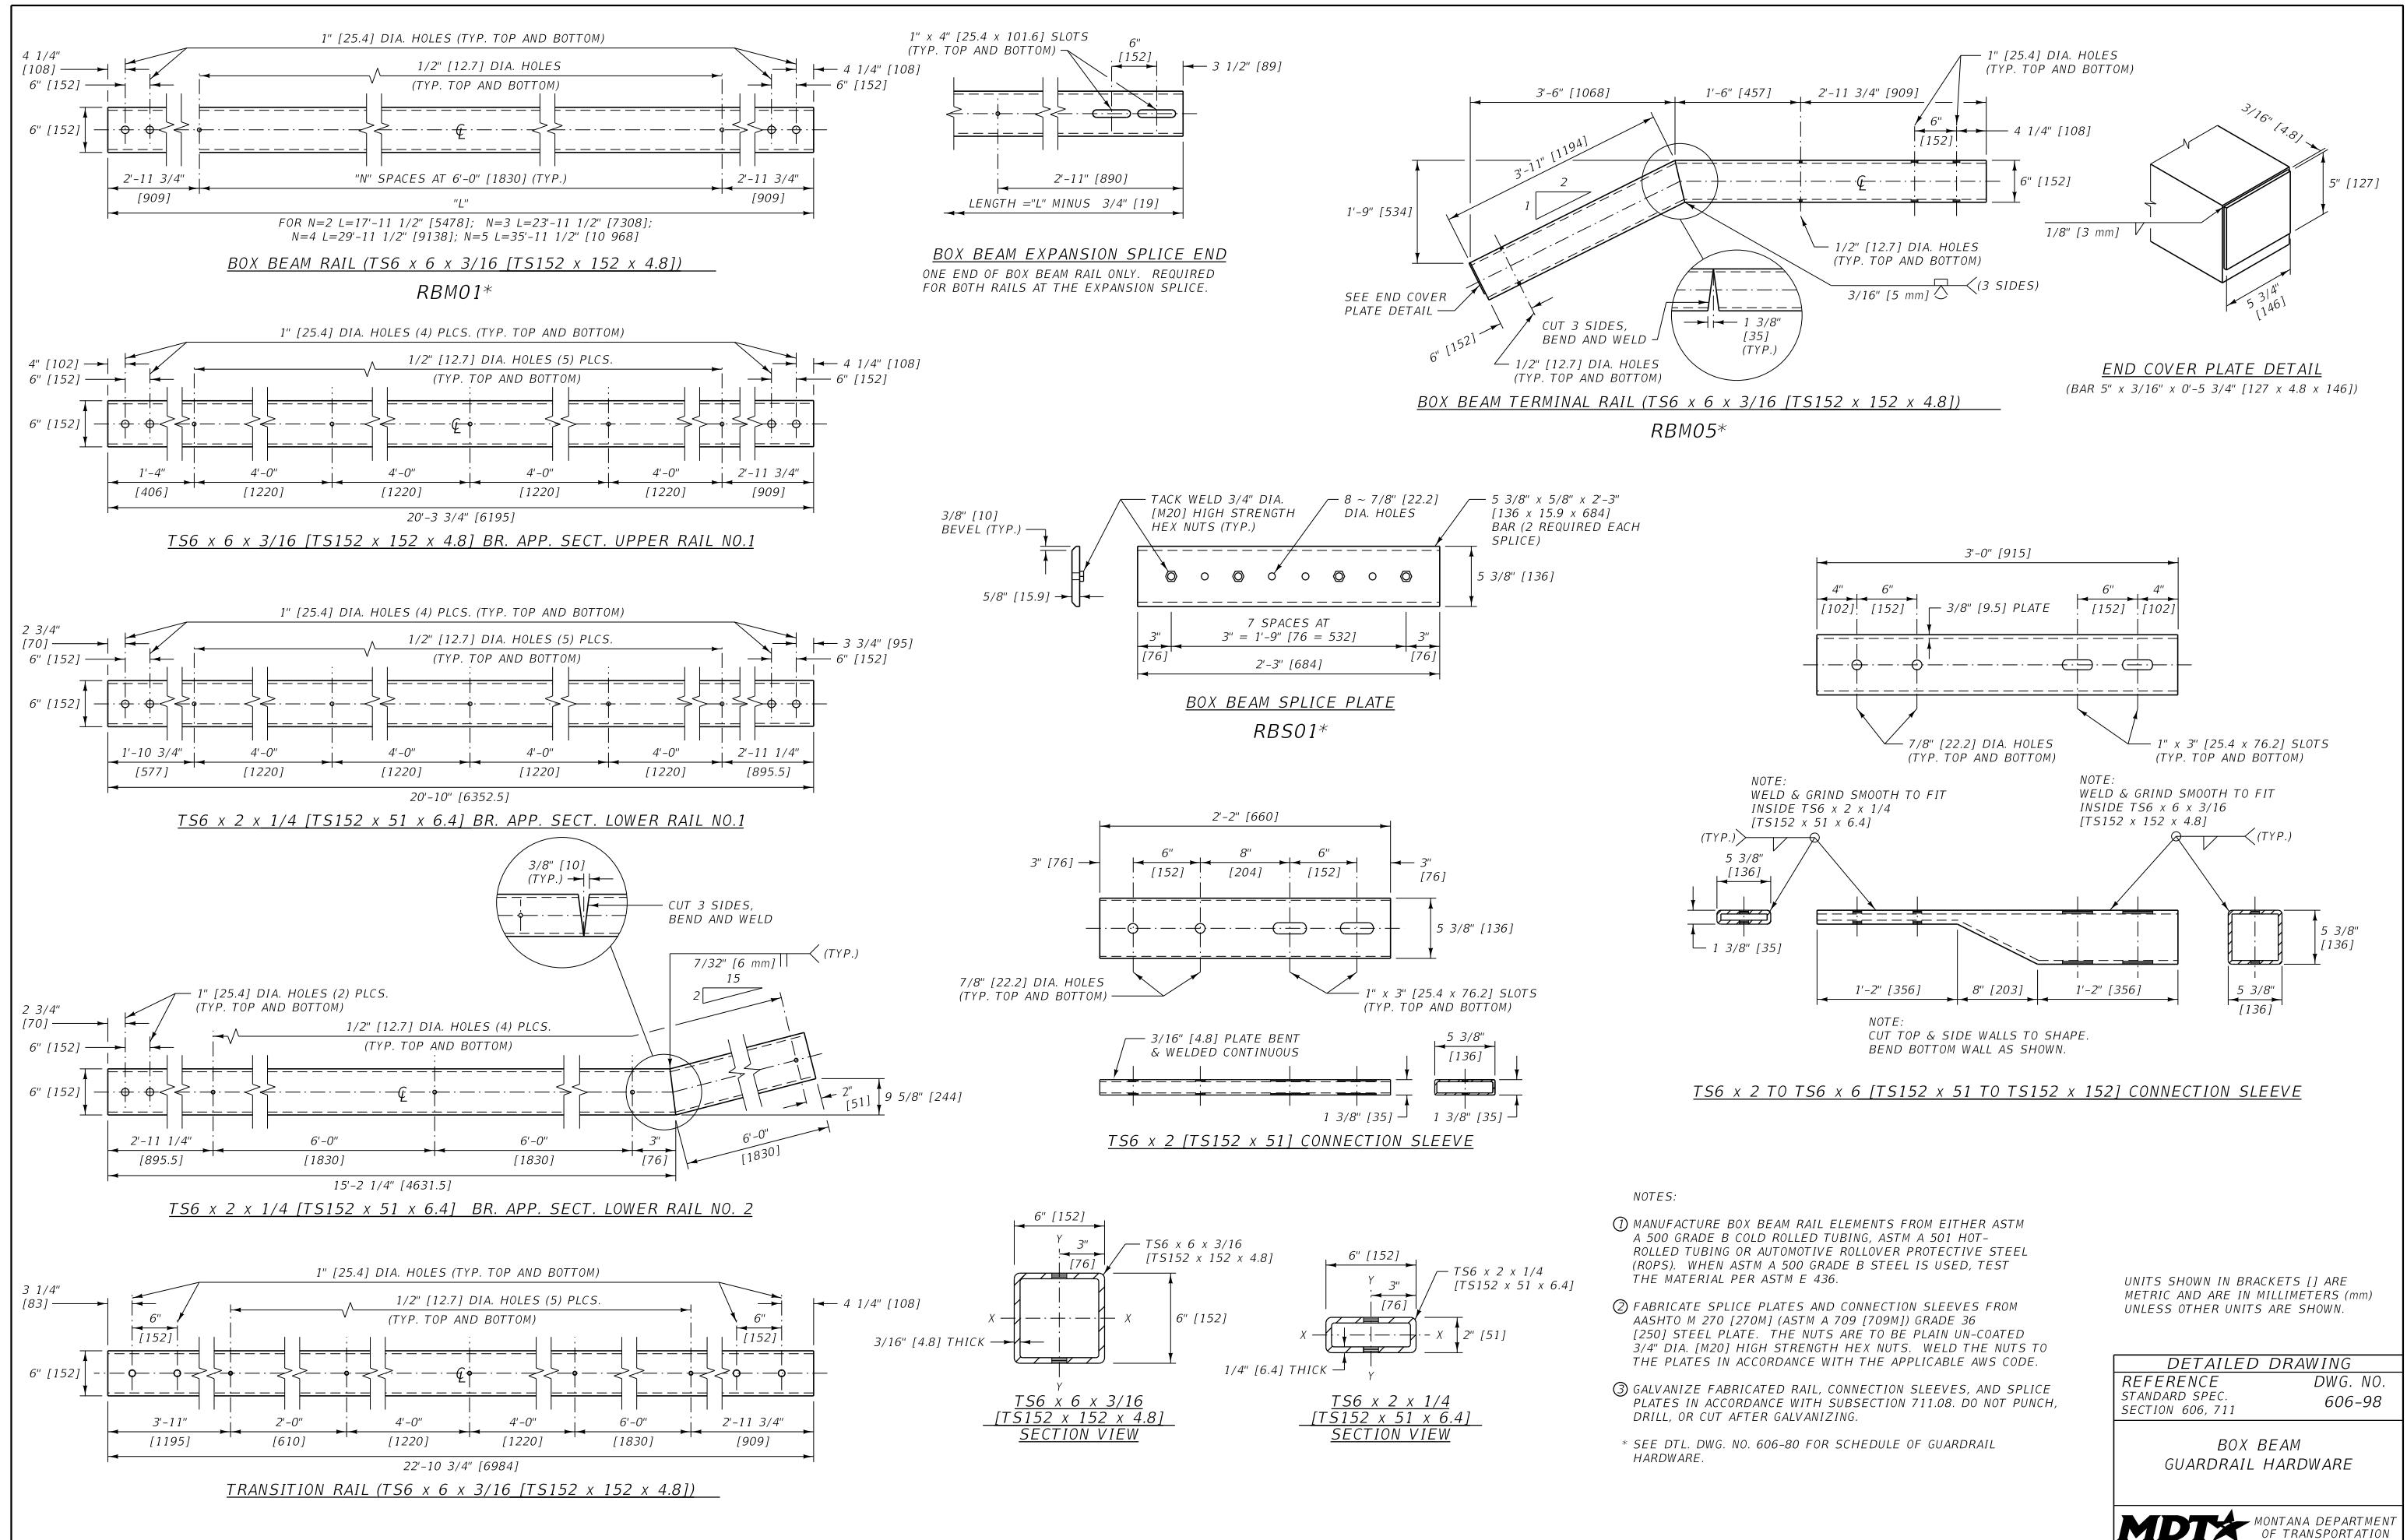

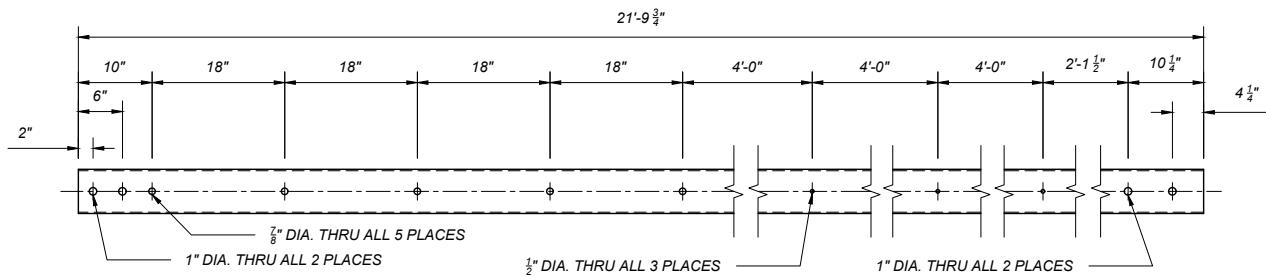


T-1 TRANSITION RAIL

HSS 6x6x $\frac{3}{16}$
ASTM A500 GRADE B

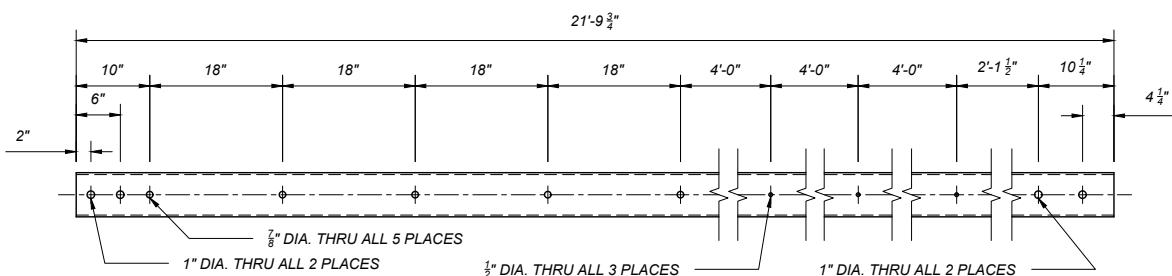


R-1 TRANSITION RUB RAIL

HSS 6x2x $\frac{3}{4}$
ASTM A500 GRADE B

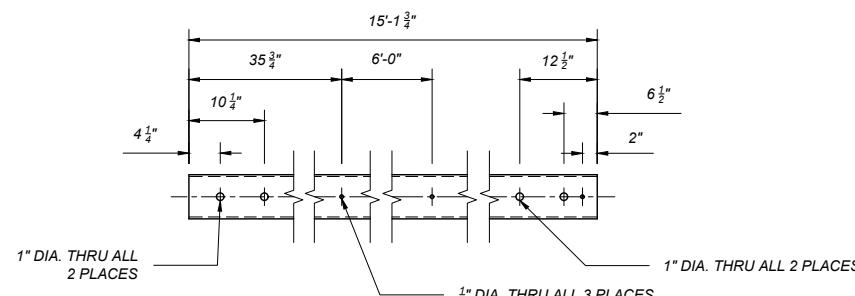



R-2 TRANSITION RUB RAIL

HSS 6x2x $\frac{3}{4}$
ASTM A500 GRADE B

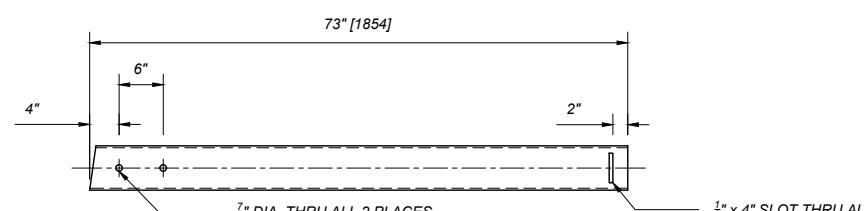

R-3 TRANSITION RUB RAIL



HSS 6x2x $\frac{3}{4}$
ASTM A500 GRADE B

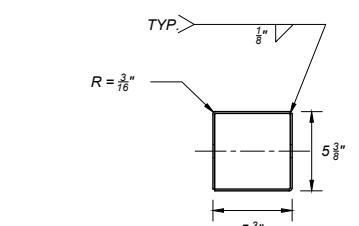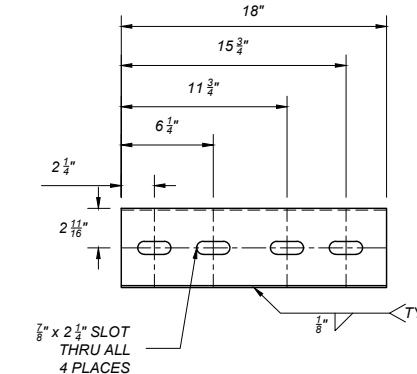

NOTE:
WELD & GRIND SMOOTH TO FIT
INSIDE 6" x 6" x $\frac{3}{16}$ "

UPPER BRIDGE RAIL CONNECTION SLEEVE


ASTM A36 PLATE, 18" x $\frac{3}{16}$ "
3/4" DIA. x 7 1/2" HIGH STRENGTH HEX BOLT (FBX20b*)
AND NUT (FNX20b*) WITH 2 HARDENED FLAT
WASHERS (FWC20b*)

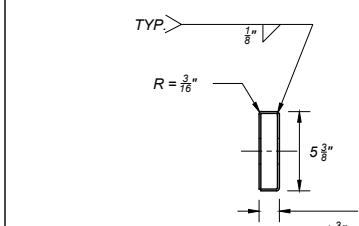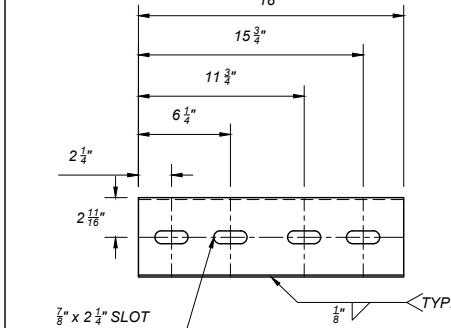

NOTE:
WELD & GRIND SMOOTH TO FIT
INSIDE 6" x 2" x $\frac{1}{4}$ "


LOWER BRIDGE RAIL CONNECTION SLEEVE

ASTM A36 PLATE, 18" x $\frac{3}{16}$ "
3/4" DIA. x 3 1/2" HIGH STRENGTH HEX BOLT (FBX20b*)
AND NUT (FNX20b*) WITH 2 HARDENED FLAT
WASHERS (FWC20b*)

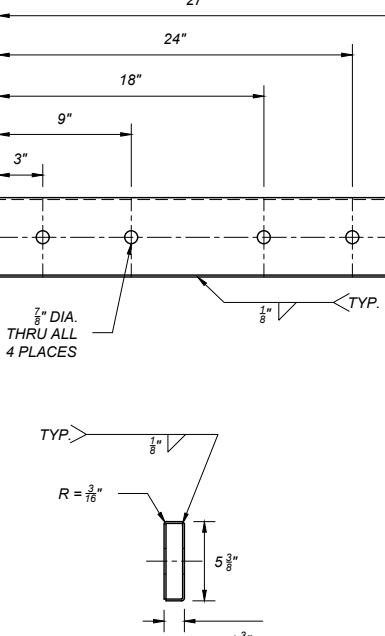


RUB RAIL SPLICE SLEEVE


ASTM A36 PLATE, 27" x $\frac{3}{16}$ "
3/4" DIA. x 3 1/2" HIGH STRENGTH HEX BOLT (FBX20b*)
AND NUT (FNX20b*) WITH 2 HARDENED FLAT
WASHERS (FWC20b*)

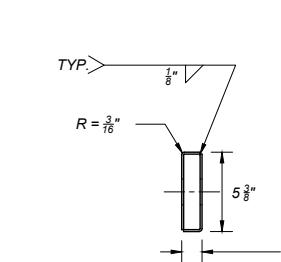

NOTE:
WELD & GRIND SMOOTH
TO FIT INSIDE 6" x 2" x $\frac{1}{4}$ "

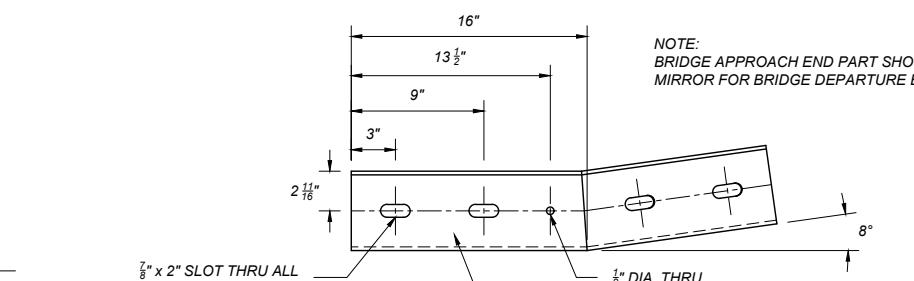


NORMAL TO THIS FACE

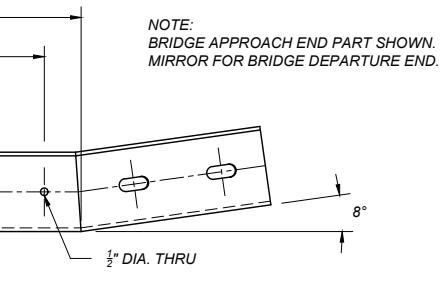

TOP VIEW



SIDE VIEW

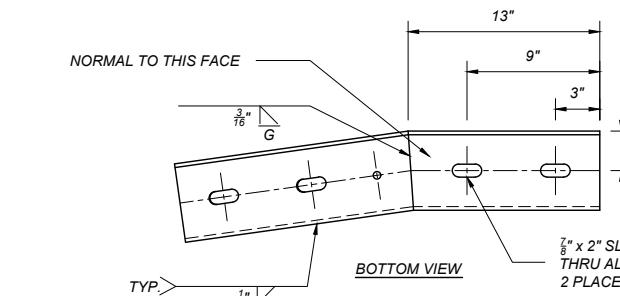

RUB RAIL FLARE SLEEVE

$\frac{3}{8}$ " ASTM A36 PLATE
3/4" DIA. x 3 1/2" HIGH STRENGTH HEX BOLT (FBX20b*)
AND NUT (FNX20b*) WITH 2 HARDENED FLAT
WASHERS (FWC20b*)

NOTES:
*SEE DTL. DWG. NO. 606-80 FOR SCHEDULE OF
GUARDRAIL HARDWARE.

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 606





DWG. NO.
606-98A


**BOX BEAM
GUARDRAIL HARDWARE**







EFFECTIVE: JUN 27, 2024



11/29/2025 8:42 AM STDDRD606098A.DWG

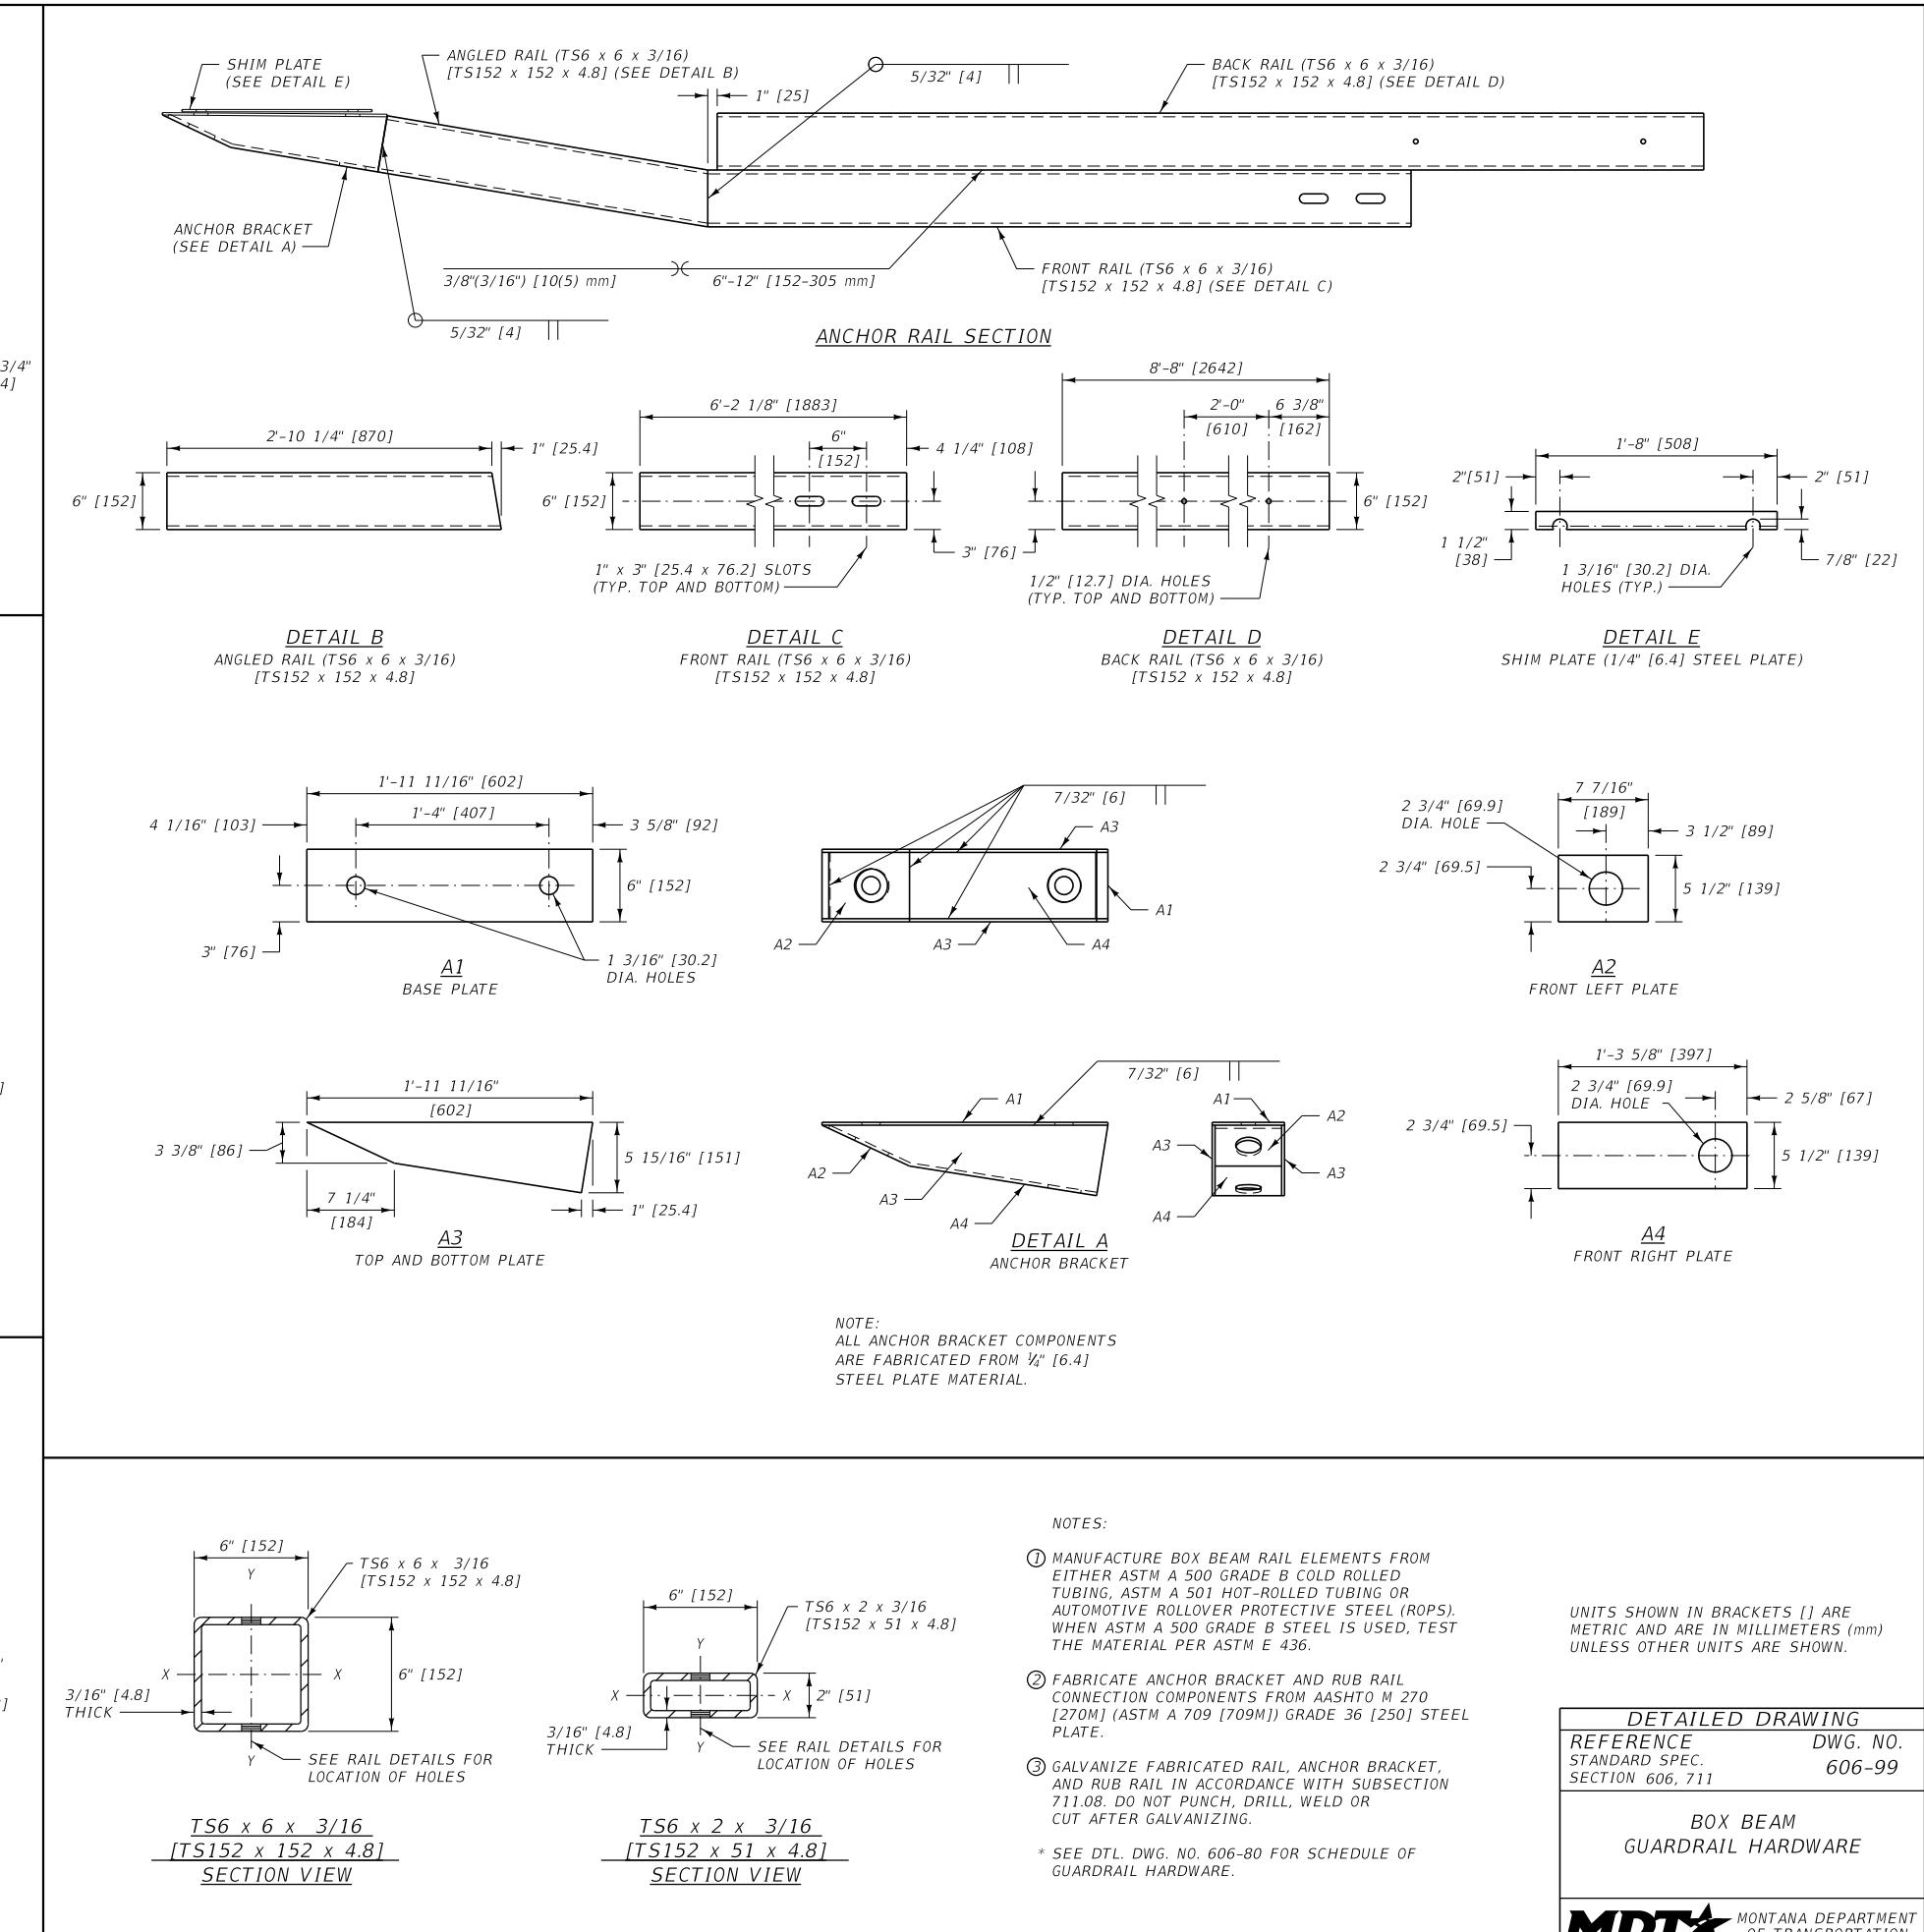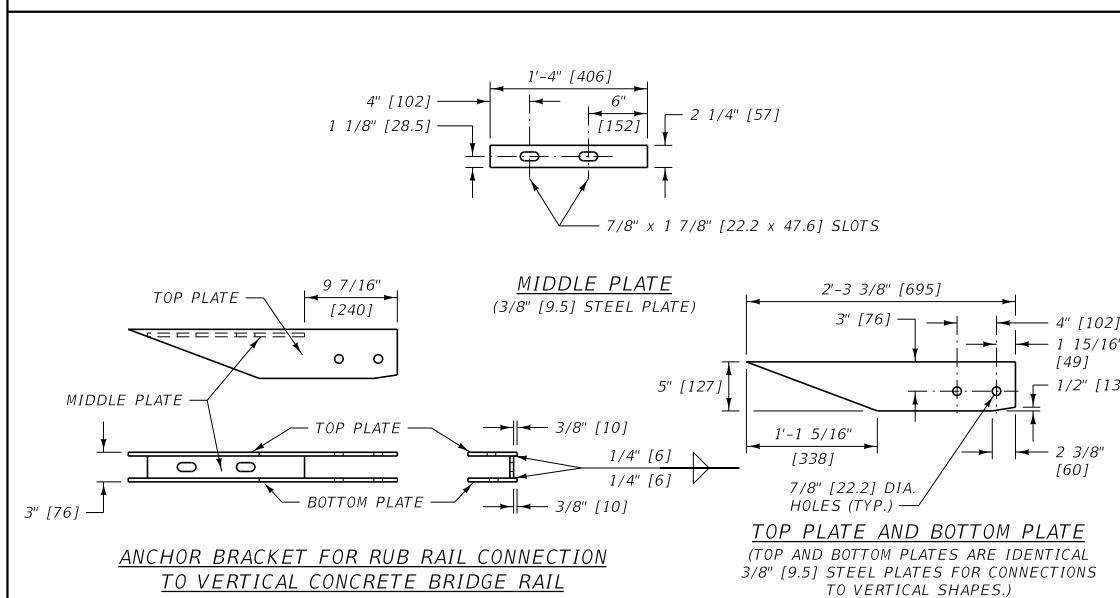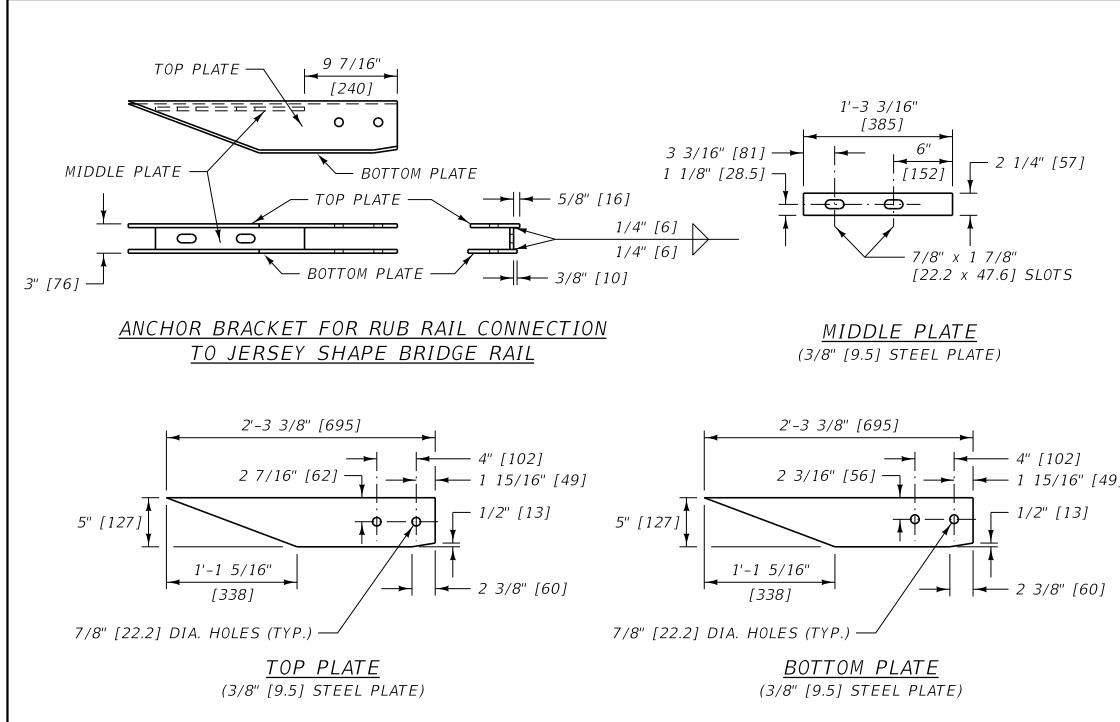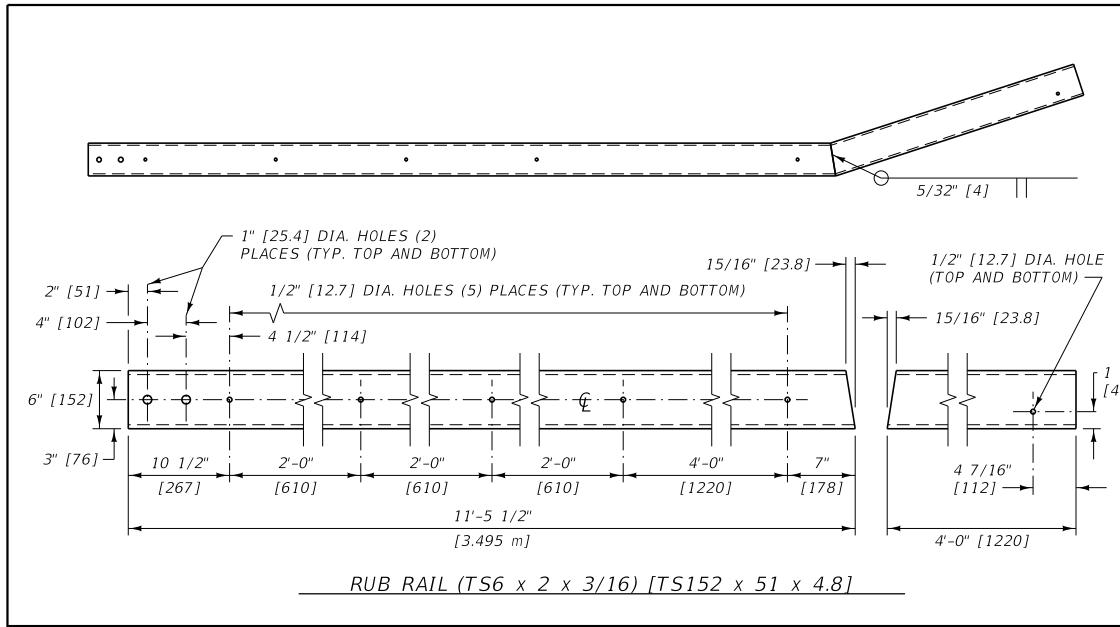

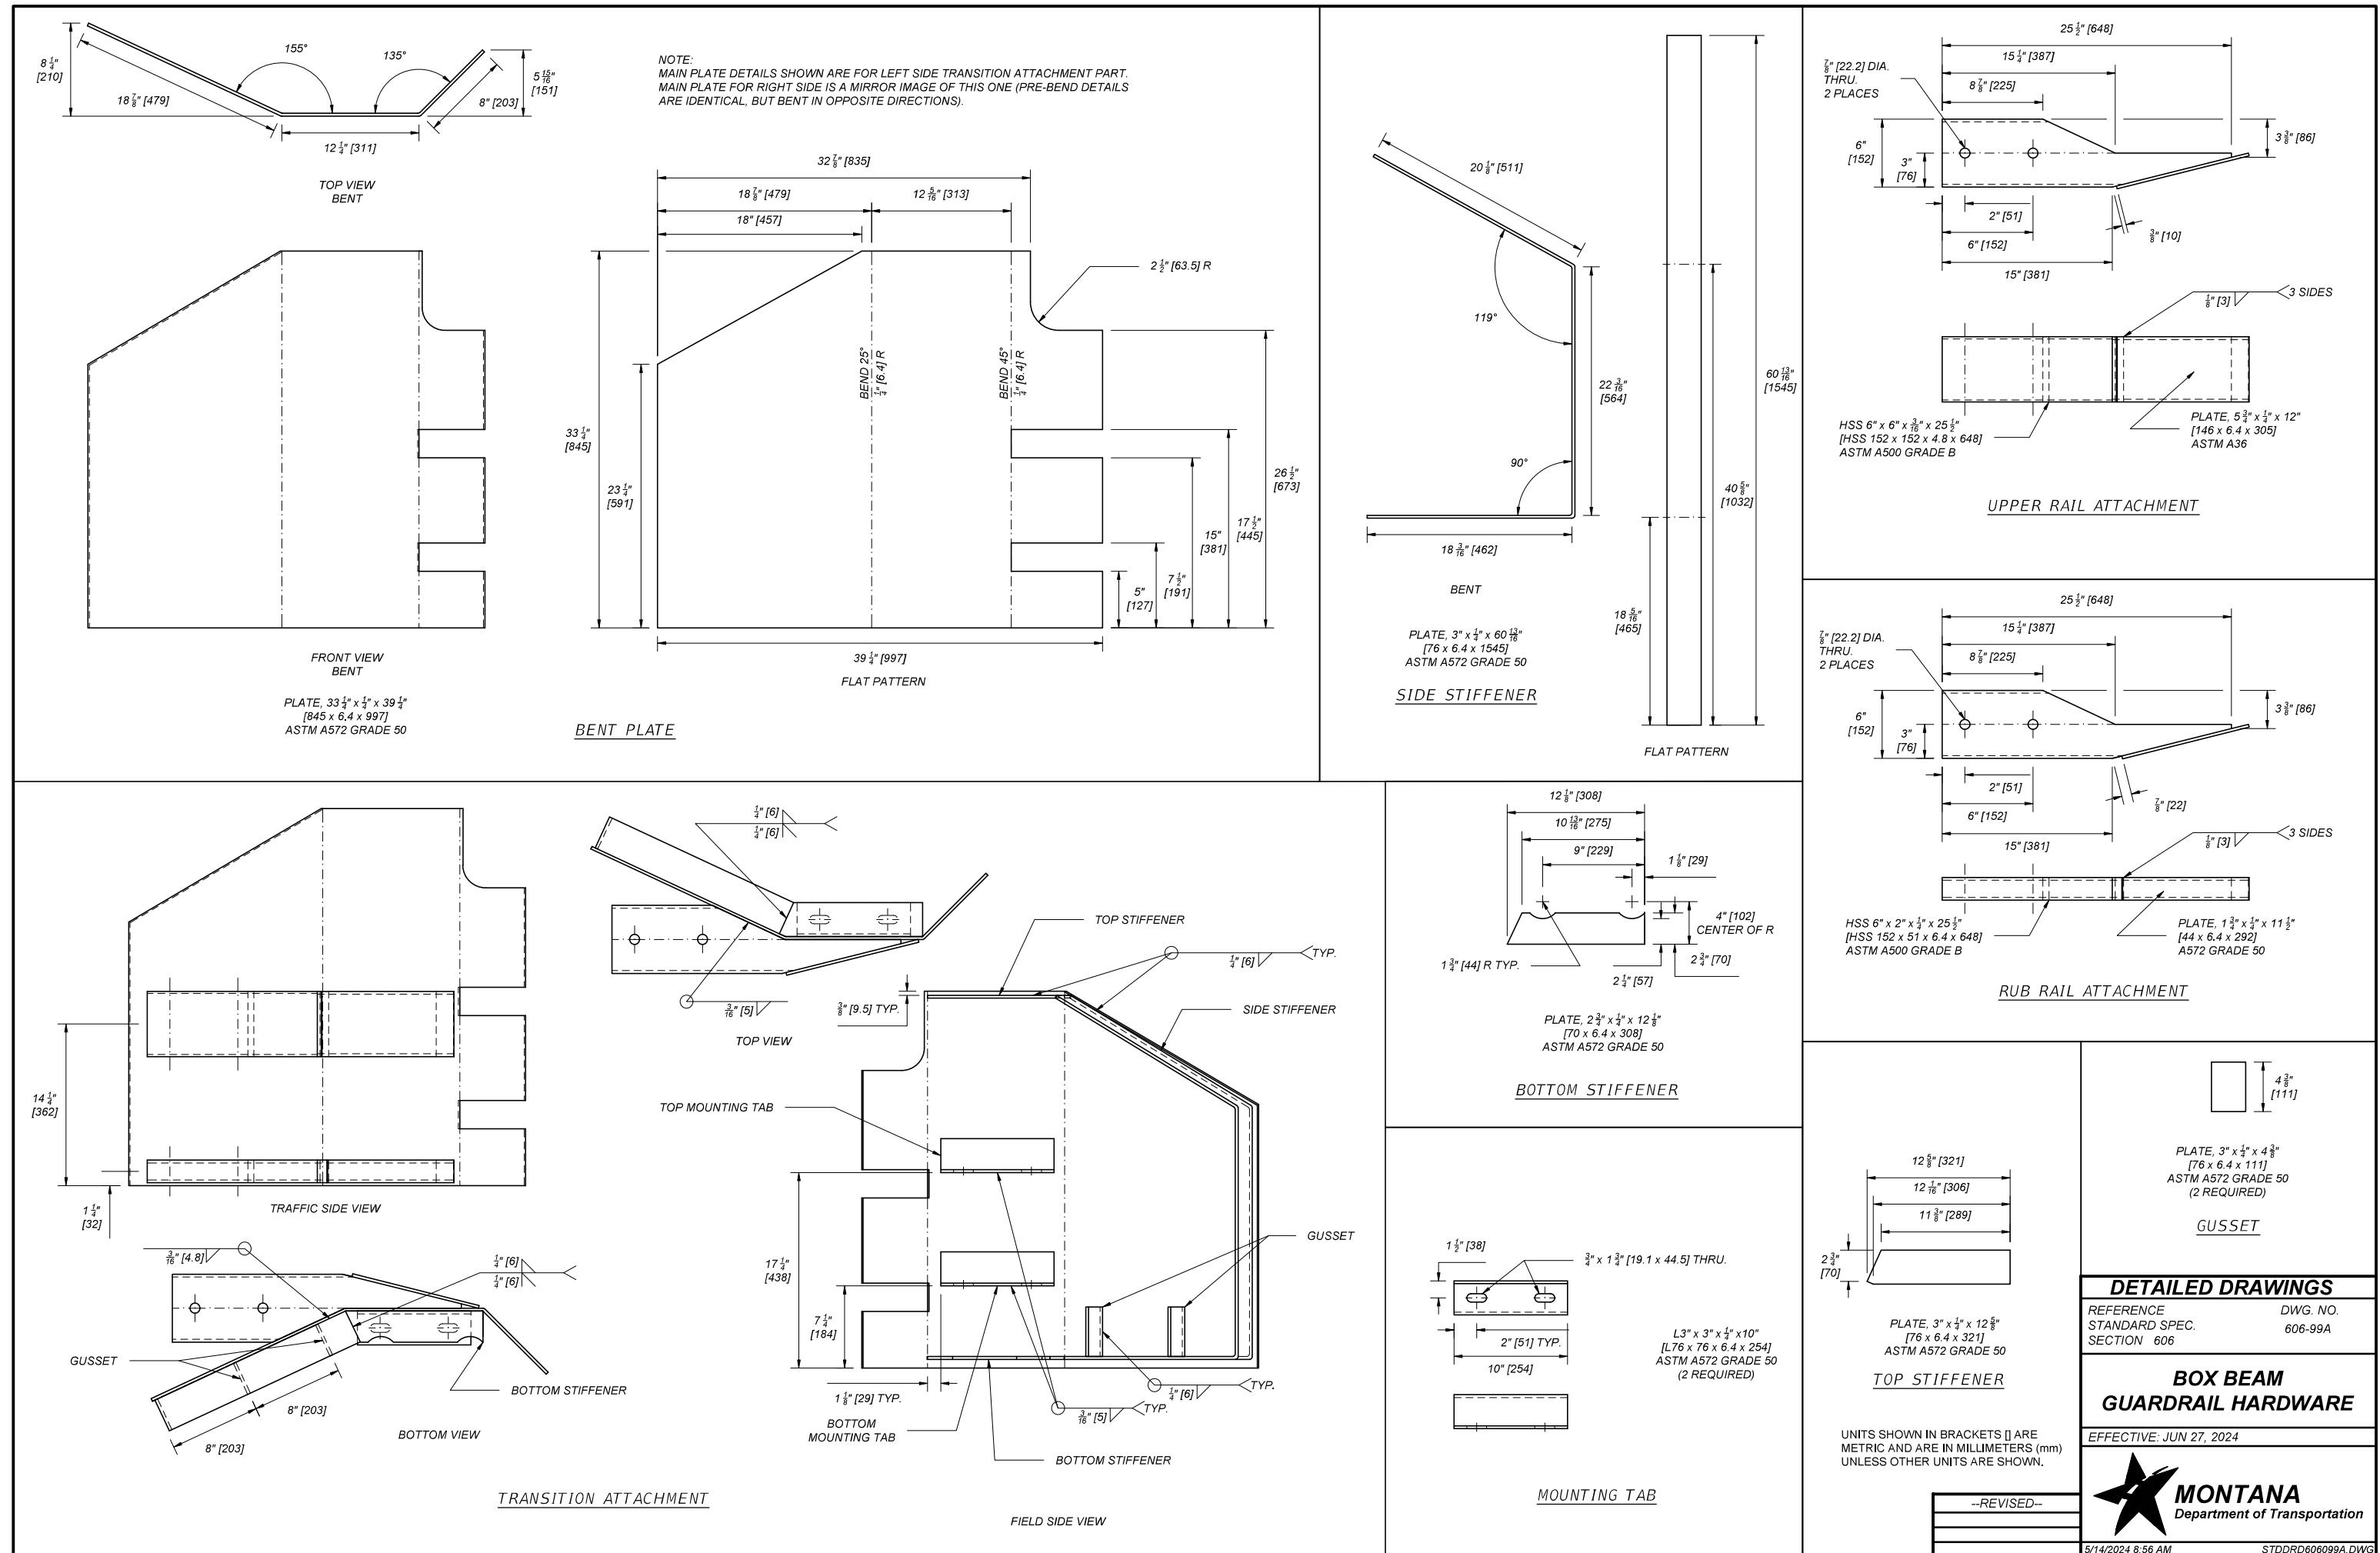

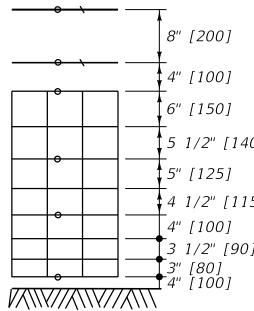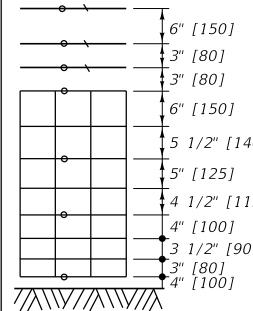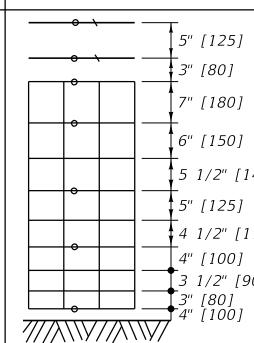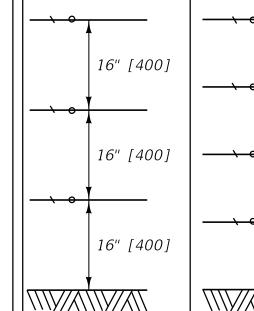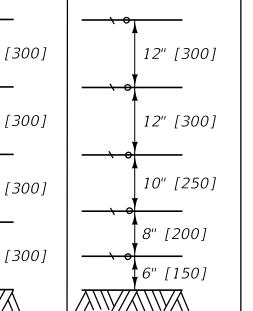WIRE SPACING TABLE							
COMBINATION WOVEN WIRE & BARBED WIRE FENCE				BARBED WIRE FENCE			
48" [1200] FENCE HEIGHT		51" [1280] FENCE HEIGHT		48" [1200] FENCE HEIGHT			
32" [813] WW-2 BW *		32" [813] WW-3 BW *		3 BW			
TYPE F2-32WW [813WW]		TYPE F3-32WW [813WW]		4 BW			
							
APPROXIMATE WEIGHT OF 32" [813] WOVEN WIRE FABRIC (832-6-12 1/2) PER 20 ROD [100 m] ROLL IS 150 LB. [68 kg] !10 LB. [5 kg] (NOTE: 12 1/2 GAUGE)		APPROXIMATE WEIGHT OF 39" [990] WOVEN WIRE FABRIC (939-6-12 1/2) PER 20 ROD [100 m] ROLL IS 170 LB. [77 kg] !10 LB. [5 kg] (NOTE: 12 1/2 GAUGE)					
○ DENOTES STAPLE AND/OR TIE LOCATIONS							

* OTHER WOVEN WIRE HEIGHTS AND NUMBER OF BARBED WIRE COMBINATIONS ARE AVAILABLE.

STAYS

1. USE WIRE STAYS ON ALL FENCES UNLESS WOOD STAYS ARE SPECIFIED.
2. LOCATE STAYS HALFWAY BETWEEN LINE POSTS.
3. WIRE STAYS FOR BARBED WIRE FENCING ARE 2" [50] LONGER THAN THE DISTANCE BETWEEN THE TOP AND BOTTOM WIRES.
4. FOR WOVEN WIRE FENCING WITH BARBED WIRE ON TOP, EXTEND WIRE STAYS 6" [150] MINIMUM BELOW THE TOP OF THE WOVEN WIRE.
5. WHEN WOOD STAYS ARE SPECIFIED, USE EITHER 2" [50] ROUND, A ROUGH DIMENSION 2" x 2" [50 x 50], OR A 1 1/2" x 3 1/2" [37.5 x 87.5] (NOMINAL 2" x 4" [50 x 100]). THE STAY MUST BE OF SUFFICIENT LENGTH TO BE PLACED ON THE GROUND WITH THE TOP OF THE STAY EXTENDING 2" [50] ABOVE THE TOP WIRE. ATTACH EACH WIRE TO THE WOOD STAYS USING 1 3/4" (44) x 9 GAUGE STAPLES. WOOD STAYS DO NOT NEED TO BE TREATED.


NOTES:

- ① STAPLE THE BOTTOM, TOP, CENTER AND ALTERNATE WIRES OF WOVEN WIRE TO WOOD LINE POSTS.
- ② TIE THE BOTTOM, TOP, CENTER AND ALTERNATE WIRES OF WOVEN WIRE TO STEEL LINE POSTS.
- ③ STAPLE ALL WIRES OF WOVEN WIRE TO WOOD CORNER POSTS OR POSTS USED TO TIE-OFF WIRE.
- ④ "M" DENOTES METAL POSTS, IE. TYPE F3M.
"W" DENOTES WOOD POSTS, IE. TYPE F4W.
- ⑤ SEE DTL. DWG. NO. 607-05, 607-10, AND 607-15 FOR ADDITIONAL FENCING DETAILS.

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 607-00
FARM FENCE	

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (MM) UNLESS OTHER UNITS ARE SHOWN.

MDT MONTANA DEPARTMENT OF TRANSPORTATION

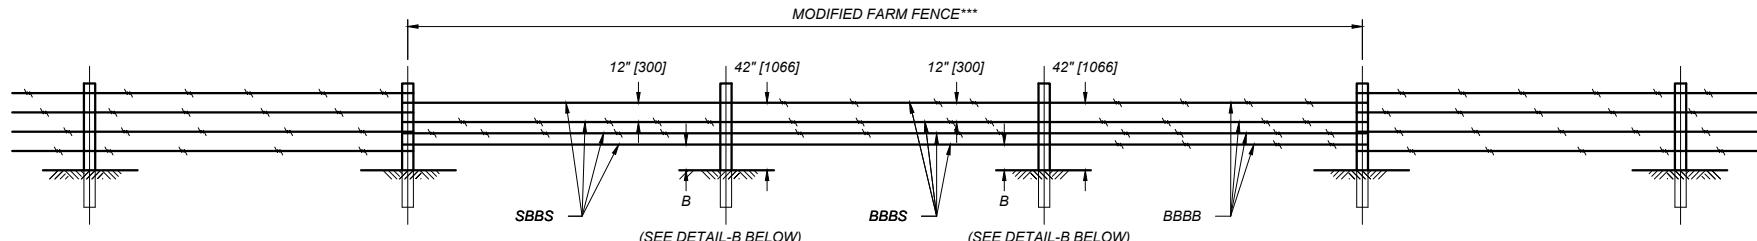

DETAIL-A***

WIRE SPACING DETAIL***		
MODIFIED FARM FENCE TYPE 1 & 4	MODIFIED FARM FENCE TYPE 2 & 5	MODIFIED FARM FENCE TYPE 3 & 6
42" [1066] FENCE HEIGHT	42" [1066] FENCE HEIGHT	42" [1066] FENCE HEIGHT
TYPE 1: MFF4-SBBS-18	TYPE 2: MFF4-3BS-18	TYPE 3: MFF4-4B-18
TYPE 4: MFF4-SBBS-16	TYPE 5: MFF4-3BS-16	TYPE 6: MFF4-4B-16

○ DENOTES STAPLE AND/OR TIE LOCATIONS

DETAIL-B***

WIRE SPACING***						
TYPE	1	2	3	4	5	6
A*	6" [150]	6" [150]	6" [150]	7" [180]	7" [180]	7" [180]
B**	18" [450]	18" [450]	18" [450]	16" [400]	16" [400]	16" [400]
* SPACING BETWEEN MIDDLE WIRES ** BOTTOM WIRE HEIGHT FROM GROUND *** COORDINATE LANDOWNER REQUESTED MODIFICATIONS WITH THE MDT DISTRICT BIOLOGIST						


NOTES:

- ① WOOD OR METAL POSTS MAY BE USED.
- ② SEE DTL. DWG. NO. 607-05, 607-10, AND 607-15 FOR ADDITIONAL FENCING DETAILS.


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

--REVISED--

DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 607	DWG. NO. 607-01
MODIFIED FARM FENCE	
EFFECTIVE: JUN 26, 2025	
 MONTANA Department of Transportation	
5/12/2025 3:30 PM	
STDDRD607001.DWG	

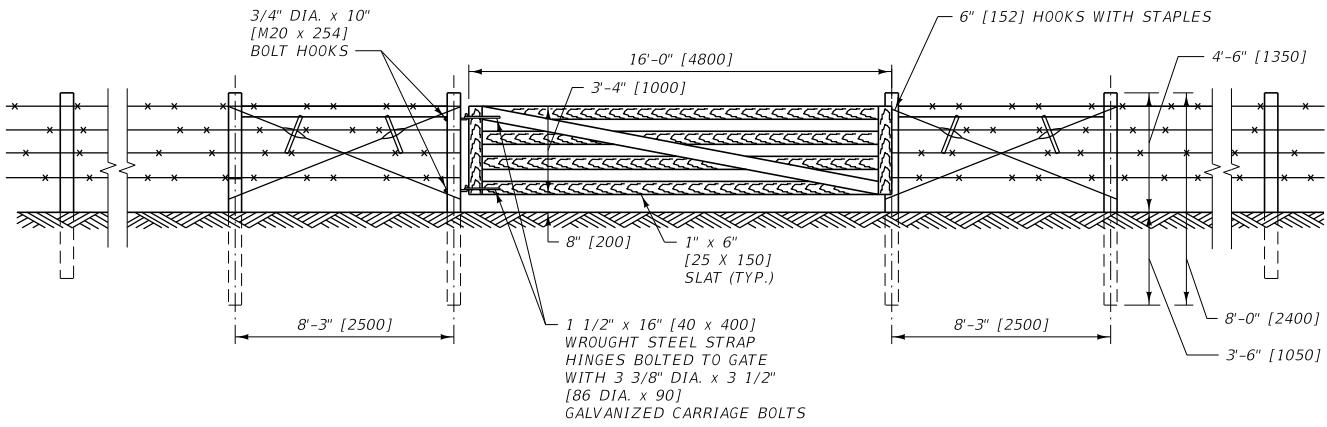


WOOD FARM ENTRANCE GATE (TYPE G-1)
NOTE: USE 10d NAILS AND CLINCH FOR GATE CONSTRUCTION.

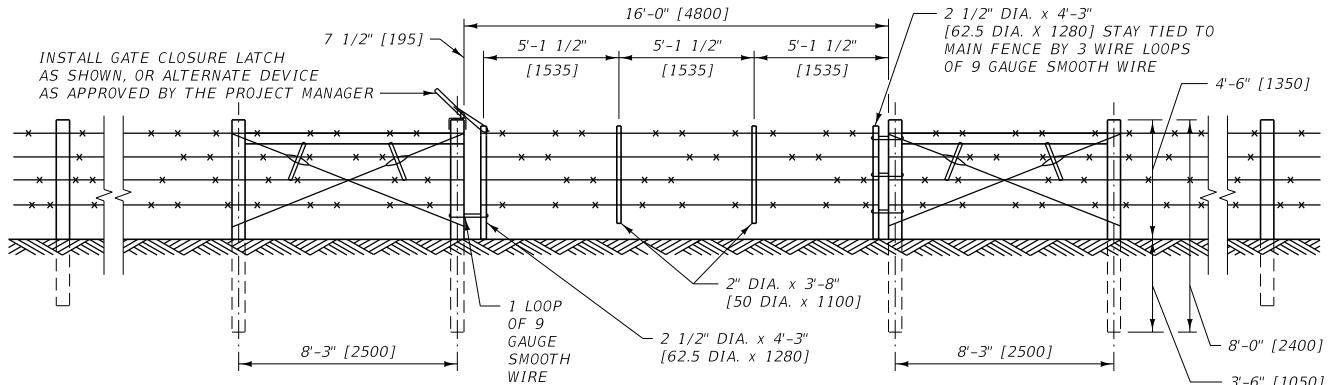

WIRE FARM ENTRANCE GATE (TYPE G-2)

NOTE:
USE SAME WIRE SCHEME ON GATE
AS THAT USED ON FENCE, UNLESS
STATED OTHERWISE IN R/W AGREEMENT.

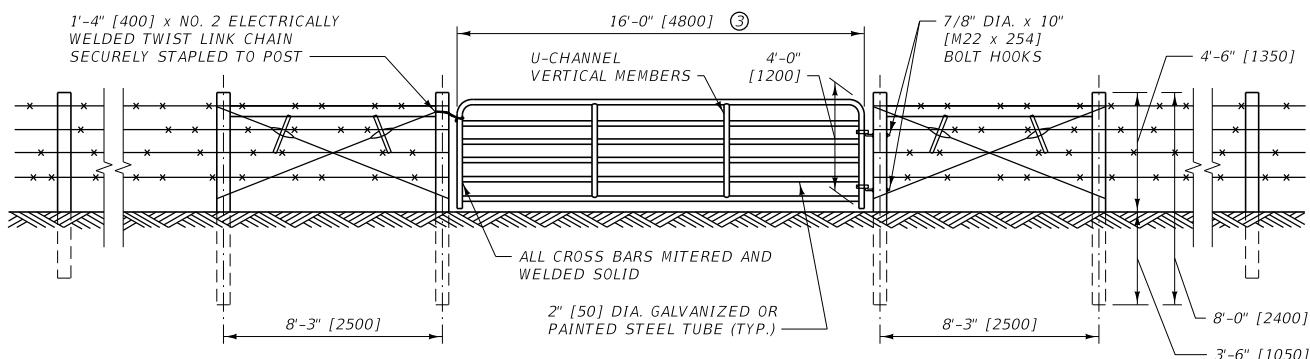



METAL FARM ENTRANCE GATE (TYPE G-3)

NOTES:


- ① ALL GATES ARE 16'-0" [4800] WIDE UNLESS R/W AGREEMENT STATES OTHERWISE.
- ② ALL GATES WILL HAVE A SINGLE OR DOUBLE PANEL AT EACH END.
- ③ TYPE G-3 GATES ARE AVAILABLE IN WIDTHS FROM 4' [1.2 m] TO 20' [6.0 m] IN 2' [0.6 m] INCREMENTS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 607	DWG. NO. 607-02
FARM ENTRANCE GATES	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

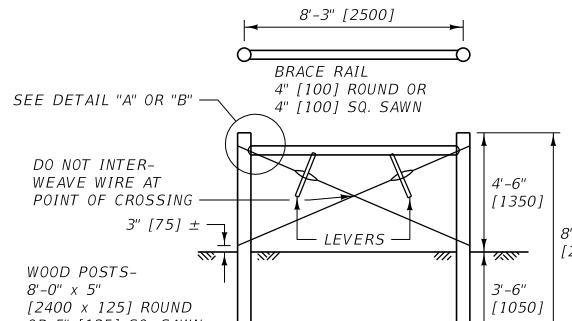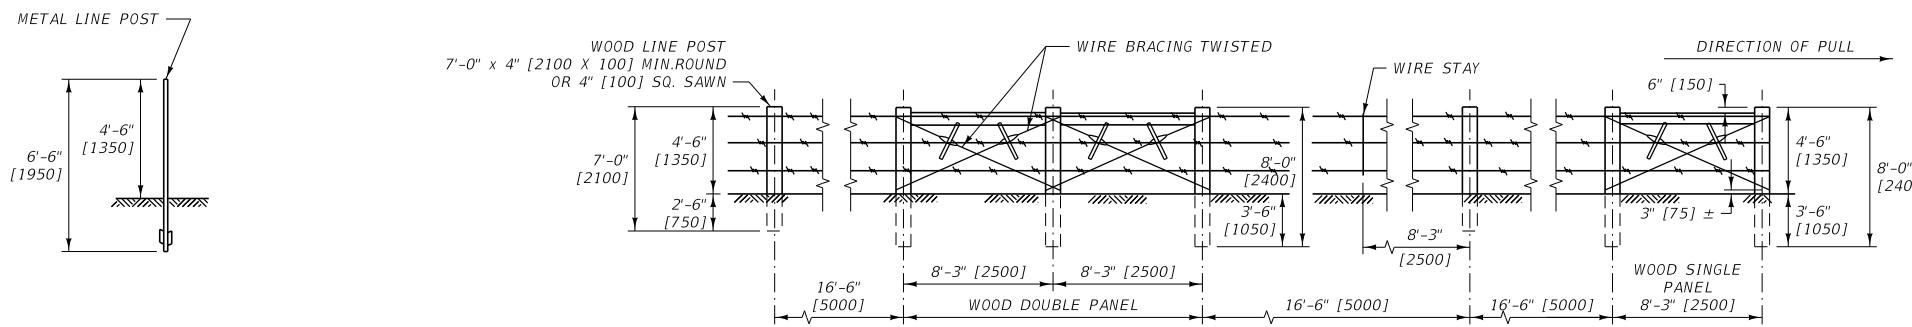


SINGLE WOOD PANEL
FOR PULLING, STRETCHING, CHANGES IN VERTICAL ALIGNMENT OR PANELS ON A RUN OF LESS THAN 330' [100 m].

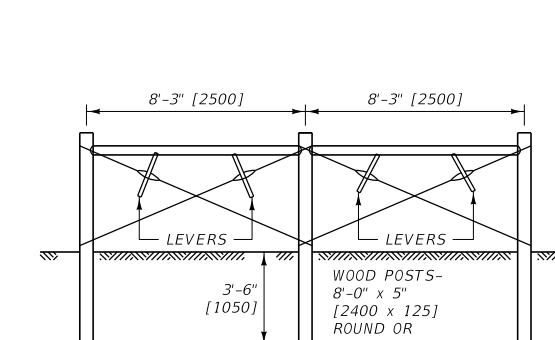


DOUBLE WOOD PANEL
FOR CORNERS, PULLING, STRETCHING, AND CHANGES IN HORIZONTAL ALIGNMENT.

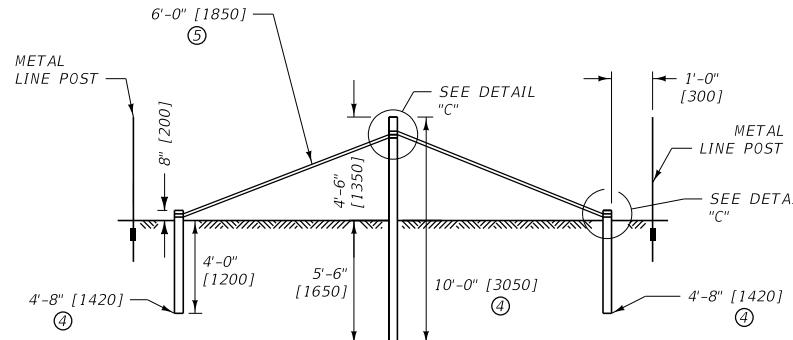

DOUBLE STEEL PANEL

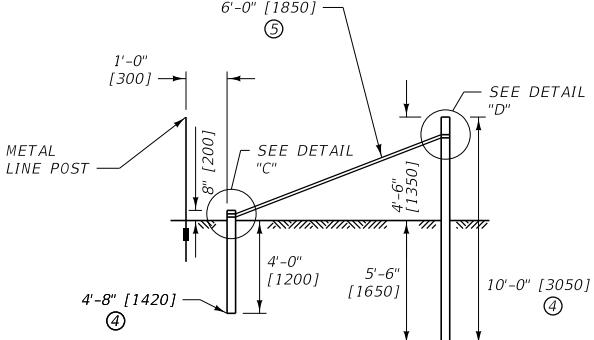


SINGLE STEEL PANEL

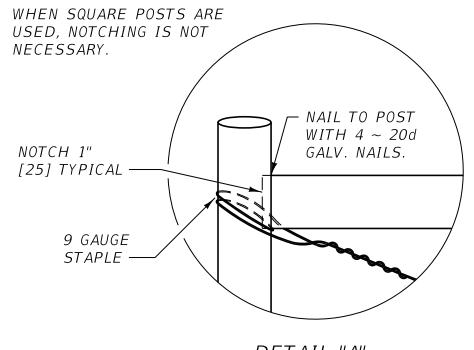


BRACE WIRES - PROVIDE MINIMUM 12 1/2 GAUGE SMOOTH WIRE DOUBLED TO FORM A FOUR WIRE BRACE. ATTACH BRACE WIRES TO POSTS BY WRAPPING AROUND THE POST AT LEAST TWO TIMES AND THEN WRAPPING AROUND ITSELF FIVE TIMES.

LEVERS - 1 1/2" x 2" x 12" [37.5 x 50 x 300] MINIMUM SIZE. LEAVE IN PLACE AFTER TWISTING.

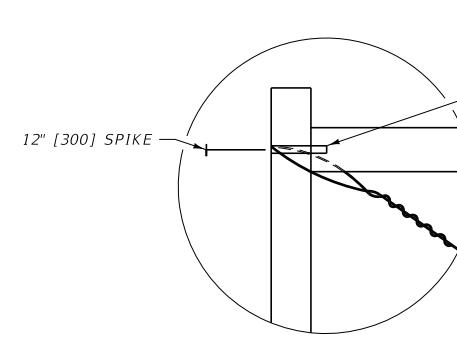


DRIVE 12" x 3/8" [300 x 9.5] DIA. SPIKE THROUGH POST AND 4" [100] INTO BRACE POST.


ALTERNATE PANEL BRACING

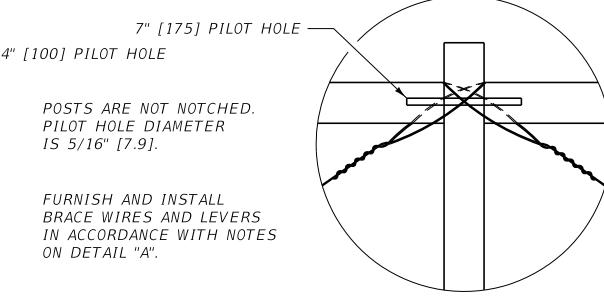

INSTALL A 20" x 3/8" [500 x 9.5] ROD IN THE MIDDLE POST PRIOR TO SETTING THE BRACES. PIN THE BRACES IN PLACE FROM THE OUTSIDE.

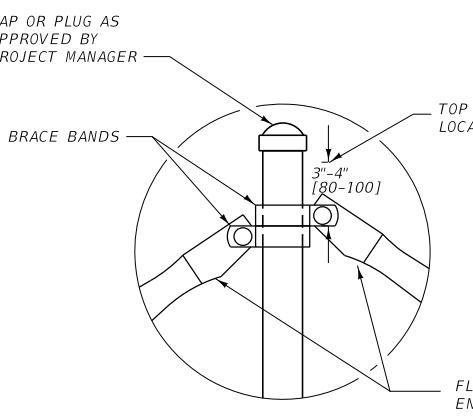

STEEL POST DOUBLE PANEL BRACING

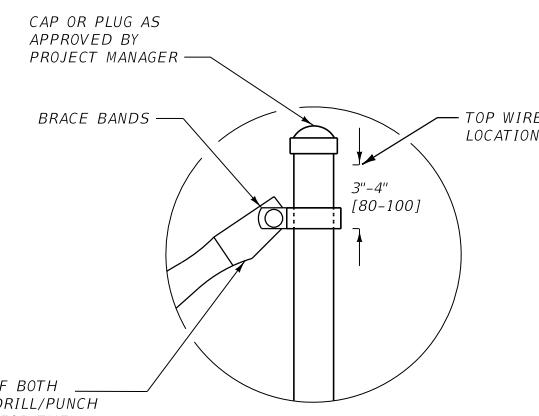


STEEL POST SINGLE PANEL BRACING

NOTES:

- ① SEE THE SPECIFICATIONS FOR POST AND WIRE REQUIREMENTS.
- ② LINE POST SPACING IS 16'-6" [5000] CENTER TO CENTER. LINE POST SPACING FROM BRACE OR PANEL POST IS 16'-6" [5000] CENTER TO CENTER.
- ③ SEE DTL. DWG. NO. 607-00, 607-10 AND 607-15 FOR ADDITIONAL FENCING DETAILS.


UNITS SHOWN IN BRACKETS () ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

- ④ 2 1/2" [65] DIA. NOMINAL STEEL PIPE- SCHEDULE 40 OR BETTER
- ⑤ 1 1/2" [40] DIA. NOMINAL STEEL PIPE- SCHEDULE 40 OR BETTER

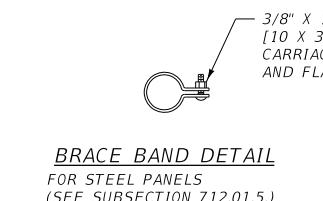


BRACE BAND DETAIL
FOR STEEL PANELS
(SEE SUBSECTION 712.01.5.)


DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 607-05
FENCE DETAILS	
SECTION 607	MONTANA DEPARTMENT OF TRANSPORTATION

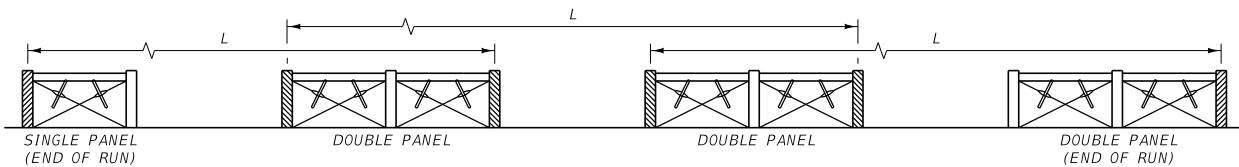

FENCE TYPE	RUN = L	PANELS REQUIRED
COMBINATION WOVEN/BARBED	LESS THAN 33'	NONE
	33' - 330'	SINGLE
	OVER 330' TO 660' MAX.	DOUBLE
BARBED	LESS THAN 66'	NONE
	66'-660'	SINGLE
	OVER 660' TO 990' MAX.	DOUBLE

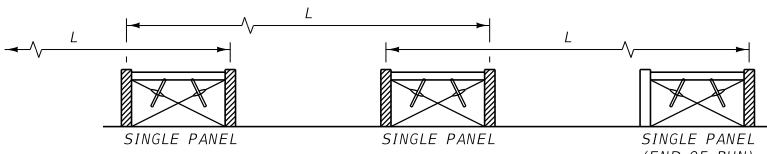

FENCE TYPE	RUN = L (m)	PANELS REQUIRED
COMBINATION WOVEN/BARBED	LESS THAN 10	NONE
	10 - 100	SINGLE
	OVER 100 TO 200 MAX.	DOUBLE
BARBED	LESS THAN 20	NONE
	20 - 200	SINGLE
	OVER 200 TO 300 MAX.	DOUBLE

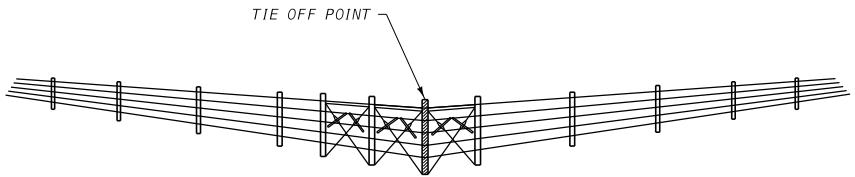

SELECT PANEL TYPE AT FENCE CORNER OR ANGLE BREAK BASED ON FENCE RUN LENGTH.

FENCE PANEL TYPES

① LIMIT RUN LENGTHS IN POOR SOIL CONDITIONS TO REDUCE RESULTING TENSION AT CORNER OR ANGLE BREAK PANELS.


② TIE OFF ON ALL CROSS HATCHED OR SHADED POSTS.

NOTES:




- ① ATTACH BARBED WIRES TO POSTS BY WRAPPING AROUND THE POST AT LEAST TWO TIMES, THEN WRAPPING AROUND ITSELF FIVE TIMES.
- ② TO ATTACH WOVEN WIRE TO AN END POST, REMOVE TWO OR THREE VERTICAL STAY WIRES FROM THE END OF THE FENCE. PLACE THE FIRST COMPLETE VERTICAL STAY WIRE AGAINST THE POST. START AT THE MIDDLE OF THE HORIZONTAL LINE WIRES, WRAPPING AROUND THE END POST AT LEAST TWO TIMES AND THEN WRAPPING AROUND ITSELF FIVE TIMES.
- ③ PLACE ALL FENCE WIRE ON PASTURE SIDE OF POST, EXCEPT ON CURVES. THEN, PLACE THE WIRE ON THE OUTSIDE OF THE CURVE.
- ④ IN AREAS SUBJECT TO HIGH VELOCITY WINDS AND MOVING DEBRIS, WIRES MAY BE PLACED ON WINDWARD SIDE OF POSTS, EXCEPT ON CURVES.
- ⑤ POST SPACING IS GENERALLY MEASURED PARALLEL TO GROUND.
- ⑥ PLACE WIRE STAYS PER DTL. DWG. NO. 607-00 HALFWAY BETWEEN POSTS. DO NOT PLACE STAYS ON PANELS.
- ⑦ WOOD FENCE HAS ONE METAL POST IN PLACE OF A WOODEN LINE POST IN EACH 500' [150 m] RUN FOR LIGHTNING PROTECTION.

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 607-10
SECTION 607	
FENCE DETAILS	
UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.	
 MONTANA DEPARTMENT OF TRANSPORTATION	


* ONE FOOT OFFSET APPLIES TO
INTERSTATE FENCING ONLY.

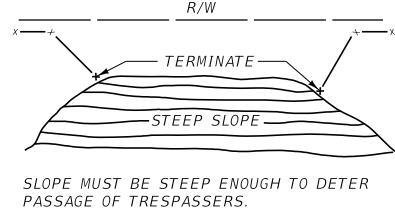


FENCE LAYOUT ON STEEP SLOPES

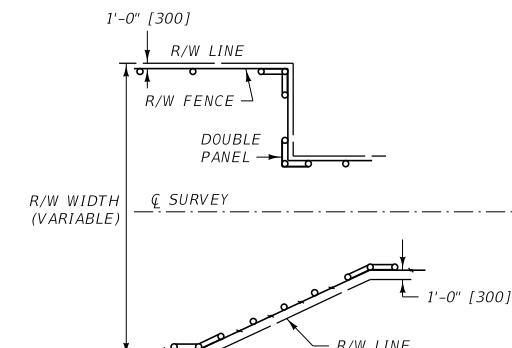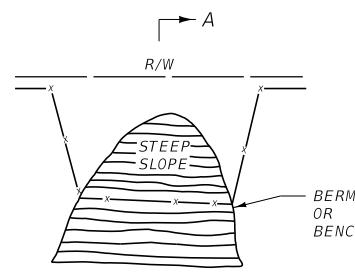

FENCE LAYOUT AT
CHANGE IN R/W WIDTH ON INTERSTATE

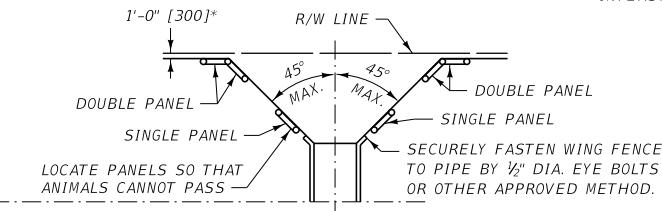


FENCE LAYOUT AT STOCKPASS, BRIDGES AND LARGE PIPES

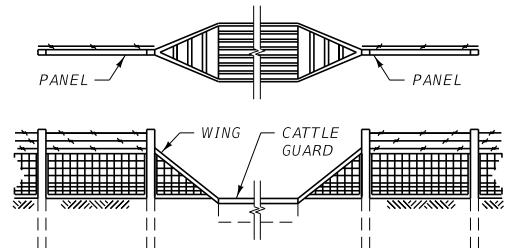


FENCE CONNECTION TO CATTLE GUARD

- ① PLACE SINGLE OR DOUBLE PANELS AT EACH END OF ALL CATTLE GUARDS.
- ② SECURELY FASTEN FENCE WIRE TO THE WINGS AND ARRANGE SO THAT ANIMALS CANNOT PASS.

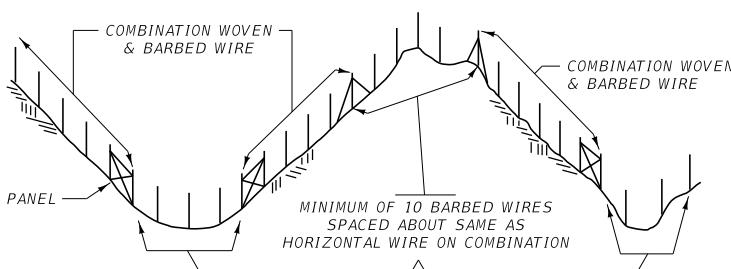


FENCE LAYOUT ON SHARP VERTICAL CURVES


TO AVOID TRYING TO CONFORM WOVEN WIRE TO UNEVEN TERRAIN

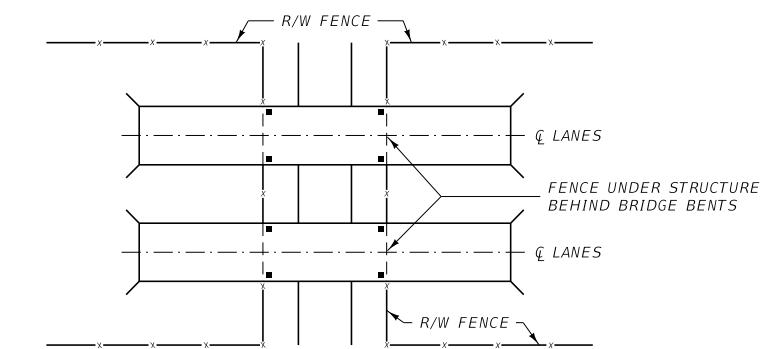

FENCE LAYOUT AT LOCAL ROAD
UNDER INTERSTATE

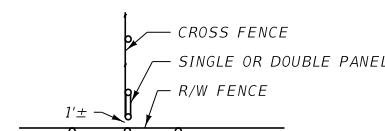

FENCE LAYOUT AT CROSS-FENCE CONNECTION

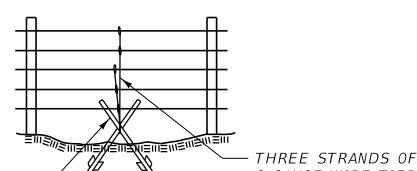

ALTERNATE DEADMAN

WHEN APPROVED BY THE PROJECT MANAGER THE ABOVE DEADMAN MAY BE USED.

A DEADMAN MAY BE A PRECAST CONCRETE BLOCK, A CAST IN PLACE CONCRETE BLOCK, A ROCK OR OTHER APPROVED OBJECT WEIGHING AT LEAST 150 LB. BURY THE DEADMAN IN THE GROUND WITH AT LEAST 2'-0" OF COVER. ATTACH THE DEADMAN TO THE FENCE WITH 3 STRANDS OF 9 GAUGE WIRE OR 6 STRANDS OF 12 1/2 GAUGE WIRE.



UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 607-15 SECTION 607

FENCE DETAILS


MDT	MONTANA DEPARTMENT OF TRANSPORTATION
------------	-----------------------------------------

UPSLOPE FENCE LAYOUT AT CORRUGATED STEEL PIPE (CSP) STOCKPASS

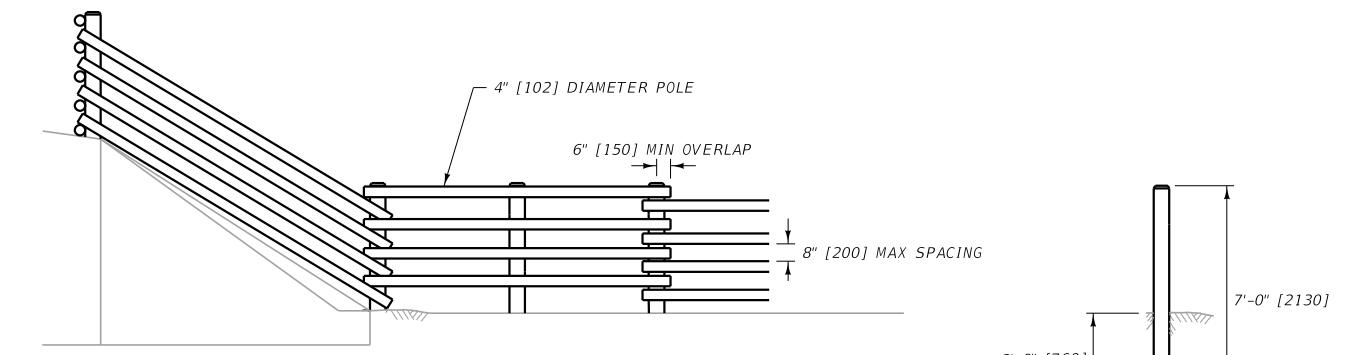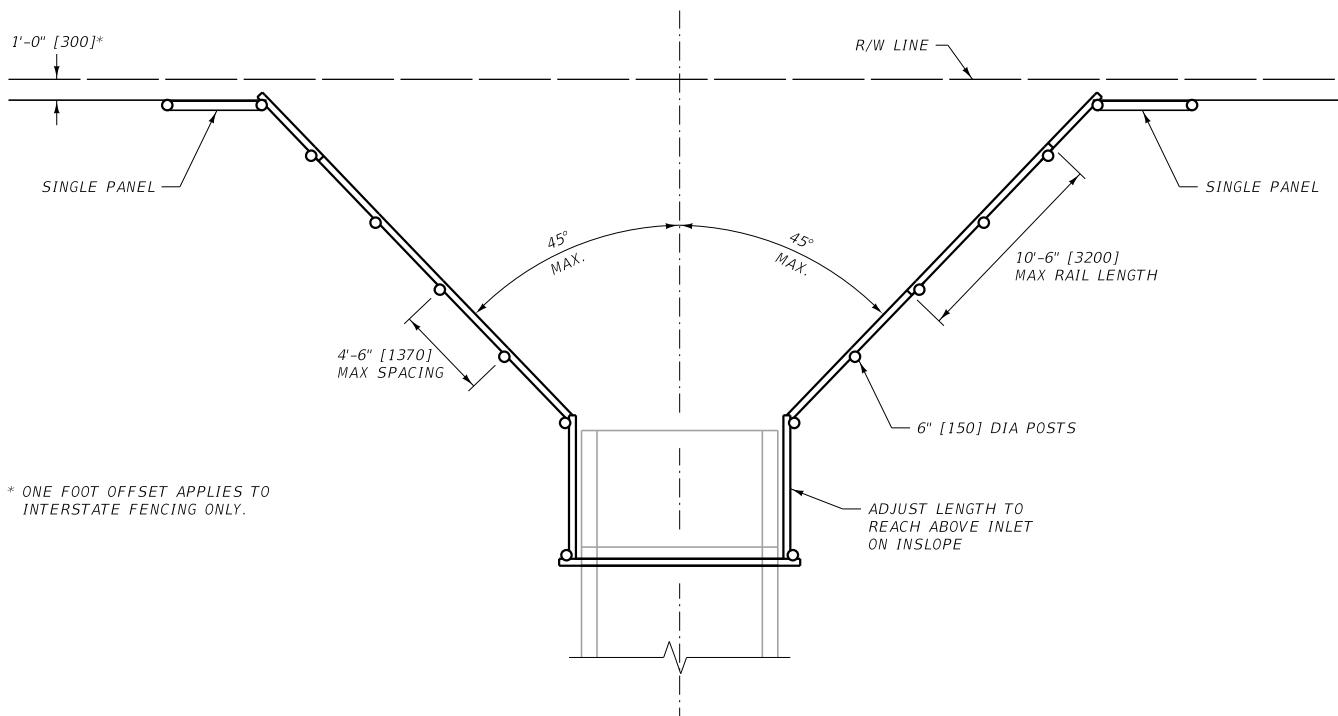



X-SEC VIEW

AT POINTS OF CONTACT WITH POSTS, NOTCH RAILS TO A DEPTH OF 2" [50] MIN.

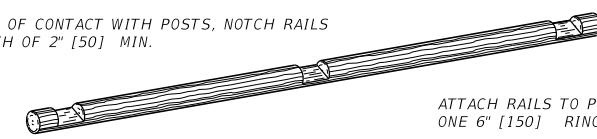


RAIL NOTCHING

FENCE LAYOUT FOR REINFORCED CONCRETE BOX (RCB) STOCKPASS

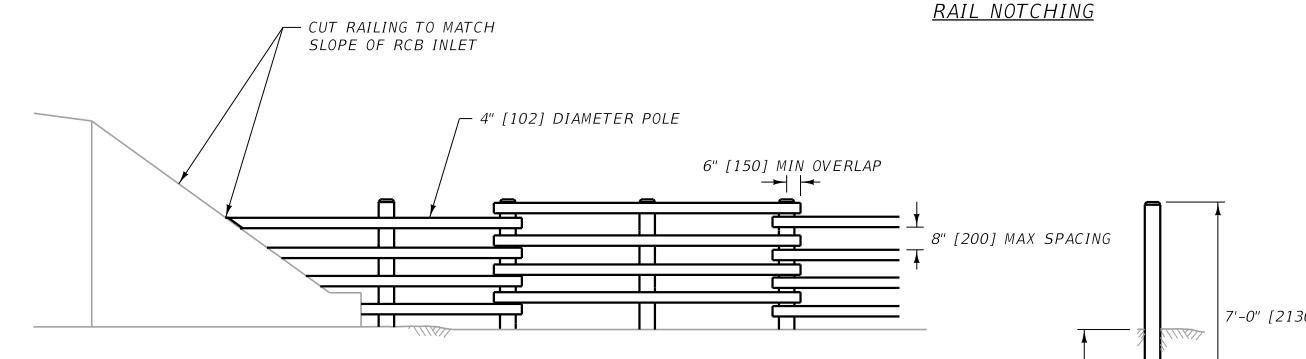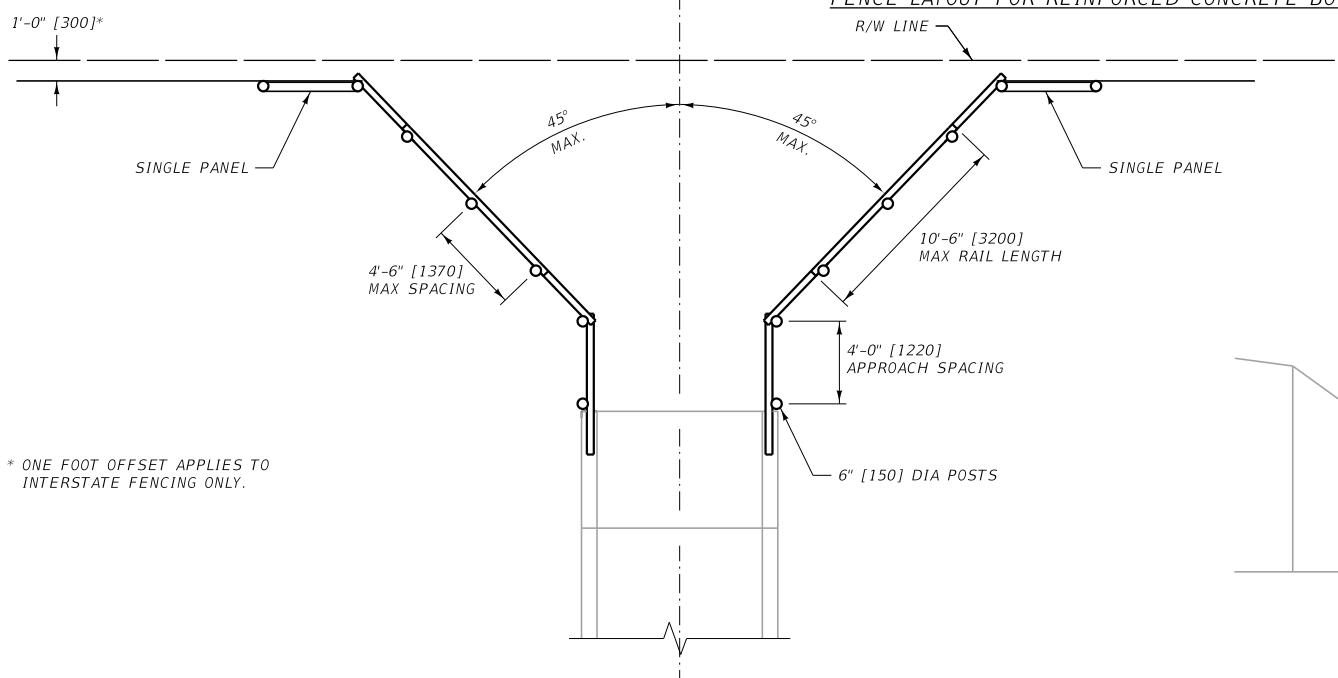

X-SEC VIEW

AT POINTS OF CONTACT WITH POSTS, NOTCH RAILS TO A DEPTH OF 2" [50] MIN.




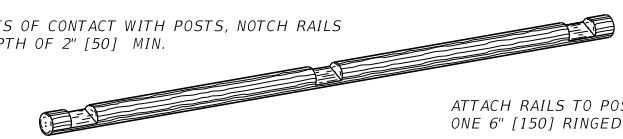


RAIL NOTCHING

DETAINED DRAWING	DWG. NO.
REFERENCE STANDARD SPEC.	607-17
SECTION 607	
FENCE DETAILS	

MDT MONTANA DEPARTMENT OF TRANSPORTATION

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

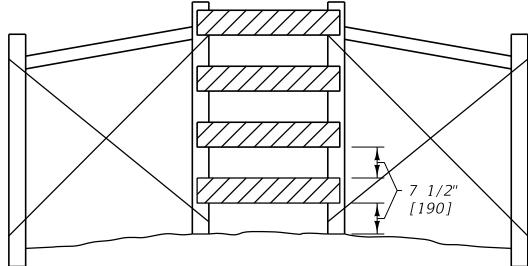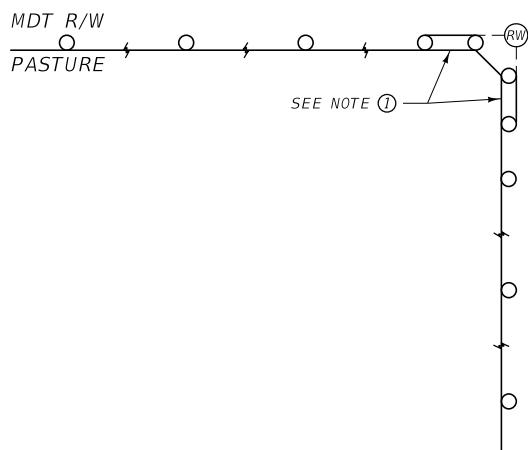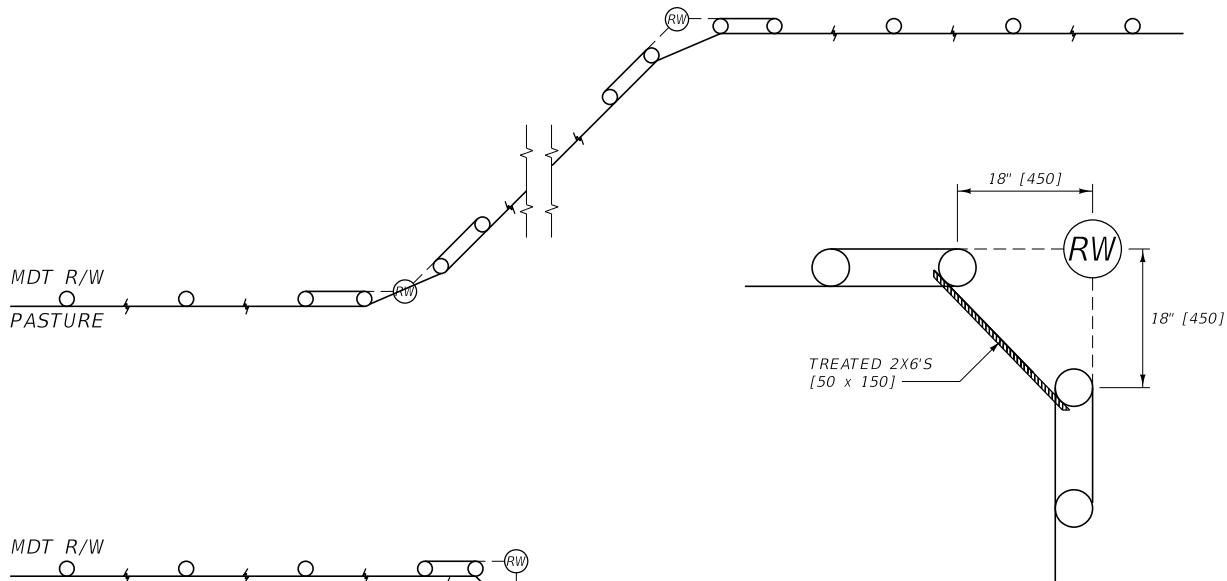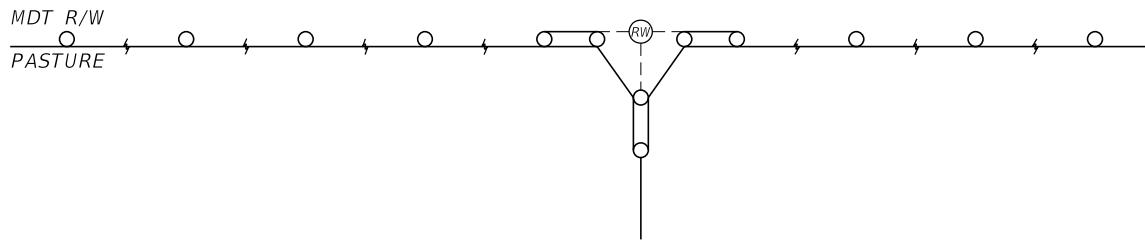



SPAN TREATED 2X6'S [50 x 150] ACROSS GAP ON PASTURE SIDE OF POSTS.
ATTACH TO PANEL POSTS WITH TWO 3" EXTERIOR GRADE SCREWS ON EACH
END AND TRIM EDGES AT 45 DEGREE ANGLES.

NOTES:

- ① INSTALL PANELS ACCORDING TO DETAIL DRAWING 607-05.
- ② INSTALL NON-INTERSTATE FENCE ON THE RIGHT-OF-WAY LINE AS SHOWN.
- ③ OFFSET PANEL POSTS 18" [450mm] FROM STAKED R/W BREAKS AND
R/W MONUMENTS AS SHOWN IN DETAIL.
- ④ DO NOT DISTURB SURVEY MONUMENTS.
- ⑤ INCLUDE COST OF 2 x 6 [50 x 150] CROSS RAILS IN THE COST OF
ADJACENT PANELS.


UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 607	DWG. NO. 607-20
FENCING AT RIGHT OF WAY BREAKS	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

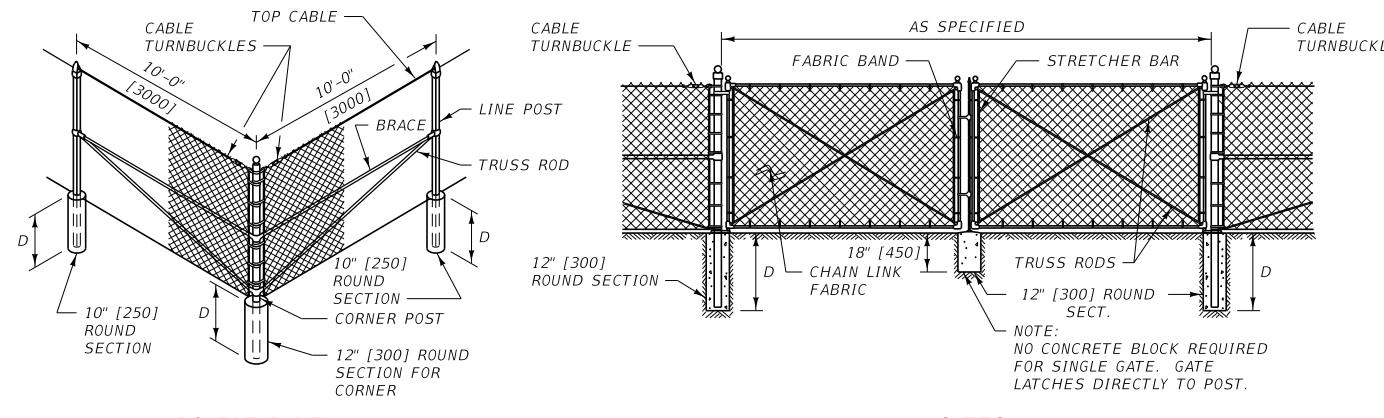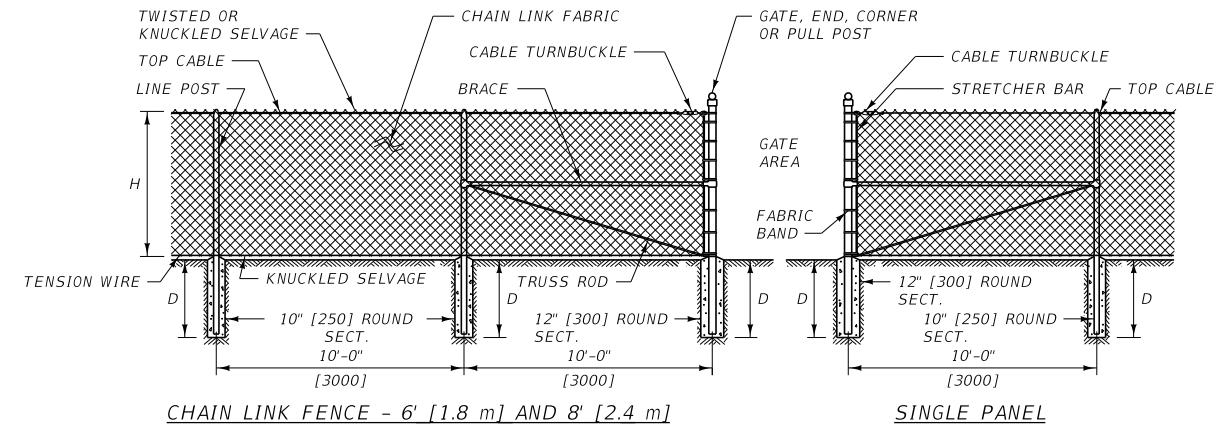

DOUBLE PANEL

PULL POST AND CORNER POST BRACING

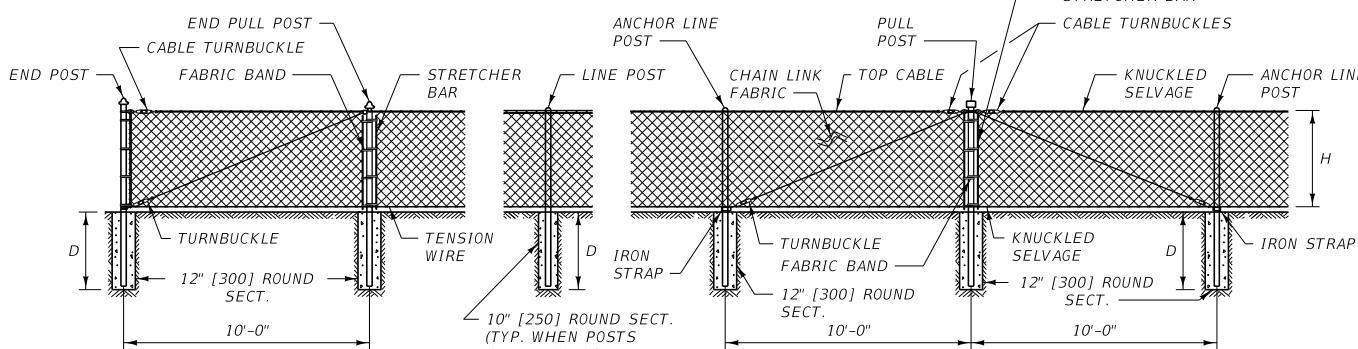


CHAIN LINK FENCE - 3' [0.9 m], 4' [1.2 m] AND 5' [1.5 m]

NOTES:

- ① DO NOT INSTALL DOUBLE PANELS MORE THAN 300' [90 m] APART ON TANGENTS OR MORE THAN 250' [75 m] APART ON ANY CURVE. FOR CURVES WITH RADII SHARPER THAN 1150' [350 m], INSTALL A DOUBLE PANEL ON EACH CURVE END, PLUS ONE ADDITIONAL PANEL FOR EACH 10' OF DEFLECTION, EVENLY SPACED, BETWEEN THE CURVE ENDS.
- ② PULL POST BRACING ON 6' [1.8 m] AND 8' [2.4 m] FENCE IS THE SAME AS CORNER BRACING.
- ③ A DROP BAR LOCKING DEVICE IS REQUIRED FOR ALL DOUBLE GATE INSTALLATIONS. THE DROP BAR MUST BE ABLE TO BE INSERTED INTO THE CONCRETE BLOCK AT LEAST SIX INCHES [150].

- ④ ALL CONCRETE IS LEAN OR BETTER.
- ⑤ INSTALL A 3/8" [10] DIAMETER GALVANIZED STEEL TOP CABLE ALONG ALL FENCE. TERMINATE TOP CABLE WITH GALVANIZED CABLE TURNBUCKLES FASTENED VIA THE FABRIC BAND AT THE POST.

HEIGHT OF FABRIC, H	WIRE FABRIC ABOVE GROUND	DEPTH OF CONCRETE, D	DEPTH OF POST IN CONC. (MIN.)
8' [2440]	1"-2" [25-50]	42" [1050]	38" [950]
6' [1830]	1"-2" [25-50]	36" [900]	32" [800]
5' [1525]	1"-2" [25-50]	36" [900]	32" [800]
4' [1220]	1"-2" [25-50]	30" [750]	26" [650]
3' [915]	1"-2" [25-50]	30" [750]	26" [650]

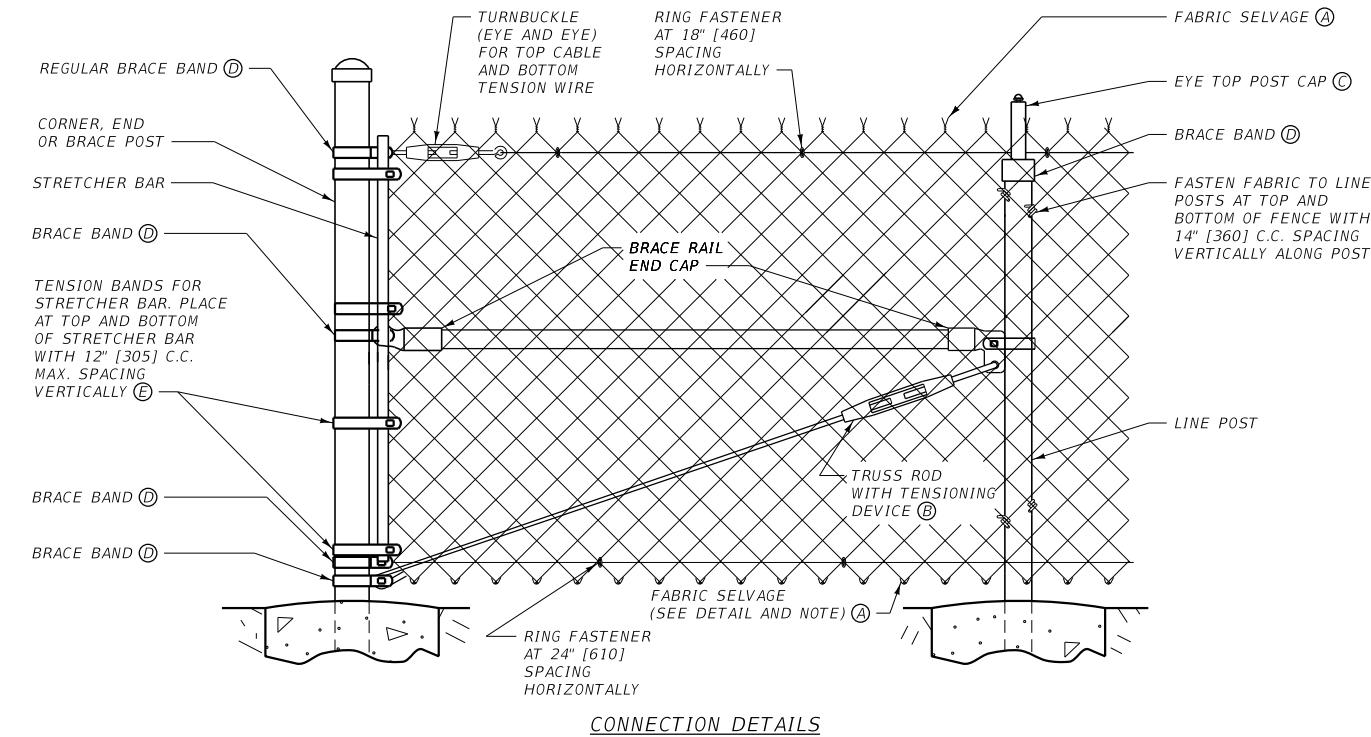

CONNECTION DETAILS

GENERAL NOTES

PROVIDE CHAIN LINK FENCE MATERIALS PER SECTION 712.

Ⓐ FABRIC SELVAGE: FENCE HEIGHT UNDER 6' [1.8 m]: TOP AND BOTTOM KNUCKLED SELVAGE.


FENCE HEIGHT 6' [1.8 m] AND OVER: TOP - TWISTED OR KNUCKLED SELVAGE
BOTTOM - KNUCKLED SELVAGE

Ⓒ POST CAPS: PROVIDE EYE-TOP CAPS FOR ALL POSTS CARRYING A TOP CABLE THROUGH THE POST.
PROVIDE ROUNDED TOPS FOR ALL OTHER ROUND POSTS. FIT POST CAPS TIGHTLY TO PREVENT REMOVAL.

Ⓓ BRACE BANDS: SEE SECTION 712.01.5.



Ⓔ TENSION BANDS: SEE SECTION 712.01.5

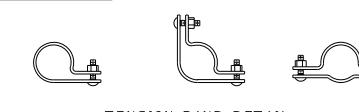


Ⓕ TRUSS RODS: SEE SECTION 712.01.4




UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 607	DWG. NO. 607-25
CHAIN LINK FENCE	

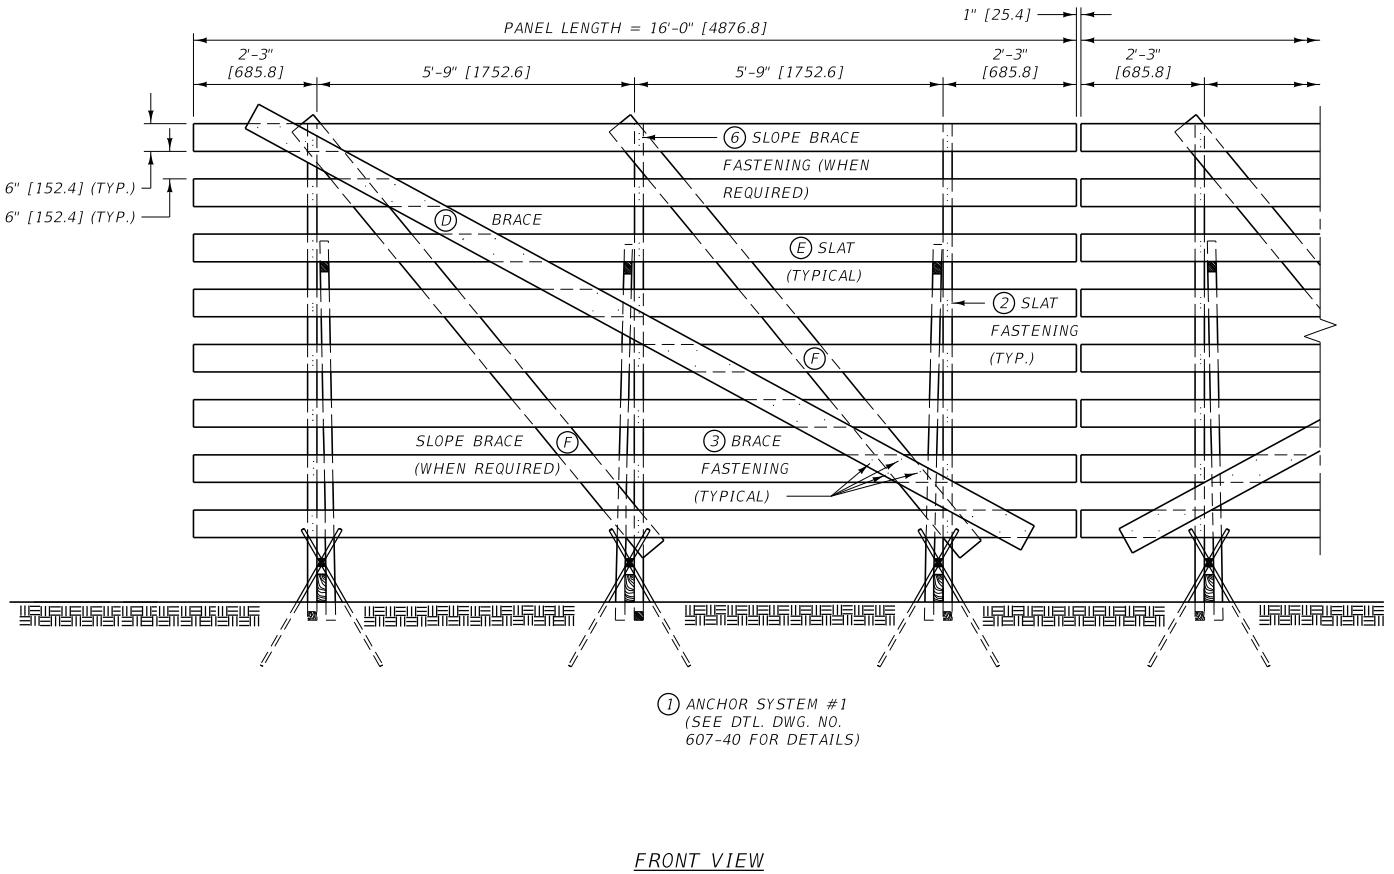

FRONT VIEW

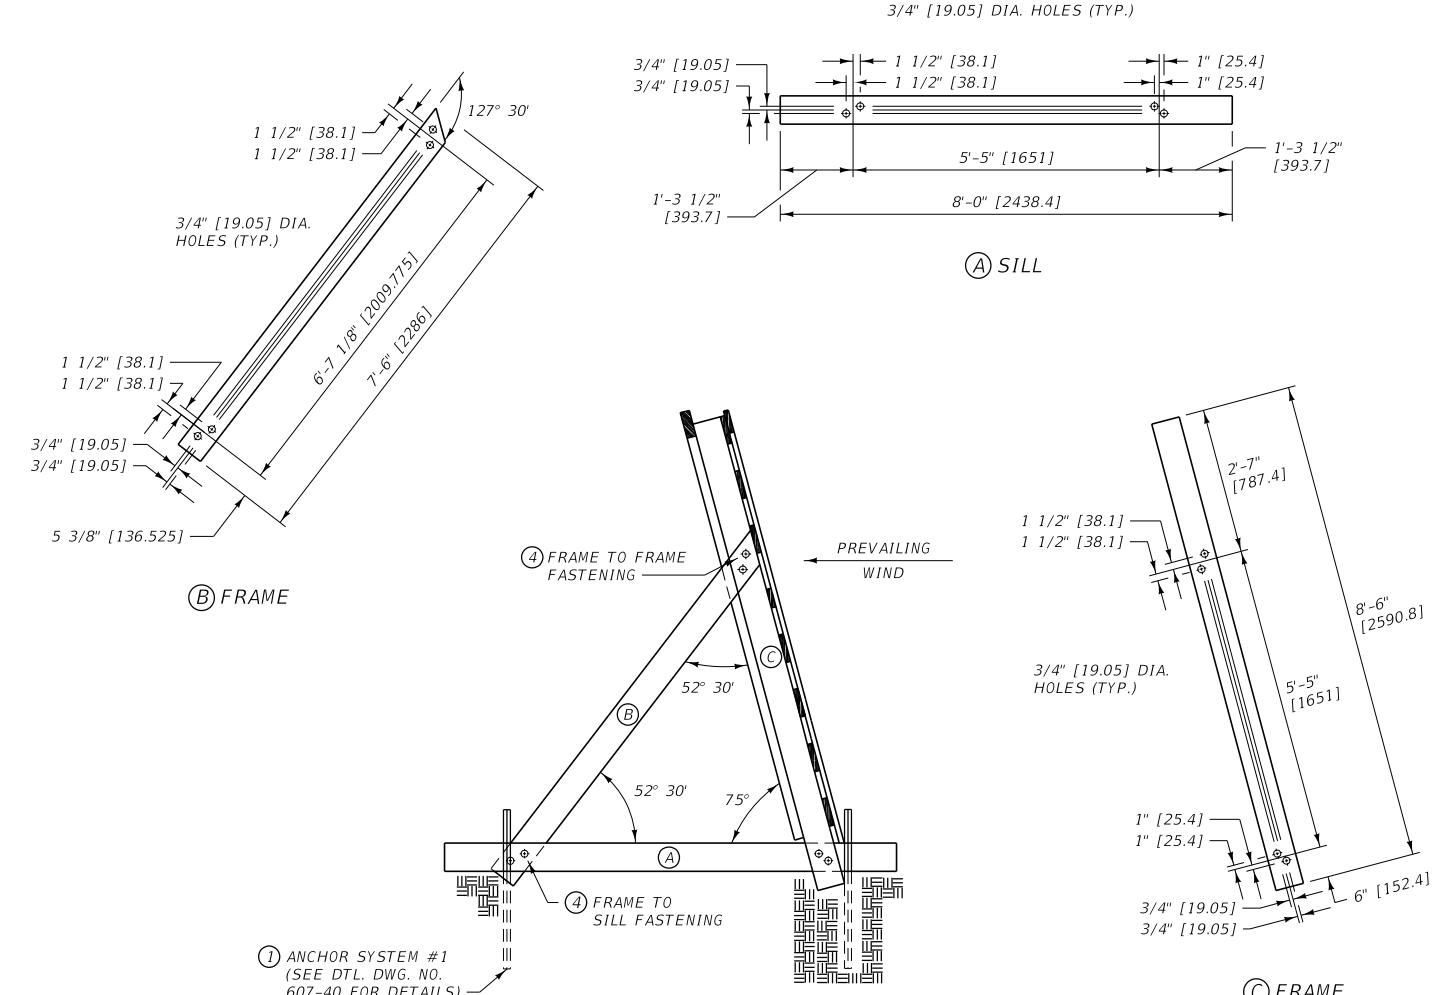

END VIEW

GENERAL NOTES

- ① **ANCHOR SYSTEM DETAIL**
USE ANCHOR SYSTEM #1 UNLESS SOIL AND MOISTURE CONDITIONS NECESSITATE THE USE OF AN ALTERNATE SYSTEM, OR AS DIRECTED BY THE PROJECT MANAGER. CONSULT DETAILED DRAWING NUMBERS 607-40 AND 607-45 FOR ANCHOR SYSTEMS #3 (ROCKY CONDITIONS) AND #2 (SWAMPY CONDITIONS).
- ② **SLAT FASTENING**
FASTEN SLATS TO THE FRAME WITH 3 ~ 12d COMMON BARBED SHANK NAILS AT EACH LOCATION.
- ③ **BRACE FASTENING**
FASTEN BRACES TO THE FRAME WITH 4 ~ 8d COMMON NAILS AT EACH LOCATION AND CLINCH.
- ④ **FRAME TO SILL AND FRAME TO FRAME FASTENING**
FASTEN THE SILL AND FRAME MEMBERS TO THE FRAME AT EACH LOCATION WITH 2 ~ 5/8 " DIA. x 5" [M16 x 127] STANDARD MACHINE BOLTS, EACH WITH HEX NUT AND TWO FLAT WASHERS. SEE NOTE  AT RIGHT.
- ⑤ **WIRE TIE**
USE 12 GAUGE OR HEAVIER GALVANIZED WIRE TO FORM THE WIRE TIES.
- ⑥ **SLOPE BRACE FASTENING**
FASTEN SLOPE BRACES WITH 3 ~ 16d COMMON BARBED SHANK NAILS AT EACH LOCATION.

BILL OF MATERIALS FOR ONE PANEL			
ITEM NO.	NO. OF PIECES	LUMBER SIZE	DESCRIPTION
(A)*	3	2" x 6" x 8'-0" [50 x 150 x 2438.4]	FRAME (SILL)
(B)*	3	2" x 6" x 7'-6" [50 x 150 x 2286.0]	FRAME
(C)*	3	2" x 6" x 8'-6" [50 x 150 x 2590.8]	FRAME
* NOTE: PRESSURE TREAT ALL 2" x 6" [50 x 150] MEMBERS (ENTIRE FRAME)			
(D)	1	1" x 6" x 16'-0" [25 x 150 x 4876.8]	BRACE
(E)	8	1" x 6" x 16'-0" [25 x 150 x 4876.8]	SLAT
(F)**	2	2" x 6" x 10'-0" [50 x 150 x 3048.0]	SLOPE BRACE


HARDWARE - 8' [2.4 m] SNOW FENCE W/ ANCHOR SYSTEM #1	
BILL OF MATERIALS FOR ONE PANEL	
QUANTITY	DESCRIPTION
④ 18	5/8" DIA. x 5" [M16 x 127] HEX BOLT (THREADED FULL LENGTH) AND NUT
④ 36	FLAT WASHER FOR 5/8" DIA. [M16] BOLT
② 1 LB. [0.45 kg]	12d COMMON BARBED SHANK NAIL
① 12	#6 REBAR x 5'-0" [#19 x 1524]
⑤ 6 PIECES	12 GAUGE TIE WIRE x 5'-0" [1524.0] ±
③ 1/3 LB. [0.15 kg]	8d COMMON NAILS
⑥ 1/4 LB. [0.11 kg]	16d COMMON BARBED SHANK NAILS

ALL NAILS MAY BE EITHER HAND DRIVEN OR DRIVEN WITH A PNEUMATIC NAILER.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	607-30
SECTION 607	
8' [2.4 m] WOOD SNOW FENCE W/ ANCHOR SYSTEM #1	




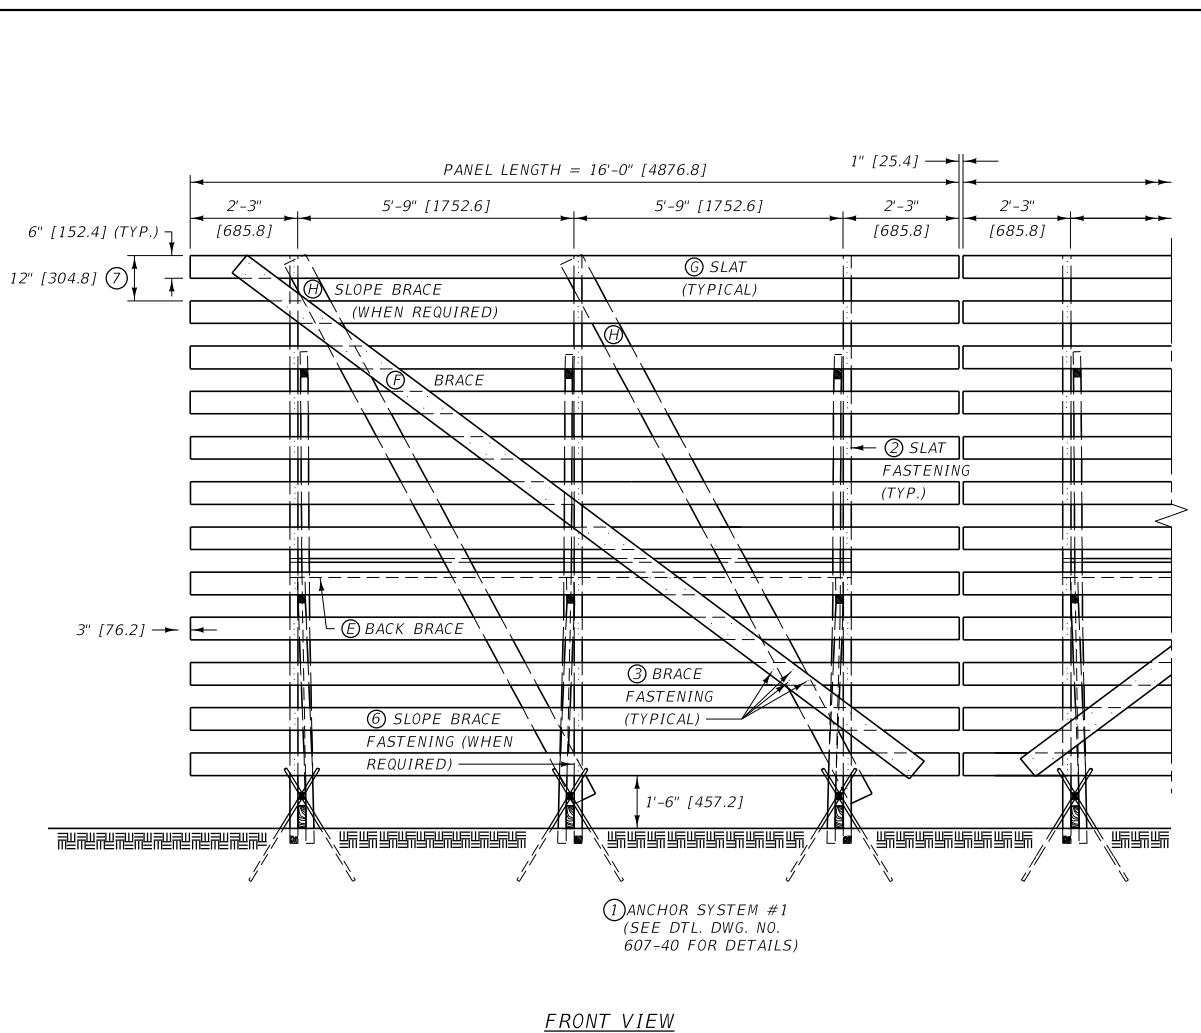

GENERAL NOTES

- ① **ANCHOR SYSTEM DETAIL**
USE ANCHOR SYSTEM #1 UNLESS SOIL AND MOISTURE CONDITIONS NECESSITATE THE USE OF AN ALTERNATE SYSTEM, OR AS DIRECTED BY THE PROJECT MANAGER. CONSULT DETAILED DRAWING NUMBERS 607-40 AND 607-45 FOR ANCHOR SYSTEMS #3 (ROCKY CONDITIONS) AND #2 (SWAMPY CONDITIONS).
- ② **SLAT FASTENING**
FASTEN SLATS TO THE FRAME WITH 3 ~ 12d COMMON BARBED SHANK NAILS AT EACH LOCATION.
- ③ **BRACE FASTENING**
FASTEN BRACES TO THE FRAME WITH 4 ~ 8d COMMON NAILS AT EACH LOCATION AND CLINCH.
- ④ **FRAME TO SILL AND FRAME FASTENING**
FASTEN THE SILL AND FRAME MEMBERS TO THE FRAME AT EACH LOCATION WITH 2 ~ 5/8" DIA. x 5" [M16 x 127] STANDARD MACHINE BOLTS, EACH WITH HEX NUT AND TWO FLAT WASHERS. SEE NOTE ~~(X)~~ AT RIGHT.
- ⑤ **WIRE TIE**
USE 12 GAUGE OR HEAVIER GALVANIZED WIRE TO FORM THE WIRE TIES.
- ⑥ **BACK & SLOPE BRACE FASTENING**
FASTEN BACK BRACES TO THE FRAME WITH 2 ~ 16d NAILS, AND FASTEN THE SLOPE BRACES WITH 3 ~ 16d BARBED SHANK NAILS AT EACH LOCATION.
- ⑦ 12" [304.8] INCREMENT SPACING FROM TOPS OF EACH SLAT
(IE. 12", [304.8], 24", [609.6], 36", [914.4]).

BILL OF MATERIALS FOR ONE PANEL			
ITEM NO.	NO. OF PIECES	LUMBER SIZE	DESCRIPTION
(A)*	3	2" x 6" x 12'-0" [50 x 150 x 3657.6]	SILL
(B)*	3	2" x 6" x 7'-0" [50 x 150 x 2133.6]	FRAME
(C)*	3	2" x 6" x 13'-0" [50 x 150 x 3962.4]	FRAME
(D)*	3	2" x 6" x 13'-0" [50 x 150 x 3962.4]	FRAME
* NOTE: PRESSURE TREAT ALL 2" x 6" [50 x 150] MEMBERS (ENTIRE FRAME)			
(E)	1	2" x 4" x 12'-0" [50 x 100 x 3657.6]	BACK BRACE
(F)	1	1" x 6" x 18'-0" [25 x 150 x 5486.4]	BRACE
(G)	12	1" x 6" x 16'-0" [25 x 150 x 4876.8]	SLAT
(H)**	2	2" x 6" x 13'-0" [50 x 150 x 3962.4]	SLOPE BRACE

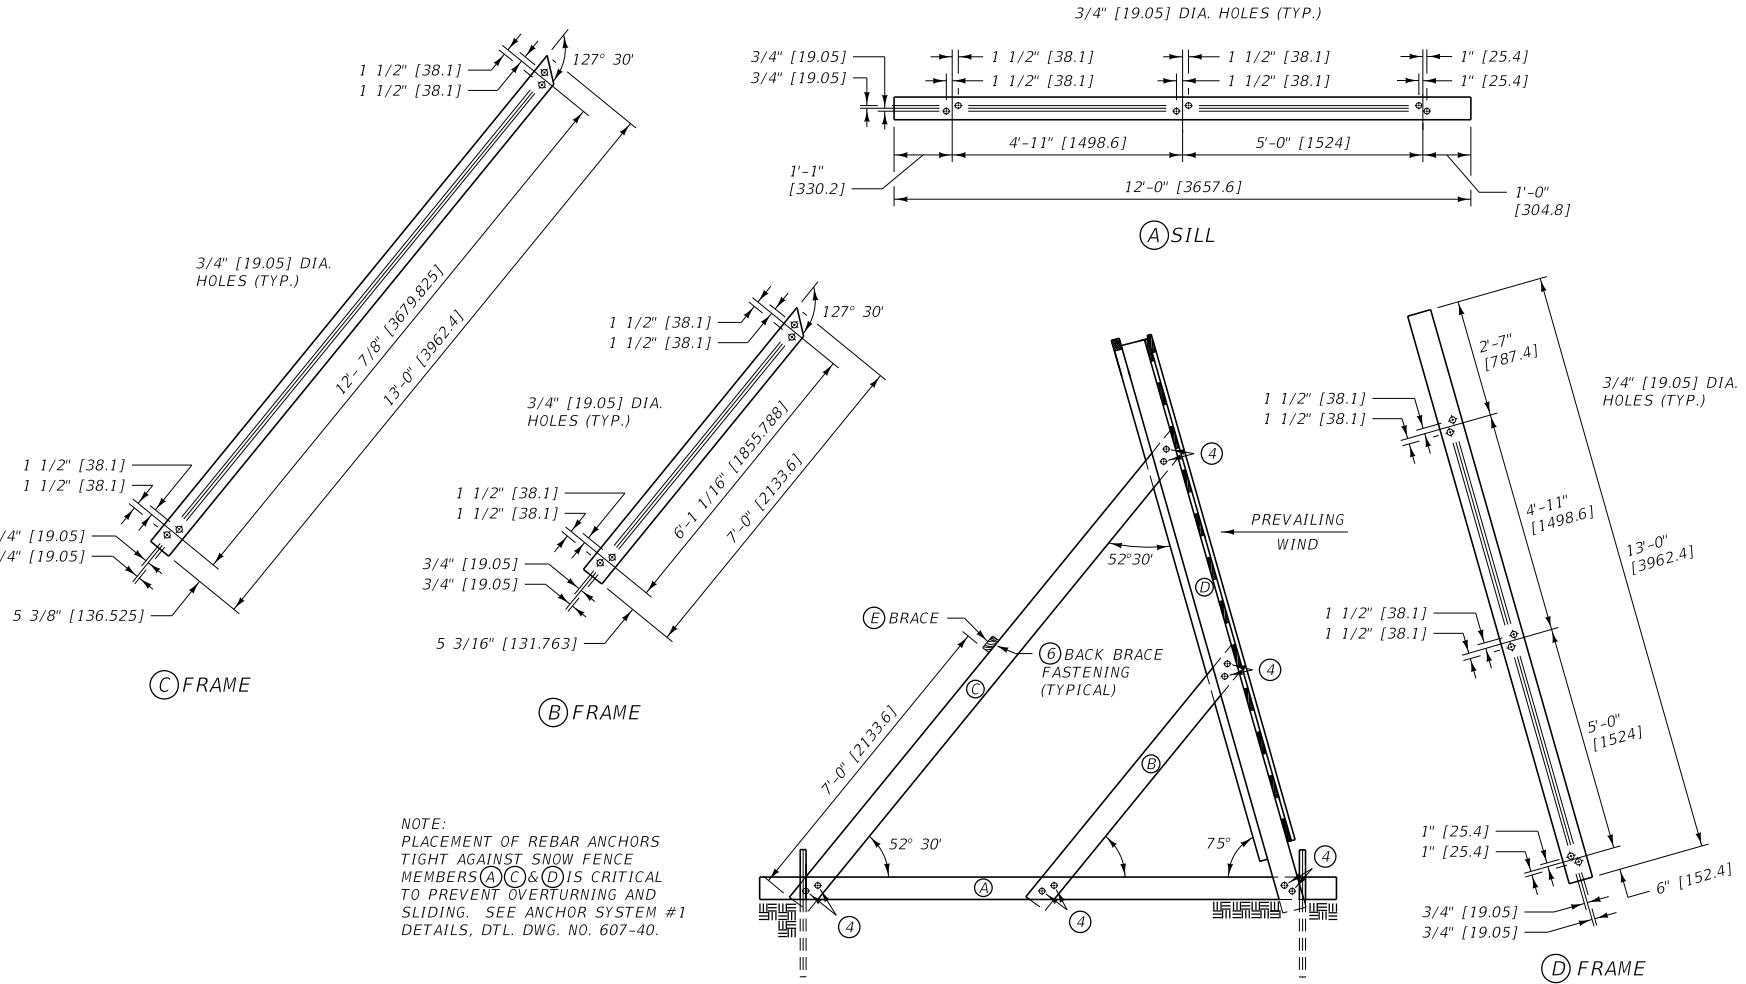

NOTE:
PLACEMENT OF REBAR ANCHORS
TIGHT AGAINST SNOW FENCE
MEMBERS **(A)** & **(D)** IS CRITICAL
TO PREVENT OVERTURNING AND
SLIDING. SEE ANCHOR SYSTEM #1
DETAILS DTI DWG. NO. 607-40.

DIG OUT AS REQUIRED FOR ENDS OF MEMBERS (B) (C) & (D) AND THE ENTIRE LENGTH OF SILL (A) TO ASSURE FULL BEARING OF SILL AGAINST TERRAIN.

END VIEW


HARDWARE - 12' [3.6 m] SNOW FENCE W/ ANCHOR SYSTEM #1	
BILL OF MATERIALS FOR ONE PANEL	
QUANTITY	DESCRIPTION
30	5/8" DIA. x 5" [M16 x 127] HEX BOLT (THREADED FULL LENGTH) AND NUT
60	FLAT WASHER FOR 5/8" DIA. [M16] BOLT
1/2 LB. [0.23 kg]	8d COMMON NAILS
1 2/3 LB. [0.76 kg]	12d COMMON BARBED SHANK NAILS
1/2 LB. [0.23 kg]	16d COMMON BARBED SHANK NAILS
12	#6 REBAR x 5'-0" [#19 x 1524]
6 PIECES	12 GAUGE TIE WIRE x 5'-0" [1524.0] ±

ALL NAILS MAY BE EITHER HAND DRIVEN OR DRIVEN WITH A PNEUMATIC NAILER.


UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING



REFERENCE	DWG. NO.
STANDARD SPEC.	607-35
SECTION 607	
12' [3.6 m] WOOD SNOW	
FENCE W/	
ANCHOR SYSTEM #1	

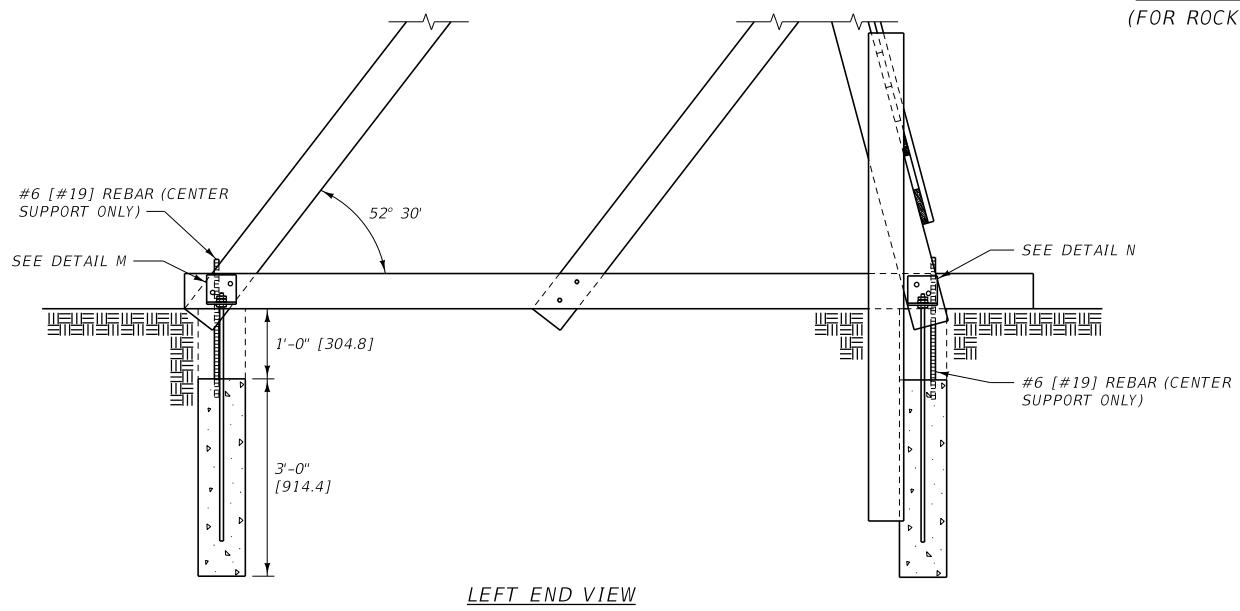


ANCHOR SYSTEM #3
(FOR ROCKY CONDITIONS)

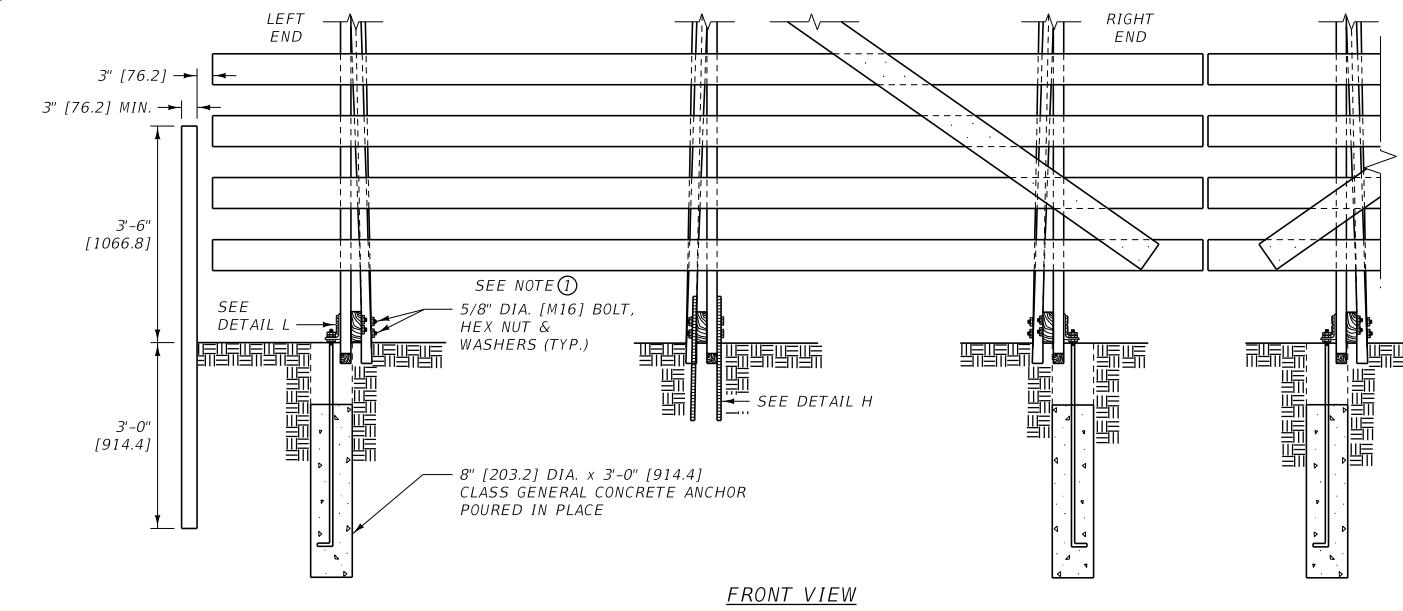

FRONT VIEW

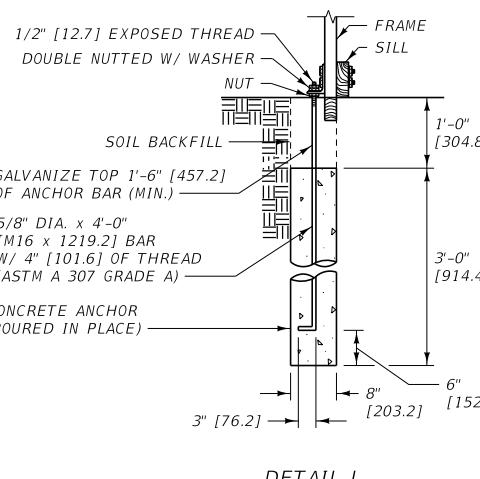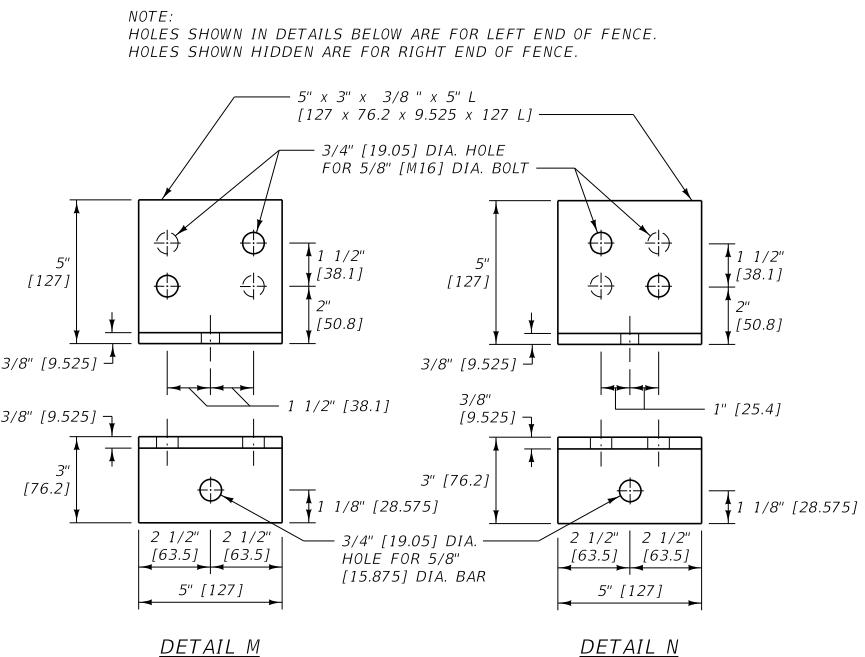

DETAIL L

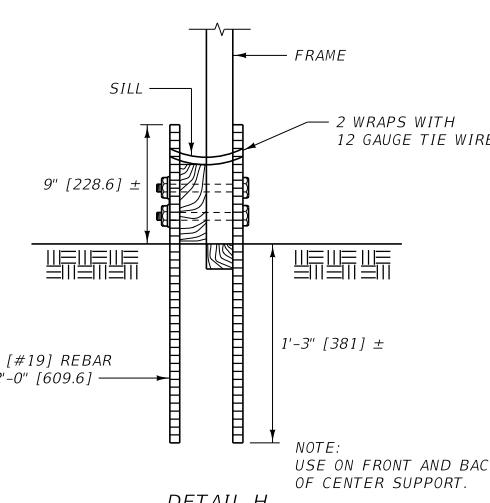

DETAIL H

LUMBER - SNOW FENCE W/ ANCHOR SYSTEM #3

BILL OF MATERIALS FOR ONE PANEL
SAME AS FOR SNOW FENCE W/ ANCHOR SYSTEM #1

HARDWARE - SNOW FENCE W/ ANCHOR SYSTEM #3

BILL OF MATERIALS FOR ONE PANEL


QUANTITY	DESCRIPTION
4	5" x 3" x 3/8" x 5" L [127 x 76.2 x 9.525 x 127.0 L]
4	5/8" DIA. x 4'-0" [M16 x 1219.2] BAR W/ 4" [101.6] OF THREAD (ASTM A 307 GRADE A)
4	FLAT WASHERS FOR 5/8" [16] DIA. BAR
0.16 C.Y. [0.122 m³]	CLASS GENERAL CONCRETE
4	#6 [#19] REBAR x 2'-0" [609.6] (3/4" [19.05] DIA.)
4 PIECES	12 GAUGE TIE WIRE x 2'-0" [609.6] ±
30	5/8" DIA. x 5" [M16 x 127] HEX BOLT (THREADED FULL LENGTH) AND NUT
60	FLAT WASHERS FOR 5/8" [16] DIA. BOLT

NOTE: NAILS REQUIRED ARE SAME AS SHOWN ON HARDWARE
SUMMARY FOR SNOW FENCE W/ ANCHOR SYSTEM #1


SEE NOTE ① BELOW

① AFTER 5/8" [M16] DIA. BOLTS HAVE BEEN TIGHTENED,
BURR THE THREAD DIRECTLY BEHIND THE NUT
TO PREVENT EVENTUAL LOOSENING OF THE NUTS.

ANCHOR SYSTEM #1
(STANDARD)

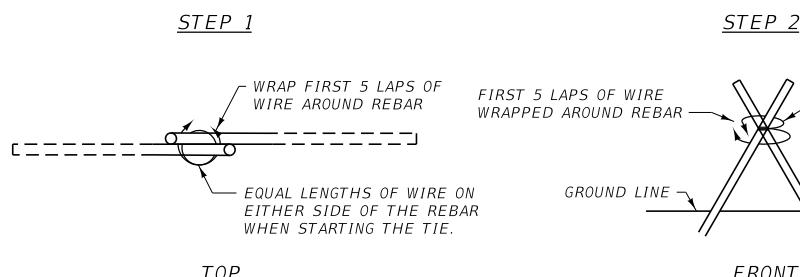

WIRE TIE DETAIL
USE 12 GAUGE OR HEAVIER GALVANIZED
WIRE TO FORM THE WIRE TIES.

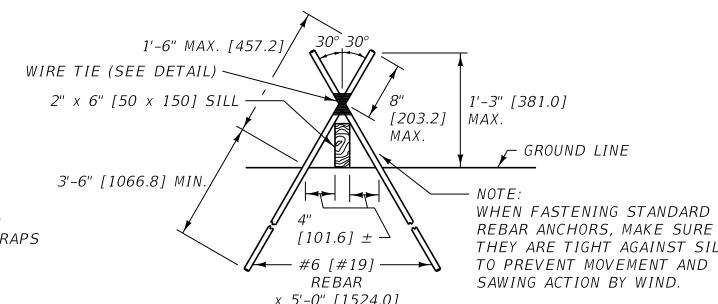

USE TWO #6 [#19] REINFORCING BARS FOR EACH END OF EACH SILL MEMBER. DRIVE THE BARS UP TIGHT TO THE FRAME TO PREVENT SLIDING. TIE THE REINFORCING BARS AS SHOWN IN THE WIRE TIE DETAIL. THE PLACEMENT OF THE ANCHORS IS CRITICAL IN PREVENTING OVERTURNING AND SLIDING OF THE FENCE. REFERENCE DETAIL DRAWING 607-35 FOR MORE DETAILS.

STANDARD ANCHOR DETAIL


UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 607-40
SECTION 607


WOOD SNOW FENCE
ANCHOR SYSTEM #3
AND #1 DETAILS

MDT MONTANA DEPARTMENT
OF TRANSPORTATION

ANCHOR SYSTEM #2
(FOR SWAMPY CONDITIONS)

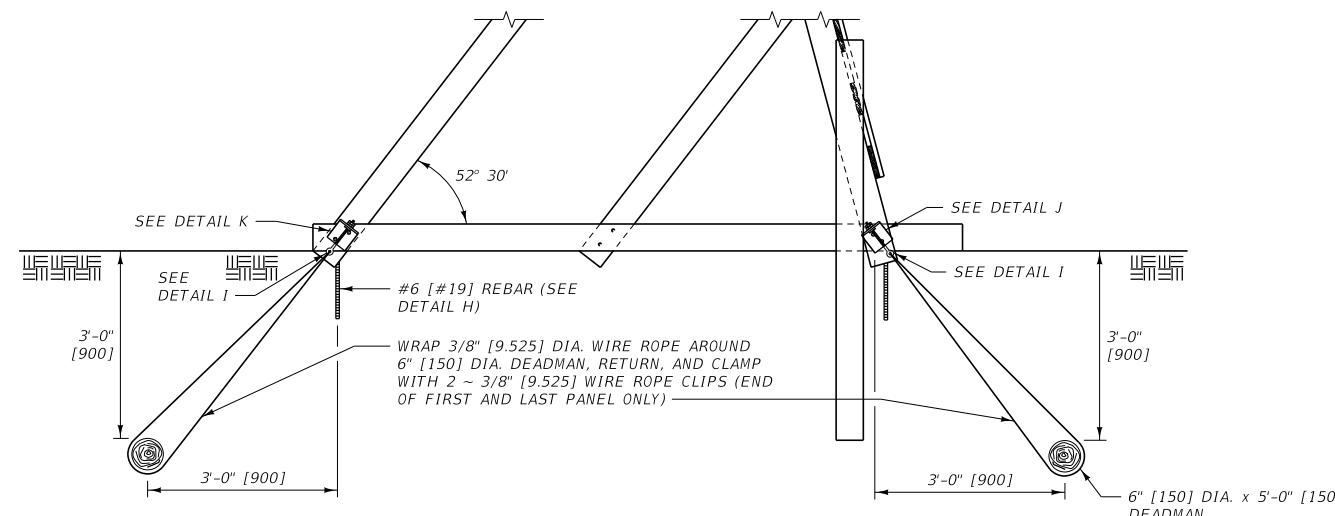


LEFT END VIEW

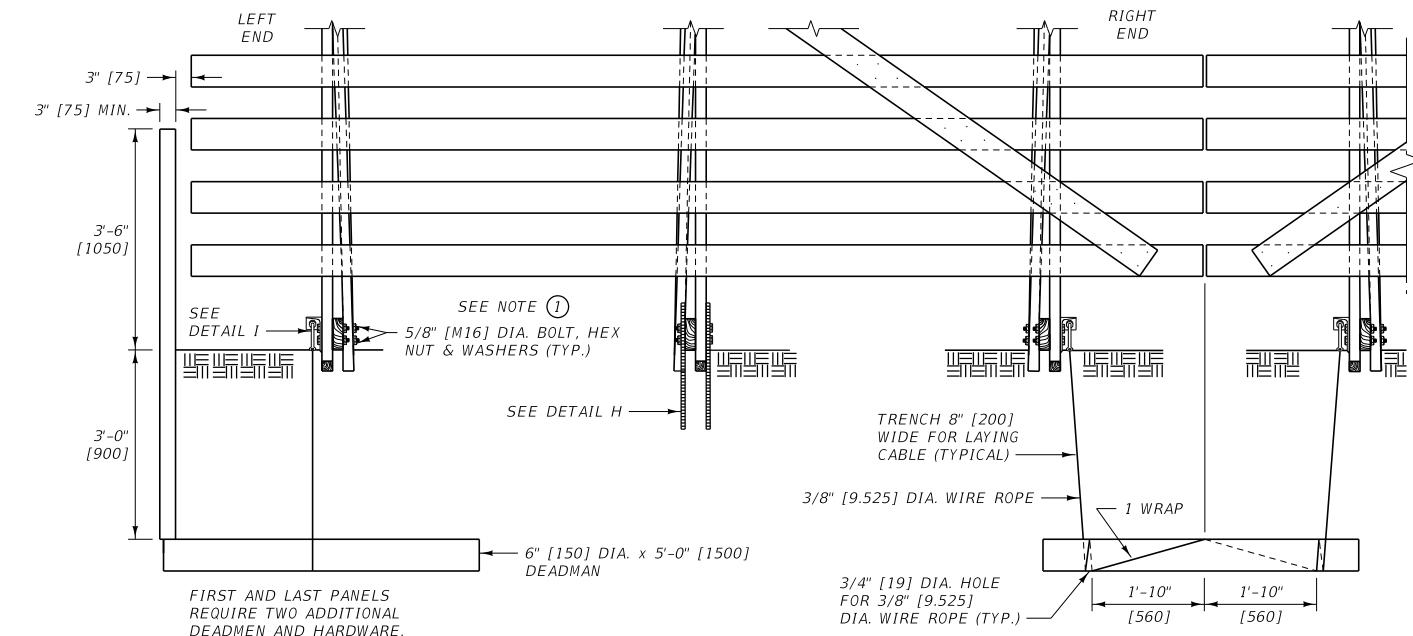

FRONT VIEW


LUMBER - SNOW FENCE W/ ANCHOR SYSTEM #2	
BILL OF MATERIALS FOR ONE PANEL	
SAME AS FOR SNOW FENCE W/ ANCHOR SYSTEM #1	

HARDWARE - SNOW FENCE W/ ANCHOR SYSTEM #2	
BILL OF MATERIALS FOR ONE 12' [3.6m] PANEL	
QUANTITY	DESCRIPTION
4	5" x 3" x 3/8" x 5" L [127 x 76.2 x 9.525 x 127 L]
8	3/8" [9.525] WIRE CLIPS
4	1/2" [12.7] DIA. DROP FORGED EYEBOLTS W/ 3 HEX NUTS
4	FLAT WASHERS FOR 1/2" [12.7] DIA. EYEBOLTS
4	#6 [#19] REBAR x 2'-0" [609.6] (3/4" [19.05] DIA.)
4 PIECES	12 GAUGE TIE WIRE x 2'-0" [609.6] ±
30 FT. [8839.2]	3/8" [9.525] DIA. WIRE ROPE
2	6" [150] DIA. x 5'-0" [1500] POST DEADMEN
30	5/8" DIA. x 5" [M16 x 127] HEX BOLT (THREADED FULL LENGTH) AND NUT
60	FLAT WASHERS FOR 5/8" [M16] BOLT
NOTE: NAILS REQUIRED ARE SAME AS SHOWN ON HARDWARE SUMMARY FOR SNOW FENCE W/ ANCHOR SYSTEM #1	

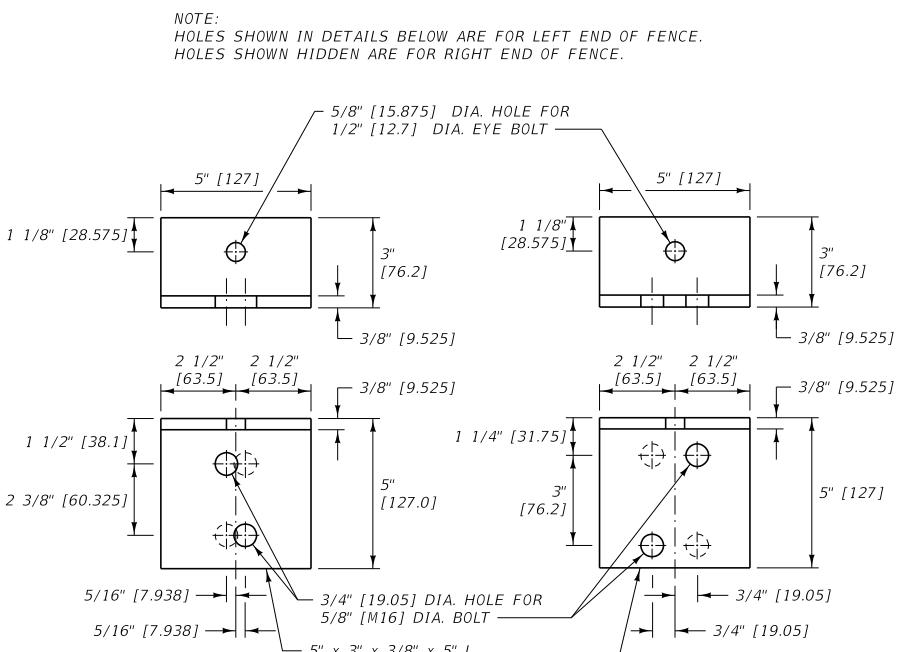


DETAIL J

DETAIL K

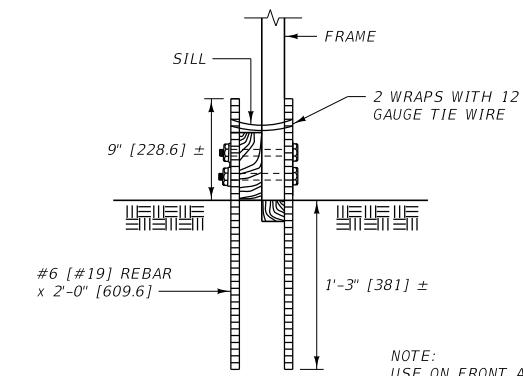


DETAIL H


NOTE:
USE ON FRONT AND
BACK OF CENTER
SUPPORT.

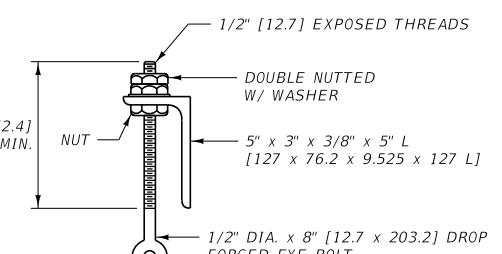

DETAIL I

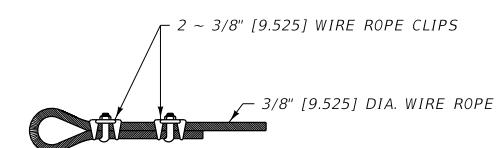

WIRE ROPE CONNECTION

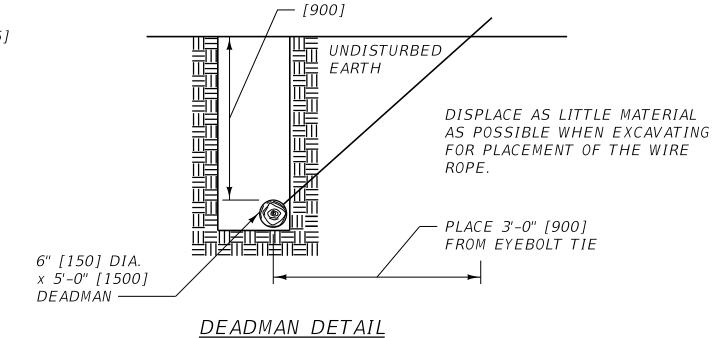


DEADMAN DETAIL

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.


REFERENCE STANDARD SPEC. SECTION 607	DWG. NO. 607-45
--------------------------------------------	--------------------

WOOD SNOW FENCE
ANCHOR SYSTEM #2 DETAILS

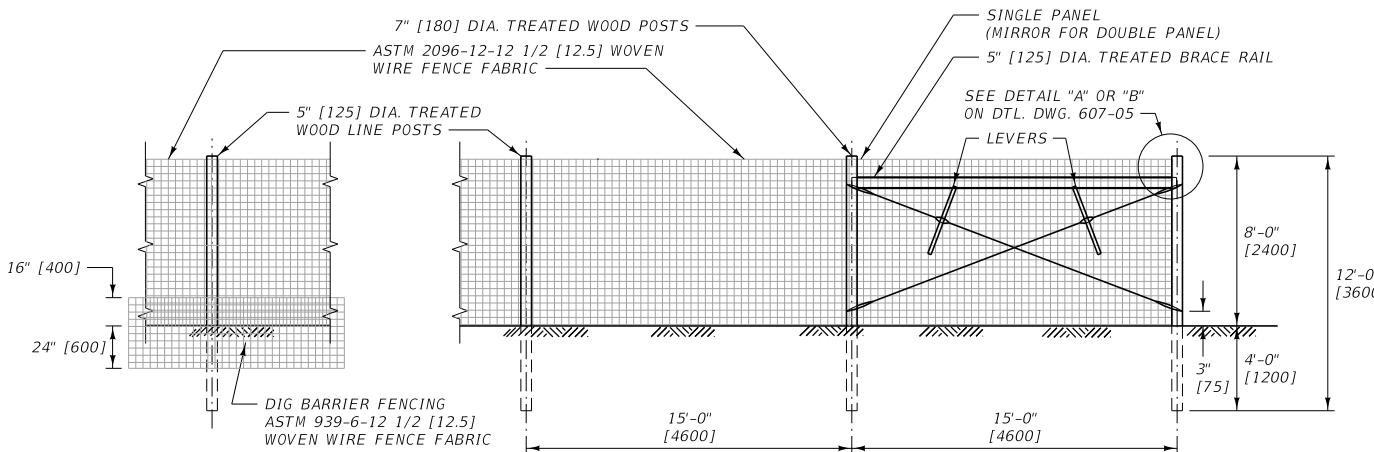


WILDLIFE FENCE W/ DIG BARRIER

PANELS NOT SHOWN

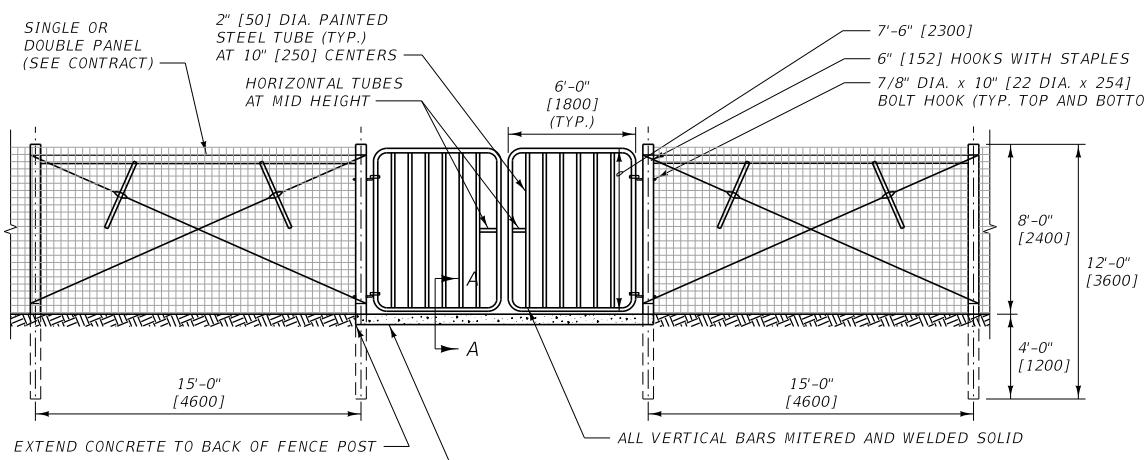

METAL MAINTENANCE ACCESS GATE

CHAIN AND LOCK TO BE SUPPLIED BY MDT FORCES

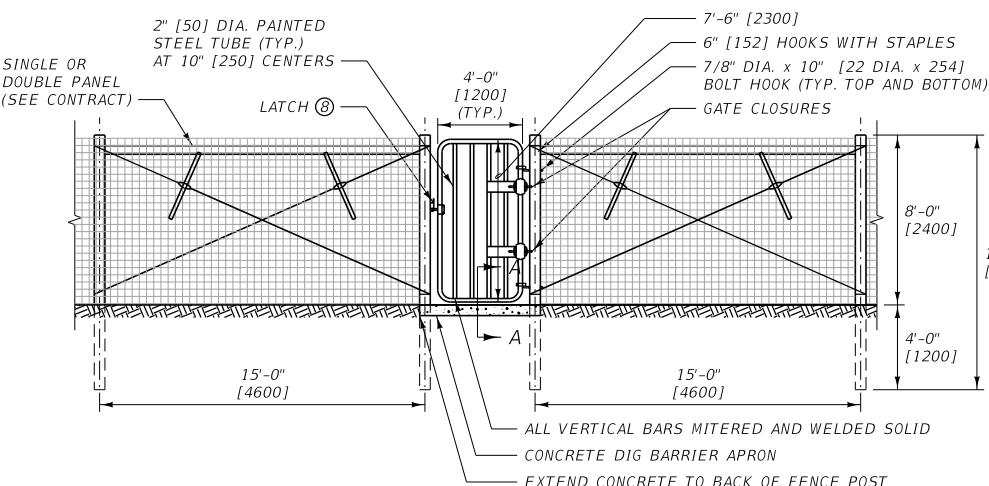


METAL EQUINE GATE

WILDLIFE FENCE


FENCE TYPE	RUN = L	PANELS REQUIRED
WILDLIFE	LESS THAN 30' [9.2 m]	NONE
	30'-330' [9.2 m - 101.2 m]	SINGLE

NOTE:


TIE OFF ON ALL CROSS HATCHED OR SHADED POSTS.

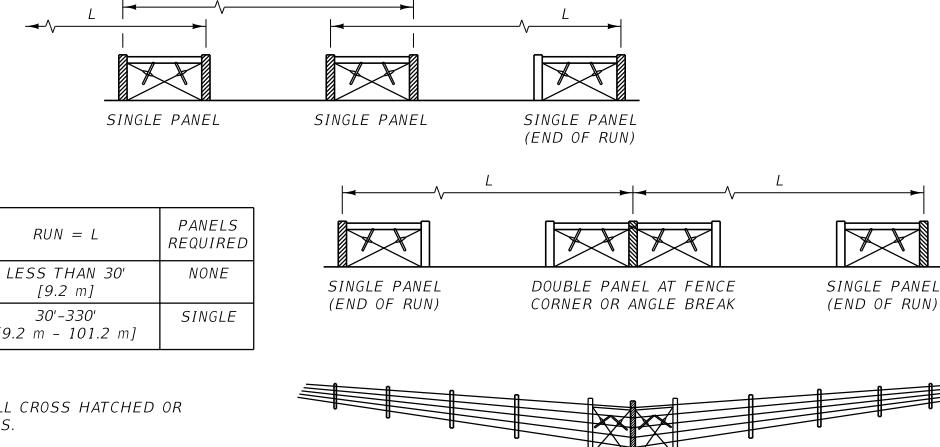

FENCE PANEL TYPES

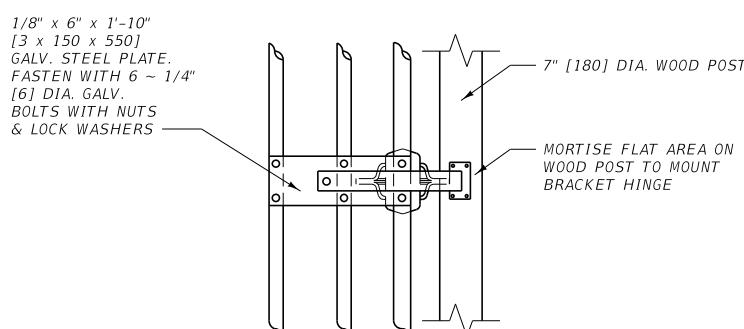

TIE BAR MOUNTING DETAIL FOR GATE CLOSERS

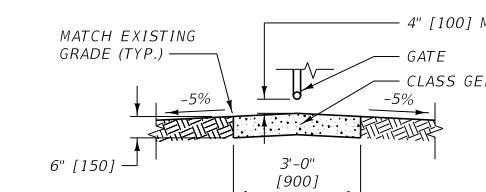


SECTION A-A
CENTER CONCRETE DIG BARRIER APRON UNDER CLOSED GATE


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAINED DRAWING	REFERENCE	DWG. NO.
	STANDARD SPEC.	SECTION 607
		607-50

WILDLIFE FENCE

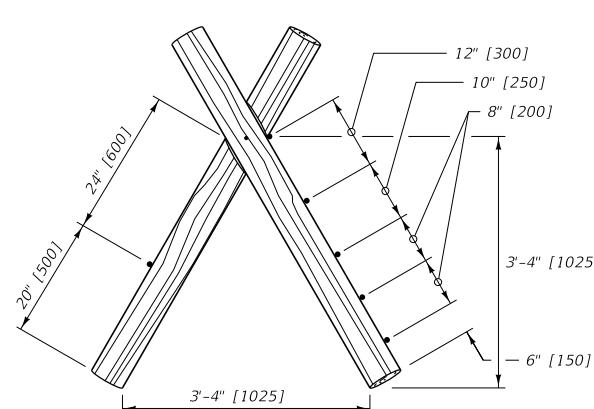

JACK AND WIRE ASSEMBLY

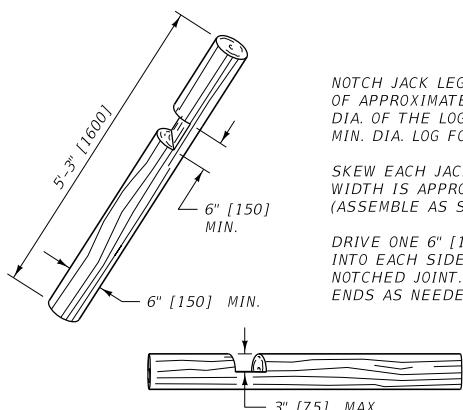


JACK LEG NOTCHING


NOTCH JACK LEGS TO A DEPTH OF APPROXIMATELY ONE-HALF THE DIA. OF THE LOG. PROVIDE 6" [150] MIN. DIA. LOG FOR JACK LEG.

SKEW EACH JACK NOTCH AND ENSURE WIDTH IS APPROX. EQUAL TO LOG DIA. (ASSEMBLE AS SHOWN)


DRIVE ONE 6" [150] RINGED NAIL INTO EACH SIDE OF THE JACK THROUGH NOTCHED JOINT. CLINCH PROTRUDING NAIL ENDS AS NEEDED.

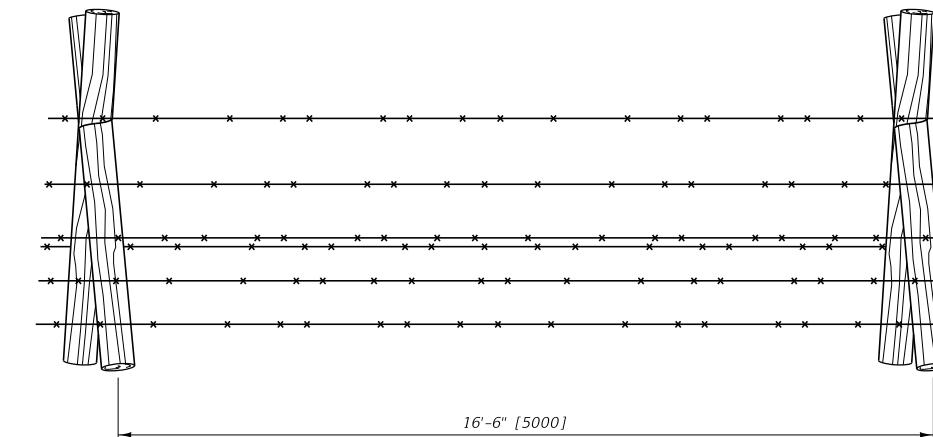

LINE JACK SPACING

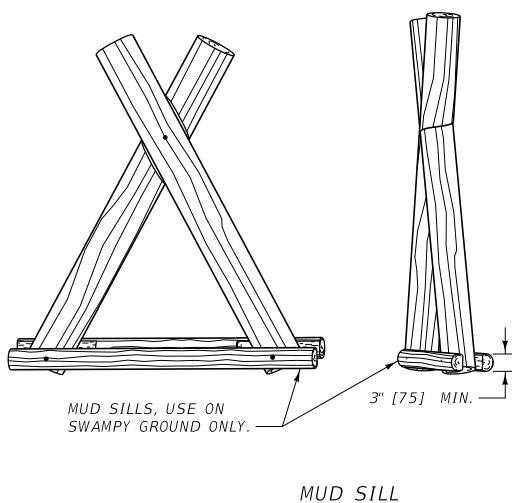

MUD SILL

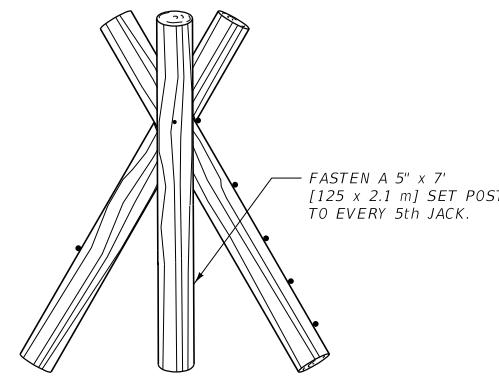


SET POST BRACE



BRACE POLE NOTCHING

AT POINTS OF CONTACT WITH JACKS, NOTCH POLES TO A DEPTH PROVIDING 3" [75] MIN. PENETRATION OF THE 6" [150] RINGED NAIL INTO JACK.

18' [5.5 m] UNIFORM LENGTH (3" [75] DIA. SMALL END) POLES. STRIP OF BARK ON TOP AND BOTTOM OF POLES.

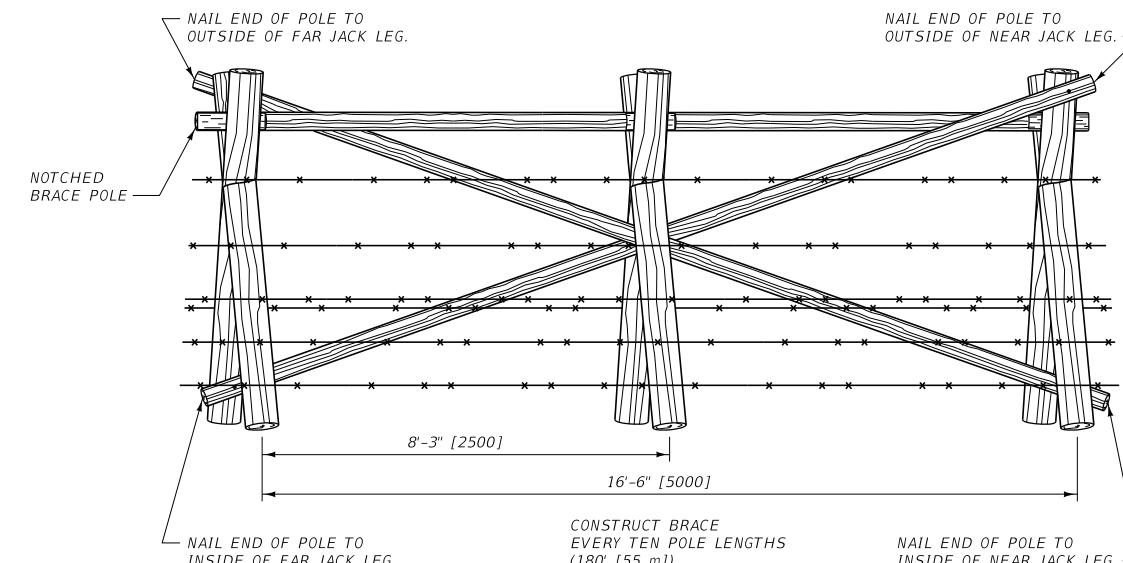


BRACED PANEL


NOTE: ALL POLES, POSTS, RAILS, OR WOOD ITEMS WILL BE TREATED.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 607-55
SECTION 607	
JACKLEG WIRE FENCE	

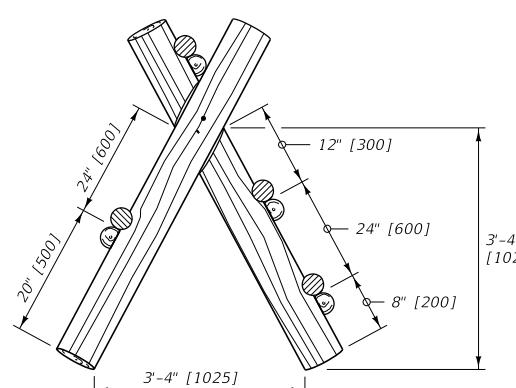

JACK AND POLE ASSEMBLY

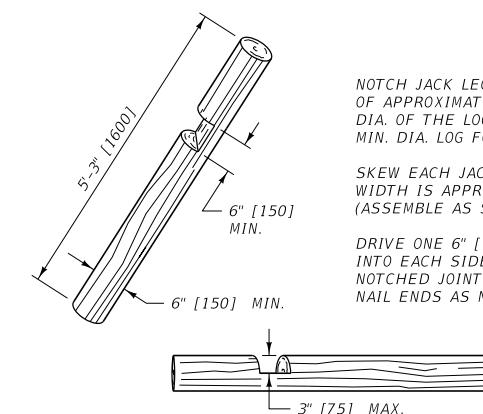


JACK LEG NOTCHING


NOTCH JACK LEGS TO A DEPTH OF APPROXIMATELY ONE-HALF THE DIA. OF THE LOG. PROVIDE 6" [150] MIN. DIA. LOG FOR JACK LEG.

SKEW EACH JACK NOTCH AND ENSURE WIDTH IS APPROX. EQUAL TO LOG DIA. (ASSEMBLE AS SHOWN)


DRIVE ONE 6" [150] RINGED NAIL INTO EACH SIDE OF THE JACK THROUGH NOTCHED JOINT. CLINCH PROTRUDING NAIL ENDS AS NEEDED.

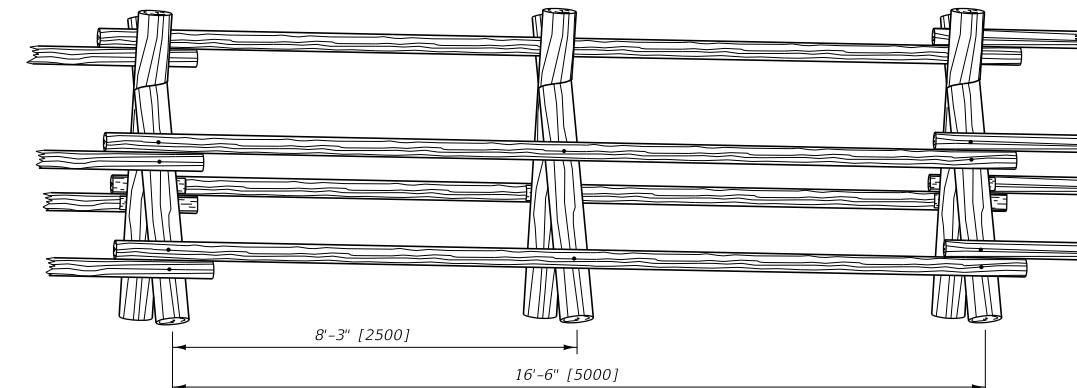


LINE JACK SPACING

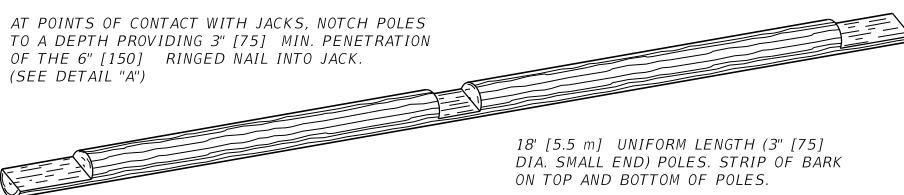

POLE NOTCHING

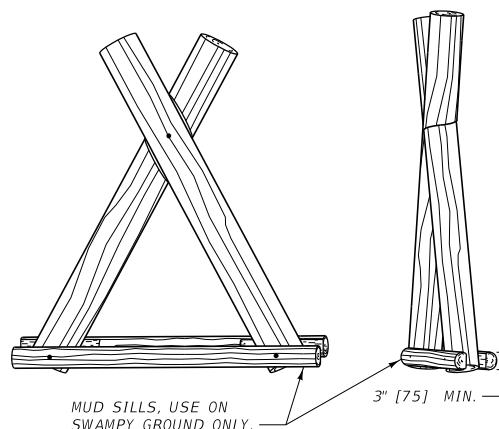


MUD SILL

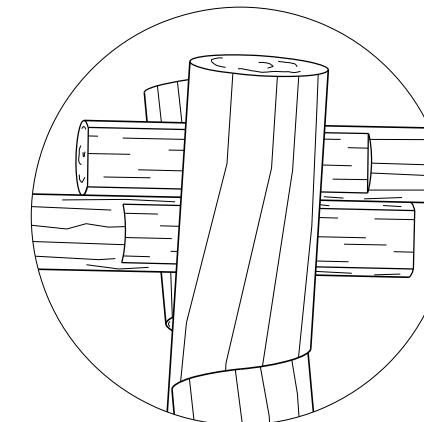

TYPICAL POLE NOTCHING AT JACK

DETAIL "A"

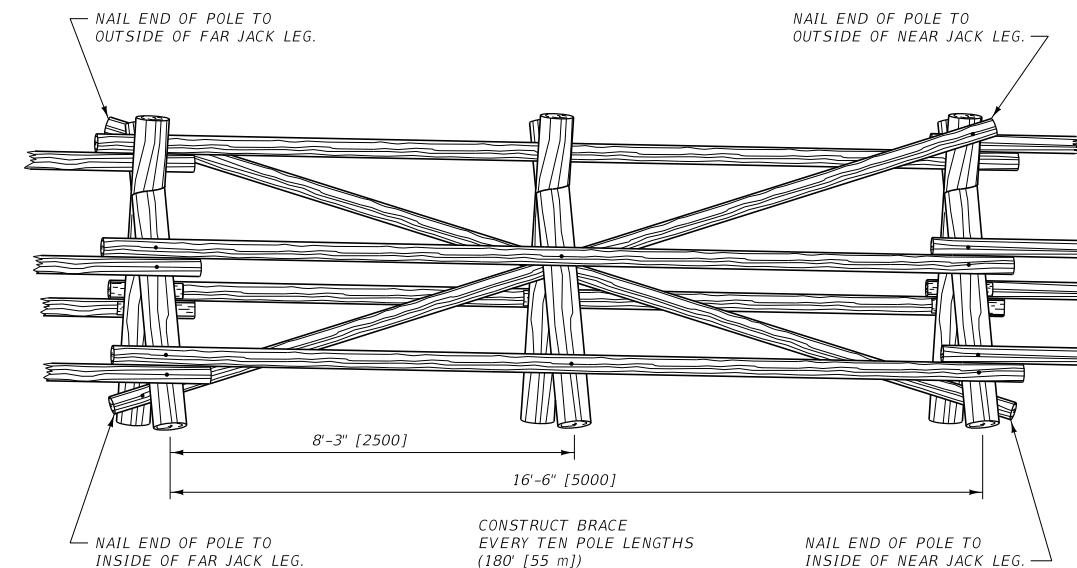

BRACED PANEL

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 607-60
SECTION 607	
JACKLEG POLE FENCE	




UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

NOTE: ALL POLES, POSTS, RAILS, OR WOOD ITEMS WILL BE TREATED.

NOTES:

1/2" [13] EXPANSION JOINTS
ARE SHOWN AS DARK SOLID
LINES FOR VISUAL PURPOSES.

BOND BREAKER IS SHOWN AS
DARK DASHED LINES FOR
VISUAL PURPOSES.

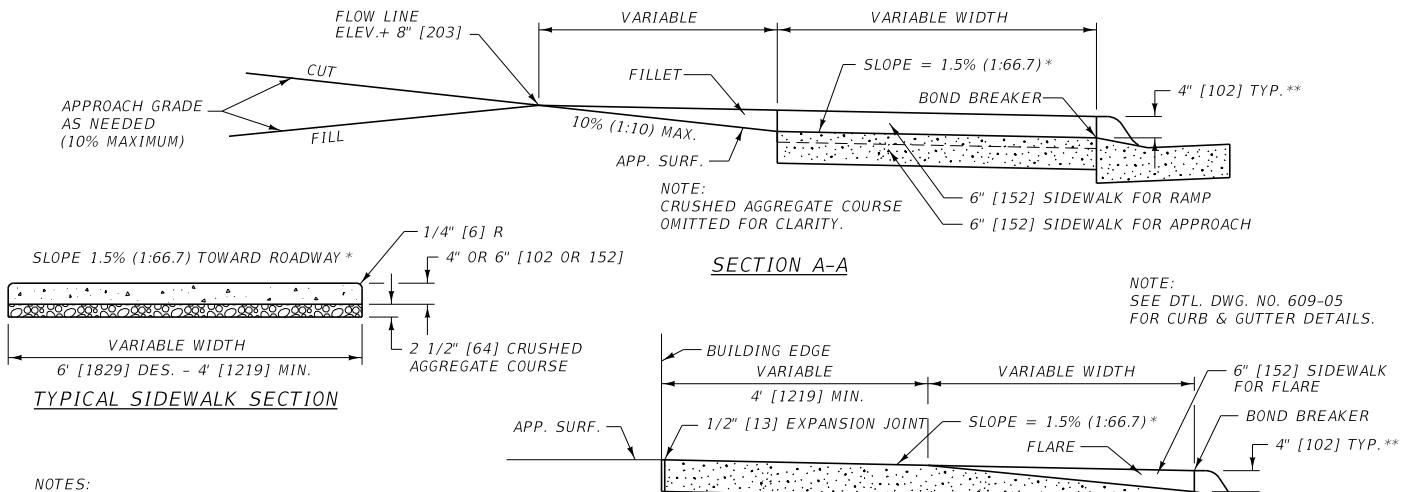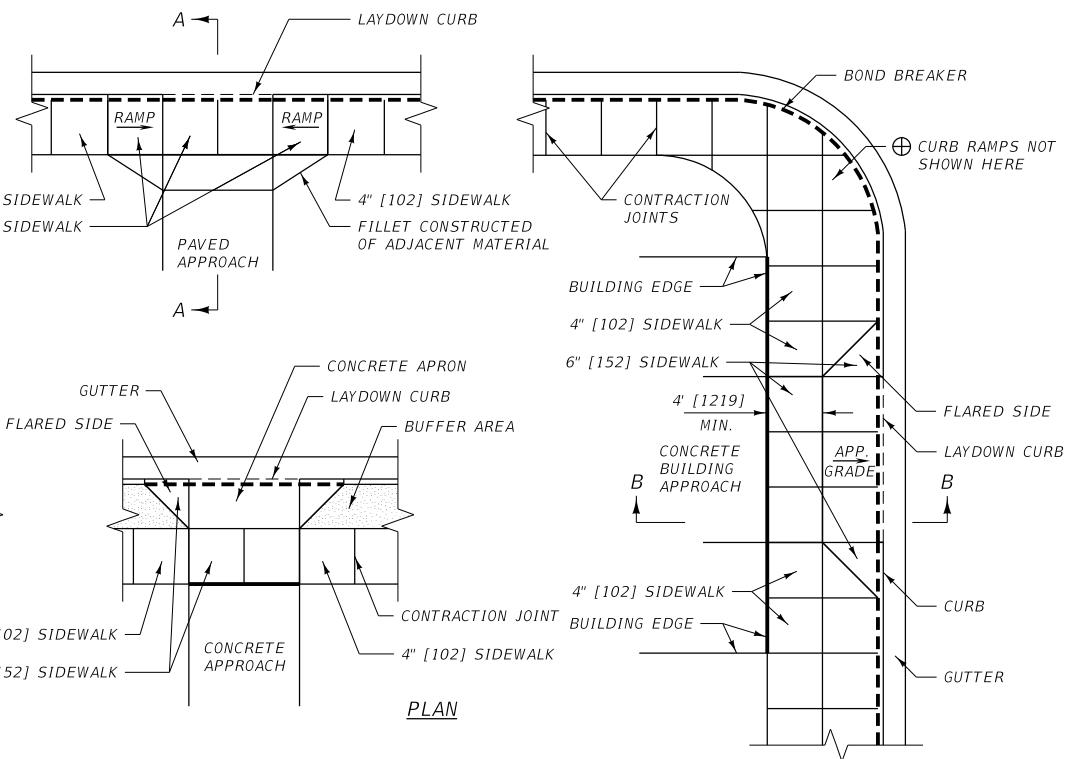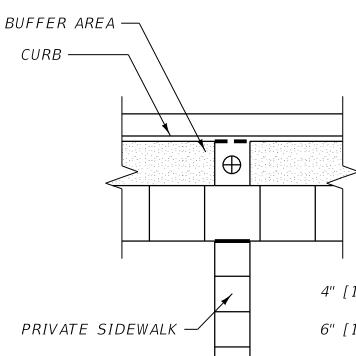

NOTES:

- ① INSTALL PREFORMED EXPANSION JOINT FILLER, PER SECTION 707, AT ALL EXPANSION JOINTS, FOR THE FULL THICKNESS OF THE SIDEWALK AND USE AT ALL JOINTS BETWEEN NEW CONCRETE SIDEWALK AND STRUCTURES IN PLACE.
- ② INSTALL A BOND BREAKER FOR THE FULL THICKNESS OF THE SIDEWALK AT LOCATIONS SPECIFIED ON THIS DETAIL. USE A 15 OR 30 POUND [6.8 OR 13.6 kg] ROOFING FELT MATERIAL, OR OTHER PRODUCT AS APPROVED BY THE PROJECT MANAGER, FOR THE BOND BREAKER. DO NOT USE EXPANSION JOINT MATERIAL AS A BOND BREAKER.
- ③ CONSTRUCT ALL JOINTS STRAIGHT AND PERPENDICULAR TO THE CENTERLINE AND THE SURFACE OF THE SIDEWALK. WHERE PRACTICAL, ALIGN ALL JOINTS WITH LIKE JOINTS IN ADJOINING WORK. USE JOINTS TO OUTLINE ALL PANELS IN THE SIDEWALK, WHICH ARE TO BE, SO FAR AS POSSIBLE, SQUARE. THE LENGTHS OF THE PANELS ARE DETERMINED BY THE WIDTH OF THE SIDEWALK.
- ④ THE MINIMUM WIDTH OF NEW SIDEWALK IS 4 FEET [1219]. THE CONTINUOUS CLEAR WIDTH OF PEDESTRIAN ACCESS ROUTES IS 4 FEET [1219] MIN. THE CLEAR WIDTH BETWEEN OBSTRUCTIONS OR AN OBSTRUCTION AND THE EDGE OF SIDEWALK IS 4' [1219] MIN.
- ⑤ WHERE FACTORS SUCH AS LIMITED RIGHT-OF-WAY DICTATE THE INSTALLATION OF A NEW SIDEWALK LESS THAN 5 FEET [1525] IN WIDTH THE NEW SIDEWALK MUST HAVE PASSING AREAS AT A MAXIMUM SPACING OF 200 FEET [61 m]. A PASSING AREA IS A MINIMUM OF 5 FEET BY 5 FEET [1524 BY 1524] IN SIZE.
- ⑥ PROVIDE CONTRACTION JOINTS NO LESS THAN 1/8" [3] WIDE AND NO MORE THAN 1/4" [6] WIDE AND NO LESS THAN 1" [25] IN DEPTH. CONTRACTION JOINTS MAY BE CUT BY A GROOVE FORMING TOOL.
- ⑦ LOCATE EXPANSION JOINTS EVERY 100 FEET (± 30 FT.) [30 m (± 10 m)] AT INTERVALS EQUAL TO THE NEAREST MULTIPLE OF THE CONTRACTION JOINT INTERVAL.
- ⑧ USE A LONGITUDINAL CONTRACTION JOINT IN THE CENTERLINE OF ALL SIDEWALKS 8 FEET [2438] WIDE AND WIDER.

* THE MAXIMUM CONSTRUCTED CROSS SLOPE OF THE SIDEWALK IS 2% (1:50).




** THIS DEPTH IS STANDARD IN NEW CONSTRUCTION. ALTERATIONS TO EXISTING FACILITIES MAY RESULT IN A LARGER DEPTH, WHICH WILL REQUIRE A GREATER RAMP LENGTH.

⊕ SEE DTL. DWG. NO. 608-15 AND 608-20 FOR GUIDELINES ON RAMP DESIGN WHEN RAMPS ARE REQUIRED FOR ADA ACCESSIBILITY.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 608	DWG. NO. 608-05
CONCRETE SIDEWALK	

CURB RAMP TYPES

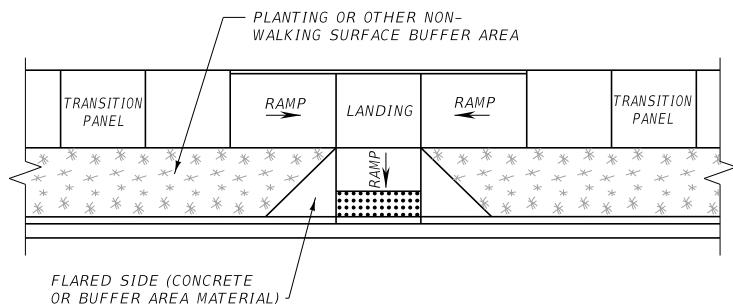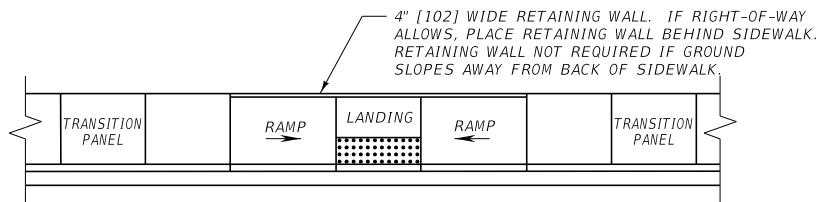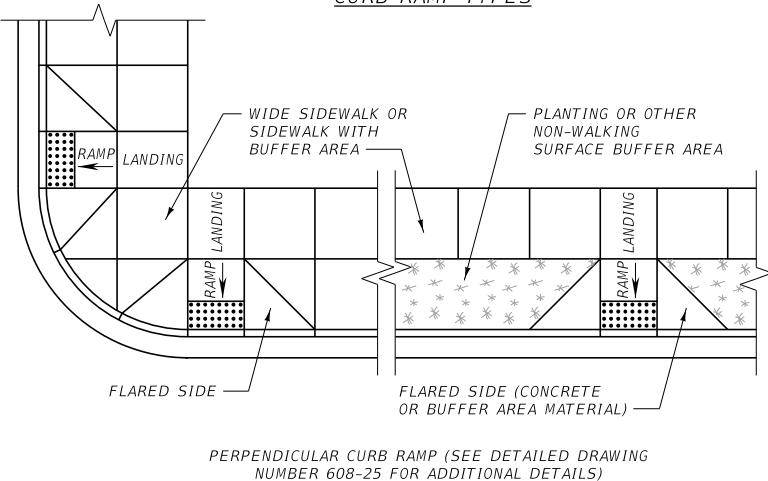

COMBINED (PARALLEL/PERPENDICULAR) CURB RAMP
(SEE DETAILED DRAWING NUMBERS 608-25 AND
608-30 FOR ADDITIONAL DETAILS)

GENERAL NOTES:

① USE CURB RAMPS IN THE FOLLOWING ORDER OF PREFERENCE:

- PERPENDICULAR CURB RAMP.
- COMBINED (PARALLEL/PERPENDICULAR) CURB RAMP.
- PARALLEL CURB RAMP.

EXISTING CONDITIONS SUCH AS R/W, SIDEWALK WIDTH, AND TYPE OF SIDEWALK (CURB-TIGHT OR BUFFER AREA) USUALLY DETERMINE THE TYPE OF CURB RAMPS TO USE.

A SINGLE CURB RAMP OR BLENDED TRANSITION CORNERS SERVING TWO STREET CROSSING DIRECTIONS ARE NOT ALLOWED IN NEW CONSTRUCTION AND NOT RECOMMENDED WHEN ALTERING EXISTING FACILITIES.

② WHEN ALTERING EXISTING FACILITIES, MEET NEW CONSTRUCTION REQUIREMENTS FOR CURB RAMPS TO THE MAXIMUM EXTENT FEASIBLE. DOCUMENT WITH AN ADA STATEMENT OF TECHNICAL INFEASIBILITY FORM WHEN ADA STANDARDS CAN'T BE ACHIEVED.

③ IF POSSIBLE, DO NOT PLACE DRAINAGE STRUCTURES IN CONFLICT WITH CURB RAMPS. LOCATION OF CURB RAMPS TAKES PRIORITY OVER LOCATION OF DRAINAGE STRUCTURES EXCEPT WHERE EXISTING DRAINAGE STRUCTURES ARE BEING UTILIZED. IF A DRAINAGE STRUCTURE MUST BE PLACED IN THE PEDESTRIAN ACCESS ROUTE, AN ADA COMPLIANT GRATE, HAVING SLOT OPENINGS 1/2" [13] OR LESS IN ONE DIRECTION, MUST BE USED.

④ USE THE FLATTEST SLOPES POSSIBLE (5% MIN.) FOR ALL CURB RAMPS. MAXIMUM CONSTRUCTED RAMP SLOPES OF 8.3% ARE SHOWN FOR GUIDANCE AT DIFFICULT SITES.

⑤ FINAL FIELD LOCATION OF THE CURB RAMPS WILL BE DETERMINED BY THE PROJECT MANAGER.

⑥ PEDESTRIAN ACCESS POINTS AT CROSSWALKS ARE TO BE WHOLLY CONTAINED WITHIN THE CROSSWALK LINES.


⑦ FOR ADDITIONAL INFORMATION CONSULT:
DRAFT PUBLIC RIGHTS-OF-WAY ACCESSIBILITY
GUIDELINES (PROWAG)

CONSTRUCTION REQUIREMENTS:

① OBTAIN A SURFACE TEXTURE ON THE RAMP BY COARSE BROOMING, TRANSVERSE TO THE RAMP SLOPE.

② TAKE CARE DURING CONSTRUCTION TO ASSURE UNIFORM RAMP GRADES, FREE OF SAGS AND SHARP GRADE CHANGES.

TRANSITION PANELS AS REQUIRED
TO MATCH EXISTING NONCOMPLYING
CROSS SLOPES


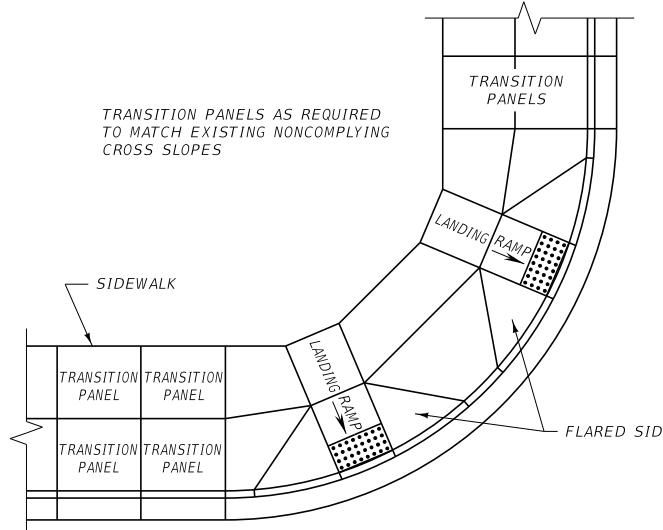


UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

PERPENDICULAR CURB RAMP USED ON LARGE RADII CORNER WITH WIDE SIDEWALK
(SEE DETAILED DRAWING NUMBER 608-35 FOR ADDITIONAL DETAILS)

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 608-15
SECTION 608

NEW CONSTRUCTION
CURB RAMPS

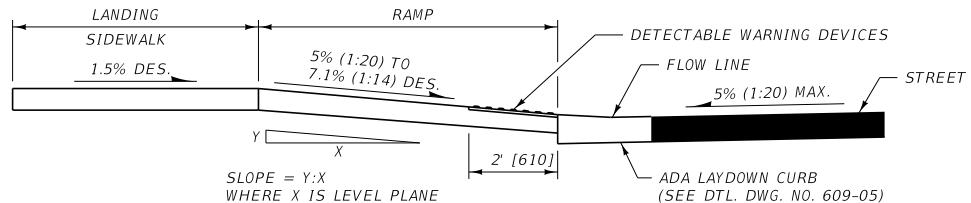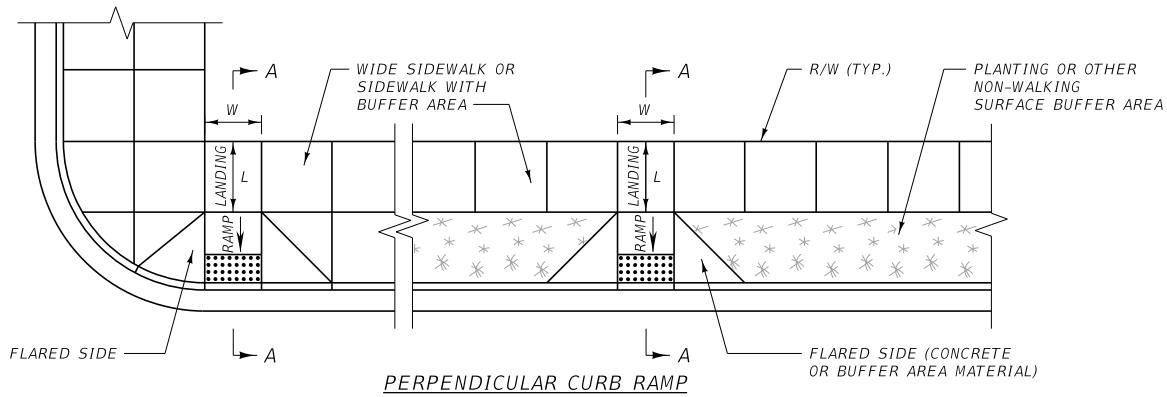


CONSTRUCTION REQUIREMENTS:

- ① THE DESIRABLE WIDTH OF THE CURB RAMP (DIMENSION "W" ABOVE) IS 5 FEET [1524] OR WIDER. THE MINIMUM WIDTH ("W") IS 4 FEET [1219].
- ② THE DESIRABLE LENGTH OF THE LANDING AT THE TOP OF THE CURB RAMP (DIMENSION "L" ABOVE) IS 5 FEET [1524]. THE MINIMUM LENGTH "L" IS 4 FEET [1220]. IF THE LANDING IS CONSTRAINED AT THE BACK OF SIDEWALK, THE MINIMUM LENGTH "L" IS 5 FEET [1524]. THE LANDING WIDTH IS EQUAL TO THE RAMP WIDTH.
- ③ THE DESIRABLE RUNNING SLOPE FOR THE CURB RAMP IS BETWEEN 5% (1:20) AND 7.1% (1:14). THE MAXIMUM CONSTRUCTED CURB RAMP SLOPE IS 8.3% (1:12).
- ④ THE DESIRABLE SLOPE FOR THE FLARED SIDE OF THE CURB RAMP IS 8.3% (1:12) OR FLATTER. THE MAXIMUM CONSTRUCTED FLARED SIDE SLOPE IS 10% (1:10).
- ⑤ THE DESIRABLE CROSS SLOPE OF THE SIDEWALK, RAMP, OR LANDING IS 1.5% (1:66.7) OR LESS. THE MAXIMUM CONSTRUCTED CROSS SLOPE OF THE SIDEWALK, RAMP, OR LANDING IS 2% (1:50).
- ⑥ THE RUNNING SLOPE OF THE SIDEWALK IS EQUAL TO THE STREET GRADE OR FLATTER.
- ⑦ PROVIDE DETECTABLE WARNING DEVICES ON THE BOTTOM 2 FEET [610] OF EACH RAMP AS SHOWN ABOVE. SEE DETAILED DRAWING NUMBER 608-40 FOR DETECTABLE WARNING DEVICES DETAILS.
- ⑧ WHERE EXISTING SITE DEVELOPMENT CONDITIONS PROHIBIT THE STRICT AND FULL COMPLIANCE OF ALL ADA CRITERIA, PROVIDE ACCESSIBILITY TO THE MAXIMUM EXTENT FEASIBLE. DOCUMENT WITH AN ADA STATEMENT OF TECHNICAL INFEASIBILITY FORM WHEN ADA STANDARDS CAN'T BE ACHIEVED.

GENERAL NOTES:


- ① WHERE THE RIGHT-OF-WAY WILL NOT ACCOMMODATE A PERPENDICULAR CURB RAMP AND LANDING, CONSIDER USING A COMBINED (PARALLEL/PERPENDICULAR) CURB RAMP. COMBINED (PARALLEL/PERPENDICULAR) CURB RAMPS ARE TO MEET THE CRITERIA FOR BOTH THE PARALLEL AND PERPENDICULAR CURB RAMPS. (SEE DETAILED DRAWING NUMBER 608-30 AND THIS DRAWING.)
- ② THERE IS NO TOLERANCE FOR EXCEEDING MAXIMUM STANDARDS.
- ③ THE COST OF RETAINING WALLS IS INCLUDED IN THE UNIT PRICE BID FOR CONCRETE SIDEWALK.

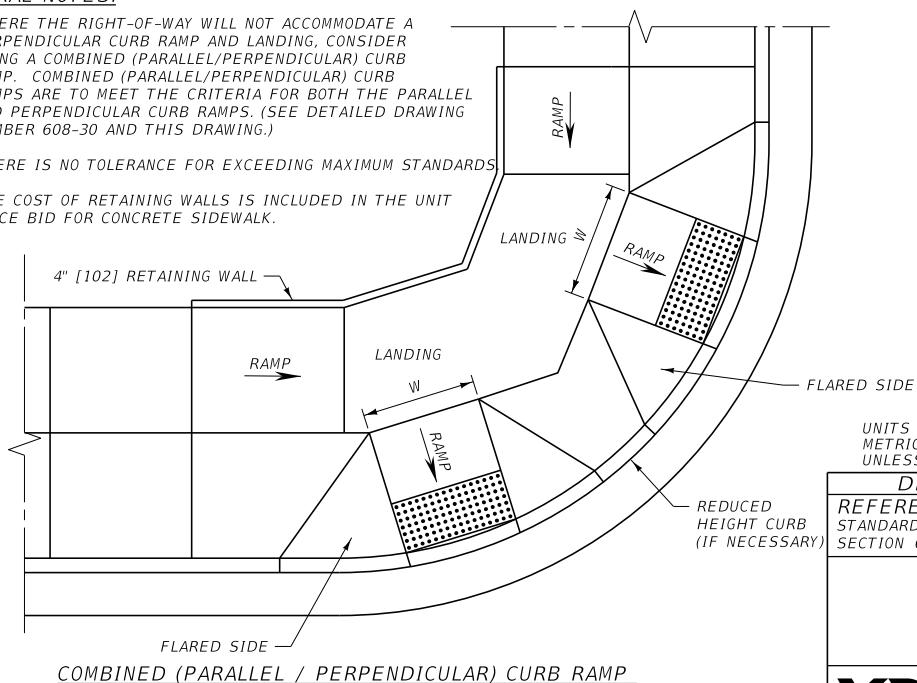

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	REFERENCE	DWG. NO.
	STANDARD SPEC.	608-25
PERPENDICULAR CURB RAMPS		
MDT MONTANA DEPARTMENT OF TRANSPORTATION		

PARALLEL CURB RAMPS

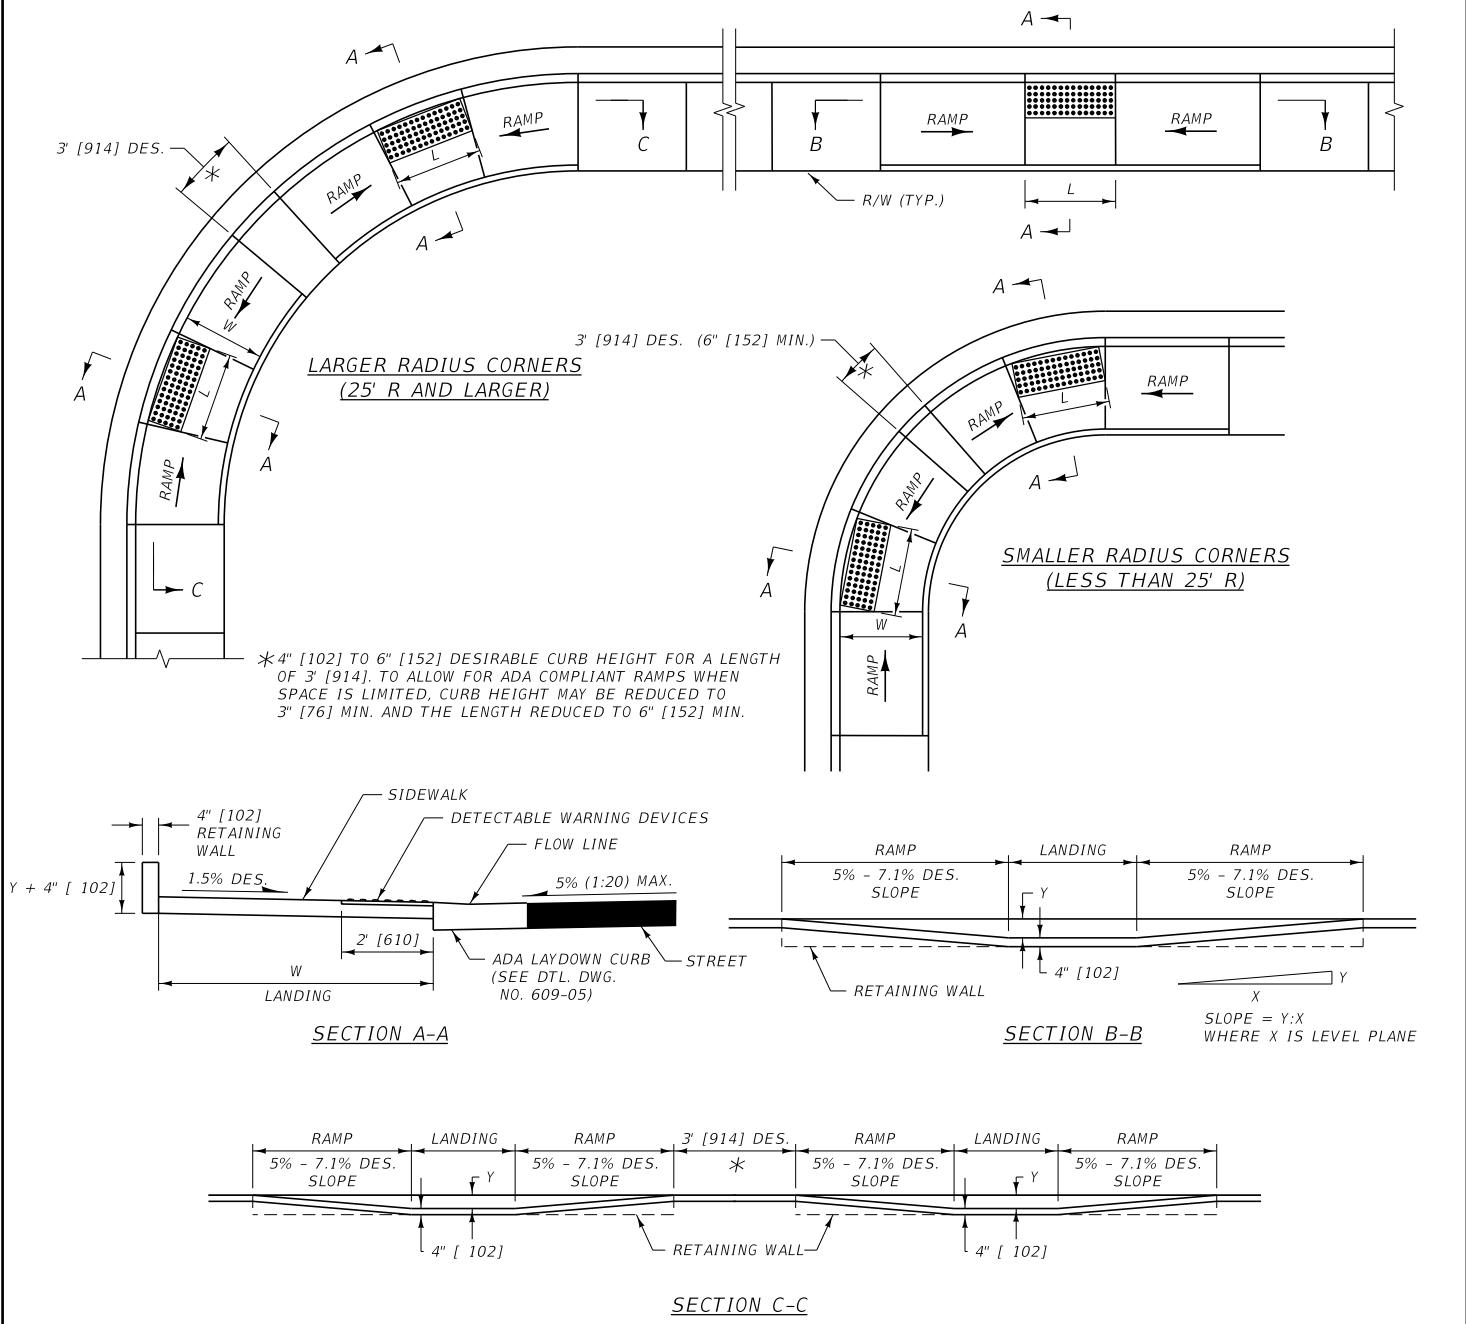

CONSTRUCTION REQUIREMENTS

NOTE: WHEREVER POSSIBLE, ALTER EXISTING FACILITIES TO COMPLY WITH THE NEW CONSTRUCTION REQUIREMENTS.


- ① THE DESIRABLE LENGTH OF THE LANDING (DIMENSION "L" ABOVE) IS 5 FEET [1524]. THE MINIMUM LANDING LENGTH IS 4 FEET [1219].
- ② THE DESIRABLE WIDTH OF THE LANDING (DIMENSION "W" ABOVE) IS 5 FEET [1524]. THE MINIMUM LANDING WIDTH IS 4 FEET [1219]. IF THE LANDING IS CONSTRAINED ON ONE OR MORE SIDES, THE MINIMUM WIDTH IS 5 FEET [1524].
- ③ THE DESIRABLE SLOPE FOR THE CURB RAMPS IS 5% (1:20) TO 7.1% (1:14). THE MAXIMUM CONSTRUCTED CURB RAMP SLOPE IS 8.3% (1:12).
- ④ THE DESIRABLE CROSS SLOPE OF THE SIDEWALK, RAMP, OR LANDING IS 1.5% (1:66.7) OR LESS. THE MAXIMUM CONSTRUCTED CROSS SLOPE OF THE SIDEWALK, RAMP, OR LANDING IS 2% (1:50).
- ⑤ PROVIDE DETECTABLE WARNING DEVICES AT THE BACK OF CURB ON EACH LANDING AS SHOWN ABOVE. SEE DETAILED DRAWING NUMBER 608-40 FOR DETECTABLE WARNING DEVICES DETAILS.
- ⑥ WHERE EXISTING SITE DEVELOPMENT CONDITIONS PROHIBIT THE STRICT AND FULL COMPLIANCE OF ALL ADA CRITERIA, PROVIDE ACCESSIBILITY TO THE MAXIMUM EXTENT FEASIBLE AND DOCUMENT WITH AN ADA STATEMENT OF TECHNICAL INFEASIBILITY FORM WHEN ADA STANDARDS CAN'T BE ACHIEVED.

GENERAL NOTES:


- ① THE COST OF RETAINING WALLS IS INCLUDED IN THE UNIT PRICE BID FOR CONCRETE SIDEWALK.
- ② THERE IS NO TOLERANCE FOR EXCEEDING MAXIMUM STANDARDS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 608	DWG. NO. 608-30
PARALLEL CURB RAMPS	

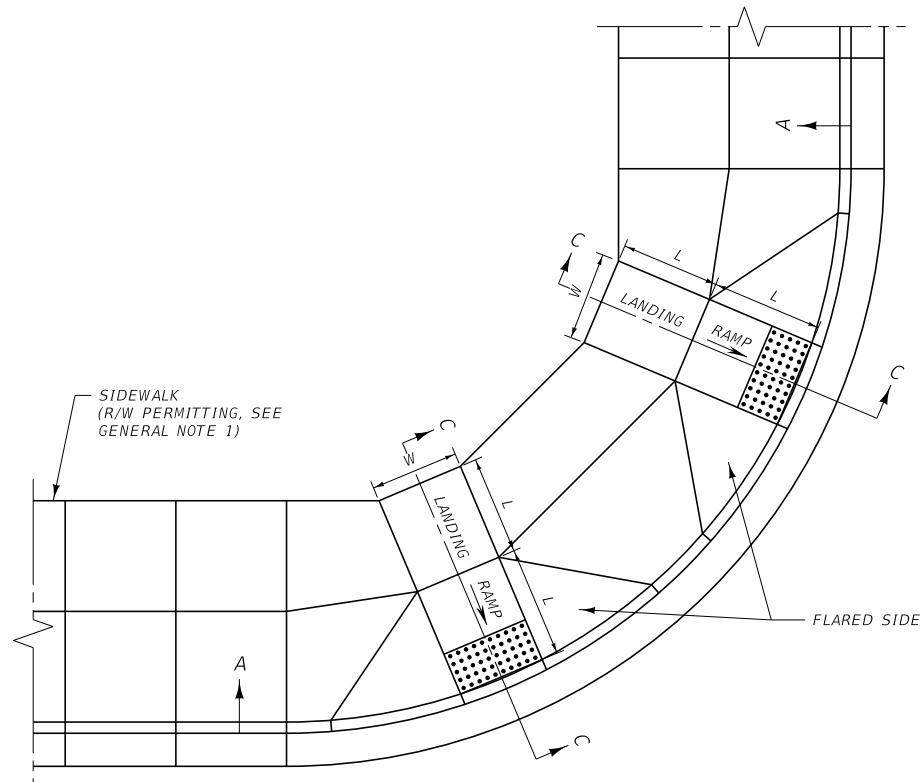


PERPENDICULAR CURB RAMP

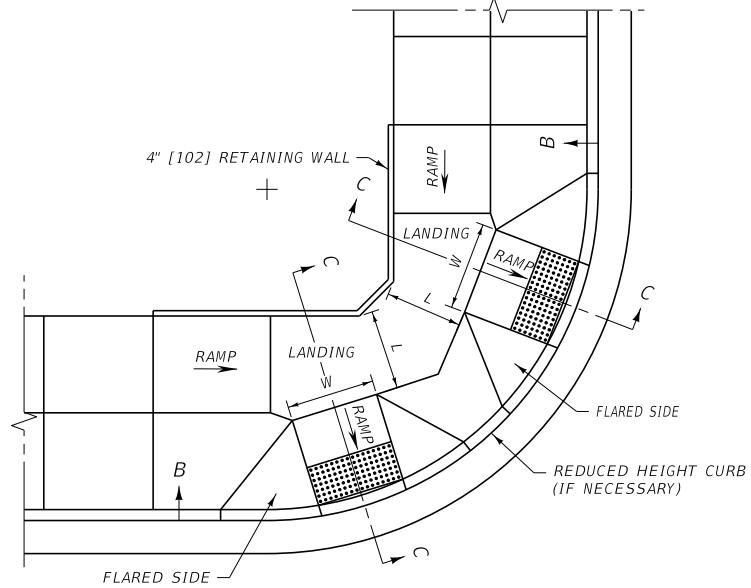

COMBINED (PARALLEL / PERPENDICULAR) CURB RAMP

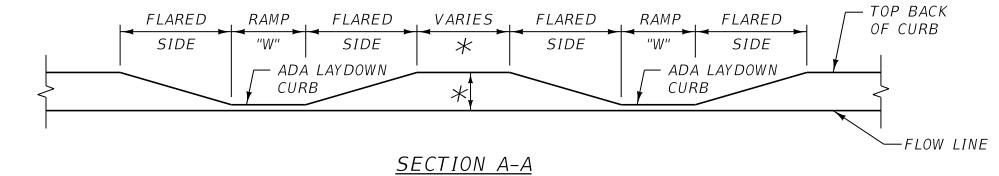


SECTION A-A

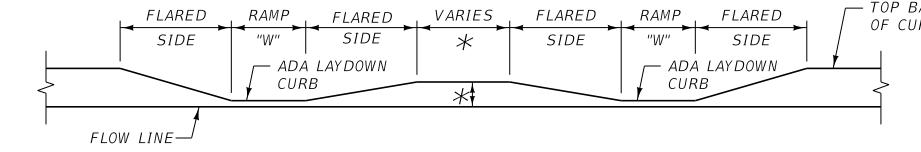


SECTION B-B


*4" [102] TO 6" [152] DESIRABLE CURB HEIGHT FOR A LENGTH OF 3.0' [914] BETWEEN RAMPS. TO ALLOW FOR ADA COMPLIANT RAMPS WHEN SPACE IS LIMITED, CURB HEIGHT MAY BE REDUCED TO 3" [76] MIN. AND THE LENGTH REDUCED TO 6" [152] MIN.

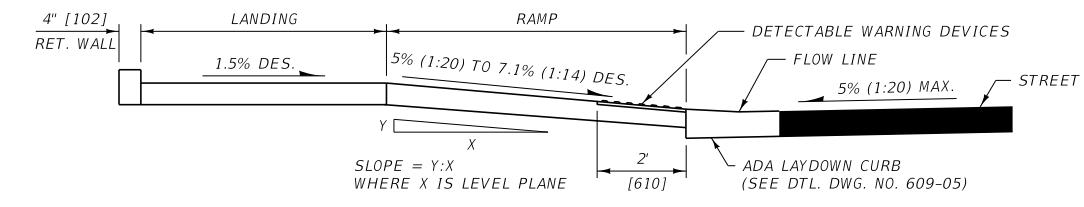

SECTION C-C

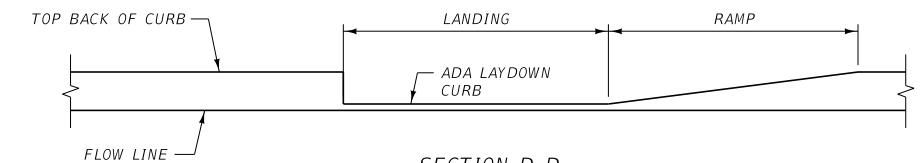

SECTION D-D

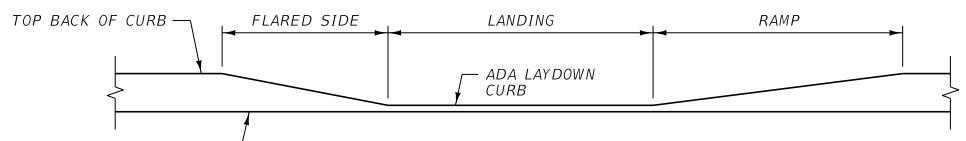

SECTION E-E

REQUIREMENTS FOR NEW CONSTRUCTION AND ALTERATIONS TO EXISTING FACILITIES:

- ① THE DESIRABLE WIDTH OF THE CURB RAMP (DIMENSION "W" ABOVE) IS 5 FEET [1524] OR WIDER. THE MINIMUM WIDTH ("W") IS 4 FEET [1219]. THE LANDING WIDTH IS EQUAL TO THE RAMP WIDTH.
- ② THE DESIRABLE LENGTH OF THE LANDING AT THE TOP OF THE CURB RAMP (DIMENSION "L" ABOVE) IS 5 FEET [1524]. THE MINIMUM LENGTH "L" OF THE LANDING IS 4 FEET [1219]. IF THE LANDING IS CONSTRAINED AT THE BACK OF SIDEWALK, THE MINIMUM LENGTH "L" IS 5 FEET [1524].
- ③ THE DESIRABLE SLOPE FOR THE CURB RAMP IS BETWEEN 5% (1:20) AND 7.1% (1:14). THE MAXIMUM CONSTRUCTED CURB RAMP SLOPE IS 8.3% (1:12).
- ④ THE DESIRABLE SLOPE FOR THE FLARED SIDE OF THE CURB RAMP IS 8.3% (1:12) OR FLATTER. THE MAXIMUM CONSTRUCTED FLARED SIDE SLOPE IS 10% (1:10).
- ⑤ THE DESIRABLE CROSS SLOPE OF THE SIDEWALK, RAMP, OR LANDING IS 1.5% (1:66.7) OR LESS. THE MAXIMUM CONSTRUCTED CROSS SLOPE OF THE SIDEWALK, RAMP, OR LANDING IS 2% (1:50).
- ⑥ PROVIDE DETECTABLE WARNING DEVICES ON THE BOTTOM 2 FEET [610] OF EACH RAMP OR AT THE BACK OF CURB ON CURB SIDE LANDINGS AS SHOWN. SEE DETAILED DRAWING NUMBER 608-40 FOR DETECTABLE WARNING DEVICES DETAILS.
- ⑦ WHERE EXISTING SITE DEVELOPMENT CONDITIONS PROHIBIT THE STRICT AND FULL COMPLIANCE OF ALL ADA CRITERIA, PROVIDE ACCESSIBILITY TO THE MAXIMUM EXTENT FEASIBLE. DOCUMENT WITH AN ADA STATEMENT OF TECHNICAL INFEASIBILITY FORM WHEN ADA STANDARDS CAN'T BE ACHIEVED.


GENERAL NOTES:

- ① WHERE THE RIGHT-OF-WAY WILL NOT ACCOMMODATE A PERPENDICULAR CURB RAMP AND LANDING MEETING THESE REQUIREMENTS, CONSIDER USING A COMBINED (PARALLEL / PERPENDICULAR) CURB RAMP DESIGN.
- ② TRIM PRECAST DETECTABLE WARNING DEVICES PANELS TO FIT ON PRIVATE APPROACH SIDEWALK CURB RAMPS AS SHOWN ABOVE.
- ③ THE COST OF RETAINING WALLS IS INCLUDED IN THE UNIT PRICE BID FOR CONCRETE SIDEWALK.
- ④ THERE IS NO TOLERANCE FOR EXCEEDING MAXIMUM STANDARDS.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 608-35
SECTION 608

CURB RAMP DESIGN OPTIONS FOR CURB-TIGHT SIDEWALKS


MDT MONTANA DEPARTMENT OF TRANSPORTATION

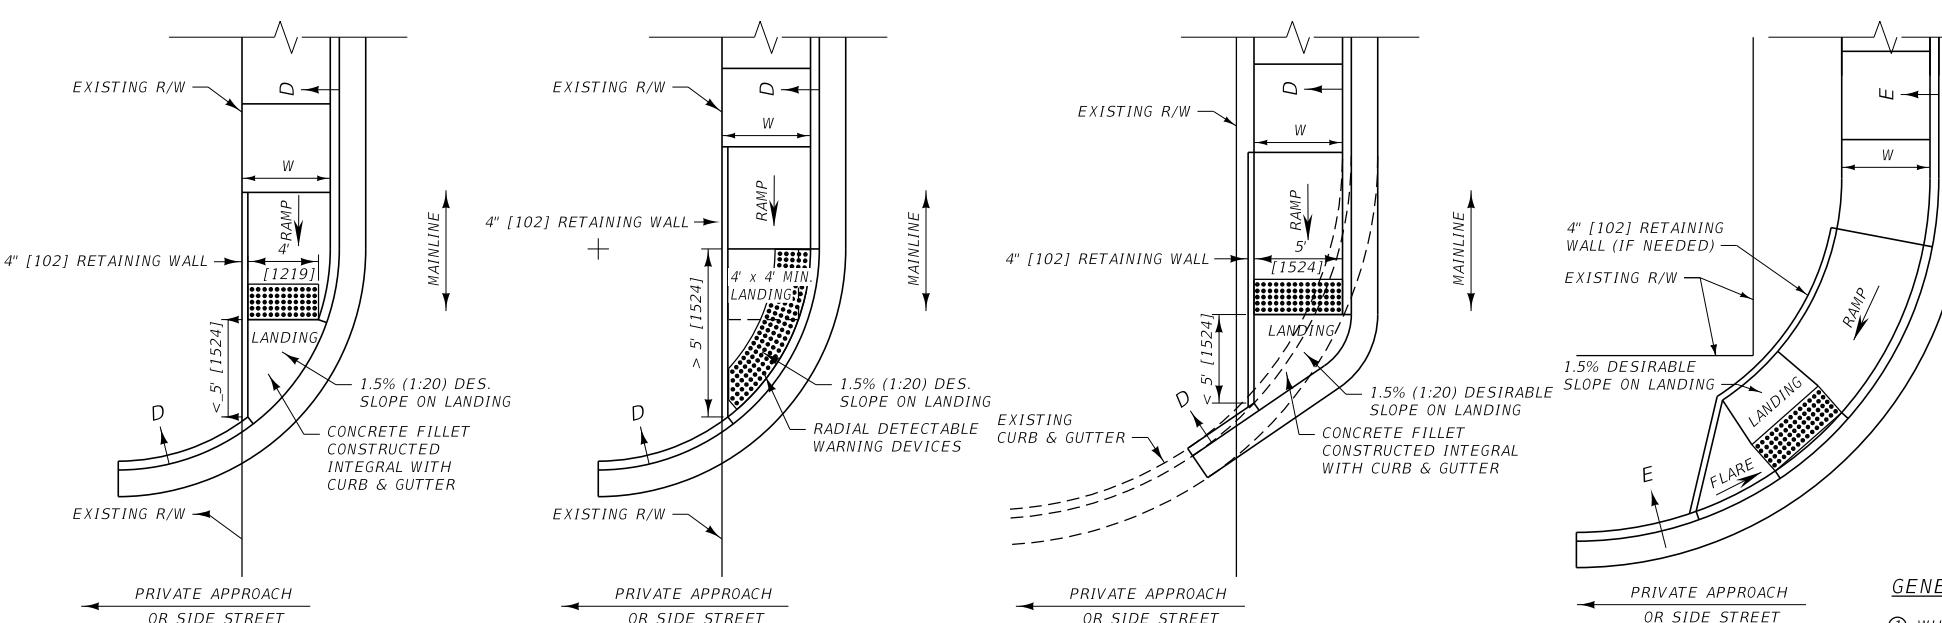


CURB RAMP OPTIONS FOR PRIVATE APPROACH OR SIDE STREETS WITH CURB RETURNS BUT WITHOUT SIDEWALK

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

SQUARE PATTERN
PARALLEL ALIGNMENT

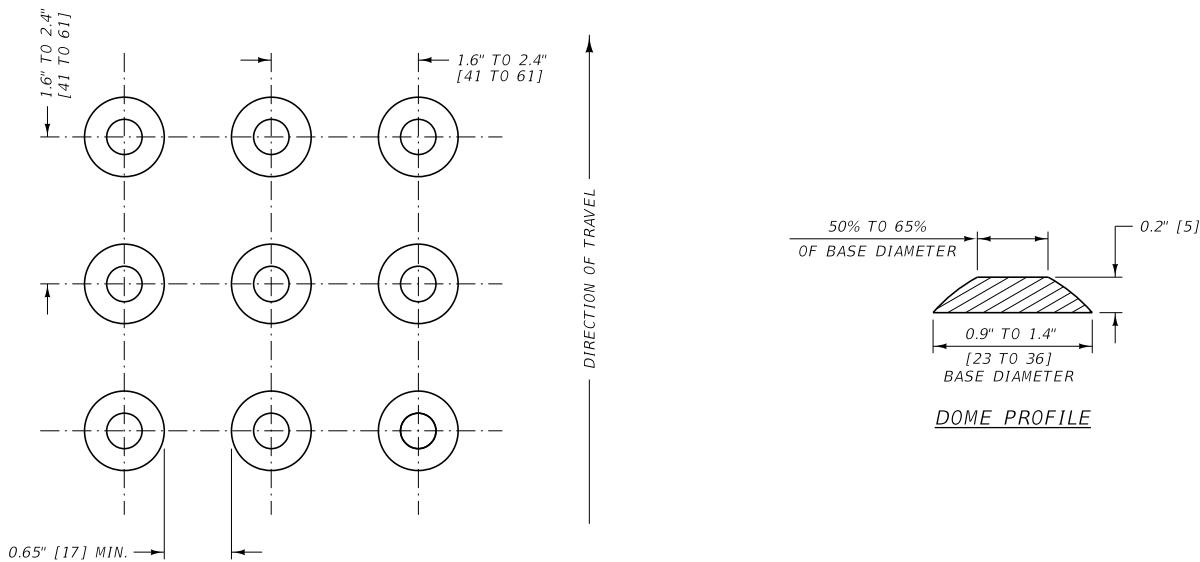

DETECTABLE WARNING DEVICES ALIGNMENT AND PATTERN

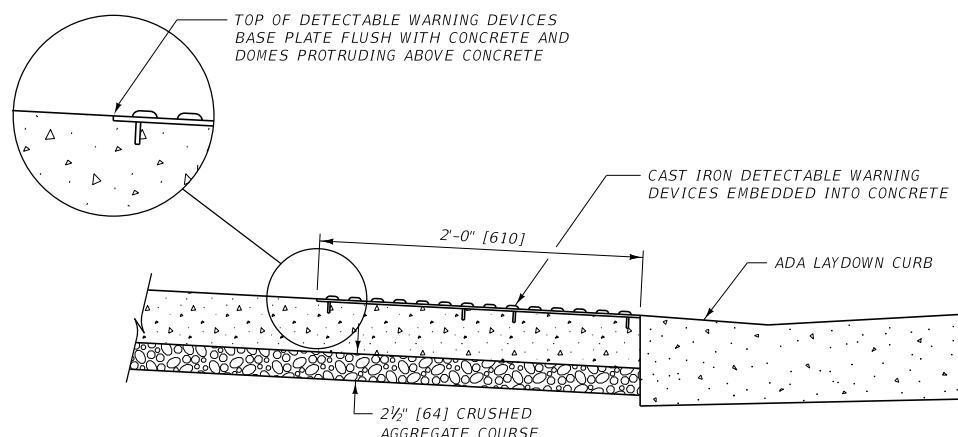

SIDE VIEW

CONSTRUCTION REQUIREMENTS:


- ① INSTALL DETECTABLE WARNING DEVICES THAT EXTEND THE FULL WIDTH OF THE RAMP, 2 FEET [610] IN DEPTH.
- ② INSTALL THE DETECTABLE WARNING DEVICES ADJACENT TO THE BACK OF CURB UNLESS OTHERWISE SHOWN IN THE PLANS.
- ③ EMBED THE DETECTABLE WARNING DEVICES DIRECTLY INTO THE CONCRETE, SO THE TOP OF THE BASE PLATE IS FLUSH WITH THE CONCRETE AND THE DOMES PROTRUDE ABOVE THE ADJACENT CONCRETE SURFACE.
- ④ USE CAST IRON DETECTABLE WARNING DEVICES FROM THE DEPARTMENT'S QUALIFIED PRODUCTS LIST (QPL).
- ⑤ ENSURE A UNIFORM GRADE ON THE DETECTABLE WARNING DEVICES FREE OF SAGS AND IRREGULAR EDGES.
- ⑥ USE DETECTABLE WARNING DEVICES THAT VISUALLY CONTRAST WITH ADJACENT WALKWAY SURFACES.
- ⑦ ENSURE THE ALIGNMENT AND PATTERN OF THE DOMES IS CONTINUED ACROSS ANY JOINTS BETWEEN DETECTABLE WARNING DEVICES BASE PLATE.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 608	DWG. NO. 608-40
DETECTABLE WARNING DEVICES	

CURB RETURN FILLET REQUIRED
FOR NEW CURB & GUTTER
INSTALLATIONS (TYPICAL)


NOTE: INCLUDE COST OF CONCRETE
FILLET IN VALLEY GUTTER.

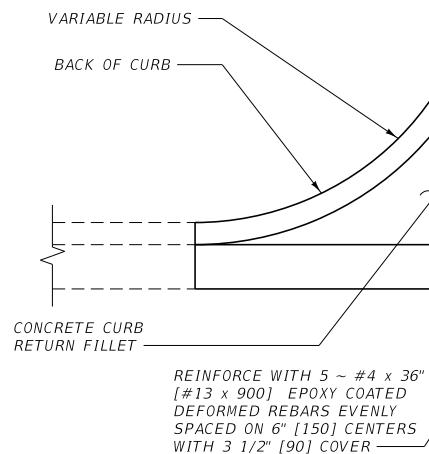

CONTRACTION JOINTS
ARE REQUIRED APPROX.
EVERY 10 FEET [3000]

CONTRACTION JOINTS
ARE REQUIRED APPROX.
EVERY 10 FEET [3000]


EXISTING CURB & GUTTER
INSTALLATION WITHOUT
CURB RETURN FILLET

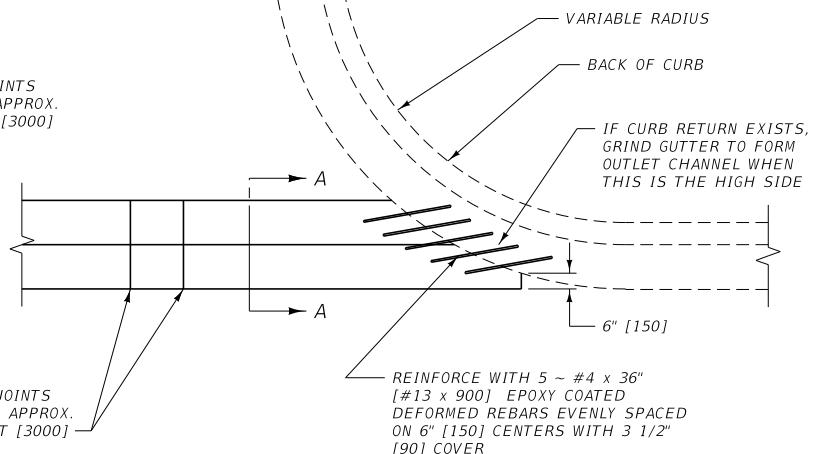

PLAN

NOTES:

- ① INDIVIDUAL LOCATIONS MAY REQUIRE MORE DETAILS FOR ELEVATIONS AND DIMENSIONS.
- ② INSTALL REINFORCEMENT AT ALL CONSTRUCTION JOINTS.
- ③ CONTRACTION JOINTS ARE 1/8" [3 mm] MIN. AND 3/8" [10 mm] MAX. IN WIDTH. FORM JOINTS BY SAWING OR SCORING TO A MINIMUM DEPTH OF 1" [25 mm]. FORM SCORED JOINTS BY A TOOL WHICH WILL LEAVE ROUNDED CORNERS AND DESTROY AGGREGATE INTERLOCK TO A MINIMUM DEPTH OF 1" [25 mm].
- ④ TO BE USED ON PLANT MIX SURFACING PROJECTS ONLY. PROVIDE PROJECT SPECIFIC DETAILS FOR PCCP PROJECTS.

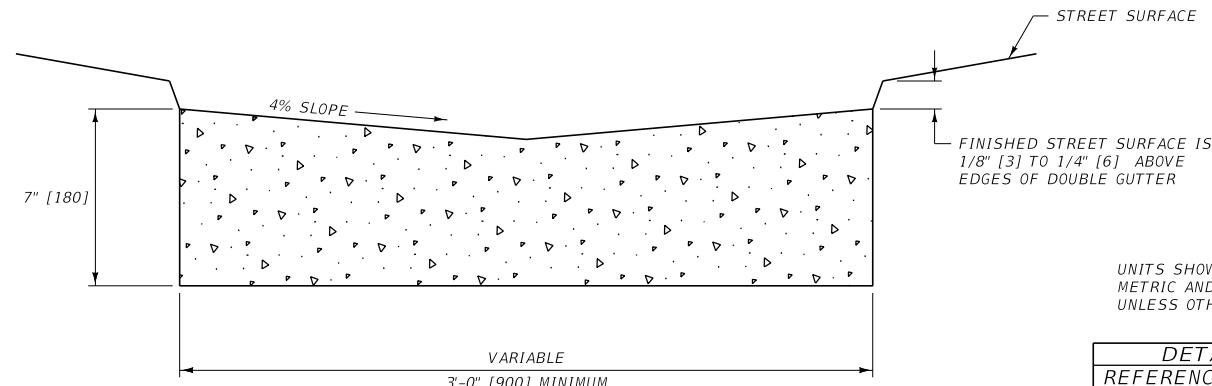

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING

REFERENCE STANDARD SPEC.	DWG. NO. SECTION 609-00
-----------------------------	----------------------------


CONCRETE VALLEY
GUTTER

CONCRETE CURBS

1 CUBIC YARD [0.765 cu m] OF CONCRETE WILL MAKE ABOUT 22.3 LINEAR FEET [6.80 lin m] OF INTEGRAL CURB & GUTTER.*

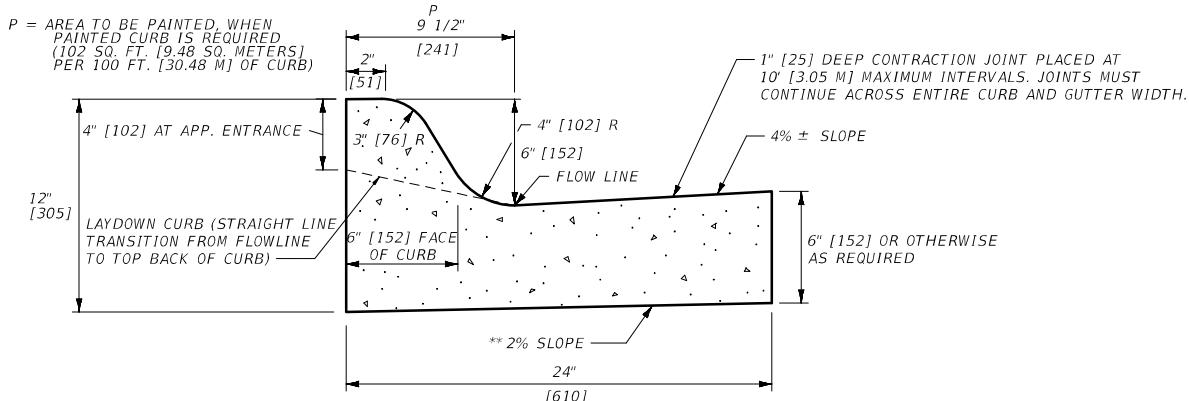


CONCRETE ADA LAYDOWN CURBS

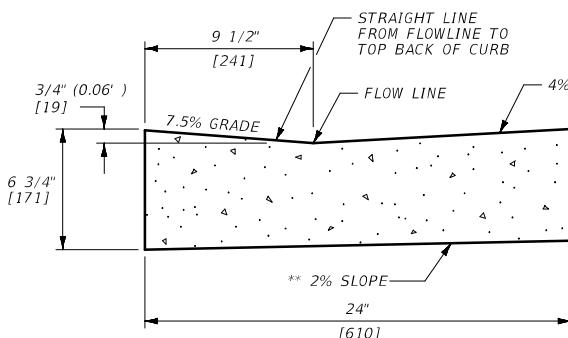

CONCRETE ADA LAYDOWN CURBS

USE WHEN LANDING IS PLACED INTEGRAL WITH CURB & GUTTER (SEE DTL. DWG. NO. 608-35)

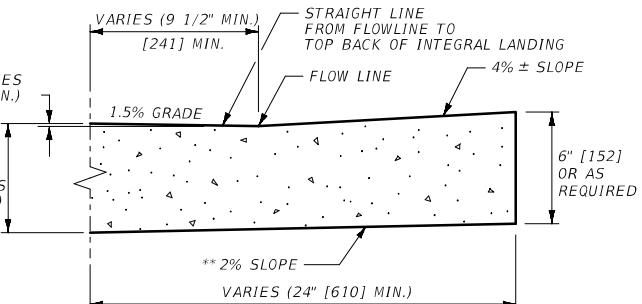

JOINTS:

(A) WHEN INTEGRAL WITH, TIED TO, OR PLACED AGAINST PORTLAND CEMENT CONCRETE PAVEMENT (P.C.C.P.); MATCH TRANSVERSE CONTRACTION AND/OR EXPANSION JOINTS IN THE ADJACENT P.C.C.P. SLAB. IF REQUIRED, EXTEND 1/2" [13] MIN. WIDTH PREFORMED EXPANSION JOINTS COMPLETELY THROUGH CURB AND GUTTER THE SAME WIDTH AS THE P.C.C.P. SLAB JOINT. FILL CURB AND GUTTER EXPANSION JOINTS WITH PREFORMED EXPANSION JOINT FILLER.

(B) ALL OTHER CASES: SPACE CONTRACTION JOINTS IN CURB AND GUTTER AT 10 FOOT [3.05 m] INTERVALS OR LESS EXCEPT AS SPECIFIED IN (A) ABOVE. EXTEND 1/2" [13] MIN. WIDTH EXPANSION JOINTS COMPLETELY THROUGH CURB AND GUTTER EVERY 100 FEET [30.48 m] (± 30 FEET [9.14 m]). AT INTERVALS EQUAL TO THE NEAREST MULTIPLE OF THE CONTRACTION JOINT INTERVAL, AND FILL WITH EXPANSION JOINT FILLER.

(C) CONTRACTION JOINTS: CONTRACTION JOINTS ARE 1/8" [3] MIN. AND 3/8" [10] MAX. IN WIDTH. FORM JOINTS BY SAWING OR SCORING TO A MINIMUM DEPTH OF 1" [25]. JOINTS MUST HAVE ROUNDED CORNERS AND PREVENT AGGREGATE INTERLOCK TO AT LEAST 1".

(D) OTHER JOINTS: SEPARATE THE CURB AND GUTTER FROM ADJACENT SIDEWALK AT POINTS SHOWN ON DTL. DWG. NO. 608-05 WITH A BOND BREAKER MATERIAL, EXCEPT AT APPROACH LAYDOWN CURB LOCATIONS, WHICH REQUIRE SEPARATION USING 1/2" [13] MIN. WIDTH PREFORMED EXPANSION JOINT MATERIAL. PLACE 1/2" [13] MIN. WIDTH PREFORMED EXPANSION JOINT MATERIAL AT ALL CURB RETURNS, BRIDGES, DROP INLETS, AND AT EXITING CURB AND GUTTER INTERFACES.

EXPANSION JOINT FILLER MATERIAL: USE PREFORMED EXPANSION JOINT FILLER MEETING THE REQUIREMENTS OF SECTION 707.

BOND BREAKER MATERIAL: USE A 15 OR 30 POUND [6.8 OR 13.6 KILOGRAM] ROOFING FELT MATERIAL, OR OTHER PRODUCT AS APPROVED BY THE PROJECT MANAGER. DO NOT USE EXPANSION JOINT MATERIAL.

RADI: MINIMUM CURB RETURN RADII = 10' [3.05 m]. 15' [4.57 m] RADII ARE DESIRABLE FOR STREETS.

CONCRETE: UNLESS OTHERWISE SPECIFIED, CONSTRUCT CONCRETE CURBS AND CONCRETE INTEGRAL CURB AND GUTTER WITH CLASS GENERAL CONCRETE OR APPROVED EQUAL.


* QUANTITIES FOR ESTIMATING PURPOSES ONLY.

** MATCH GUTTER CROSS SLOPE TO ROADWAY SUPERELEVATION.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 609, 707	DWG. NO. 609-05
-------------------------------------------------	--------------------

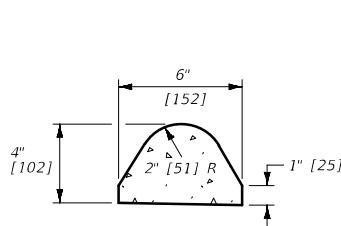

CURB SECTION

1 CUBIC FOOT [0.305 cu m] OF CONCRETE WILL MAKE ABOUT 8 LINEAR FEET [2.44 lin m] OF CURB. *



CURB SECTION

1 CUBIC FOOT [0.305 cu m] OF CONCRETE WILL MAKE ABOUT 5 LINEAR FEET [1.52 lin m] OF CURB. *

NOTES:


- ① USE 4" HIGH CURB IN VICINITY OF GUARDRAIL. USE EITHER SECTION NOT IN VICINITY OF GUARDRAIL.
- ② MATERIALS AND CONSTRUCTION MUST BE IN ACCORDANCE WITH STANDARD SPECIFICATIONS SECTION 609.
- ③ FORM CONCRETE CURB CONTRACTION JOINTS PER NOTE (B) ABOVE.

--REVISED--
JUN 27, 2024



EFFECTIVE: JAN 23, 2020

MISCELLANEOUS CURBS

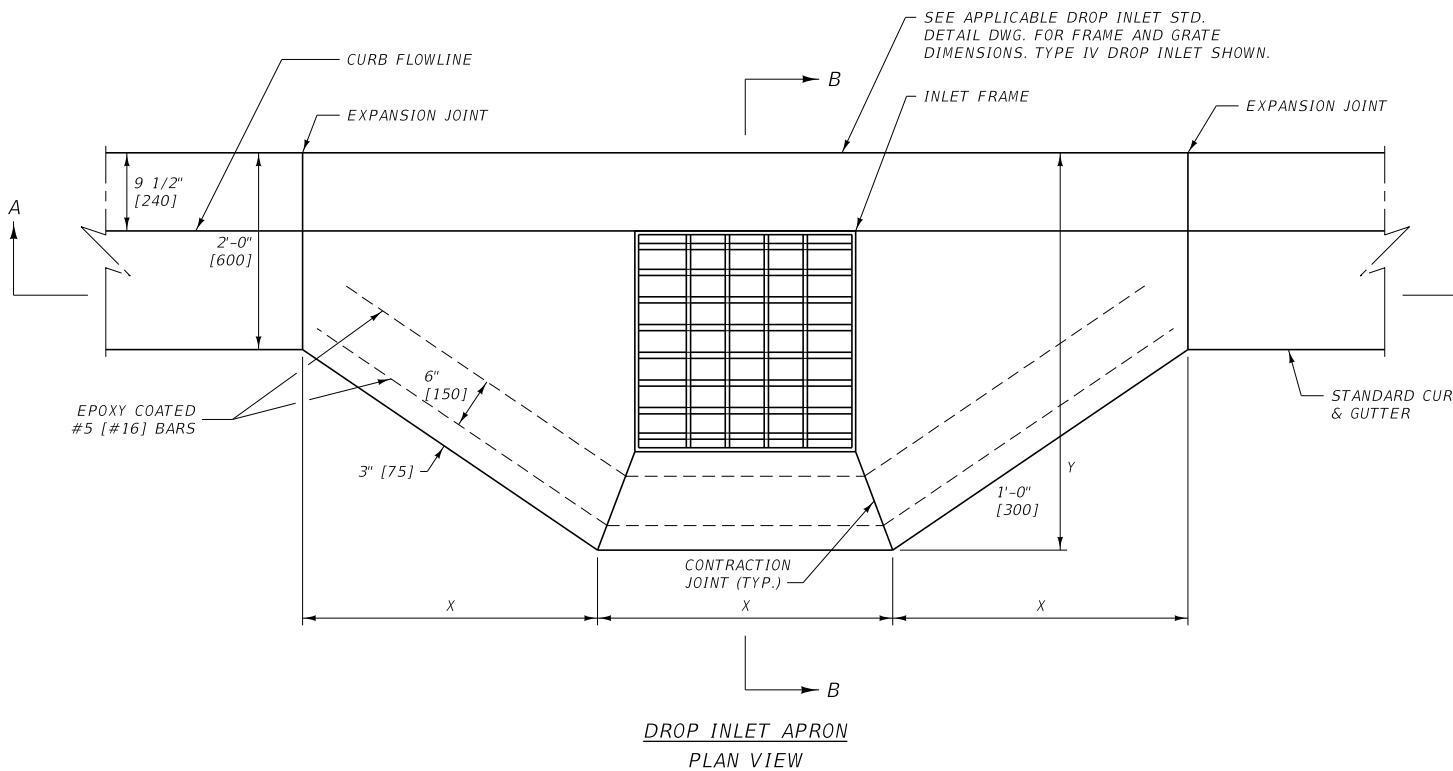


INLET TYPE	LENGTH	
	FT	mm
TYPE IV	X	3'-0" 925
	Y	3'-11 1/2" 1200
TYPE I, III, V, VI	X	3'-7" 1100
	Y	4'-6 7/8" 1400

DROP INLET TYPE I, III, V, VI			
ROADWAY % CROSS SLOPE*	APRON ELEV. BELOW TOP BACK OF CURB		GRATE & APRON SLOPE %
	FT	m	
0	0.45	0.137	3.31
0.5	0.44	0.134	3.63
1.0	0.43	0.131	3.96
1.5	0.41	0.125	4.28
2.0	0.40	0.122	4.60
2.5	0.39	0.119	4.93
3.0	0.37	0.113	5.25
3.5	0.36	0.110	5.57
4.0	0.35	0.107	5.90
4.5	0.34	0.104	6.22

* SEE CROSS SECTIONS FOR CROSS SLOPES ON STREET.

DROP INLET TYPE IV			
ROADWAY % CROSS SLOPE*	APRON ELEV. BELOW TOP BACK OF CURB		GRATE & APRON SLOPE %
	FT	m	
0	0.45	0.137	4.07
0.5	0.44	0.134	4.38
1.0	0.43	0.131	4.68
1.5	0.42	0.128	5.00
2.0	0.41	0.125	5.29
2.5	0.40	0.122	5.59
3.0	0.39	0.119	5.90
3.5	0.38	0.116	6.20
4.0	0.37	0.113	6.50
4.5	0.36	0.110	6.81

* SEE CROSS SECTIONS FOR CROSS SLOPES ON STREET.

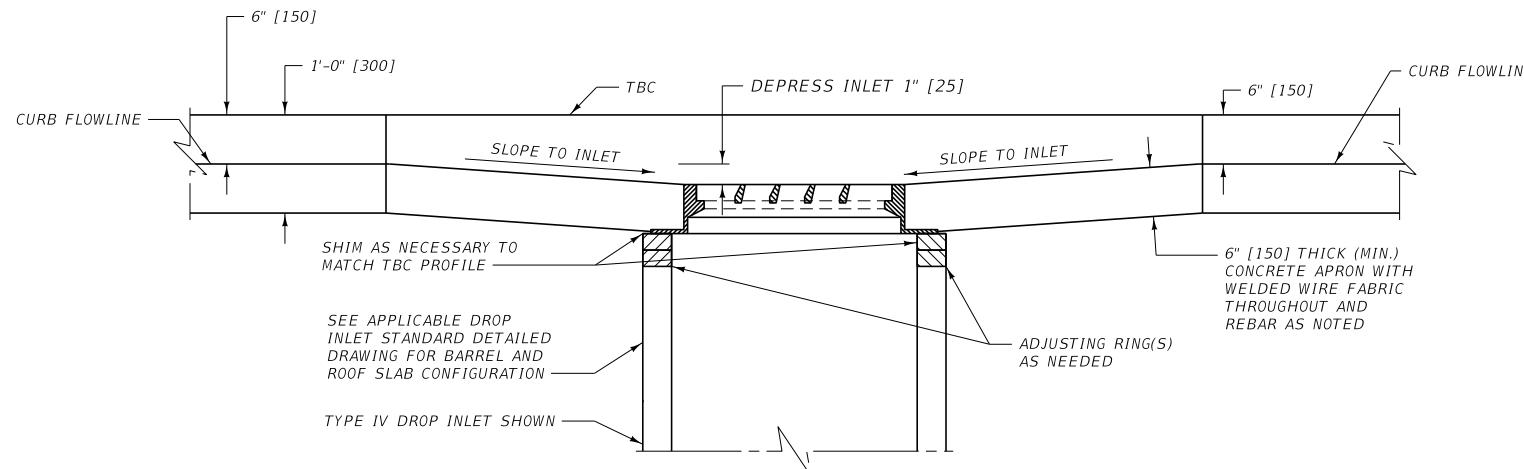


NOTES:

ALL CONCRETE IS CLASS GENERAL OR APPROVED EQUAL.

SHIM DROP INLET FRAME TO MATCH TBC PROFILE AND GRATE APRON SLOPE SHOWN IN THE TABLES. FILL SPACE BETWEEN GRATE AND ADJUSTING RING WITH CLASS GENERAL CONCRETE.

THE REFERENCED GRATE ELEVATION IS 1" LOWER THAN THE CURB FLOWLINE ELEVATION.


THE DROP INLET APRON IS MEASURED SEPARATELY FOR PAYMENT.

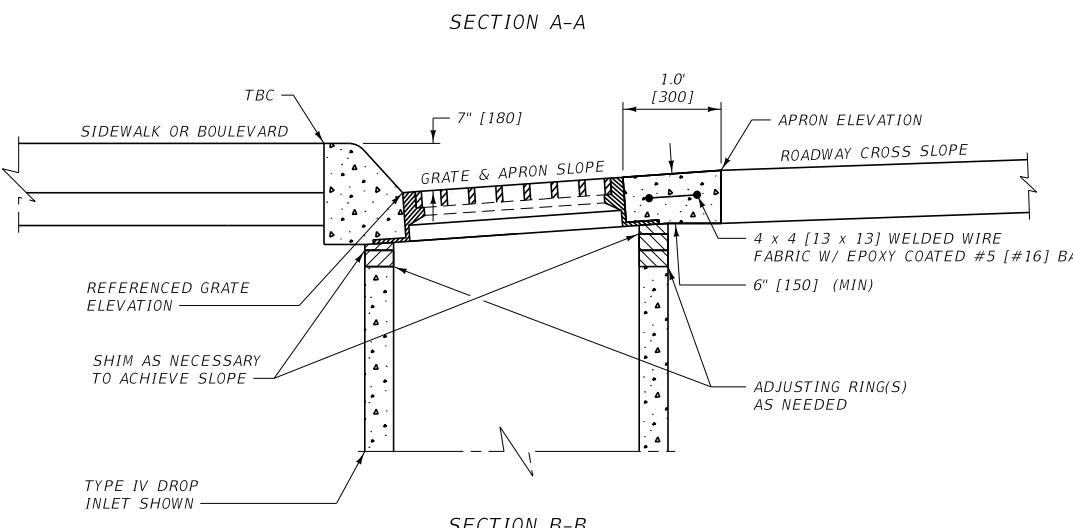

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 609-07
SECTION 609

DROP INLET APRONS

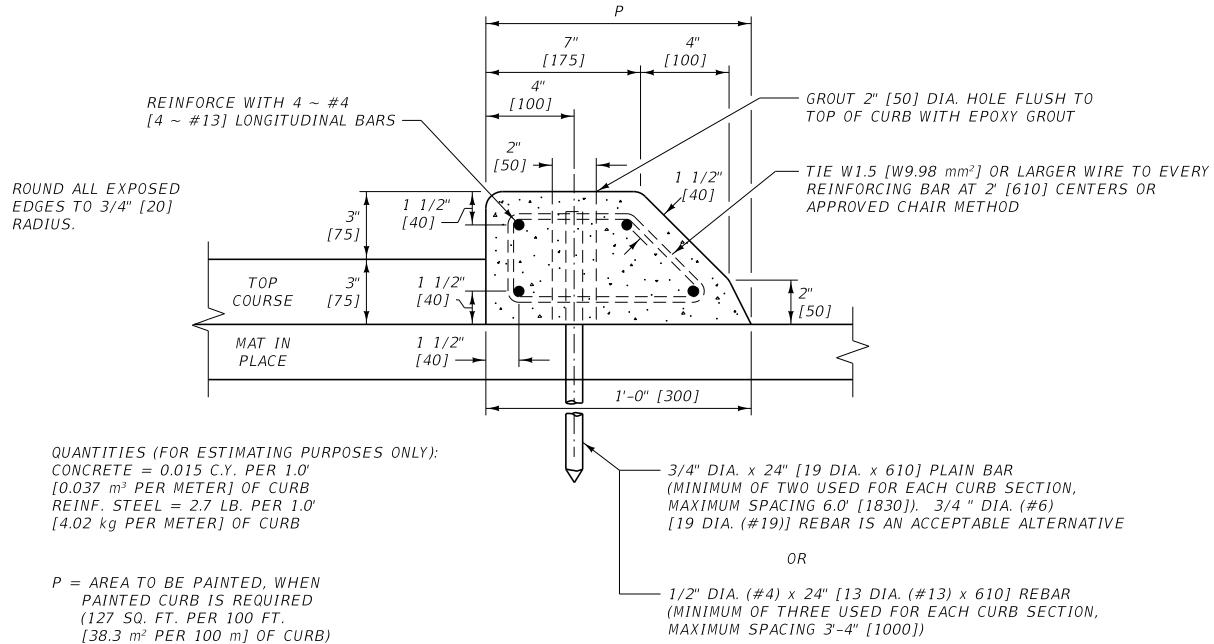

TYPE "A" - MAT IN PLACE

CONSTRUCTION:



1. CURBS MAY BE CONSTRUCTED USING ANY OF THE FOLLOWING THREE METHODS:
 - (1) PRECAST
 - (2) CAST IN PLACE
 - (3) CONSTRUCTED BY THE USE OF AN APPROVED CURB FORMING OR SLIP FORM MACHINE.
2. WHEN USING EITHER METHOD (2) OR (3), REINFORCING STEEL IS NOT REQUIRED, WITH THE EXCEPTION OF THE PINS. SCORE OR SAW CUT CURBS TO A DEPTH OF 1" [25] TO FORM CONTRACTION JOINTS AT INTERVALS OF 10 FT. [3000] OR LESS. EXTEND 1/2" [13] MIN. WIDTH EXPANSION JOINTS COMPLETELY THROUGH CURB EVERY 100 FT. (± 30 FT.) [30 m (± 10 m)], AT INTERVALS EQUAL TO THE NEAREST MULTIPLE OF THE CONTRACTION JOINT INTERVAL AND FILL WITH PREFORMED EXPANSION JOINT FILLER MEETING SECTION 707.
3. FORM PRECAST CURBS IN THEIR INVERTED POSITION, IN LENGTHS NOT LESS THAN 4 FT. [1220], OR MORE THAN 10 FT. [3050].

MATERIAL:

1. CONSTRUCT CURBS WITH CLASS GENERAL CONCRETE OR AN APPROVED EQUIVALENT MIX.
2. EPOXY BINDER FOR GROUTING MUST MEET THE REQUIREMENTS OF (AASHTO M 235 [235 M]) (ASTM C 881 [881 M]).

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 609, 707	DWG. NO. 609-10
MEDIAN CONCRETE CURBS	
 MONTANA DEPARTMENT OF TRANSPORTATION	

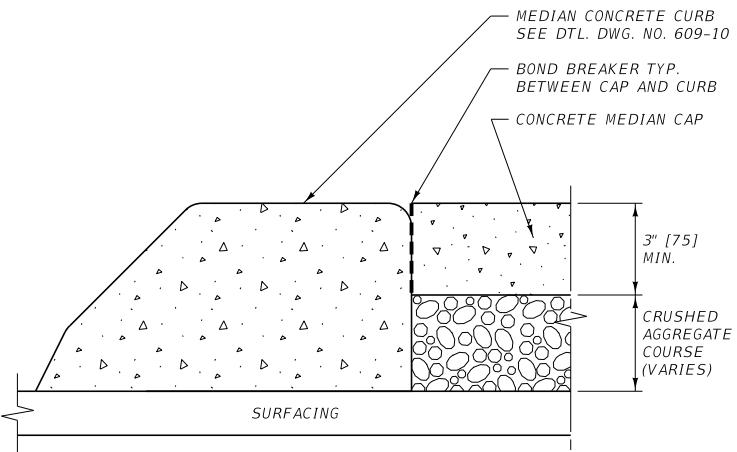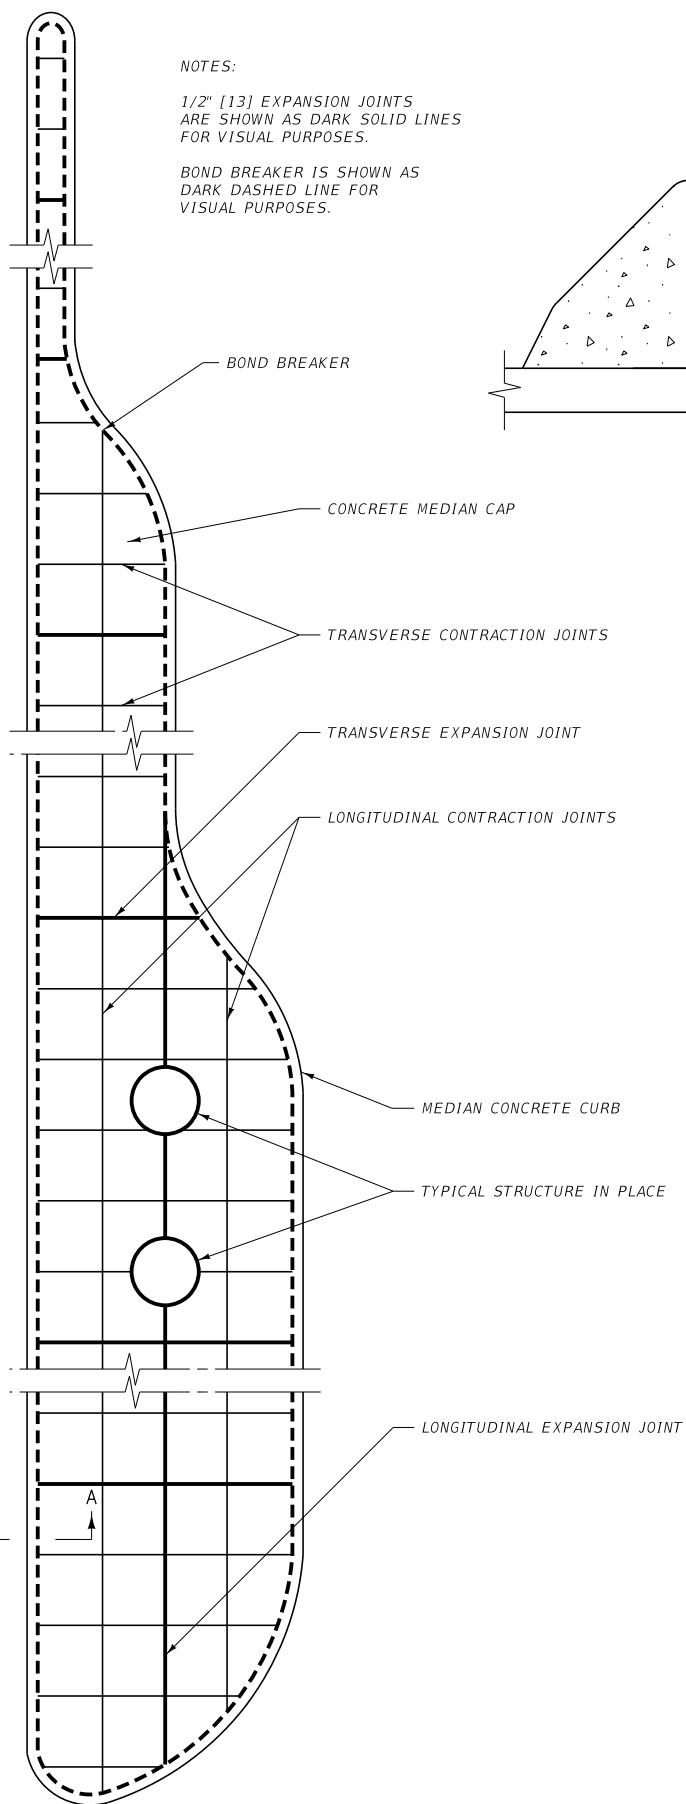


SECTION A-A

NOTES:

- ① INSTALL PREFORMED EXPANSION JOINT FILLER, PER SECTION 707, AT ALL EXPANSION JOINTS, FOR THE FULL THICKNESS OF THE CONCRETE MEDIAN CAP.
- ② INSTALL A BOND BREAKER FOR THE FULL THICKNESS OF THE CONCRETE MEDIAN CAP BETWEEN THE CAP AND THE CURB. USE A 15 OR 30 POUND [16.8 OR 13.6 kg] ROOFING FELT MATERIAL, OR OTHER PRODUCT AS APPROVED BY THE PROJECT MANAGER, FOR THE BOND BREAKER. DO NOT USE EXPANSION JOINT MATERIAL AS A BOND BREAKER.
- ③ ALL JOINTS MUST BE STRAIGHT AND PERPENDICULAR TO THE CENTERLINE AND THE SURFACE OF THE MEDIAN CAP. WHERE PRACTICAL, ALIGN ALL JOINTS WITH LIKE JOINTS IN ADJOINING WORK. USE JOINTS TO OUTLINE ALL PANELS IN THE MEDIAN CAP. USE SQUARE PANELS WHEN PRACTICAL. ON NARROW MEDIAN CAPS RECTANGULAR SHAPED PANELS ARE ACCEPTABLE.
- ④ PROVIDE CONTRACTION JOINTS NO LESS THAN 1/8" [3] WIDE AND NO MORE THAN 1/4" [6] WIDE AND NO LESS THAN 1" [25] IN DEPTH. CONTRACTION JOINTS MAY BE CUT BY A GROOVE FORMING TOOL.
- ⑤ LOCATE EXPANSION JOINTS AT ALL JOINTS BETWEEN THE MEDIAN CAP AND STRUCTURES IN PLACE AND EVERY 100 FT. (± 30 FT.) [30 m (± 10 m)] AT INTERVALS EQUAL TO THE NEAREST MULTIPLE OF THE CONTRACTION JOINT INTERVAL. USE A LONGITUDINAL EXPANSION JOINT IN THE CENTERLINE OF ALL MEDIAN CAPS WIDER THAN 12 FT. [3660].
- ⑥ USE LONGITUDINAL CONTRACTION JOINTS IN MEDIAN CAPS WIDER THAN 6 FT. [1830], WITH SPACING NOT TO EXCEED 6 FT. [1830]. SPACE TRANSVERSE CONTRACTION JOINTS EQUAL TO THE LONGITUDINAL SPACING ON MEDIAN CAPS WIDER THAN 6 FT. [1830]. FOR MEDIAN CAPS NARROWER THAN 6 FT. [1830], SPACE TRANSVERSE CONTRACTION JOINTS 10 FT. [3000] OR LESS.
- ⑦ CONSTRUCT CONCRETE MEDIAN CURB AND CAP WITH CLASS GENERAL CONCRETE OR APPROVED EQUAL.

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 609, 707	DWG. NO. 609-12
CONCRETE MEDIAN CAPS	

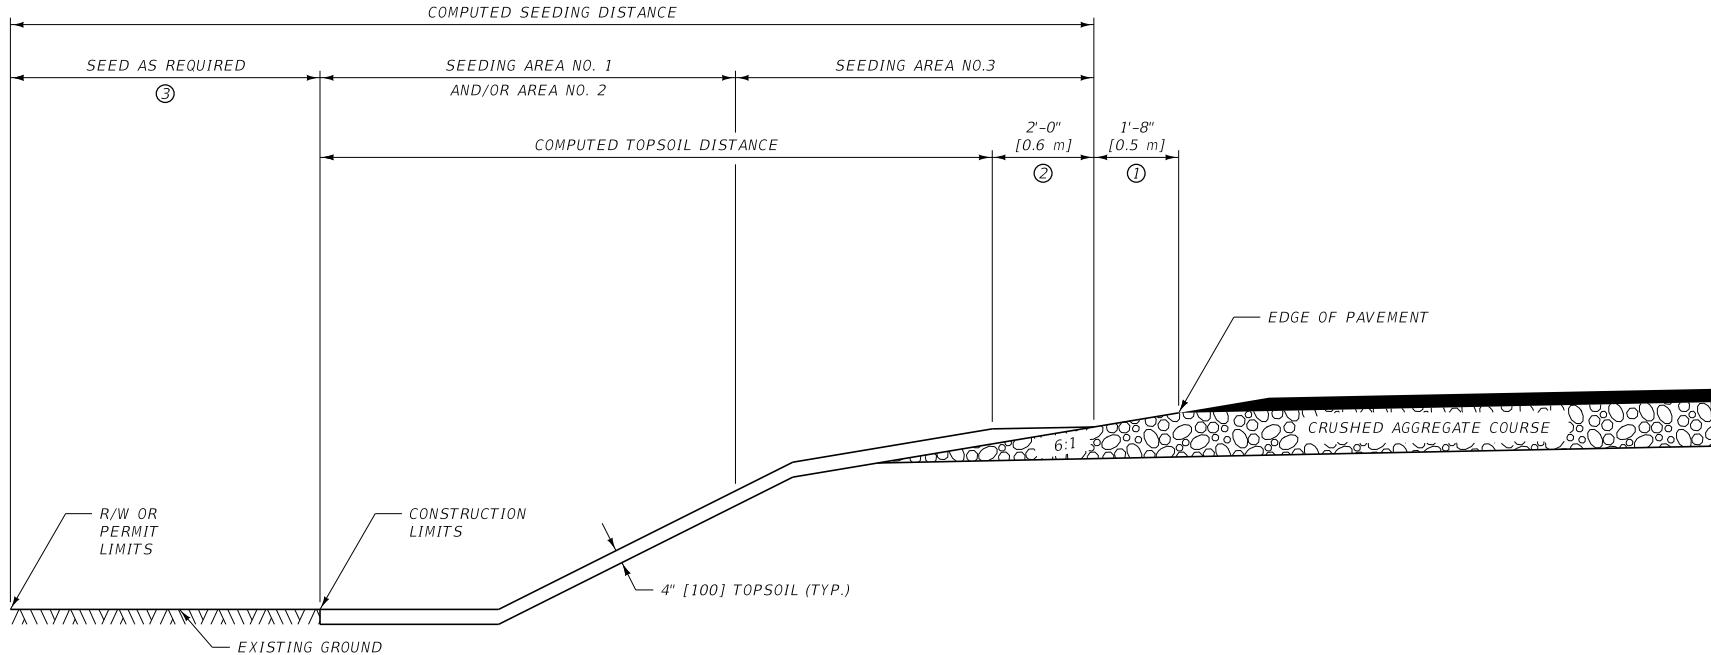

NOTES:




- ① DO NOT PLACE TOPSOIL WITHIN 1'-8" [0.5 m] OF THE EDGE OF PAVEMENT.
- ② PLACE TOPSOIL ON THE SURFACING INSLOPE TO A DEPTH OF 4" [100] (+/- NOT LESS THAN 2'-0" [0.6 m]) FROM THE EDGE OF SEEDING. FEATHER TOPSOIL TO THE EDGE OF SEEDING.
- ③ SEED AREAS BEYOND THE CONSTRUCTION LIMITS WITHIN THE RIGHT-OF-WAY OR PERMIT BOUNDARIES THAT HAVE BEEN DISTURBED (i.e. STAGING AREAS, TOPSOIL PILES, EQUIPMENT TRAILS, etc.).
- ④ SALVAGE SUFFICIENT AMOUNTS OF TOPSOIL TO ASSURE QUANTITIES ARE AVAILABLE TO COVER ALL CLEARED AND GRUBBED AREAS WITH 4" [100] OF TOPSOIL. IF QUANTITIES ARE NOT AVAILABLE, RE-SPREAD TOPSOIL TO AN EVEN DEPTH ACROSS ALL DISTURBED GROUND.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

SEEDING		
AREA NO.	DEFINITION	TREATMENT
1	3:1 OR FLATTER SLOPES	CONDITION SEEDBED, SEED & FERTILIZE
2	STeeper than 3:1 SLOPES	SEED, FERTILIZE & MULCH
3	15' [4.5 m] OR TO THE EDGE OF THE SURFACING INSLOPE, WHICHEVER IS GREATER	CONDITION SEEDBED & SEED

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 610-00 SECTION 610

TOPSOIL AND SEEDING

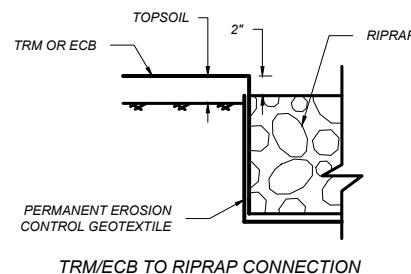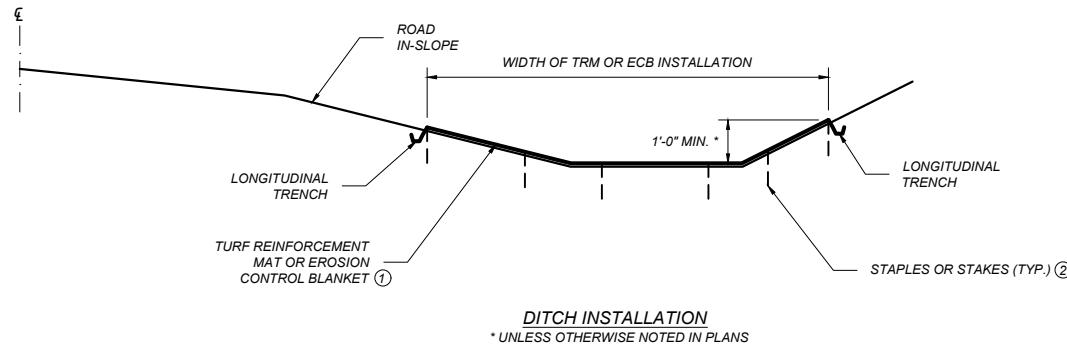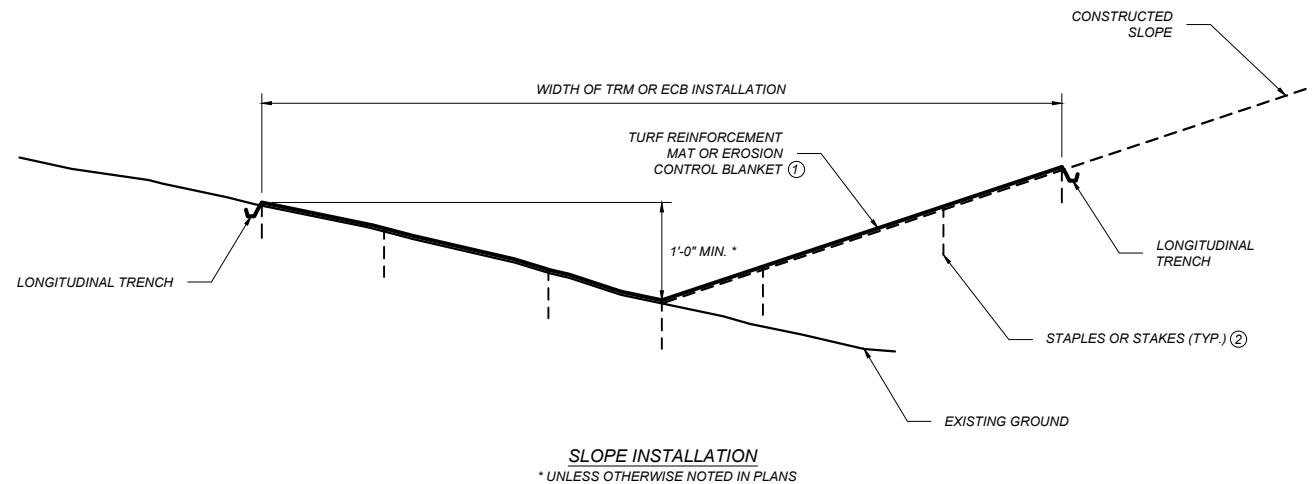



NOTES:

- ① INSTALL IN ACCORDANCE WITH THE DEPARTMENT'S BMP MANUAL AND SECTION 610.
- ② USE STAPLES OR STAKES IN ACCORDANCE WITH SECTION 610.

--REVISED--
JAN 15, 2026
####
####


DETAILED DRAWINGS REFERENCE STANDARD SPEC. SECTION 610-05 ROLLED EROSION CONTROL (REC) EFFECTIVE: JAN 23, 2020	 MONTANA Department of Transportation

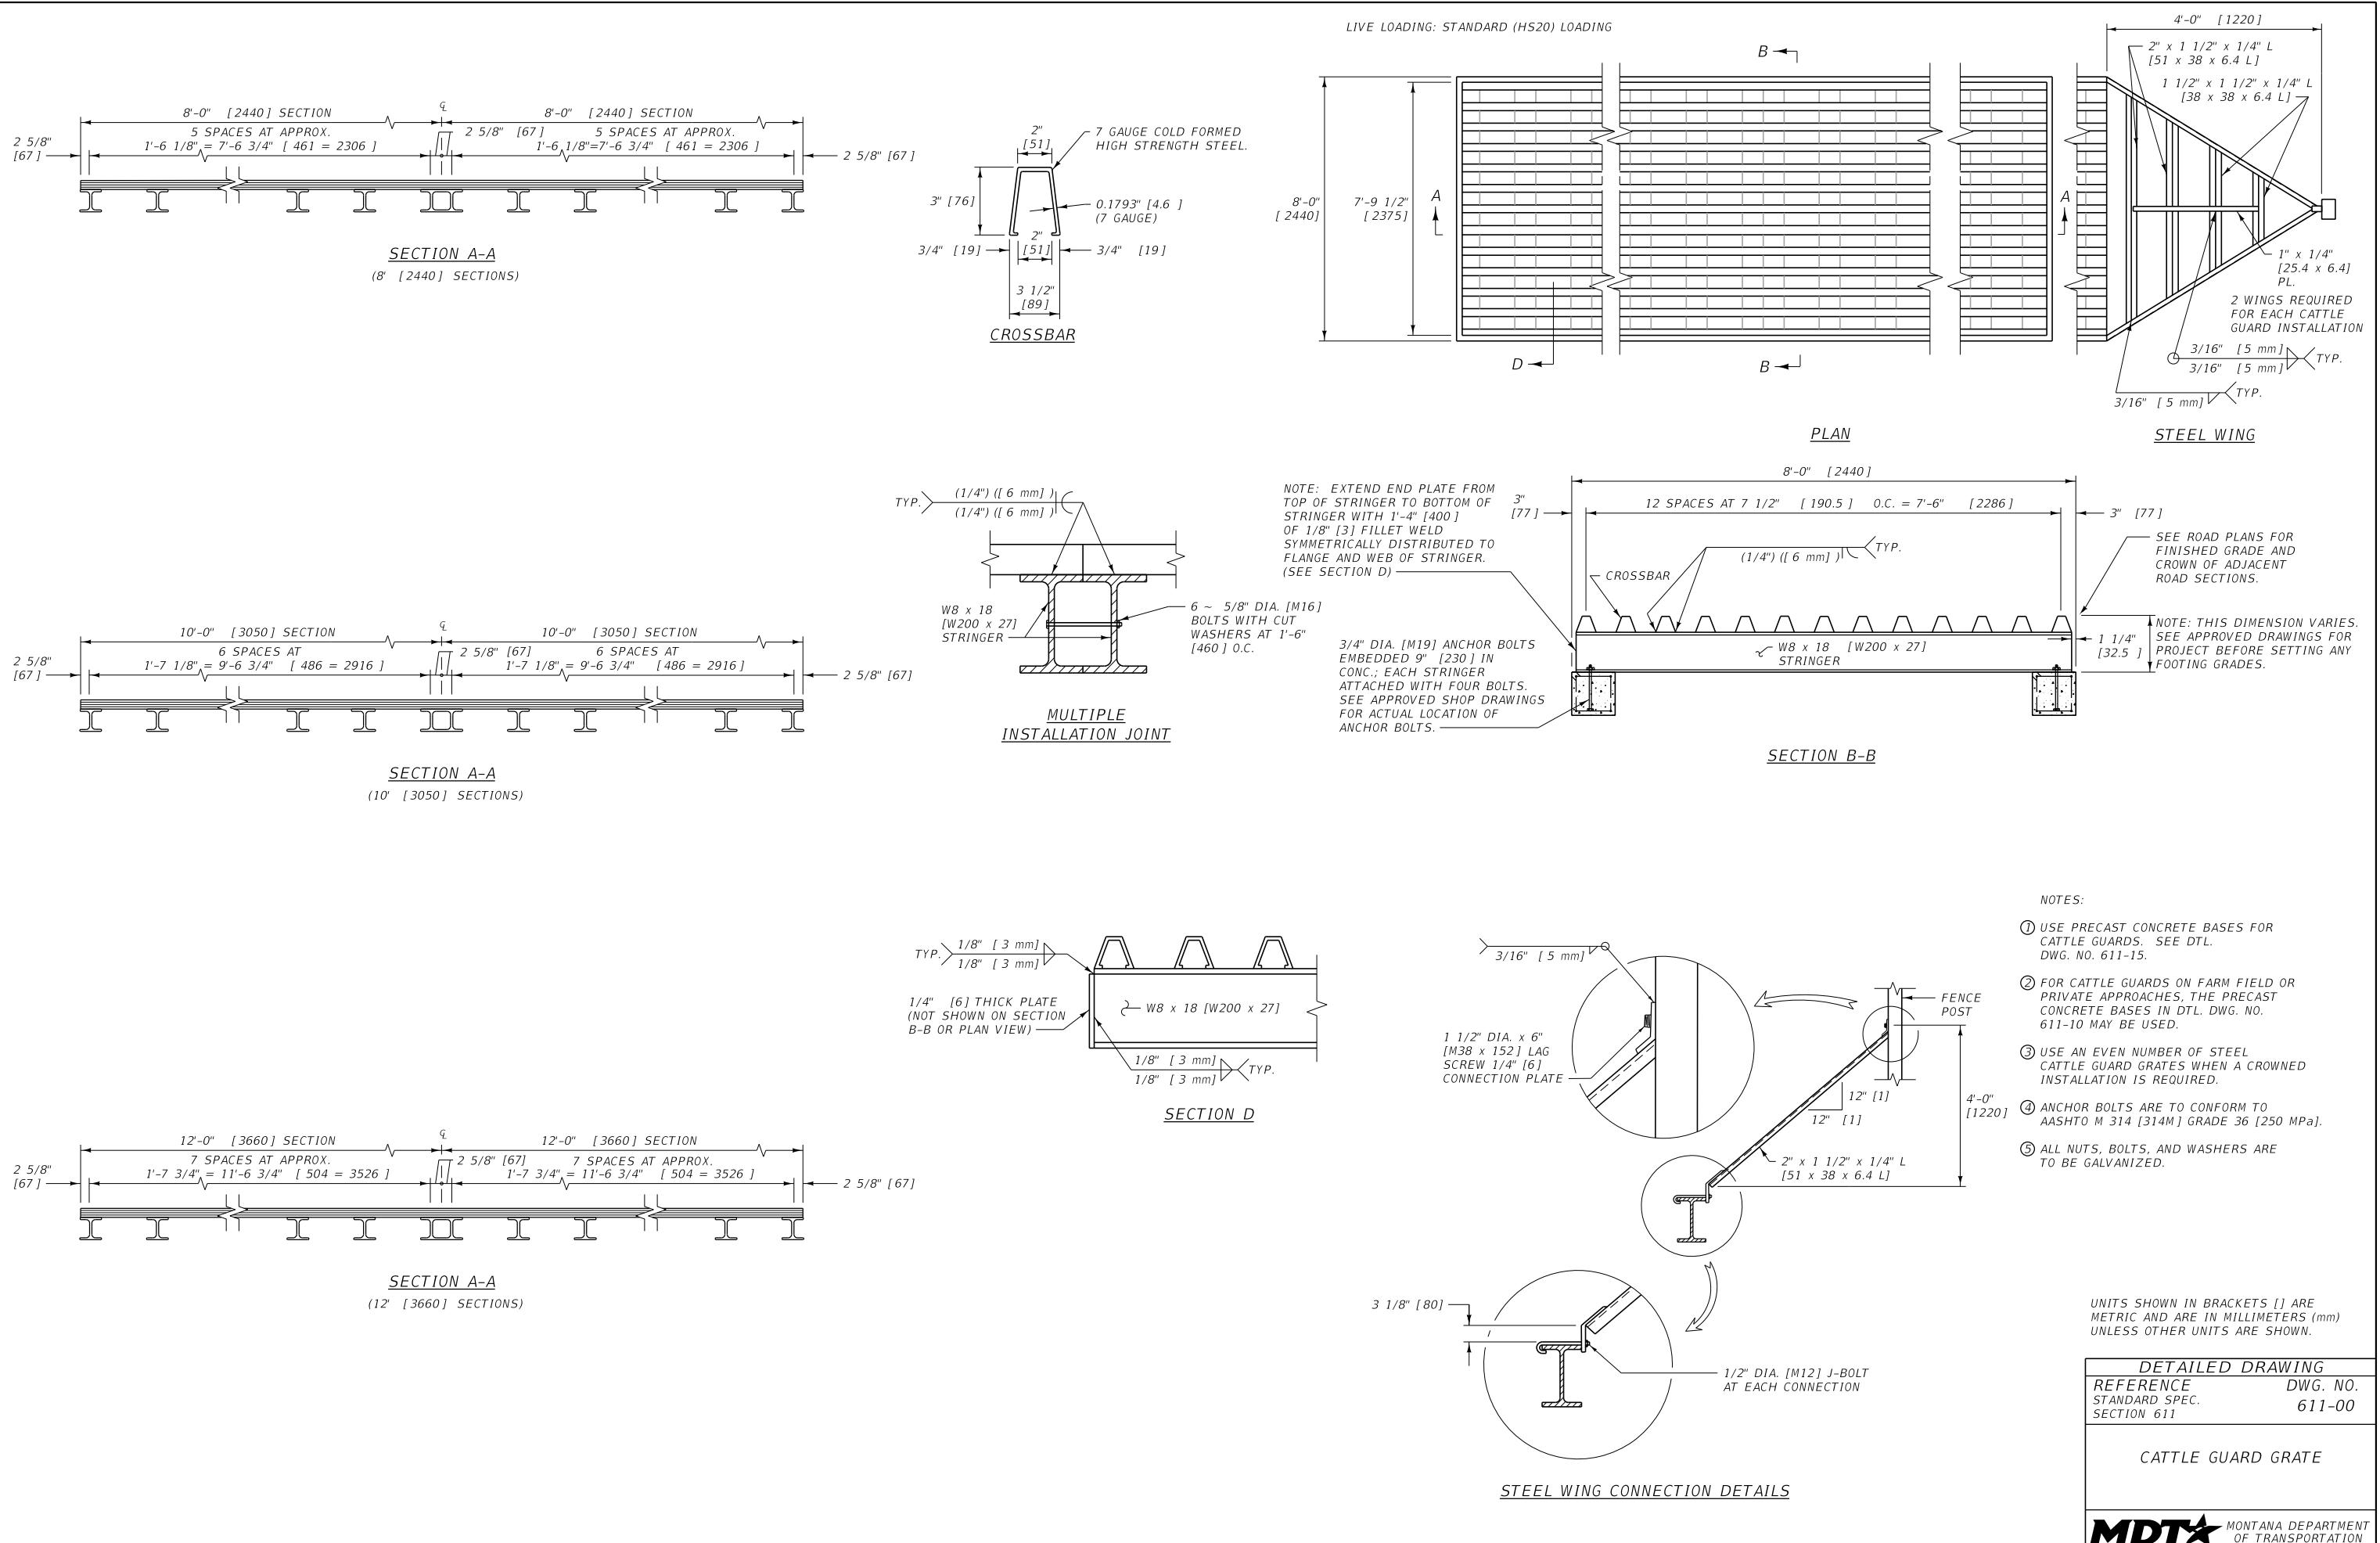



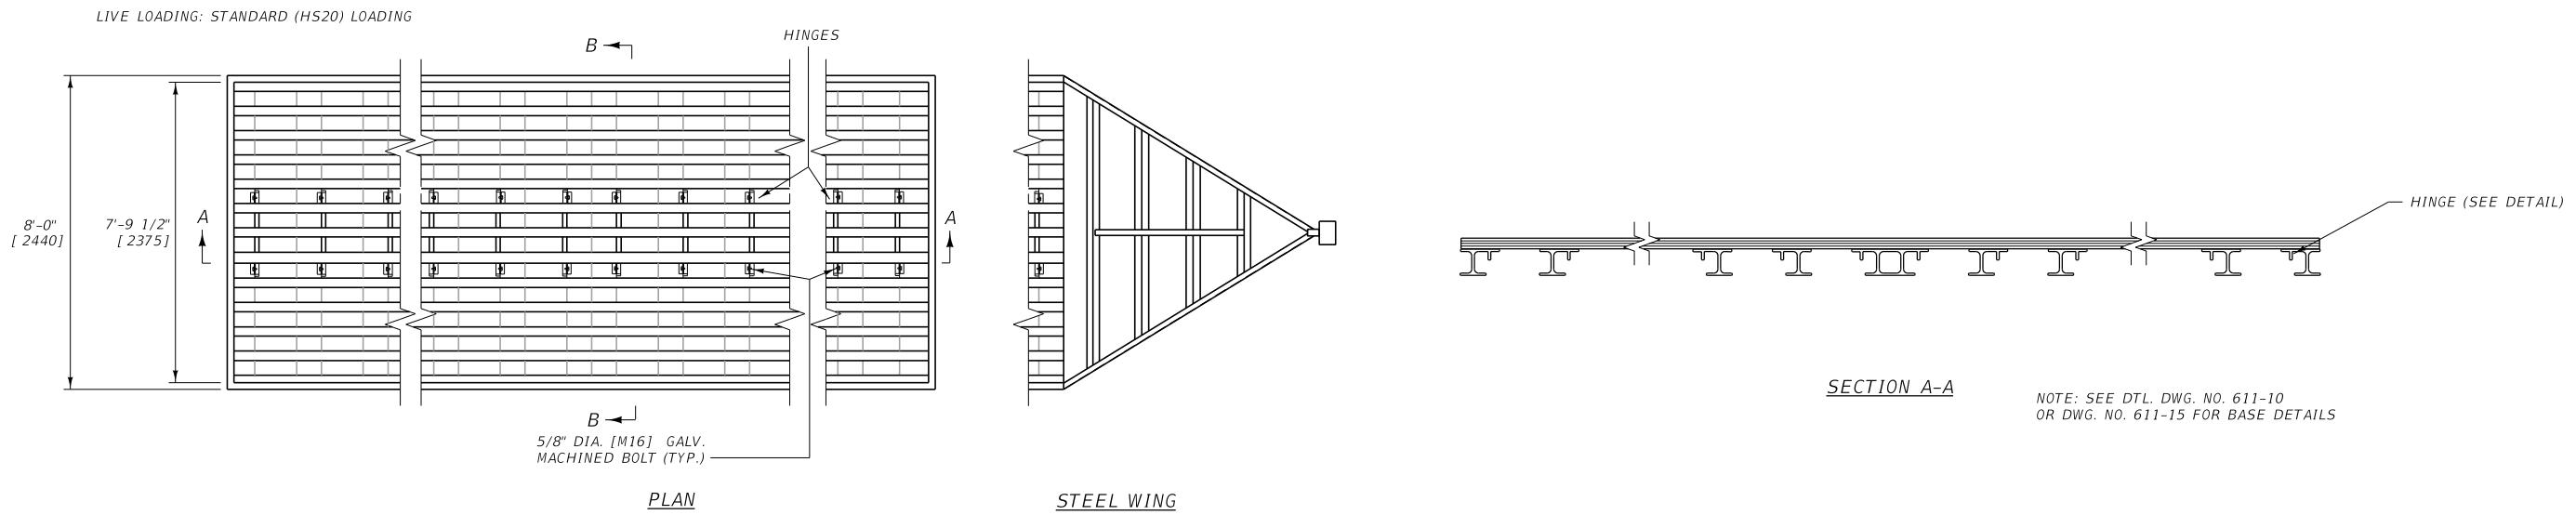


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 611	DWG. NO. 611-03
CATTLE GUARD HINGED GRATE	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

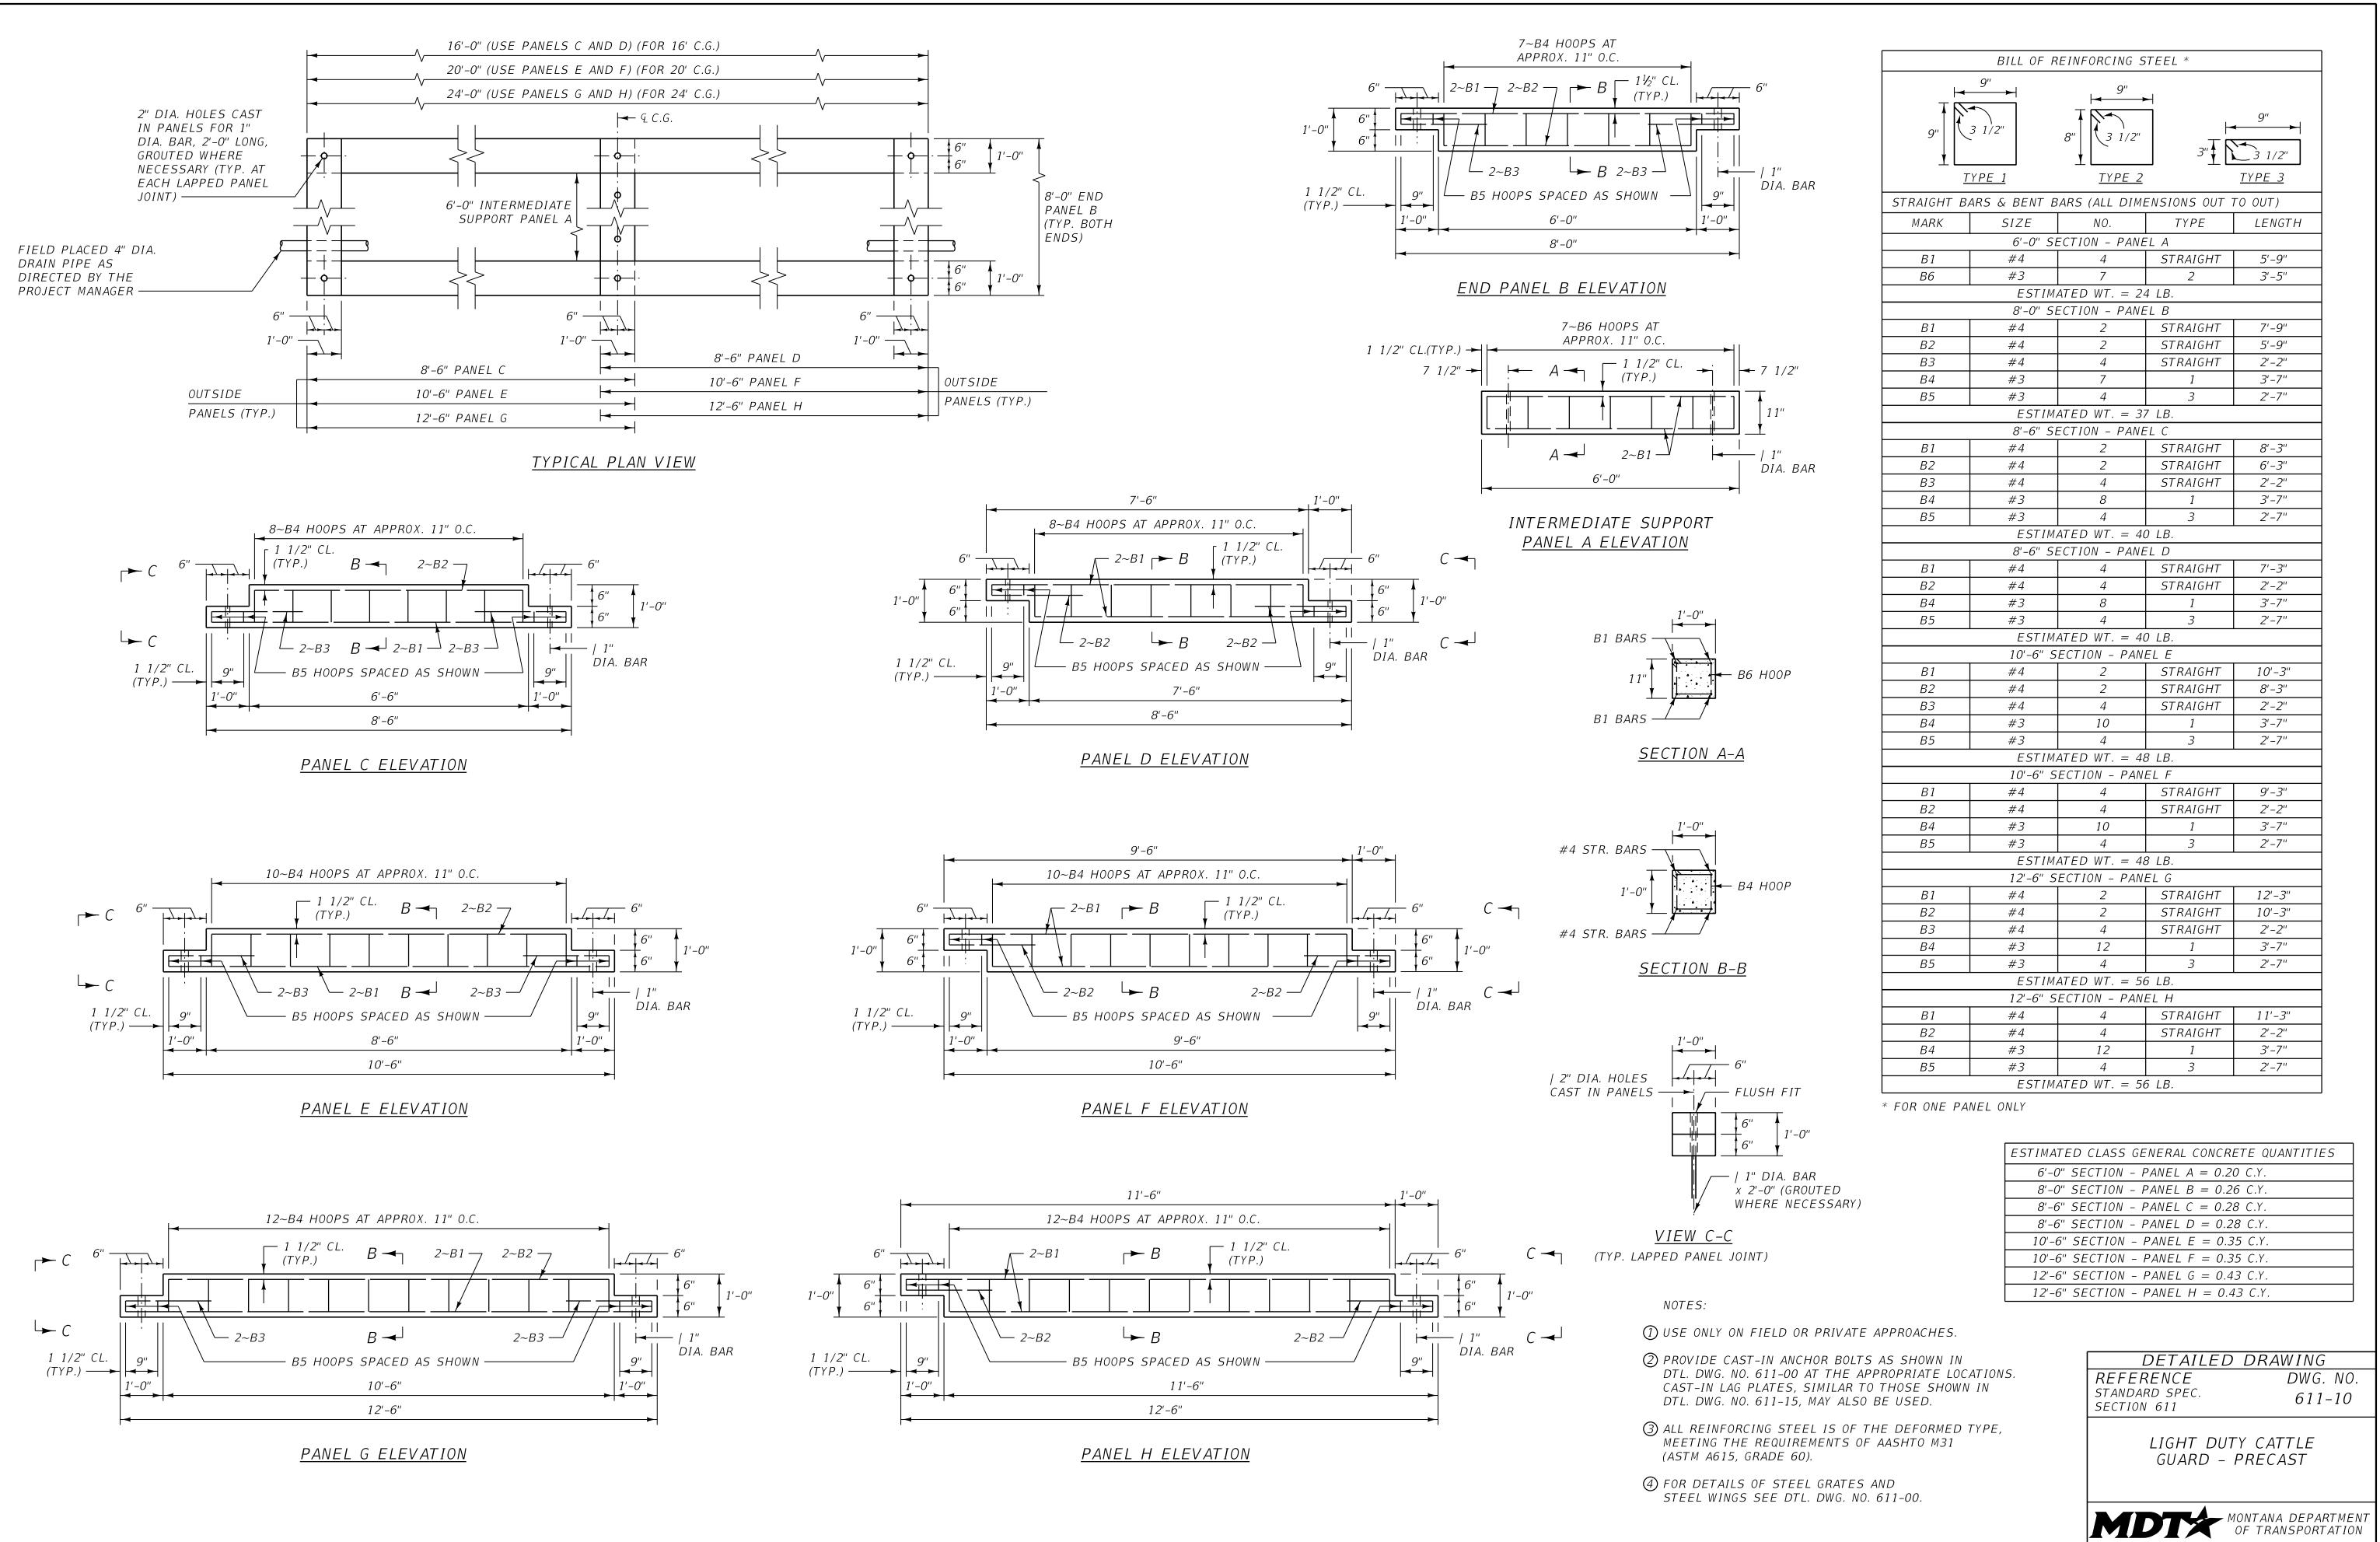

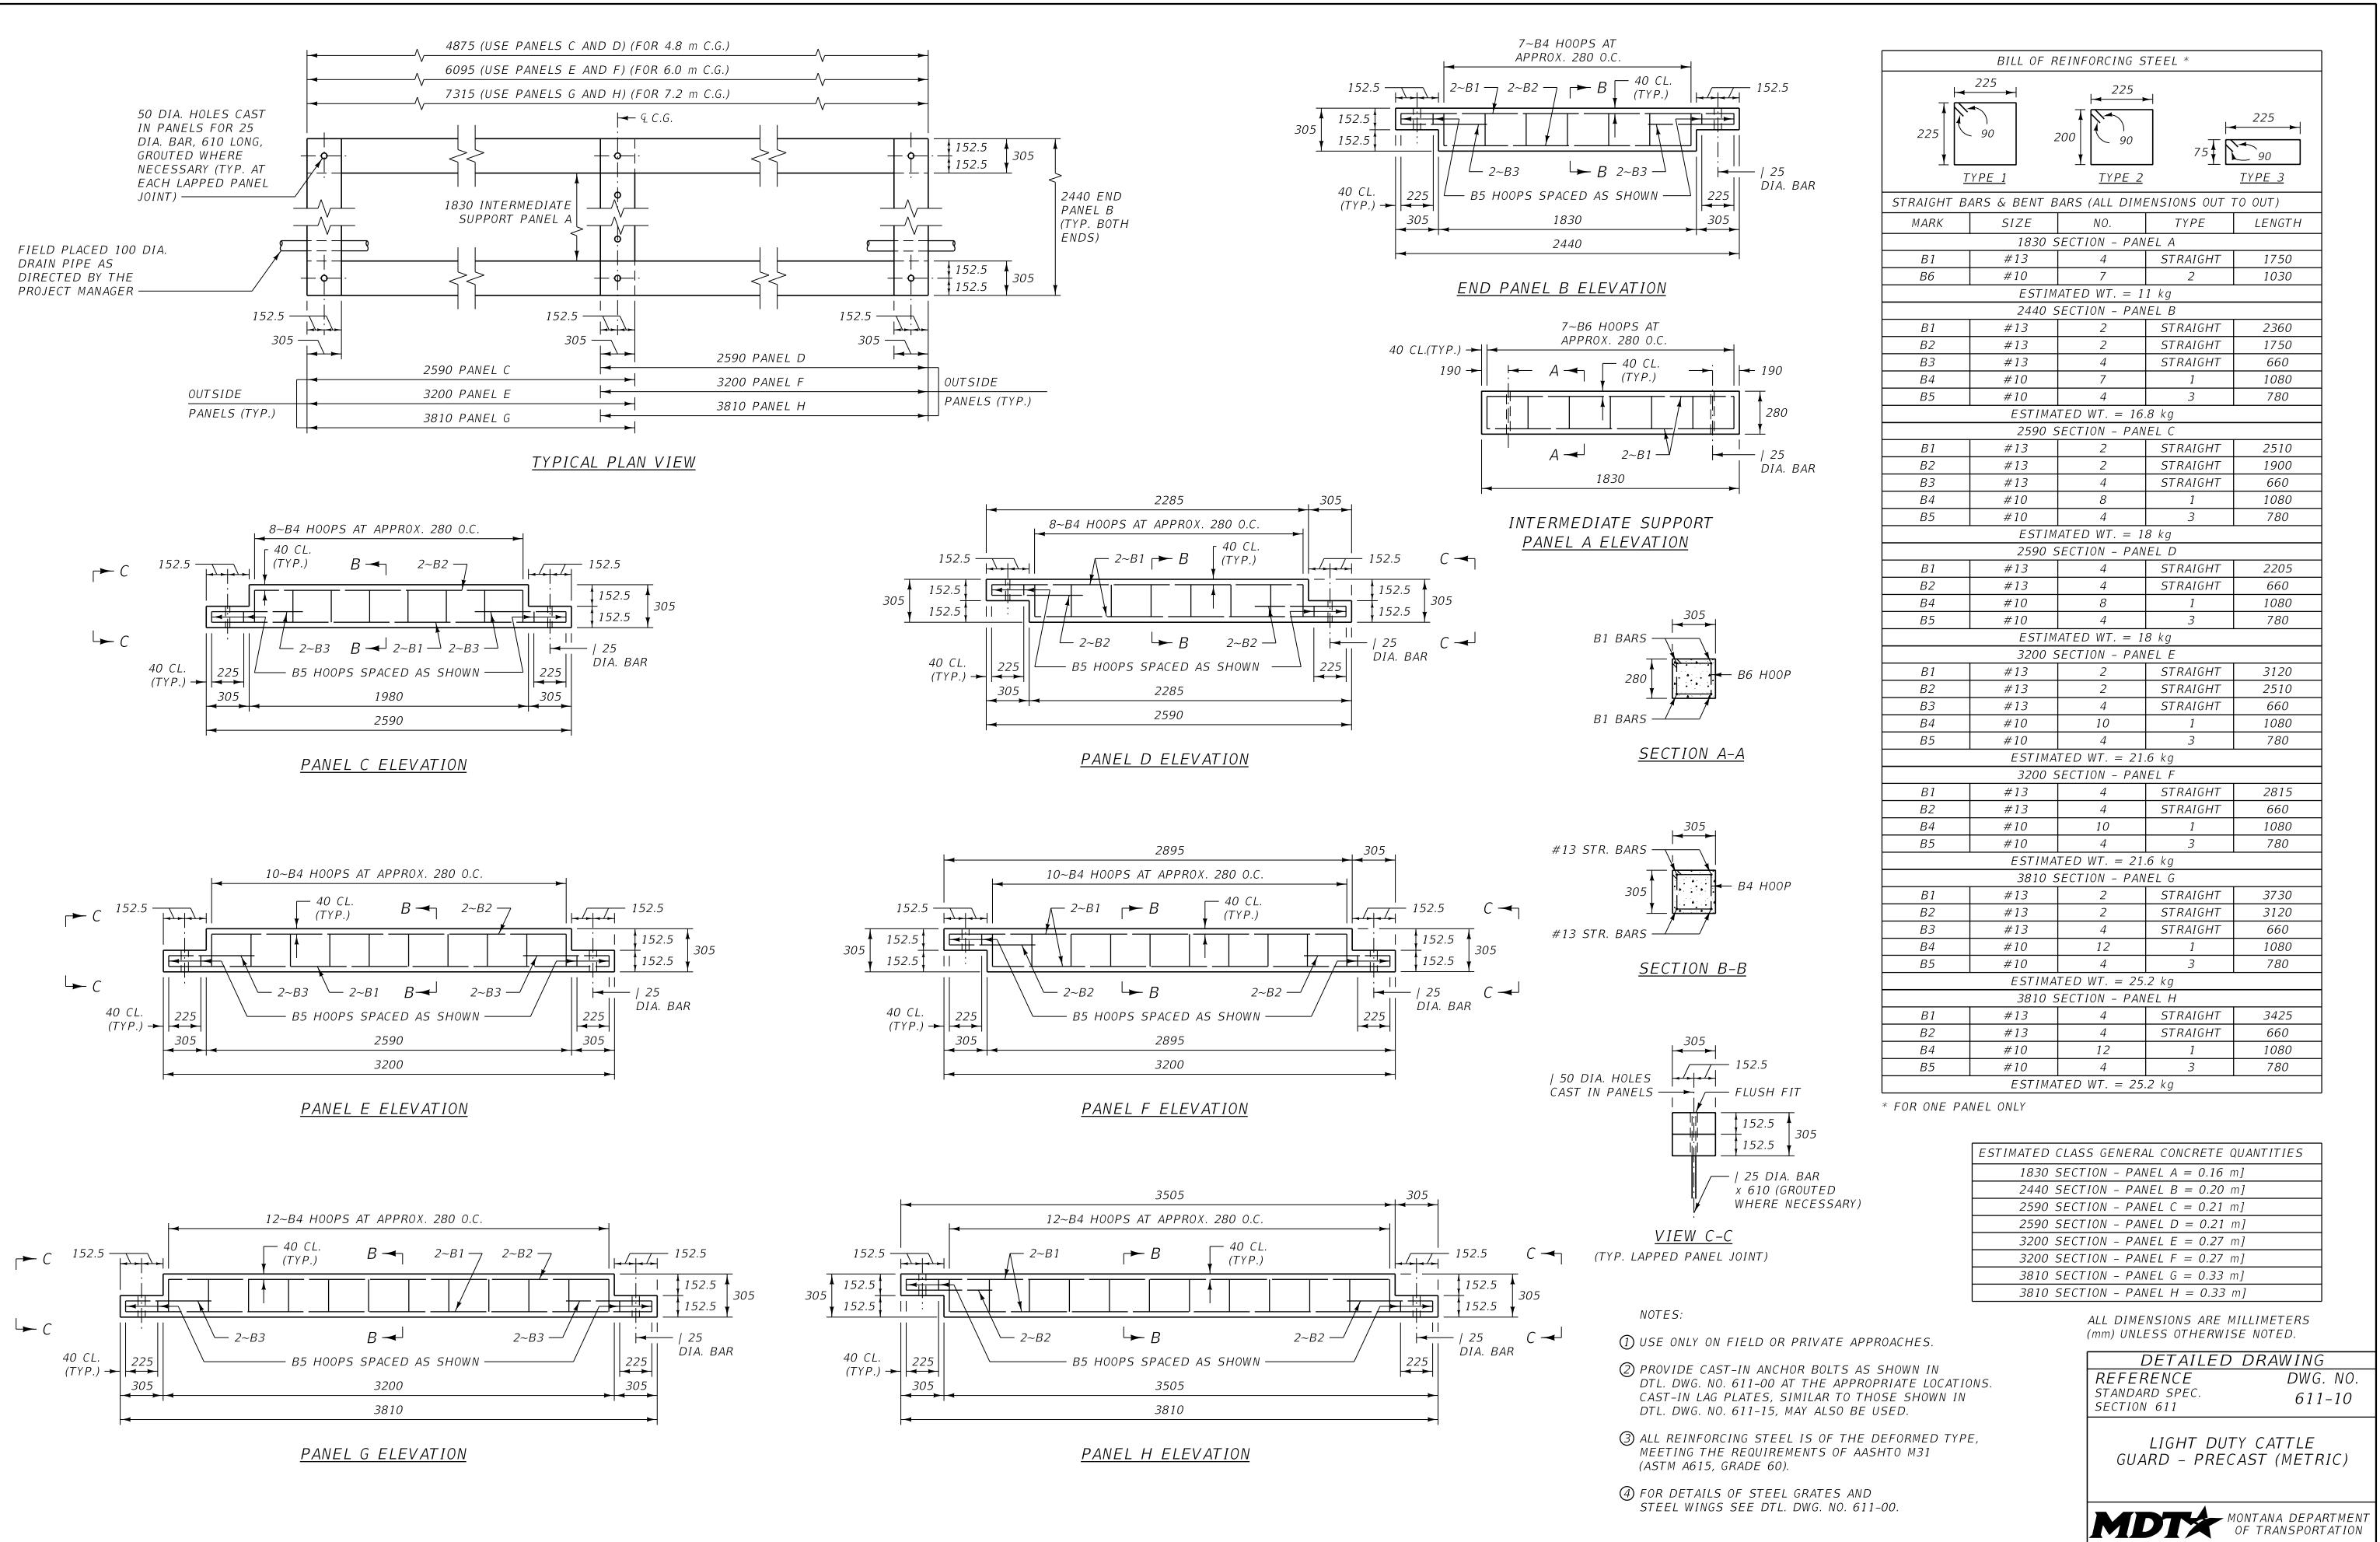


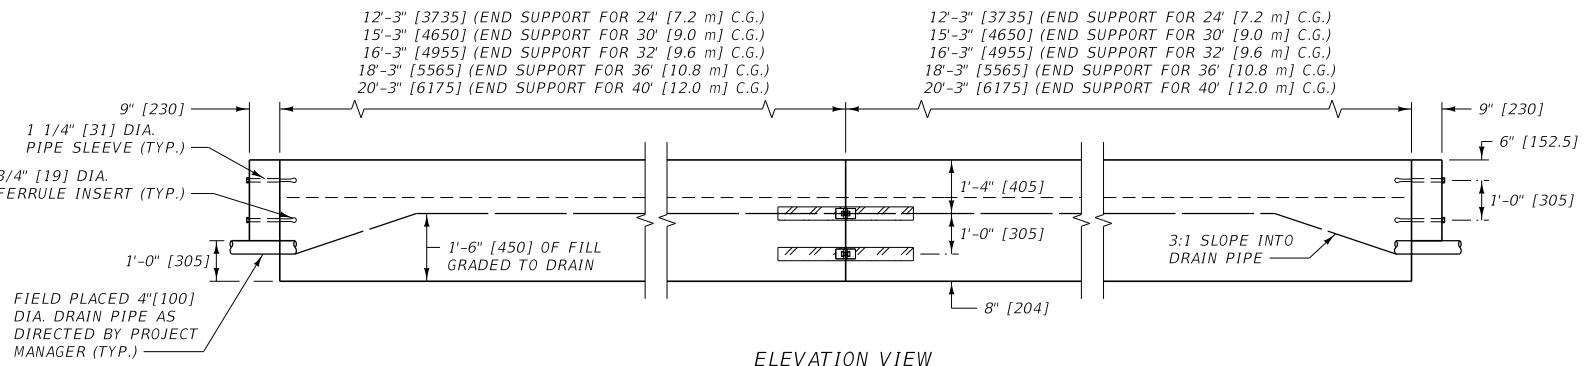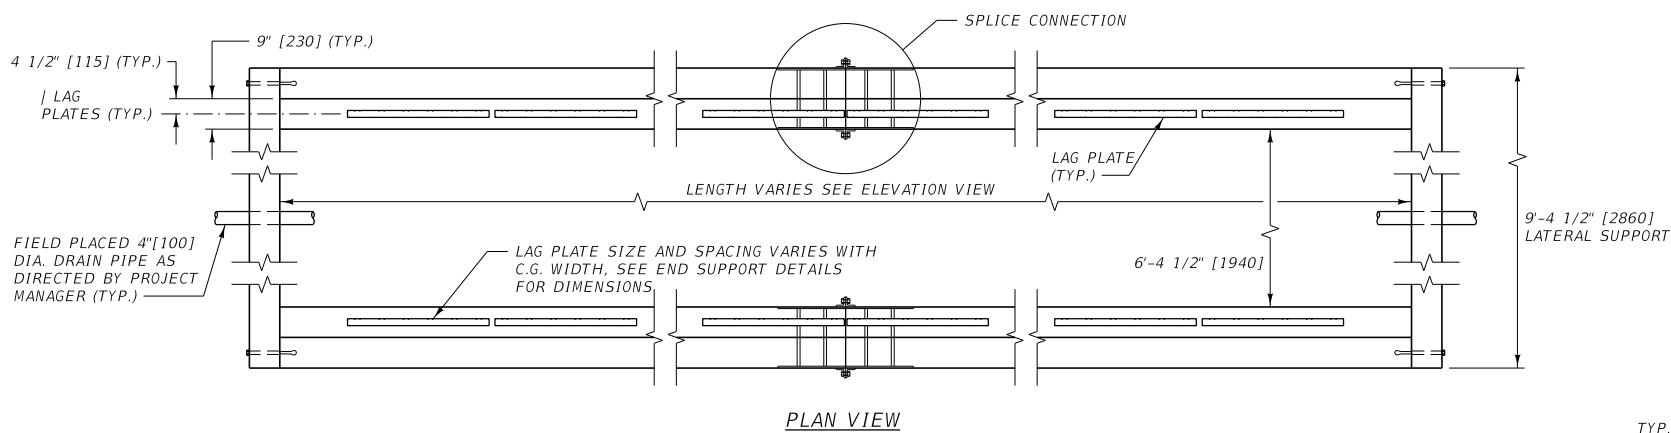


ELEVATION VIEW

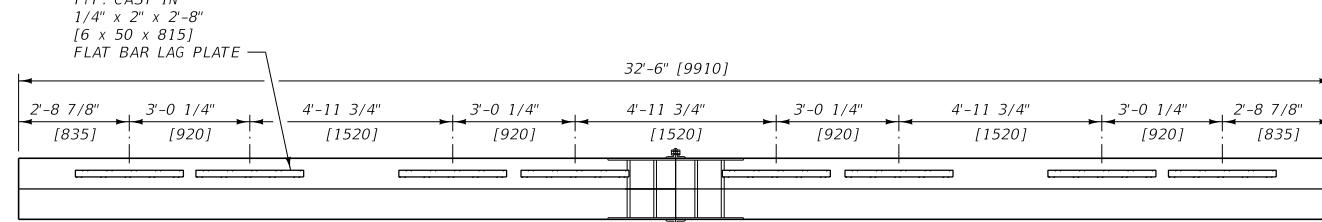


32' [9.6 m] CATTLE GUARD END SUPPORT DETAIL

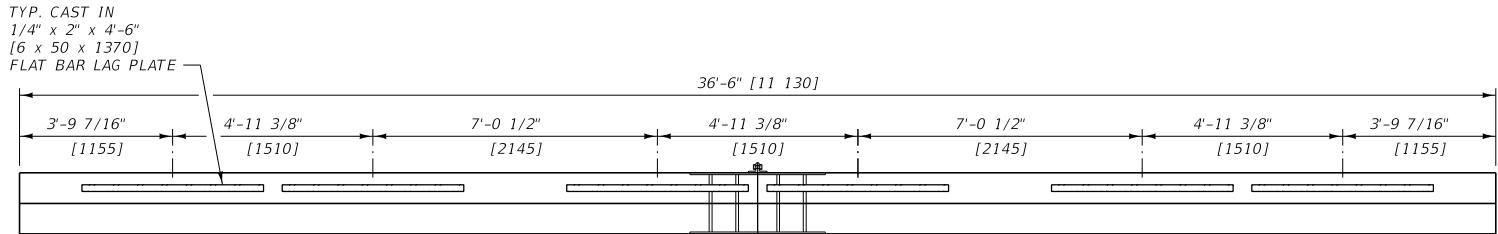


36' [10.8 m] CATTLE GUARD END SUPPORT DETAIL

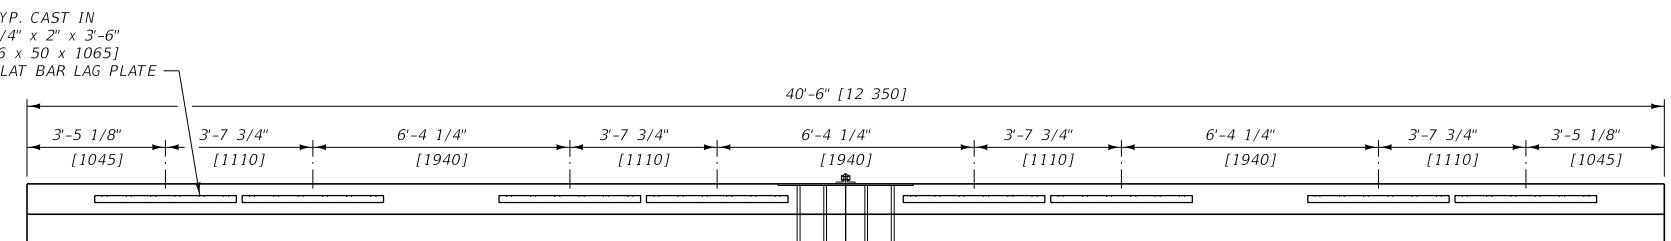


40' [12.0 m] CATTLE GUARD END SUPPORT DETAIL

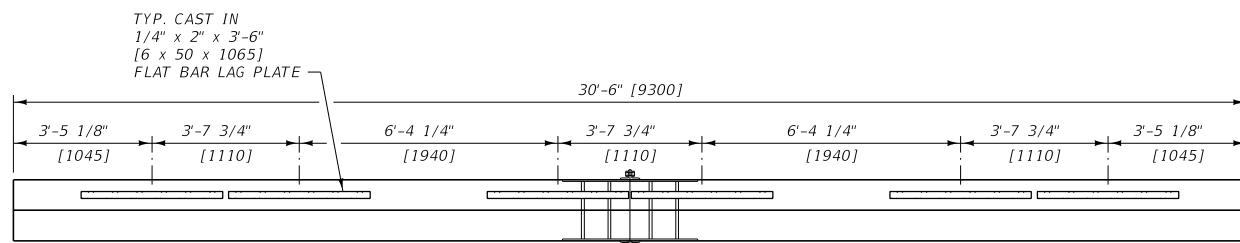


30' [9.0 m] CATTLE GUARD END SUPPORT DETAIL

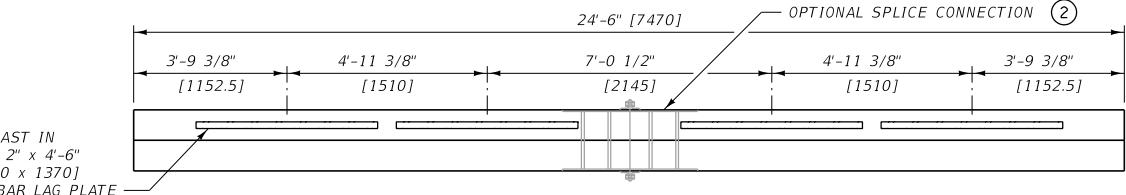


24' [7.2 m] CATTLE GUARD END SUPPORT DETAIL

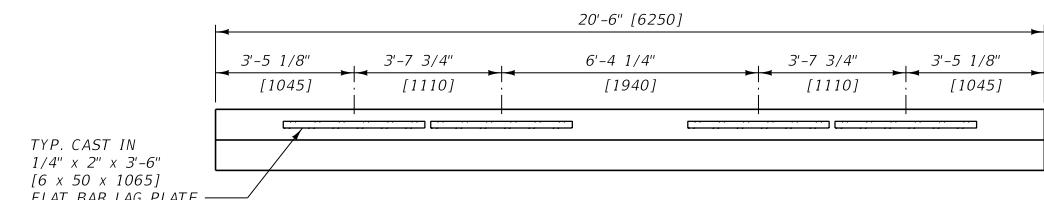


20' [6.0 m] CATTLE GUARD END SUPPORT DETAIL

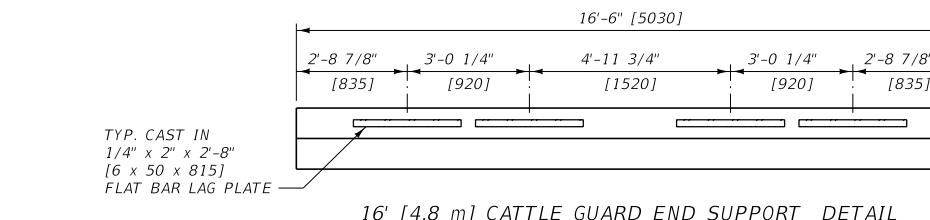

16' [4.8 m] CATTLE GUARD END SUPPORT DETAIL

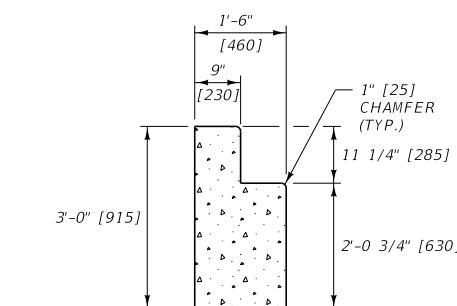

END SUPPORT SECTION VIEW

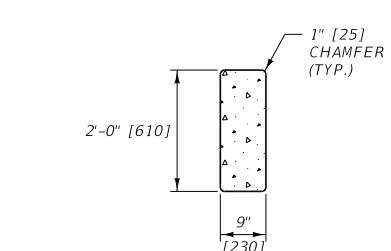

LATERAL SUPPORT SECTION VIEW

NOTES:

- ① METRIC CATTLE GUARD SIZES ARE NOMINAL. STANDARD HS20 LIVE LOADING IS REQUIRED FOR HEAVY DUTY CATTLE GUARDS.
- ② USE SPLICING CONNECTIONS WHEN A CROWNED INSTALLATION IS REQUIRED.
- ③ SEE DTL. DWG. NO. 611-20 FOR ADDITIONAL PRE-CAST CONCRETE CATTLE GUARD BASE AND MATERIAL QUANTITY DETAILS.
- ④ SEE DTL. DWG. NO. 611-00 FOR DETAILS OF STEEL GRATES AND STEEL WINGS.

⑤ INSTALLATION PROCEDURE:

EXCAVATE 2'-0" [600] BELOW THE ELEVATION OF THE BOTTOM OF THE CATTLE GUARD BASE. EXTEND THE EXCAVATION HORIZONTALLY AT LEAST 1'-0" [300] IN ALL DIRECTIONS BEYOND THE CATTLE GUARD BASE'S EXTERIOR DIMENSION.


FILL THE EXCAVATION WITH C.A.C. TO THE LEVEL OF THE BOTTOM OF THE CATTLE GUARD BASE. COMPACT ACCORDING TO SECTION 203.

AFTER PLACING THE CATTLE GUARD, FILL THE EXTERIOR PORTION OF THE EXCAVATION TO GRADE WITH THE SAME MATERIAL.

FILL THE INTERIOR OF THE CATTLE GUARD BASE TO A DEPTH OF 1'-6" [450] WITH THE SIMILARLY COMPAKTED MATERIAL.

DETAINED DRAWING	REFERENCE DWG. NO.
STANDARD SPEC.	DWG. NO. 611-15
SECTION 611	
HEAVY DUTY CATTLE GUARD - PRECAST	


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

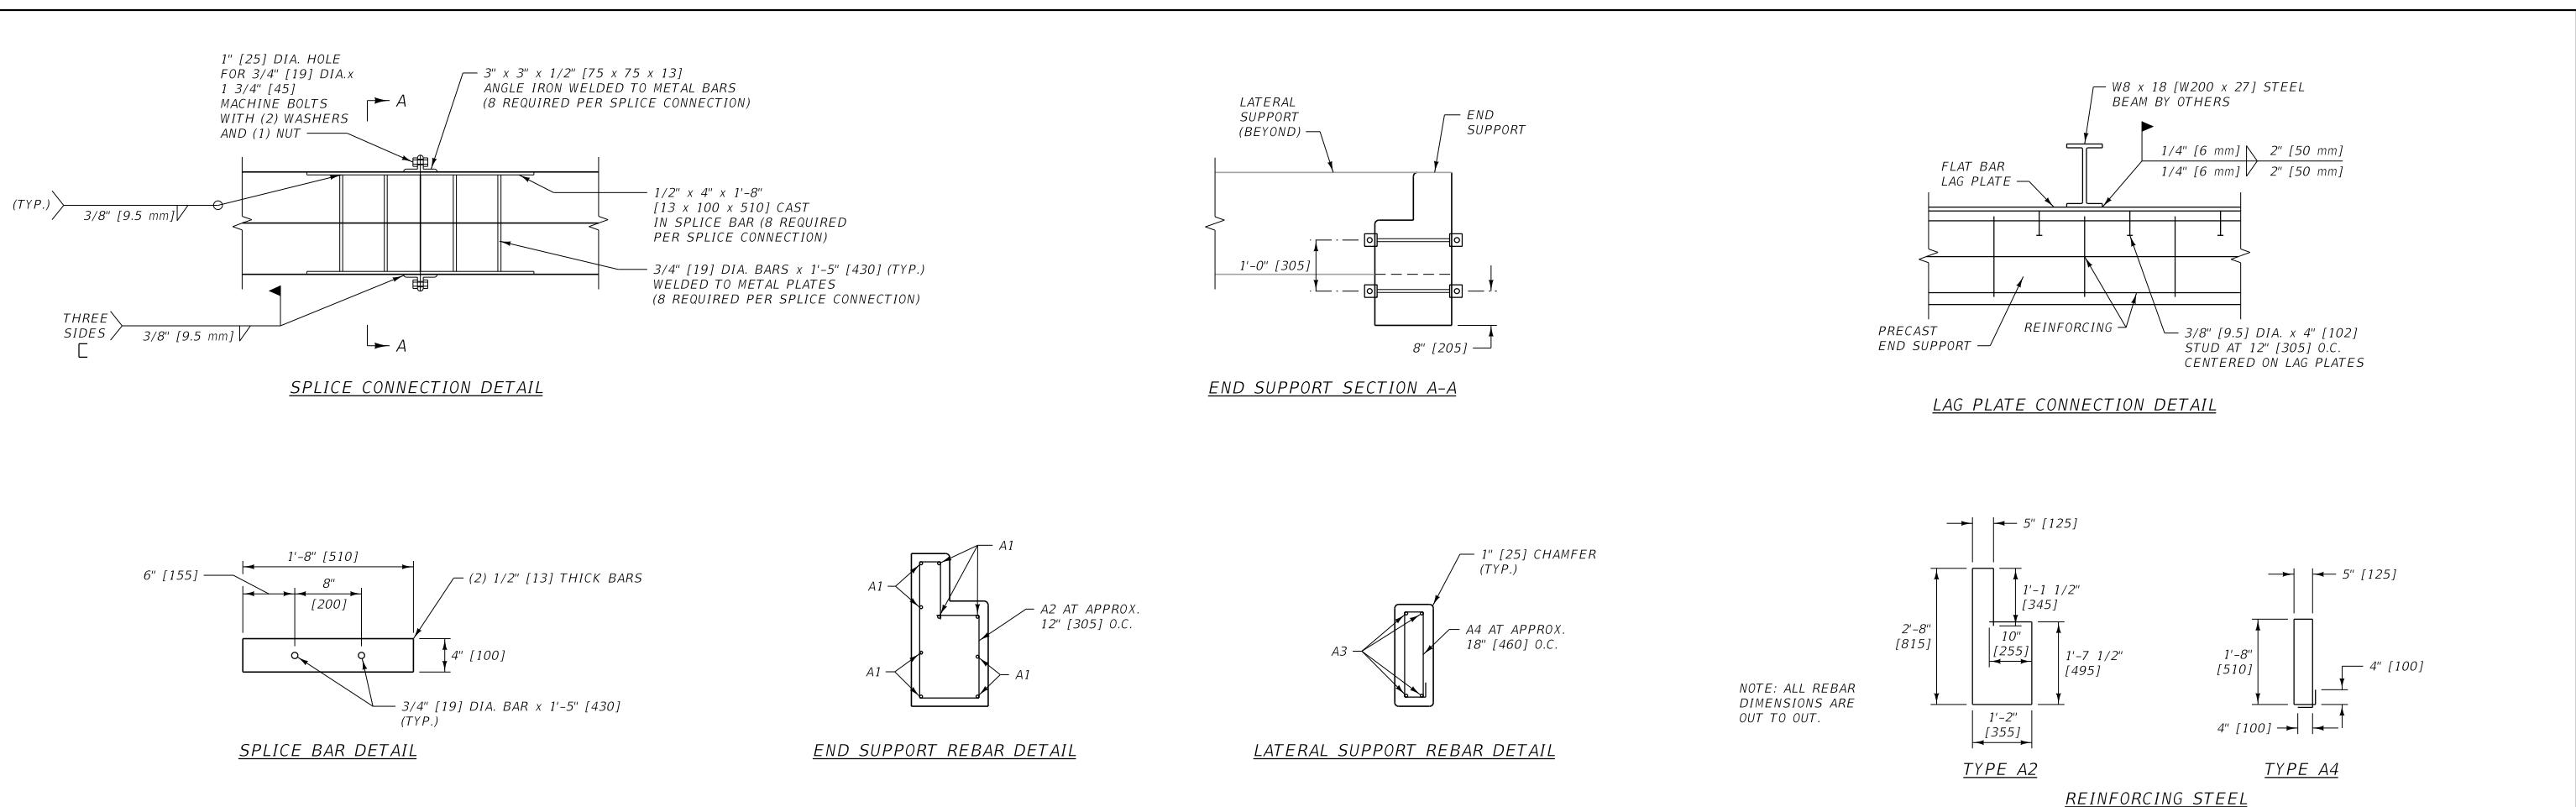

QUANTITIES AND DIMENSIONS ARE APPROXIMATE ONLY BASED ON ONE COMPLETE CATTLE GUARD.													
NOMINAL C.G. SIZE	REINFORCING STEEL (NO. 4 BARS / GRADE 60)							MISC. STEEL					
	A1		A2		A3		A4		ESTIMATED WT.		LAG PLATES	SPLICE CONNECTION	ESTIMATED WT.
	REQUIRED	LENGTH	REQUIRED	LENGTH	REQUIRED	LENGTH	REQUIRED	LENGTH	LB.	REQUIRED	LENGTH	LB.	
16'-0"	18	16'-2"	36	7'-10"	8	9'-1 1/2"	14	4'-10"	477	8	2'-8"	NO	39
20'-0"	18	20'-2"	44	7'-10"	8	9'-1 1/2"	14	4'-10"	567	8	3'-6"	NO	52
24'-0"	18	24'-2"	52	7'-10"	8	9'-1 1/2"	14	4'-10"	657	8	4'-6"	NO	66
* 24'-0"	36	11'-11"	52	7'-10"	8	9'-1 1/2"	14	4'-10"	653	8	4'-6"	YES	323
30'-0"	36	14'-11"	64	7'-10"	8	9'-1 1/2"	14	4'-10"	788	12	3'-6"	YES	334
32'-0"	36	15'-11"	68	7'-10"	8	9'-1 1/2"	14	4'-10"	833	16	2'-8"	YES	335
36'-0"	36	17'-11"	76	7'-10"	8	9'-1 1/2"	14	4'-10"	923	12	4'-6"	YES	356
40'-0"	36	19'-11"	84	7'-10"	8	9'-1 1/2"	14	4'-10"	1013	16	3'-6"	YES	360

* 24'-0" CATTLE GUARD WITH OPTIONAL SPLICE

ESTIMATED CLASS GENERAL CONCRETE QUANTITIES							
16'-0" C.G. = 5.68 C.Y.							
20'-0" C.G. = 6.81 C.Y.							
24'-0" C.G. = 7.93 C.Y.							
* 24'-0" C.G. = 7.93 C.Y.							
30'-0" C.G. = 9.62 C.Y.							
32'-0" C.G. = 10.18 C.Y.							
36'-0" C.G. = 11.31 C.Y.							
40'-0" C.G. = 12.43 C.Y.							

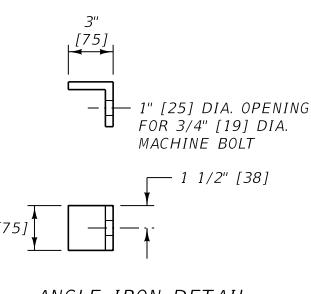

ANGLE IRON DETAIL

QUANTITIES AND DIMENSIONS ARE APPROXIMATE ONLY BASED ON ONE COMPLETE CATTLE GUARD.													
NOMINAL C.G. SIZE	REINFORCING STEEL (NO. 13 BARS / GRADE 420)							MISC. STEEL					
	A1		A2		A3		A4		ESTIMATED WT.		LAG PLATES	SPLICE CONNECTION	ESTIMATED WT.
	REQUIRED	LENGTH	REQUIRED	LENGTH	REQUIRED	LENGTH	REQUIRED	LENGTH	kg.	REQUIRED	LENGTH	kg.	
4.8 m	18	4930 mm	36	2390 mm	8	2780 mm	14	1470 mm	216.3	8	815 mm	NO	16.7
6.0 m	18	6150 mm	44	2390 mm	8	2780 mm	14	1470 mm	257.1	8	1065 mm	NO	21.4
7.2 m	18	7370 mm	52	2390 mm	8	2780 mm	14	1470 mm	298.0	8	1370 mm	NO	27.1
* 7.2 m	36	3635 mm	52	2390 mm	8	2780 mm	14	1470 mm	296.2	8	1370 mm	YES	144.2
9.0 m	36	4550 mm	64	2390 mm	8	2780 mm	14	1470 mm	357.4	12	1065 mm	YES	149.1
9.6 m	36	4855 mm	68	2390 mm	8	2780 mm	14	1470 mm	377.8	16	815 mm	YES	150.4
10.8 m	36	5465 mm	76	2390 mm	8	2780 mm	14	1470 mm	418.7	12	1370 mm	YES	157.8
12.0 m	36	6075 mm	84	2390 mm	8	2780 mm	14	1470 mm	459.5	16	1065 mm	YES	159.8

* 7.2 m CATTLE GUARD WITH OPTIONAL SPLICE

ESTIMATED CLASS GENERAL CONCRETE QUANTITIES (METRIC)							
4.8 m C.G. = 3.72 m]							
6.0 m C.G. = 4.43 m]							
7.2 m C.G. = 5.13 m]							
* 7.2 m C.G. = 5.13 m]							
9.0 m C.G. = 6.19 m]							
9.6 m C.G. = 6.55 m]							
10.8 m C.G. = 7.25 m]							
12.0 m C.G. = 7.96 m]							

NOTES:

① C.G. = CATTLE GUARD.

② ALL HARDWARE IS TO BE PRIMER PAINTED.

③ ALL STEEL HARDWARE IS TO CONFORM TO AASHTO M270 [270M] GRADE 36 [250].

④ ALL NUTS, BOLTS, AND WASHERS ARE TO CONFORM TO ASTM A307 [307M] AND BE GALVANIZED PER AASHTO M232 [M232M].



⑤ SEE DTL. DWG. NO 611-15 FOR PRECAST CONCRETE CATTLE GUARD BASE

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 611-20
SECTION 611



PRECAST CONCRETE
CATTLE GUARD BASE
DETAILS

ROUND PIPE

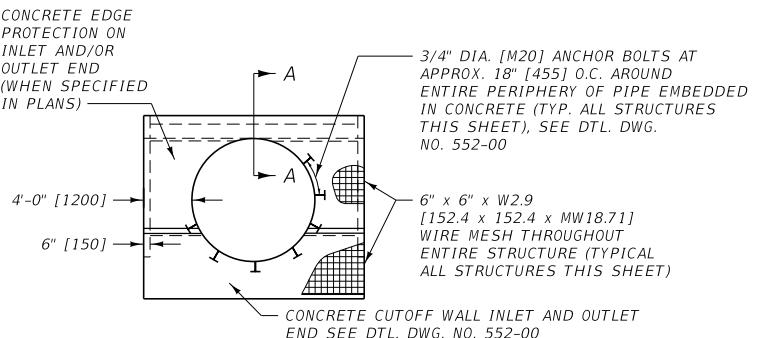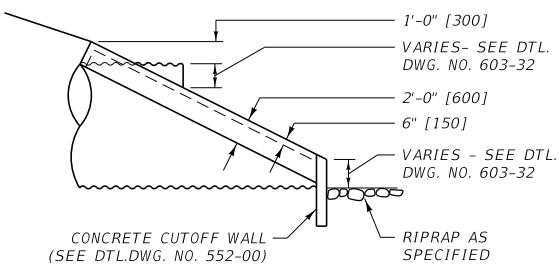

SIDE ELEVATION



FRONT ELEVATION

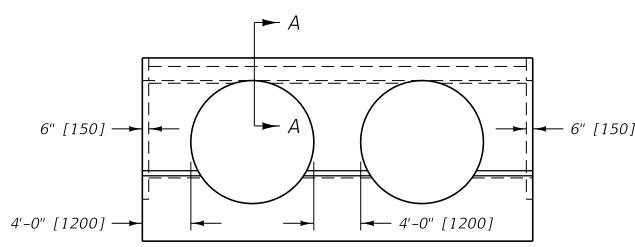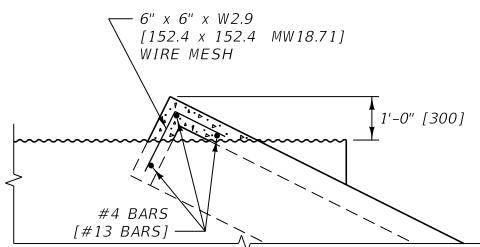

SECTION A-A



FRONT ELEVATION MULTIPLE PIPES

ARCH PIPE

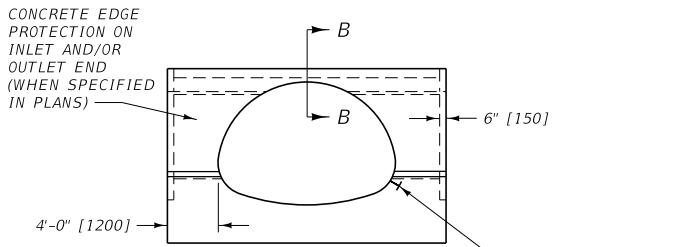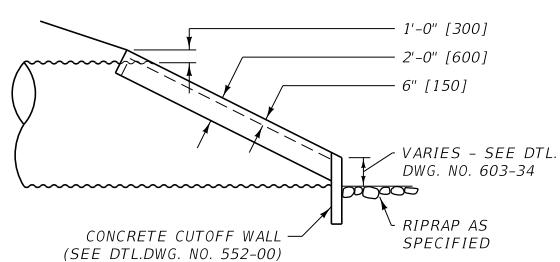

SIDE ELEVATION

FRONT ELEVATION

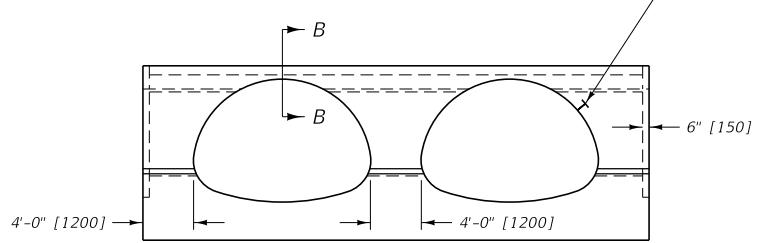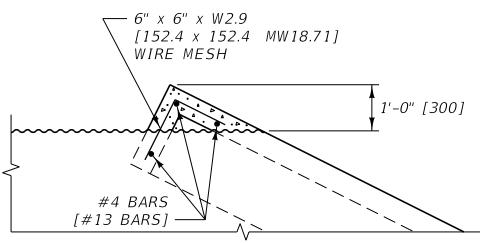

SECTION B-B

FRONT ELEVATION MULTIPLE PIPES



NOTE:
ALL CONCRETE IS CLASS
GENERAL OR EQUAL.

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.



DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 613, 603, 552	DWG. NO. 613-06
CONCRETE EDGE PROTECTION FOR METAL CULVERTS	

MDT MONTANA DEPARTMENT
OF TRANSPORTATION

ROUND PIPE
(FETS SHOWN)

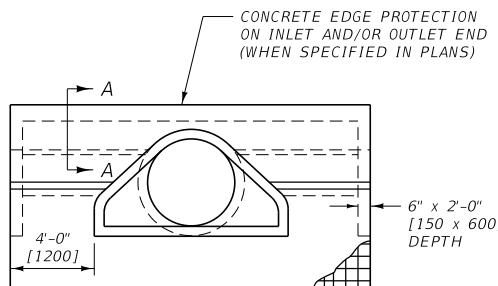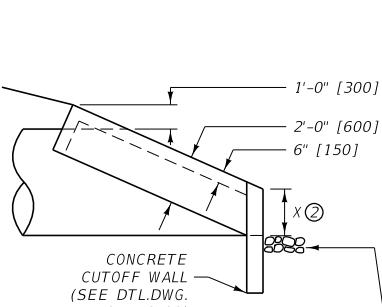

ARCH PIPE
(FETS SHOWN)

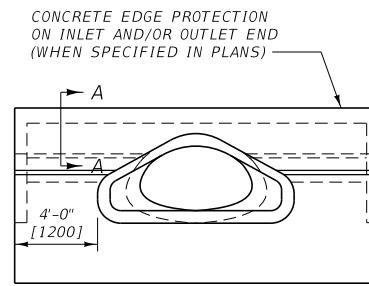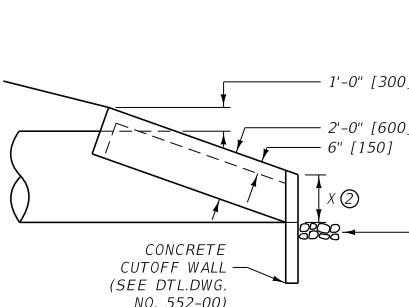


SIDE ELEVATION


FRONT ELEVATION

SIDE ELEVATION


FRONT ELEVATION

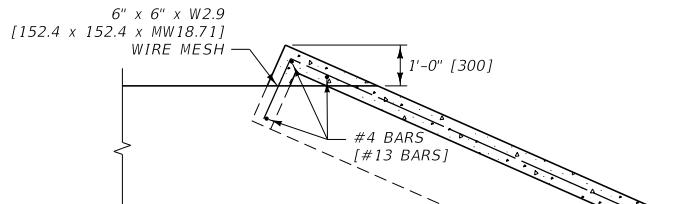

SECTION A-A

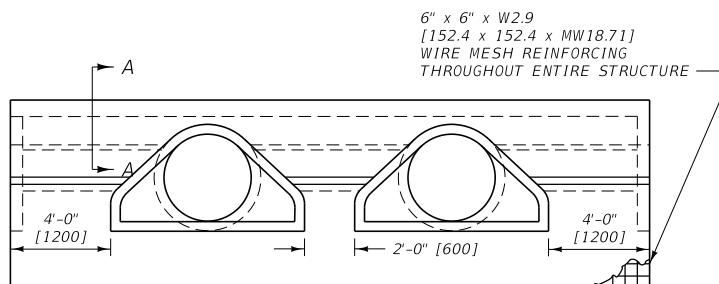

FRONT ELEVATION MULTIPLE PIPES

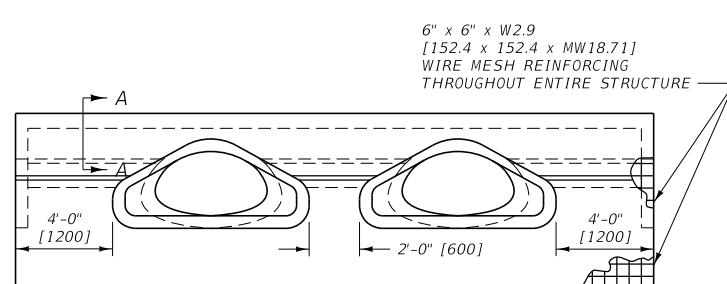

FRONT ELEVATION MULTIPLE PIPES

NOTES:



- ① ALL CONCRETE IS CLASS GENERAL CONCRETE OR EQUAL.
- ② SEE DTL. DWG. NO. 603-08 AND 603-10 FOR RCP AND RCPA CULVERTS WITH FETS. FOR RCP AND RCPA CULVERTS WITH SQUARE ENDS, THE "X" DIMENSION IS D/4 OR R/3.

CONCRETE CUTOFF WALL INLET AND OUTLET END SEE DTL. DWG. NO. 552-00 (WHEN SPECIFIED IN PLANS)

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 613-08
SECTION 613,603,552

CONCRETE EDGE PROTECTION
FOR CONCRETE CULVERTS

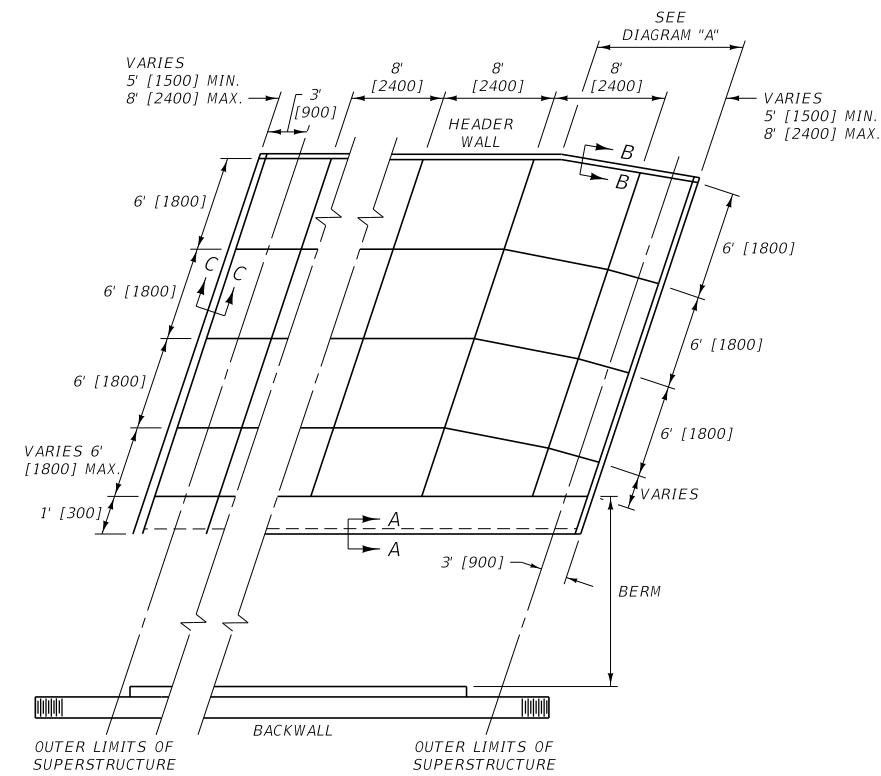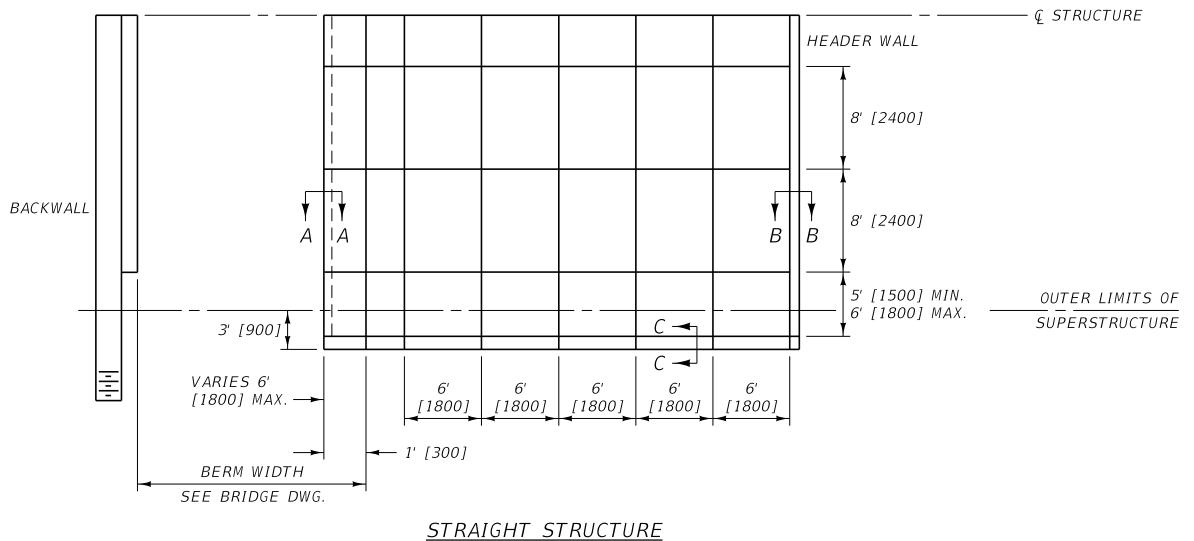

CAST-IN-PLACE CONCRETE:
LOCATE JOINTS AS INDICATED ON THE PLANS. IF CONSTRUCTION IS STOPPED FOR OVER TWO HOURS, CREATE A CONSTRUCTION JOINT. USE CLASS GENERAL CONCRETE FOR ALL CAST-IN-PLACE CONCRETE.








USE A 1/2" [13] EXPANSION JOINT FILLER PER SECTION 707 WHENEVER THE CAST-IN-PLACE CONCRETE ABUTS AGAINST ANY PART OF THE BRIDGE STRUCTURE.

CLEAR THE EMBANKMENT SLOPE OF ALL BRUSH, DEBRIS AND RUBBLE. A CUSHION IS NOT REQUIRED FOR GRAVEL EMBANKMENT SLOPES. FINISH ALL SLOPES TO THE SLOPE INDICATED IN THE BRIDGE PLANS. COMPACT ALL LOOSE MATERIAL. LEAVE THE ADJACENT SLOPE AREA IN A SMOOTH, UNIFORM CONDITION.

REINFORCING STEEL:
(MAY USE EITHER ALTERNATE LISTED BELOW)

1. #3 [#10] BARS AT 10" [250] O.C. (HORIZONTAL AND VERTICAL SPACING) MIN. COVER OF 2" [50]
2. 6" x 6" x W2.9 [152.4 x 152.4 x MW18.71] WIRE MESH

12" [300] OVERLAP REQUIRED AT CONSTRUCTION JOINTS FOR REINFORCING STEEL AND WIRE MESH.

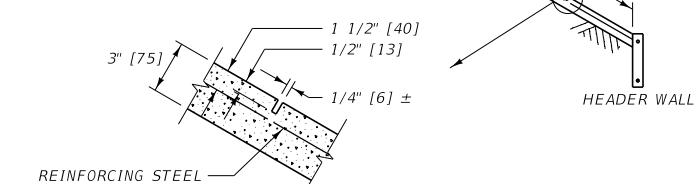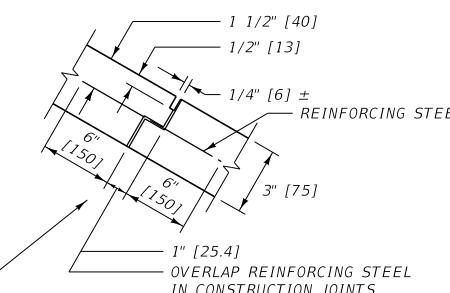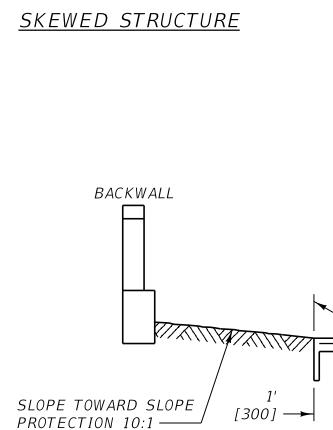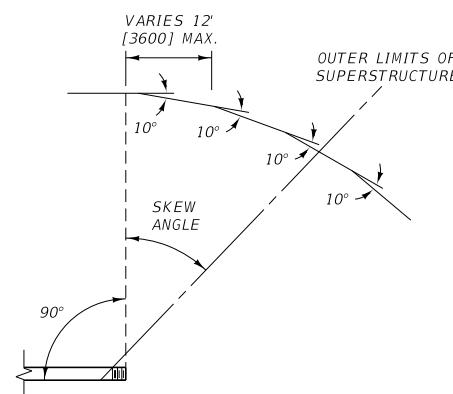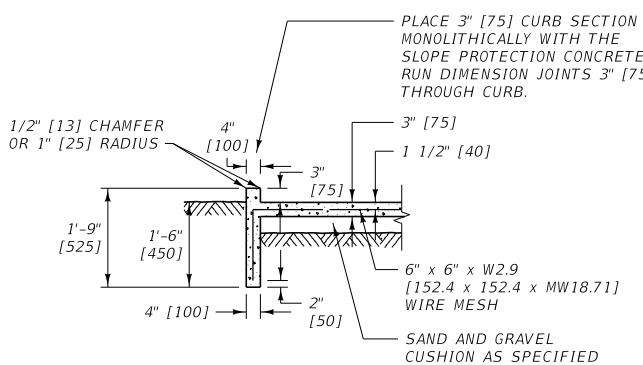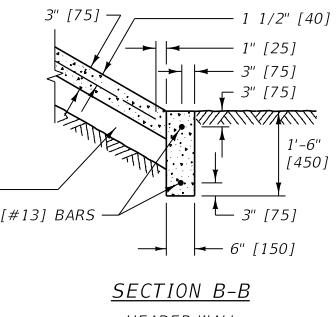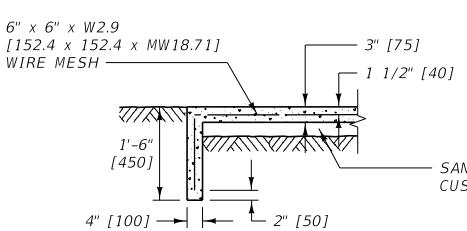

VERTICAL AND HORIZONTAL DIMENSION JOINT

6" [1800] VERTICAL SPACING OR AS NOTED.
8" [2400] HORIZONTAL SPACING OR AS NOTED.
JOINTS MAY BE SAWED, MADE WITH GROOVING TOOLS OR REMOVABLE INSERTS OF AN APPROVED TYPE.


VERTICAL AND HORIZONTAL CONSTRUCTION JOINT
USE AS NEEDED IN PLACING SLAB.
WHEN REQUIRED, USE IN LIEU OF A DIMENSION JOINT AT THE SAME SPACING AS A DIMENSION JOINT.

JOINTS MAY BE SAWED, MADE WITH GROOVING TOOLS OR REMOVABLE INSERTS OF AN APPROVED TYPE.

IF JOINTS ARE TO BE SAWED, SAW JOINTS JUST AFTER CONCRETE HAS SET BUT BEFORE UNCONTROLLED CRACKING OCCURS.



DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 613-10
SECTION 613, 707	
CONCRETE SLOPE PROTECTION	

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

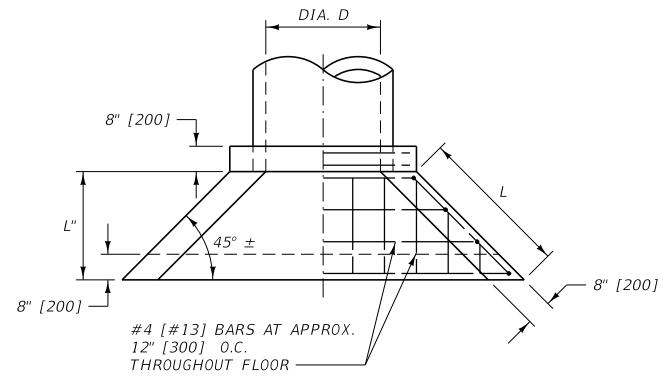

INLET AND OUTLET HEADWALLS FOR CMP											DIMENSION TABLE	
CULVERT		CL. GENERAL CONC. OR EQUAL (C.Y.)		* REBAR #4 (LB.)		DIMENSION TABLE						
DIA. D	AREA (SQ. FT.)	INLET	OUTLET	INLET	OUTLET	A	B	H	L	L"	F	L'
18"	1.77	0.73	0.59	70	60	1'-3"	1'-3"	2'-6"	2'-6"	1'-9"	6"	2'-2"
24"	3.14	0.91	0.76	83	73	1'-6"	1'-6"	3'-0"	3'-0"	2'-1"	6"	2'-6"
30"	4.91	1.06	0.95	109	93	1'-9"	1'-9"	3'-6"	3'-6"	2'-6"	6"	2'-10"
36"	7.07	1.68	1.11	127	108	2'-0"	2'-0"	4'-0"	4'-0"	2'-10"	6"	3'-2"
42"	9.62	2.10	1.40	153	125	2'-3"	2'-3"	4'-6"	4'-6"	3'-2"	6"	3'-6"
48"	12.57	2.32	1.66	178	149	2'-6"	2'-6"	5'-0"	5'-0"	3'-6"	6"	3'-10"

* FOR INFORMATION PURPOSES ONLY INCLUDE IN THE COST OF CLASS GENERAL CONCRETE

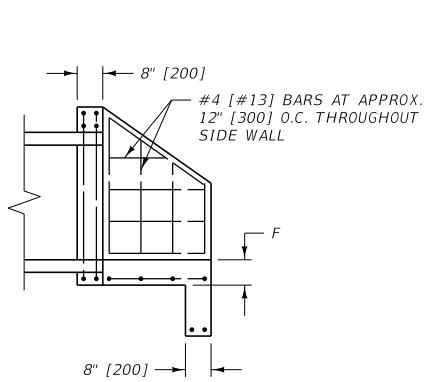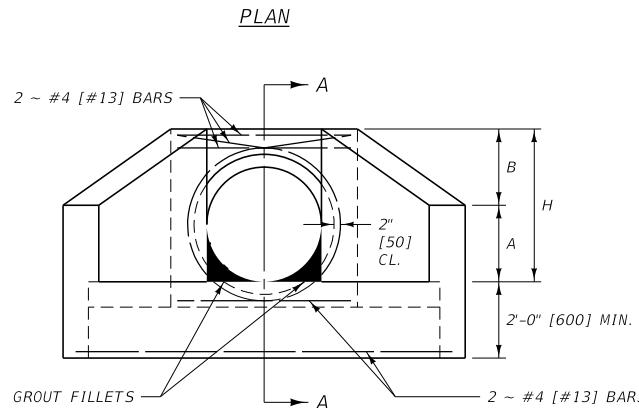

ELEVATION

INLET HEADWALL


CHAMFER ALL EXPOSED CORNERS 1" [25]. REINFORCING STEEL TO BE NOT LESS THAN 1 1/2" [40] TO NEAREST FACE OF CONCRETE.

INLET AND OUTLET HEADWALLS FOR RCP											DIMENSION TABLE	
CULVERT		CL. GENERAL CONC. OR EQUAL (C.Y.)		* REBAR #4 (LB.)		DIMENSION TABLE						
DIA. D	AREA (SQ. FT.)	INLET	OUTLET	INLET	OUTLET	A	B	H	L	L"	F	L'
18"	1.77	0.80	0.60	71	61	1'-3"	1'-3"	2'-6"	2'-6"	1'-9"	6 1/2"	2'-2"
24"	3.14	1.00	0.86	85	75	1'-6"	1'-6"	3'-0"	3'-0"	2'-1"	7"	2'-6"
30"	4.91	1.42	1.14	112	95	1'-9"	1'-9"	3'-6"	3'-6"	2'-6"	7 1/2"	2'-10"
36"	7.07	1.84	1.43	129	111	2'-0"	2'-0"	4'-0"	4'-0"	2'-10"	8"	3'-2"
42"	9.62	2.12	1.73	156	128	2'-3"	2'-3"	4'-6"	4'-6"	3'-2"	8 1/2"	3'-6"
48"	12.57	2.34	2.07	182	152	2'-6"	2'-6"	5'-0"	5'-0"	3'-6"	9"	3'-10"


* FOR INFORMATION PURPOSES ONLY INCLUDE IN THE COST OF CLASS GENERAL CONCRETE

METRIC INLET AND OUTLET HEADWALLS FOR RCP											METRIC DIMENSION TABLE (mm)	
CULVERT		CL. GENERAL CONC. OR EQUAL (m ³)		* REBAR #13 (kg)		METRIC DIMENSION TABLE (mm)						
DIA. D	AREA	INLET	OUTLET	INLET	OUTLET	A	B	H	L	L"	F	L'
450	0.164	0.7	0.5	32	28	400	400	800	750	550	200	650
600	0.292	0.8	0.6	38	34	450	450	900	650	650	200	750
750	0.456	1.1	0.8	51	43	550	550	1100	1050	750	200	850
900	0.657	1.4	1.0	59	50	600	600	1200	1200	850	250	950
1050	0.894	1.7	1.2	71	58	700	700	1400	1350	950	250	1050
1200	1.167	2.0	1.4	82	69	750	750	1500	1500	1050	250	1150


* FOR INFORMATION PURPOSES ONLY INCLUDE IN THE COST OF CLASS GENERAL CONCRETE

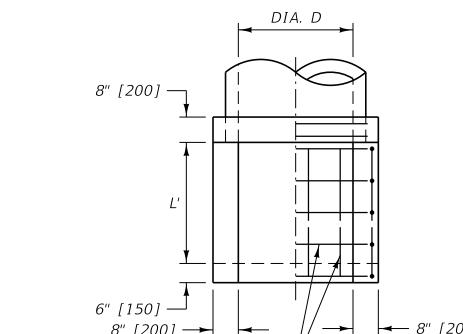

PLAN

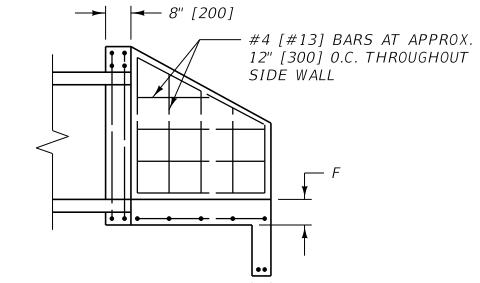

SECTION B-B

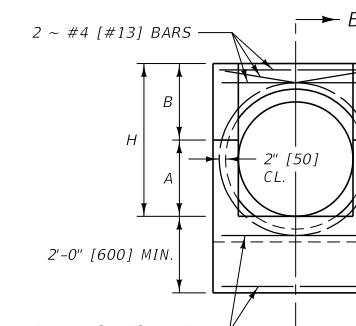

ELEVATION



OUTLET HEADWALL

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 613-12
SECTION 613

INLET AND OUTLET
HEADWALLS FOR
RCP AND CMP PIPES

MDT MONTANA DEPARTMENT OF TRANSPORTATION

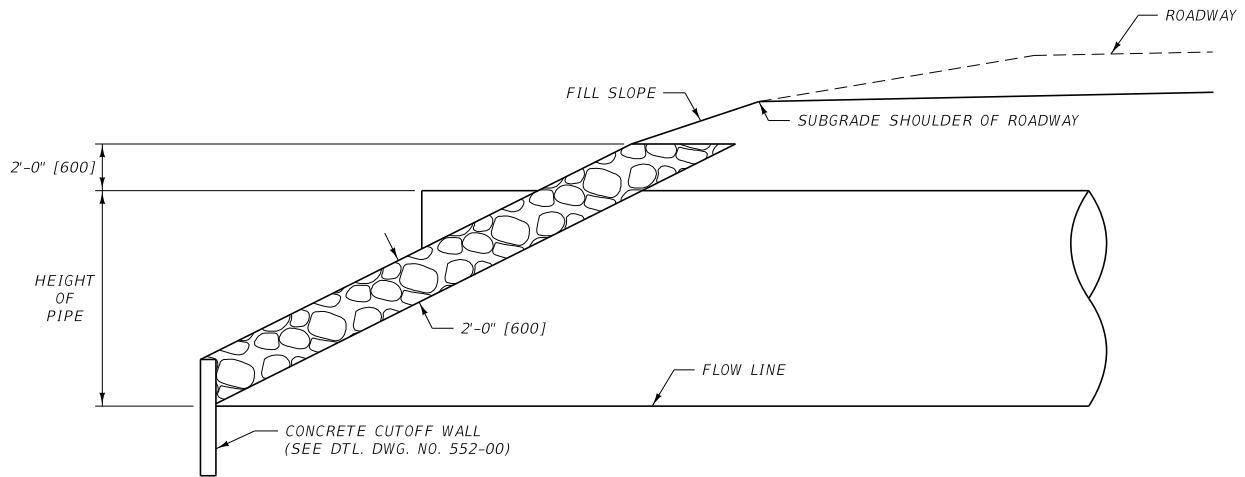
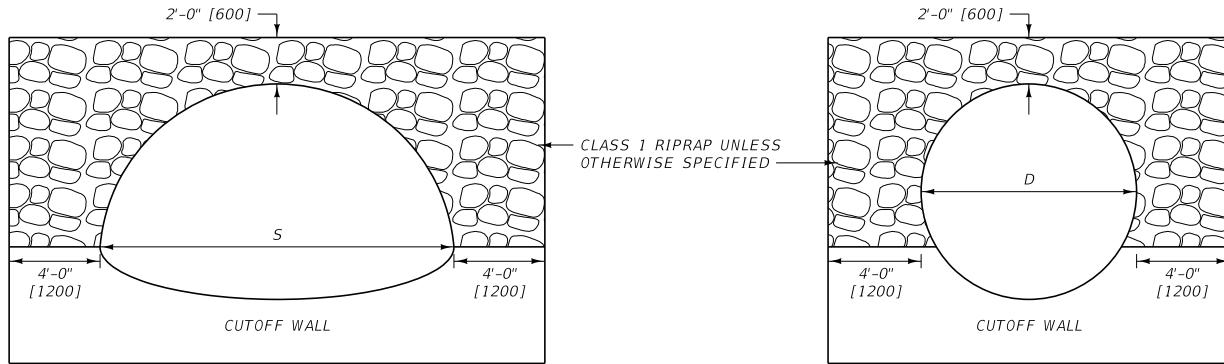


NOTES:

- ① CULVERT RIPRAP IS ONLY USED IN SPECIAL CIRCUMSTANCES.
- ② KEY ENDS OF RIPRAP WALLS INTO THE EMBANKMENT SLOPES A MINIMUM OF 2 FEET [600 mm] FROM OUTER FACE OF THE RIPRAP FOR THE FULL HEIGHT OF THE RIPRAP WALL.

DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	613-14
SECTION 613	
CULVERT RIPRAP	
 MONTANA DEPARTMENT OF TRANSPORTATION	

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

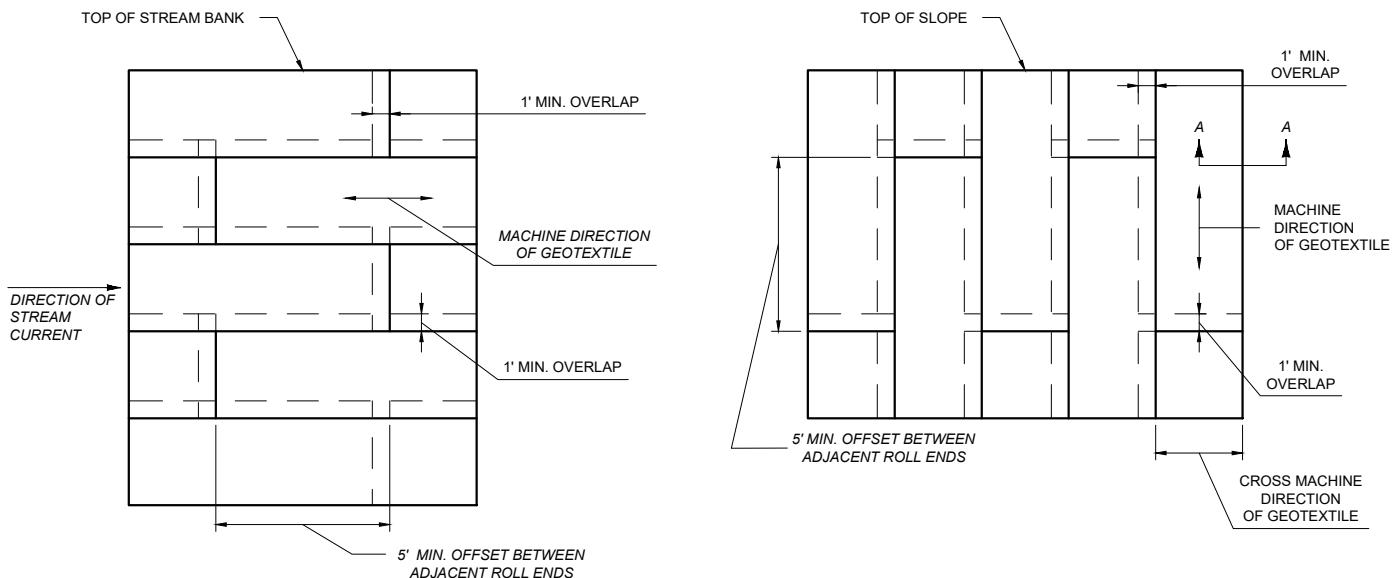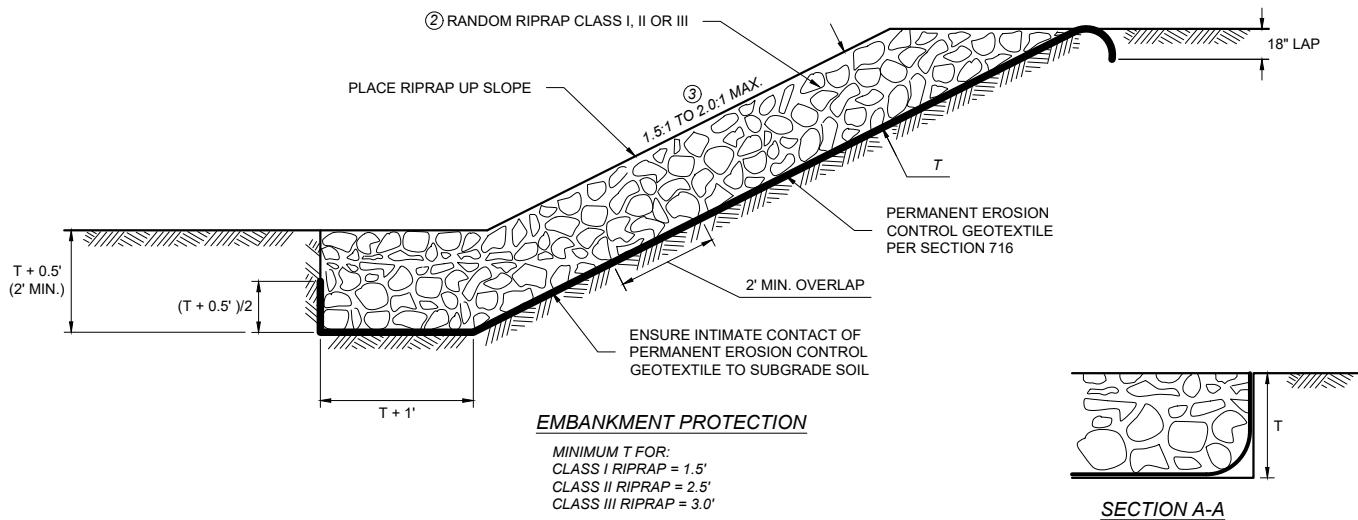

GEOTEXTILE PLACEMENT DETAIL

METHOD FOR PLACING PERMANENT EROSION CONTROL GEOTEXTILE FOR PROTECTION OF STREAM BANKS

GEOTEXTILE PLACEMENT DETAIL

METHOD FOR PLACING PERMANENT EROSION CONTROL GEOTEXTILE FOR PROTECTION OF CUT AND FILL SLOPES

NOTES:

- ① INSTALL PERMANENT EROSION CONTROL GEOTEXTILE PER SECTION 622.
- ② ONLY RANDOM RIPRAP CLASS II OR LARGER IS ALLOWED FOR RIPRAP SLOPE PROTECTION AT BRIDGES.
- ③ 2.0:1 MAX ALLOWED FOR RIPRAP SLOPE PROTECTION AT BRIDGES.

DETAILED DRAWINGS

REFERENCE	DWG. NO.
STANDARD SPEC.	613-16
SECTION	613, 622

RIPRAP SLOPE PROTECTION

EFFECTIVE: JAN 23, 2020




--REVISED--
JAN 15, 2026


12/12/2025 2:20 PM

STDDRD613016.DWG

RIPRAP & GROUTED RIPRAP DRAINAGE CHUTE

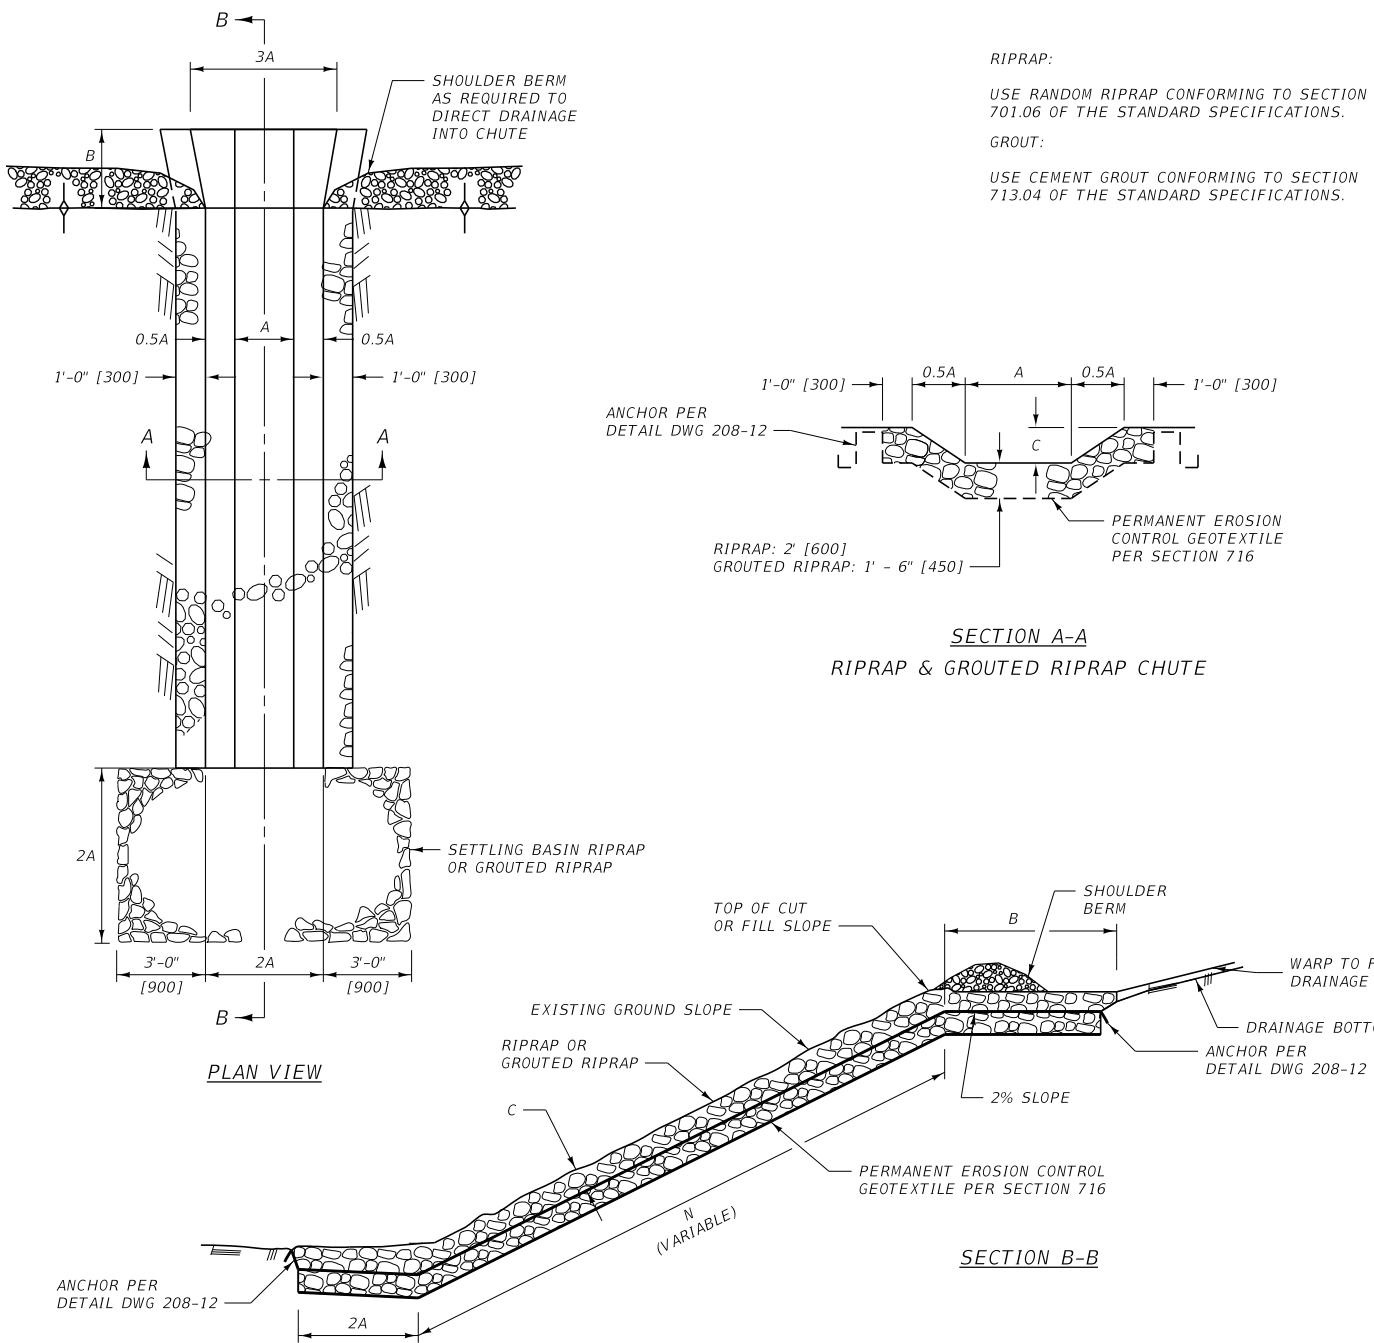

TURF REINFORCEMENT MAT DRAINAGE CHUTE

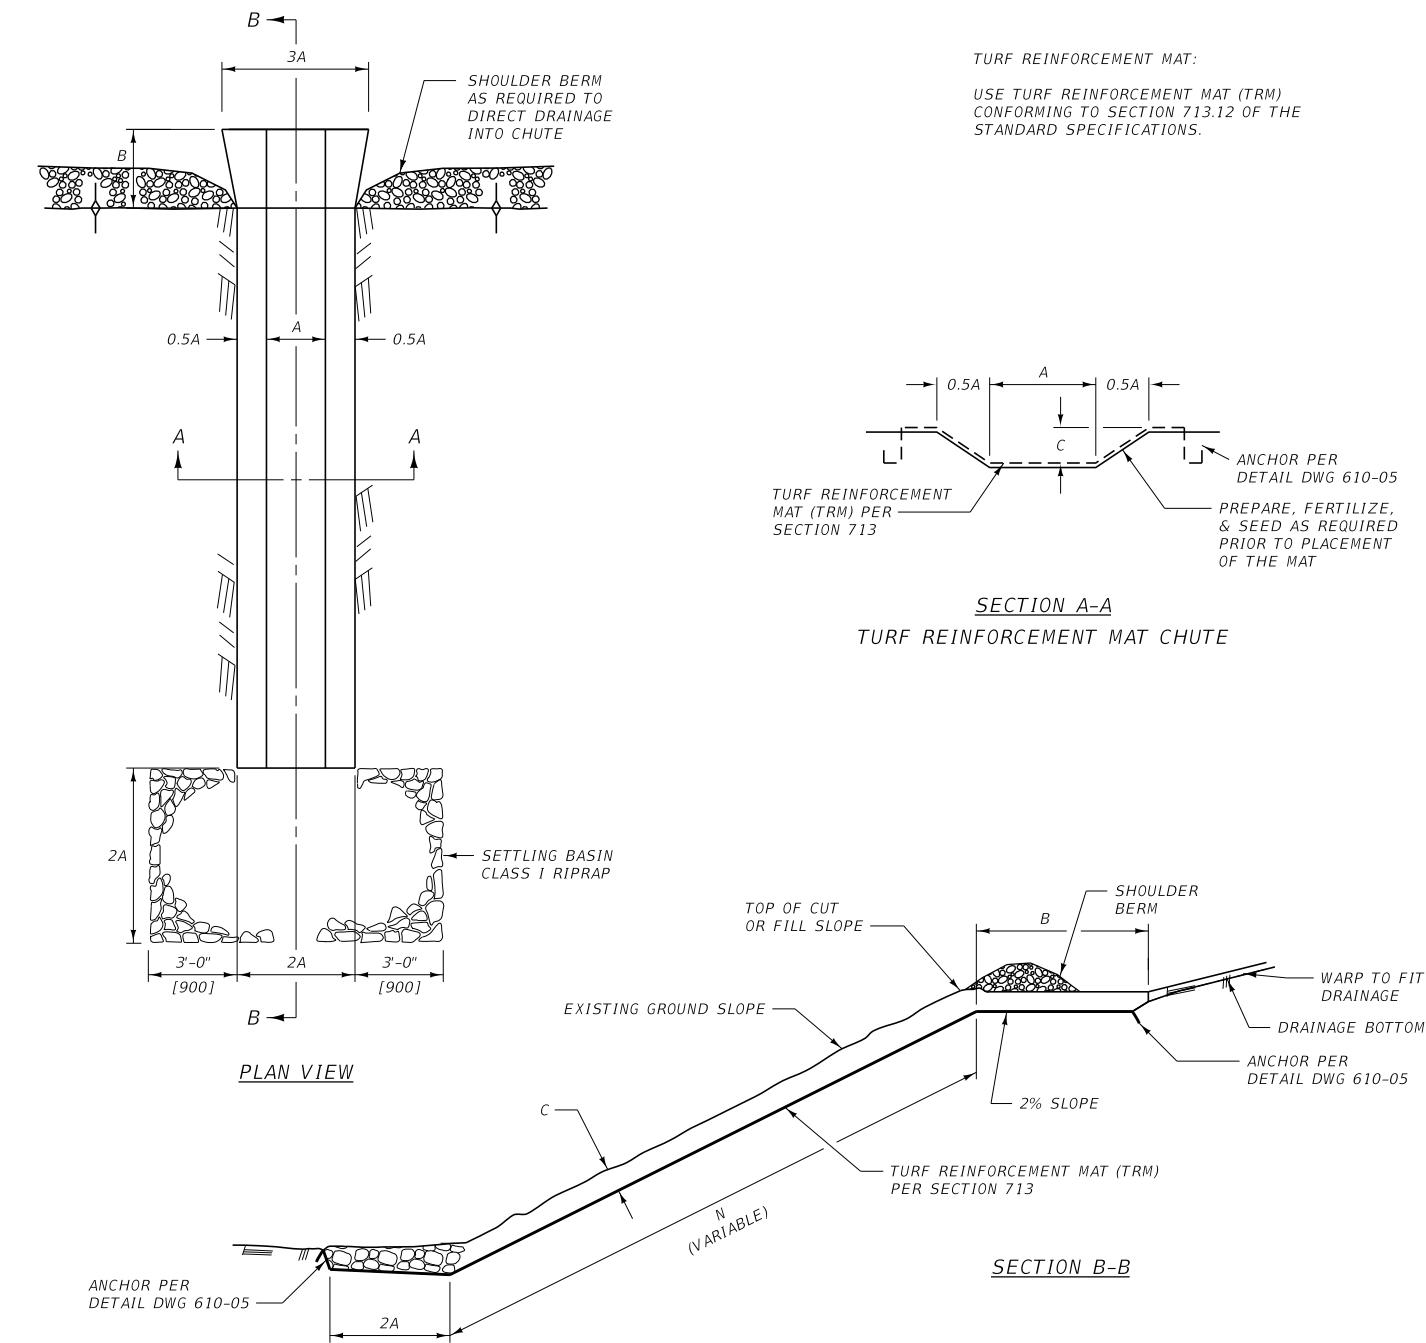


TYPE	DIMENSIONS			RIPRAP CLASS	QUANTITIES			
	A	B	C		RIPRAP	GROUTED RIPRAP	TURF REINFORCEMENT MAT	ADD. RIPRAP FOR TRM CHUTES
1	2'-0"	4'-0"	1'-0"	I	5.23 C.Y. + (N x 0.506) C.Y./L.F.	* 7.84 S.Y. + (N x 0.759) S.Y./L.F.	6.96 S.Y. + (N x 0.537) S.Y./L.F.	* 1.5 C.Y.
2	2'-0"	4'-0"	1'-6"	I	5.42 C.Y. + (N x 0.563) C.Y./L.F.	* 8.13 S.Y. + (N x 0.845) S.Y./L.F.	7.25 S.Y. + (N x 0.623) S.Y./L.F.	* 2.2 C.Y.
3	4'-0"	8'-0"	1'-6"	II	15.86 C.Y. + (N x 0.815) C.Y./L.F.	* 23.80 S.Y. + (N x 1.222) S.Y./L.F.	22.02 S.Y. + (N x 1.000) S.Y./L.F.	* 9.8 C.Y.
4	4'-0"	8'-0"	2'-0"	II	16.18 C.Y. + (N x 0.863) C.Y./L.F.	* 24.27 S.Y. + (N x 1.295) S.Y./L.F.	22.49 S.Y. + (N x 1.073) S.Y./L.F.	* 13.0 C.Y.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

TYPE	METRIC DIMENSIONS			RIPRAP CLASS	METRIC QUANTITIES			
	A	B	C		RIPRAP	GROUTED RIPRAP	TURF REINFORCEMENT MAT	ADD. RIPRAP FOR TRM CHUTES
1	600	1200	300	I	3.81 m ³ + (N x 1.229) m ³ /m	* 6.35 m ² + (N x 2.049) m ² /m	5.63 m ² + (N x 1.449) m ² /m	* 1.2 m ³
2	600	1200	450	I	3.95 m ³ + (N x 1.369) m ³ /m	* 6.59 m ² + (N x 2.282) m ² /m	5.87 m ² + (N x 1.682) m ² /m	* 1.7 m ³
3	1200	2400	450	II	11.57 m ³ + (N x 1.980) m ³ /m	* 19.28 m ² + (N x 3.300) m ² /m	17.84 m ² + (N x 2.700) m ² /m	* 7.5 m ³
4	1200	2400	600	II	11.79 m ³ + (N x 2.098) m ³ /m	* 19.66 m ² + (N x 3.497) m ² /m	18.22 m ² + (N x 2.897) m ² /m	* 10.0 m ³

* USE CLASS-I RIPRAP FOR ALL GROUTED RIPRAP TYPES & TRM CHUTES

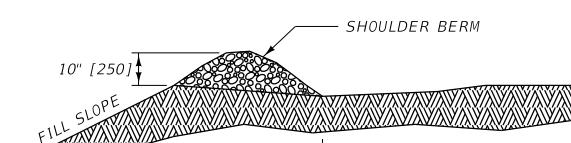


SHOULDER BERM DETAIL (TYP. FOR ALL TYPES)


INLET CONDITIONS (TYP. FOR ALL TYPES):

DEPRESS THE INLET BELOW THE NATURAL DRAINAGE BOTTOM TO PREVENT FLOW FROM BYPASSING THE DRAINAGE CHUTE.


REFERENCE STANDARD SPEC.	DWG. NO. 613-18
SECTION 613,701,713,716	

DRAINED CHUTES

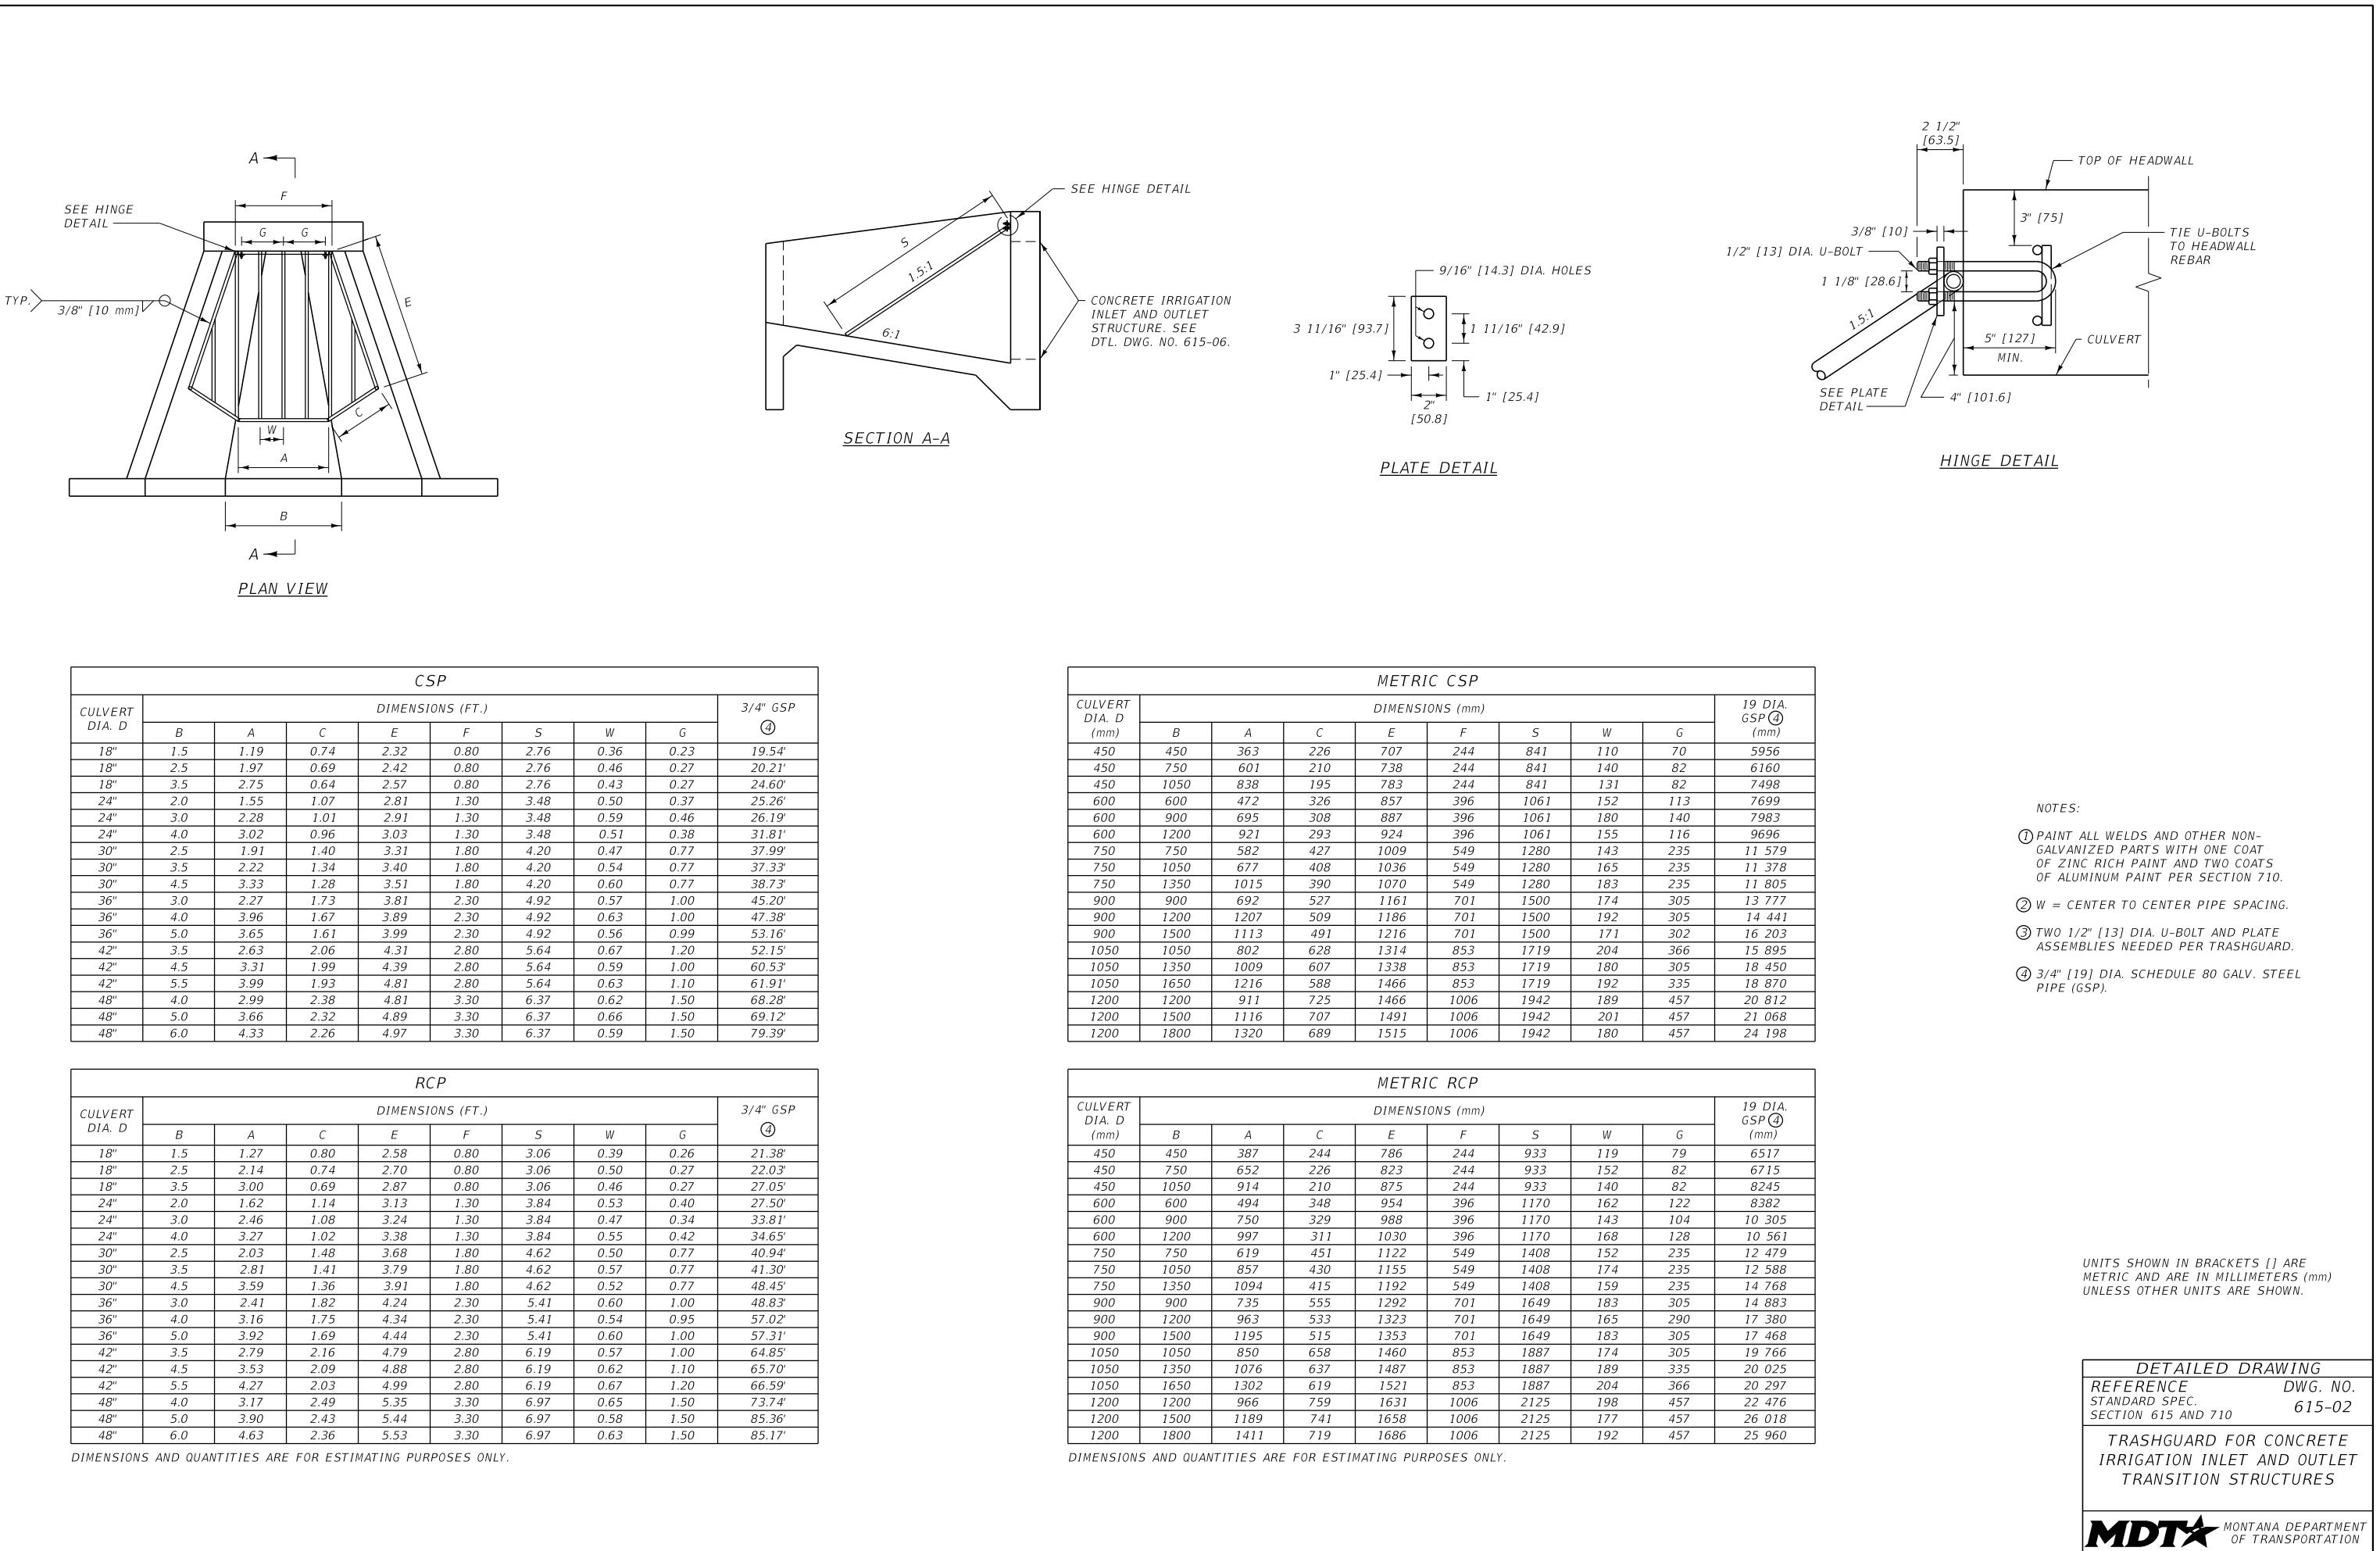


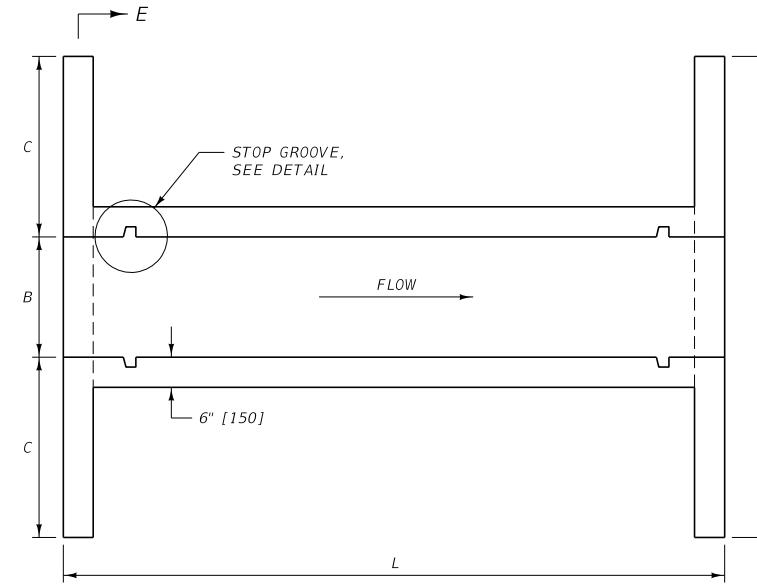


PLAN
TYPE I

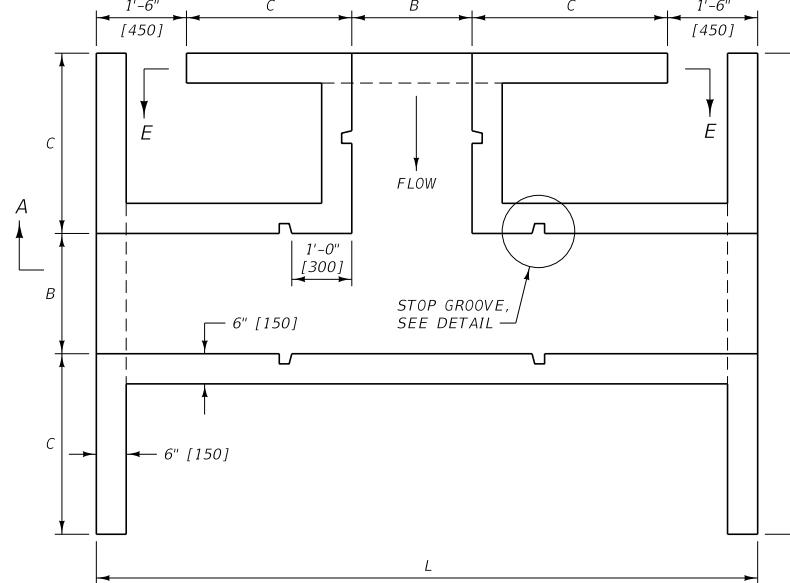


PLAN
TYPE III

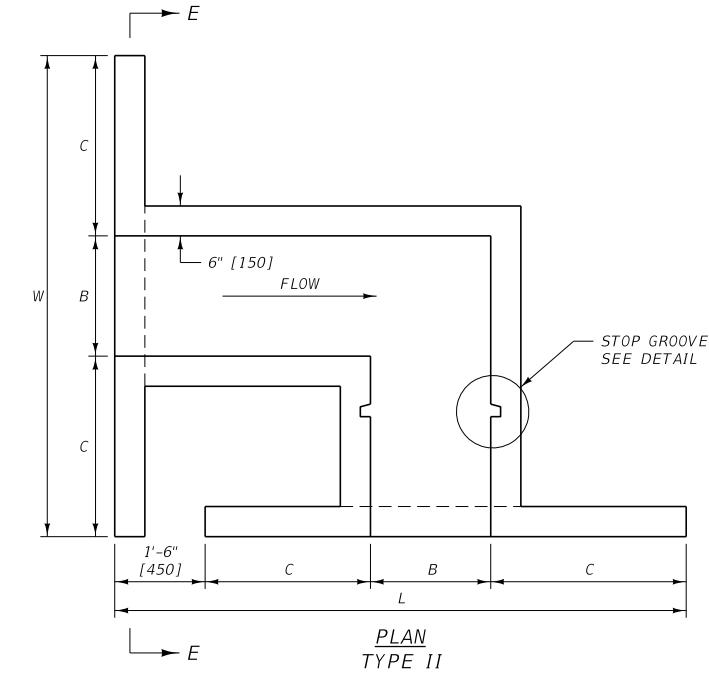


PLAN
TYPE II

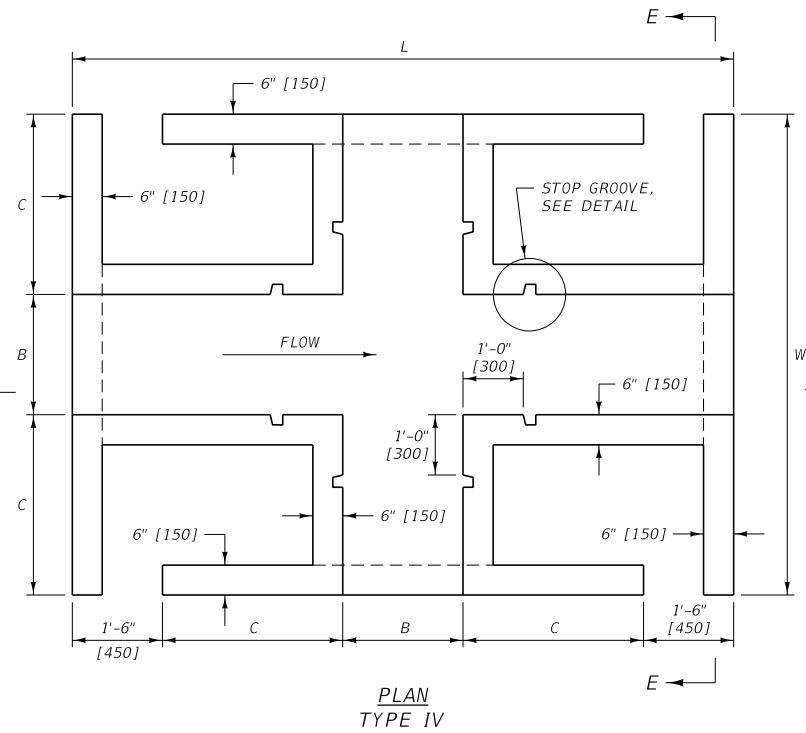


PLAN
TYPE IV

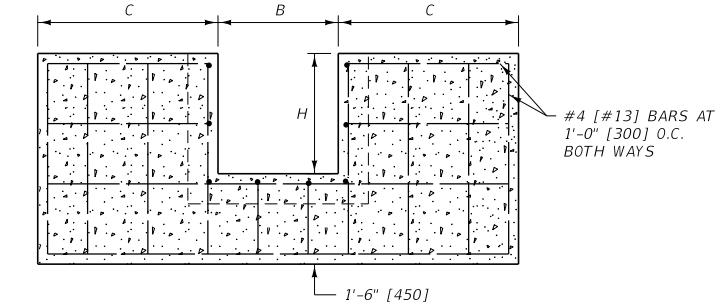


SECTION E-E

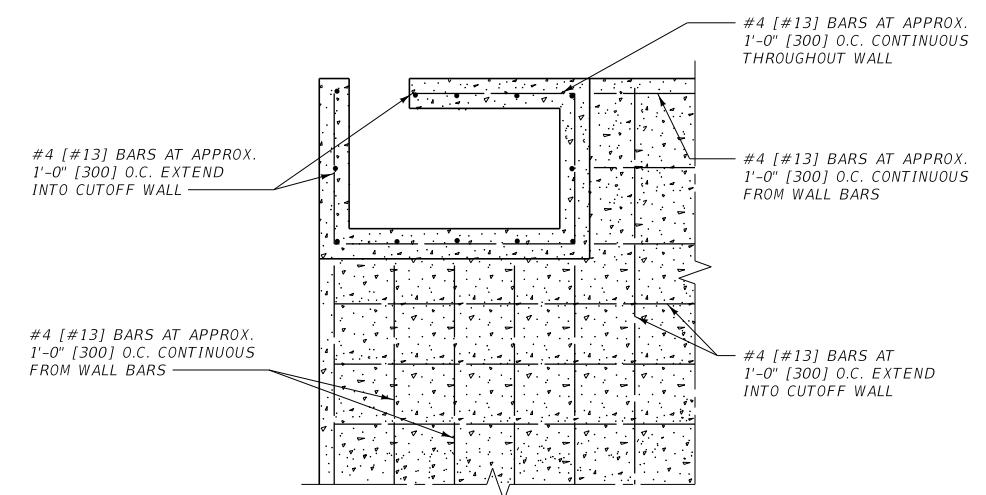

SECTION F-F

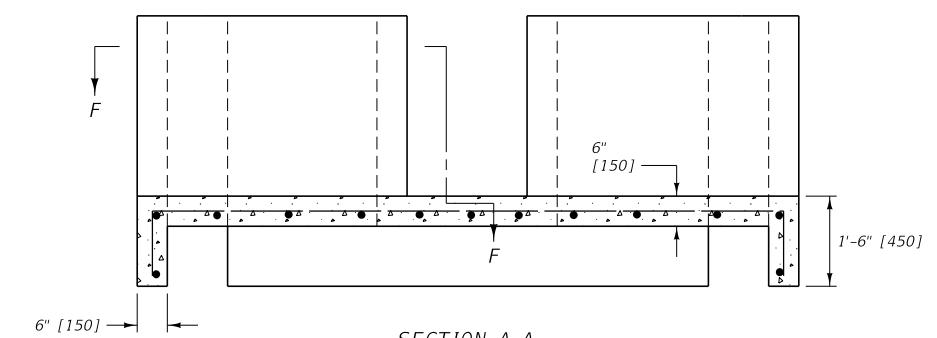

SECTION A-A

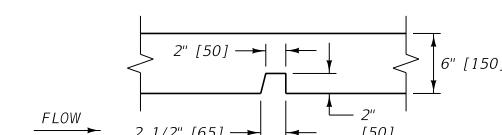

STOP GROOVE DETAIL

	DIMENSIONS AND QUANTITIES						
	B	C	H	L	W	CL. GENERAL CONC. OR EQUAL (C.Y.)	REINFORCING STEEL (LB.)
TYPE I	2'-0"	3'-0"	2'-0"	6'-0"	8'-0"	1.5	114.0
	2'-6"	3'-6"	2'-0"	6'-0"	9'-6"	1.7	124.4
	3'-0"	4'-0"	2'-6"	6'-0"	11'-0"	2.2	129.0
TYPE II	2'-0"	3'-0"	2'-0"	9'-6"	8'-0"	2.0	152.0
	2'-6"	3'-6"	2'-0"	11'-0"	9'-6"	2.4	190.0
	3'-0"	4'-0"	2'-6"	12'-6"	11'-0"	3.3	250.8
TYPE III	2'-0"	3'-0"	2'-0"	11'-0"	8'-0"	2.8	212.8
	2'-6"	3'-6"	2'-0"	12'-6"	9'-6"	3.4	258.4
	3'-0"	4'-0"	2'-6"	14'-0"	11'-0"	4.6	349.6
TYPE IV	2'-0"	3'-0"	2'-0"	11'-0"	8'-0"	3.4	266.0
	2'-6"	3'-6"	2'-0"	12'-6"	9'-6"	4.2	319.2
	3'-0"	4'-0"	2'-6"	14'-0"	11'-0"	5.6	425.6

	METRIC DIMENSIONS AND QUANTITIES						
	B (mm)	C (mm)	H (mm)	L (mm)	W (mm)	CL. GENERAL CONC. OR EQUAL(m ³)	REINF. STEEL (kg)
TYPE I	600	900	600	1850	2400	1.1	54.7
	750	1050	600	1850	2850	1.3	60.7
	900	1200	750	1850	3300	1.6	80.2
TYPE II	600	900	600	2850	2400	1.4	69.8
	750	1050	600	3300	2850	1.8	84.2
	900	1200	750	3750	3300	2.4	118.1
TYPE III	600	900	600	3300	2400	2.0	98.7
	750	1050	600	3750	2850	2.5	117.6
	900	1200	750	4200	3300	3.3	164.3
TYPE IV	600	900	600	3300	2400	2.5	121.1
	750	1050	600	3750	2850	3.0	144.4
	900	1200	750	4200	3300	4.1	201.9

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


NOTES:

- ① MODIFY DIVISION BOX DIMENSIONS IF REQUIRED IN THE PLANS.
- ② QUANTITIES ARE FOR ESTIMATING PURPOSES ONLY.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 615-04
SECTION 552,615


STANDARD CONCRETE
IRRIGATION DIVISION BOXES

INLET AND OUTLET TRANSITION

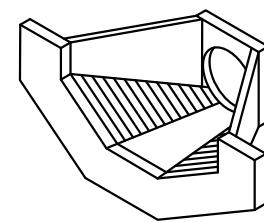


ISOMETRIC VIEW OF TRANSITION

PLACE REBAR IN CENTER OF WALLS,
SLAB, ETC. UNLESS OTHERWISE
SPECIFIED.

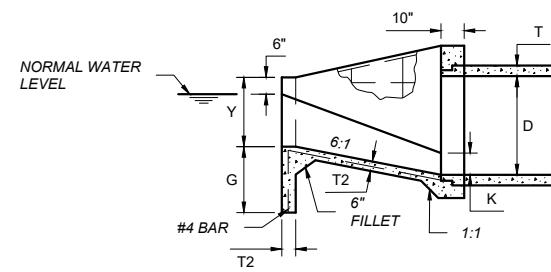


SECTION B-B


SPACE REINFORCING BARS APPROX.
12" EACH WAY THROUGHOUT
STRUCTURE. USE CONTINUOUS BARS
IN FLOORS AND WALLS WHENEVER
POSSIBLE. WHEN SPLICES ARE MADE,
LAP REINFORCING BAR 1'-6".

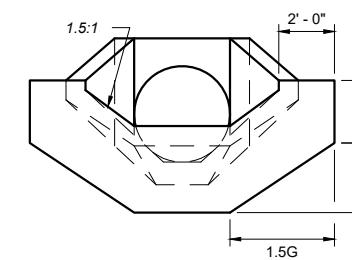


ELEVATION

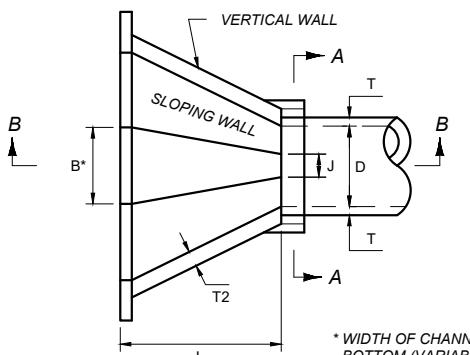

PLAN VIEW

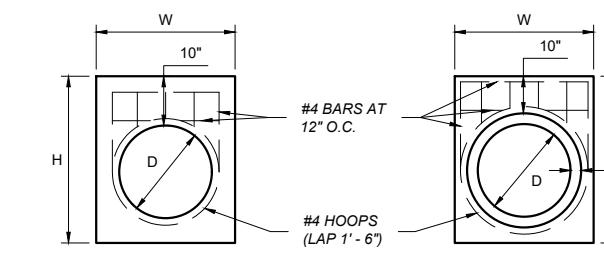

SECTION A-A
FOR CSP

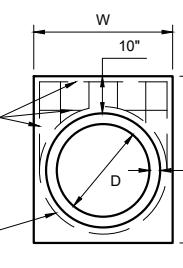

SECTION A-A
FOR RCP

CHAMFER ALL EXPOSED
CORNERS TO 1".

INLET AND OUTLET CONCRETE TRANSITIONS FOR CSP

CULVERT		DIMENSIONS								QUANTITIES								
										B = D				B = D + 1'-0"				B = D + 2'-0"
DIA. D	AREA (SQ. FT.)	J	H	L	T2	W	K	Y	G	B	CL GEN CONC. (C.Y.)	#4 REBAR (LB.)	B	CL GEN CONC. (C.Y.)	#4 REBAR (LB.)	B	CL GEN CONC. (C.Y.)	#4 REBAR (LB.)
18"	1.77	0.61'	4'-0"	4'-0"	6"	3'-3"	0.46'	1'-6"	2'-0"	2'-0"	1.2	94	3'-0"	1.3	103	4'-0"	1.4	112
24"	3.14	0.61'	4'-0"	4'-0"	6"	3'-3"	0.46'	1'-6"	2'-0"	2'-0"	1.2	94	3'-0"	1.3	103	4'-0"	1.4	112
30"	4.91	0.76'	4'-6"	5'-0"	6"	3'-9"	0.58'	1'-9"	2'-0"	2'-6"	1.6	124	3'-6"	1.7	134	4'-6"	1.8	144
36"	7.07	0.91'	5'-1"	6'-0"	6"	4'-3"	0.70'	2'-0"	2'-6"	3'-0"	2.1	162	4'-0"	2.2	173	5'-0"	2.3	184
42"	9.62	1.10'	5'-8"	7'-0"	6"	4'-9"	0.81'	2'-3"	2'-6"	3'-6"	2.6	200	4'-6"	2.7	212	5'-6"	2.9	225
48"	12.57	1.20'	6'-3"	8'-0"	8"	5'-3"	0.93'	2'-6"	2'-6"	4'-0"	4.1	245	5'-0"	4.3	259	6'-0"	4.4	272

INLET AND OUTLET CONCRETE TRANSITIONS FOR RCP

CULVERT		DIMENSIONS								QUANTITIES									
										B = D				B = D + 1'-0"				B = D + 2'-0"	
DIA. D	AREA (SQ. FT.)	J	H	L	T	T2	W	K	Y	G	B	CL GEN CONC. (C.Y.)	#4 REBAR (LB.)	B	CL GEN CONC. (C.Y.)	#4 REBAR (LB.)	B	CL GEN CONC. (C.Y.)	#4 REBAR (LB.)
18"	1.77	0.61'	4'-3"	4'-0"	3"	6"	3'-9"	0.46'	1'-6"	2'-0"	2'-0"	1.2	98	3'-0"	1.3	107	4'-0"	1.4	116
24"	3.14	0.61'	4'-3"	4'-0"	3"	6"	3'-9"	0.46'	1'-6"	2'-0"	2'-0"	1.2	98	3'-0"	1.3	107	4'-0"	1.4	116
30"	4.91	0.76'	4'-10"	5'-0"	3 1/2"	6"	4'-4"	0.58'	1'-9"	2'-0"	2'-6"	1.7	128	3'-6"	1.8	138	4'-6"	1.9	149
36"	7.07	0.91'	5'-6"	6'-0"	4"	6"	4'-11"	0.70'	2'-0"	2'-6"	3'-0"	2.2	168	4'-0"	2.3	179	5'-0"	2.4	190
42"	9.62	1.10'	6'-1"	7'-0"	4 1/2"	6"	5'-6"	0.81'	2'-3"	2'-6"	3'-6"	2.7	212	4'-6"	2.8	224	5'-6"	2.9	237
48"	12.57	1.20'	6'-8"	8'-0"	5"	8"	6'-1"	0.93'	2'-6"	2'-6"	4'-0"	4.2	254	5'-0"	4.3	267	6'-0"	4.6	280

NOTES:

① INSTALL STRUCTURES OUTSIDE THE CLEAR ZONE.

② PROVIDE TRASHGUARDS WHEN REQUIRED. SEE DTL.
DWG. NO. 615-02.

③ ALTERNATIVE DESIGNS TO BE CONSIDERED FOR PIPES
30" DIAMETER AND LARGER.

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 615-06
SECTION 615


CONCRETE IRRIGATION
INLET AND OUTLET
TRANSITION FOR RCP AND
CSP PIPES

EFFECTIVE: JAN 23, 2020





11/29/2025 8:43 AM STDDR615006.DWG

REVISED--
JAN 15, 2026

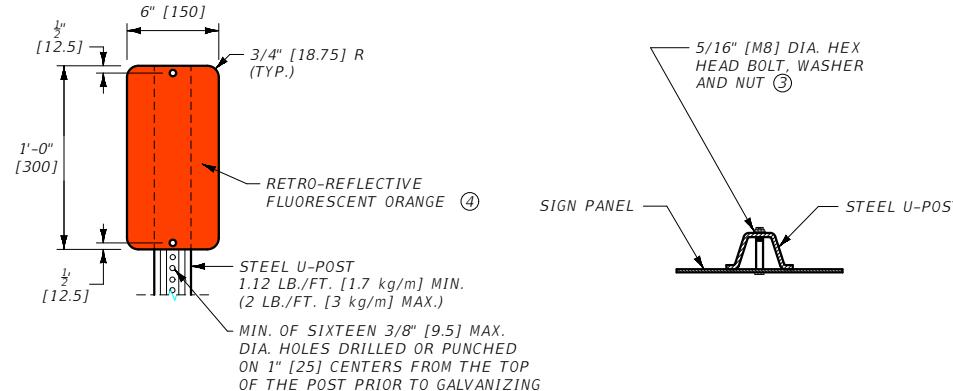

TYPE 2 OBJECT MARKER

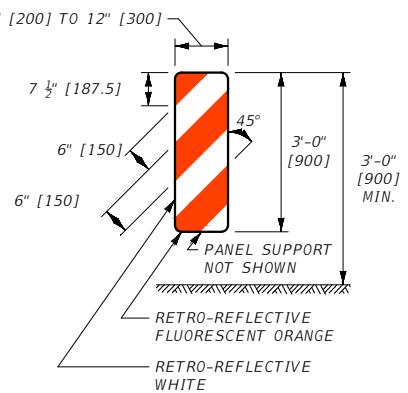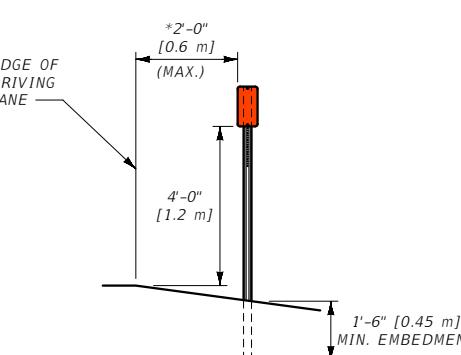

PORTABLE VERTICAL PANEL
(VP-IR SHOWN. REVERSE FOR VP-1L.)


TYPE 2 OBJECT MARKER NOTES:

- ① USE TYPE 2 OBJECT MARKERS TO DELINEATE ROADSIDE CONSTRICIONS OF THE CLEAR ZONE (i.e. DROP OFFS, OBSTACLES, ABRUPT CHANGES IN ROADWAY ALIGNMENT, ETC.)
- ② DO NOT USE TYPE 2 OBJECT MARKERS AS CHANNELIZING DEVICES.
- ③ ATTACH PANELS TO POSTS AT BOTH TOP AND BOTTOM HOLE LOCATIONS.
- ④ USE RETRO-REFLECTIVE SHEETING AS PER THE CONTRACT.


* REDUCE OR ELIMINATE THE 2'-0" [0.6 m] DISTANCE WHEN OBSTACLE OR HAZARD IS LESS THAN 2'-0" [0.6 m] FROM THE EDGE OF THE DRIVING LANE.

PORTABLE VERTICAL PANEL NOTES:


- ① USE PORTABLE VERTICAL PANELS AS CHANNELIZING DEVICES ONLY. DO NOT USE PORTABLE VERTICAL PANELS TO DELINEATE ROADSIDE CONSTRICIONS OF THE CLEAR ZONE.
- ② VERTICAL PANELS DESIGNATED "R" ARE PLACED TO THE RIGHT SIDE OF APPROACHING TRAFFIC. THOSE DESIGNATED "L" ARE PLACED TO THE LEFT SIDE.
- ③ USE RETRO-REFLECTIVE SHEETING AS PER THE CONTRACT.

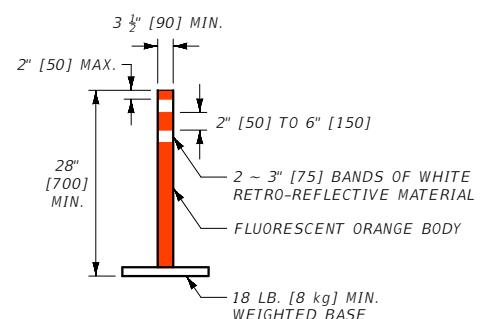

FLEXIBLE GUIDE POST
(TUBULAR MARKER)

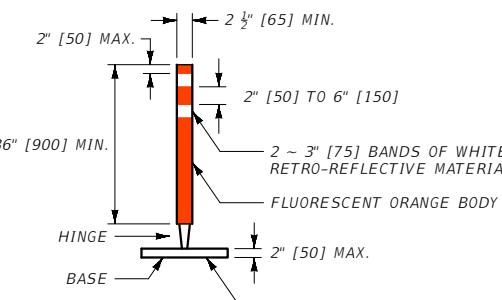

HINGED FLEXIBLE GUIDE POST
(TUBULAR MARKER)
(SELF RIGHTING AFTER IMPACT)

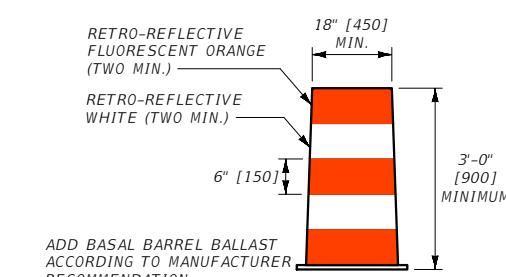

PLASTIC DRUM


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 618-00
SECTION 618

CHANNELIZING DEVICES AND OBJECT MARKERS

EFFECTIVE: JAN 23, 2020

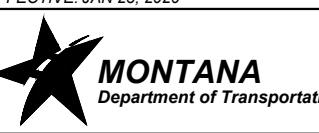







FLEXIBLE GUIDE POST AND PLASTIC DRUM NOTES:

- ① USE FLEXIBLE GUIDE POSTS AND PLASTIC DRUMS AS CHANNELIZING DEVICES.
- ② USE ASTM TYPE III RETRO-REFLECTIVE SHEETING ON ALL PLASTIC DRUMS AND FLEXIBLE GUIDE POSTS.
- ③ USE ONE SIZE GUIDE POST FOR CONTINUOUS RUNS.



GENERAL NOTES:

- ① SEE THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) PART 6 FOR ADDITIONAL INFORMATION.



-REVISED-
APR 28, 2022
JUN 27, 2024
JUN 26, 2025

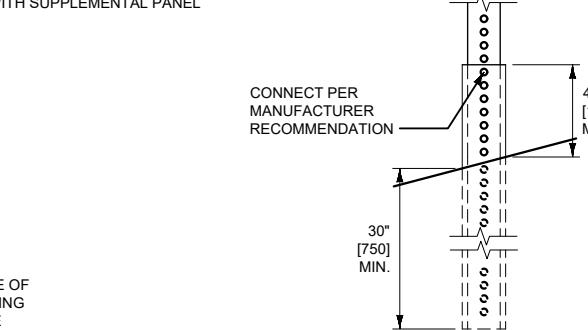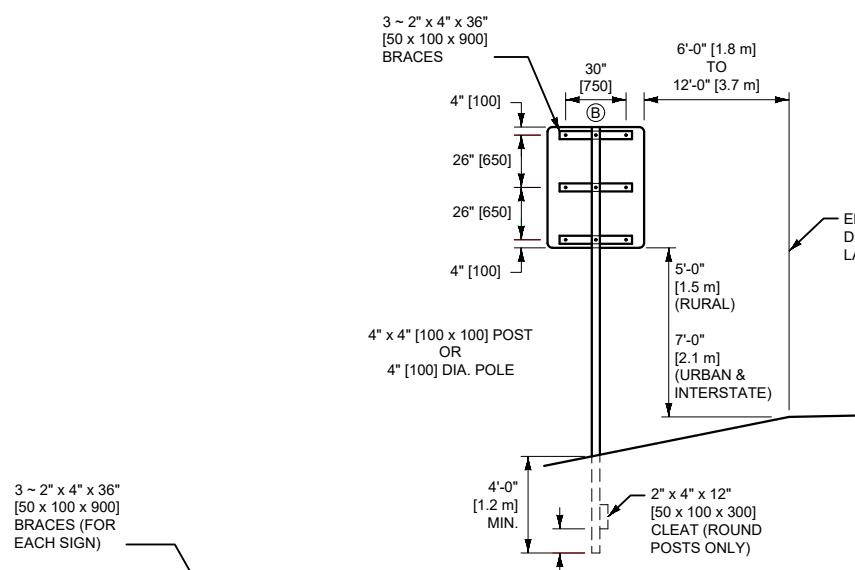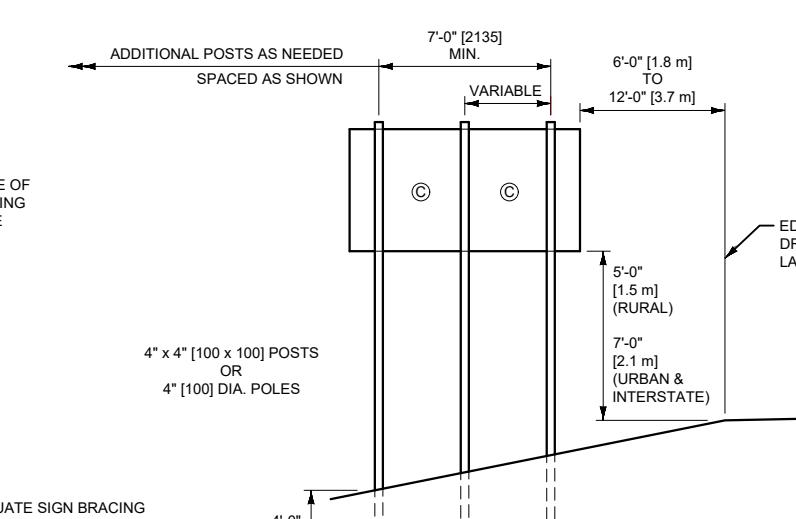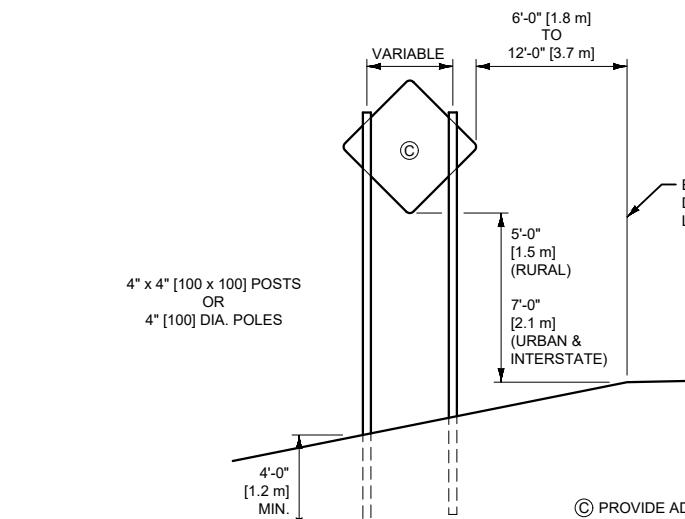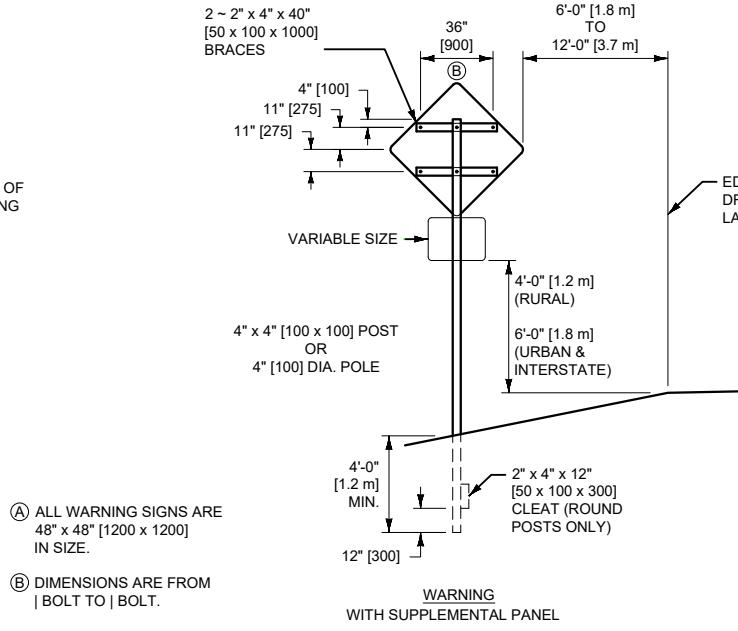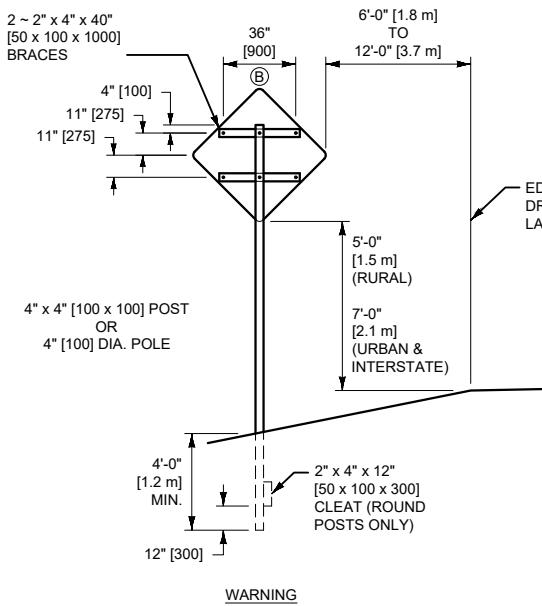

OPTIONAL TELESPAR MOUNTING
(FOR CONSTRUCTION SIGNING ONLY)

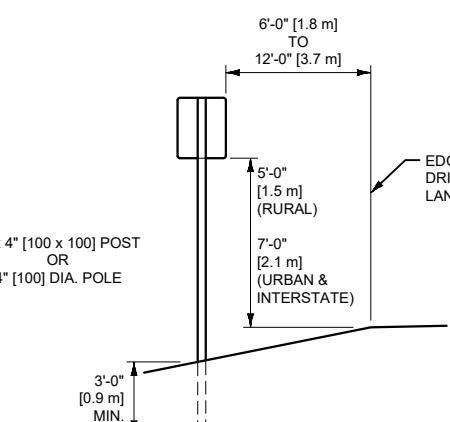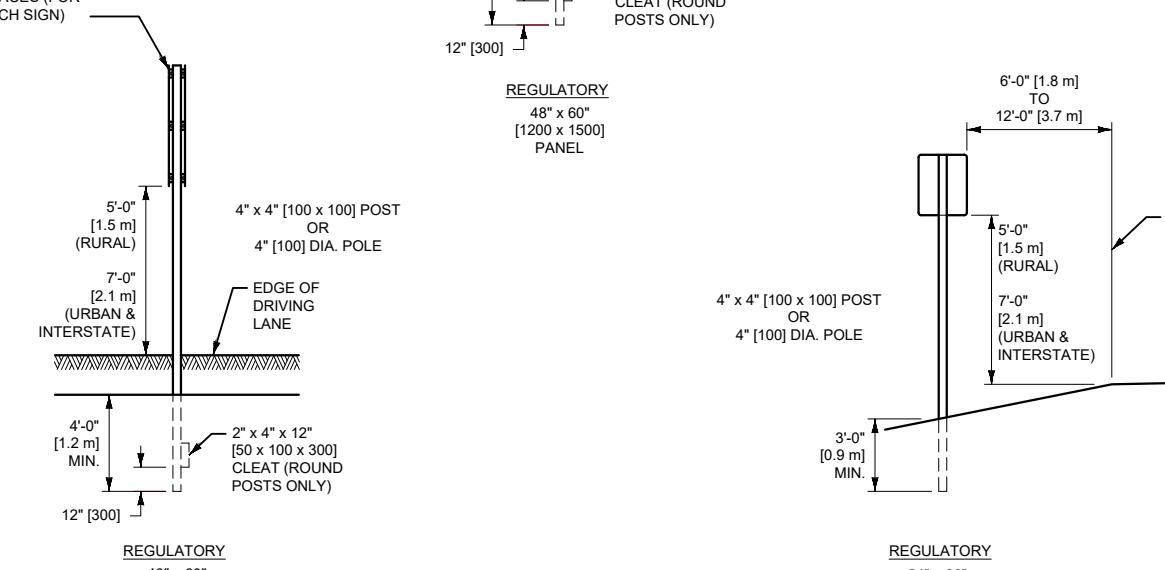

TYPICAL SIGN MOUNTINGS
(FOR CONSTRUCTION SIGNING ONLY)

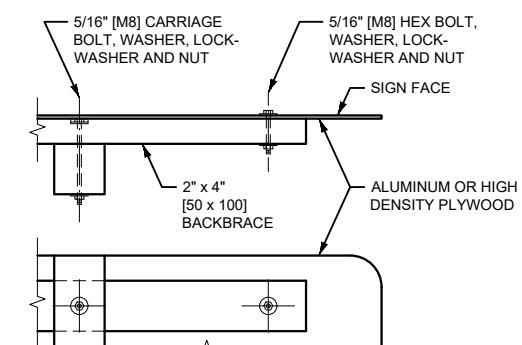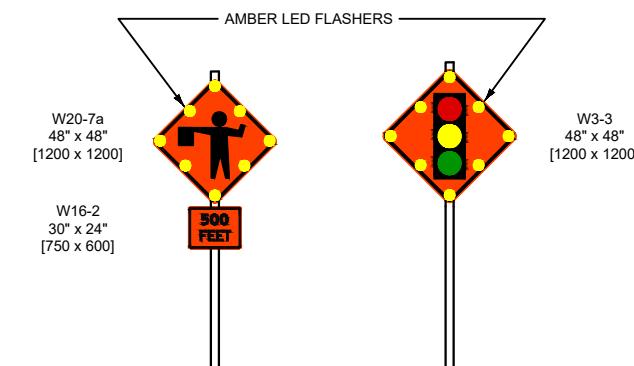

NOTES:

- ① FURNISH POST INSTALLATIONS MEETING NCHRP 350 OR MASH CRASH TEST REQUIREMENTS.
- ② FURNISH POST OR POLE LENGTHS TO ACCOMMODATE FOUNDATION DEPTH, MOUNTING HEIGHT AND MOUNTINGS.
- ③ BACKFILL FOUNDATION HOLES USING THOROUGHLY COMPACTED 8" LIFTS.
- ④ IN HIGH WIND AREAS INSTALL LARGER POSTS OR POLES COMPLYING WITH THE FOUNDATION AND BREAKAWAY REQUIREMENTS OF DTL. DWG. NO. 619-20. THE MINIMUM POST SPACING FOR MULTIPLE POSTS LARGER THAN 4" [100] IS 7'-0" [2135].
- ⑤ SIGN VERTICAL ALIGNMENT MUST BE WITHIN 5° OF PLUMB.
- ⑥ USE THE URBAN MOUNTING HEIGHTS IN BUSINESS, COMMERCIAL, AND RESIDENTIAL DISTRICTS WHERE PARKING AND/OR PEDESTRIAN MOVEMENT IS LIKELY TO OCCUR, OR VIEW IS OBSTRUCTED. URBAN MOUNTING HEIGHTS MAY ALSO BE USED IN RURAL AREAS FOR INCREASED VISIBILITY.
- ⑦ AMBER LED FLASHERS MUST MEET STANDARD SPECIFICATION SECTION 715 REQUIREMENTS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS


REFERENCE DWG. NO.

STANDARD SPEC. 618-01

SECTION 618, 715

CONSTRUCTION SIGN DETAILS


EFFECTIVE: JAN 23, 2020

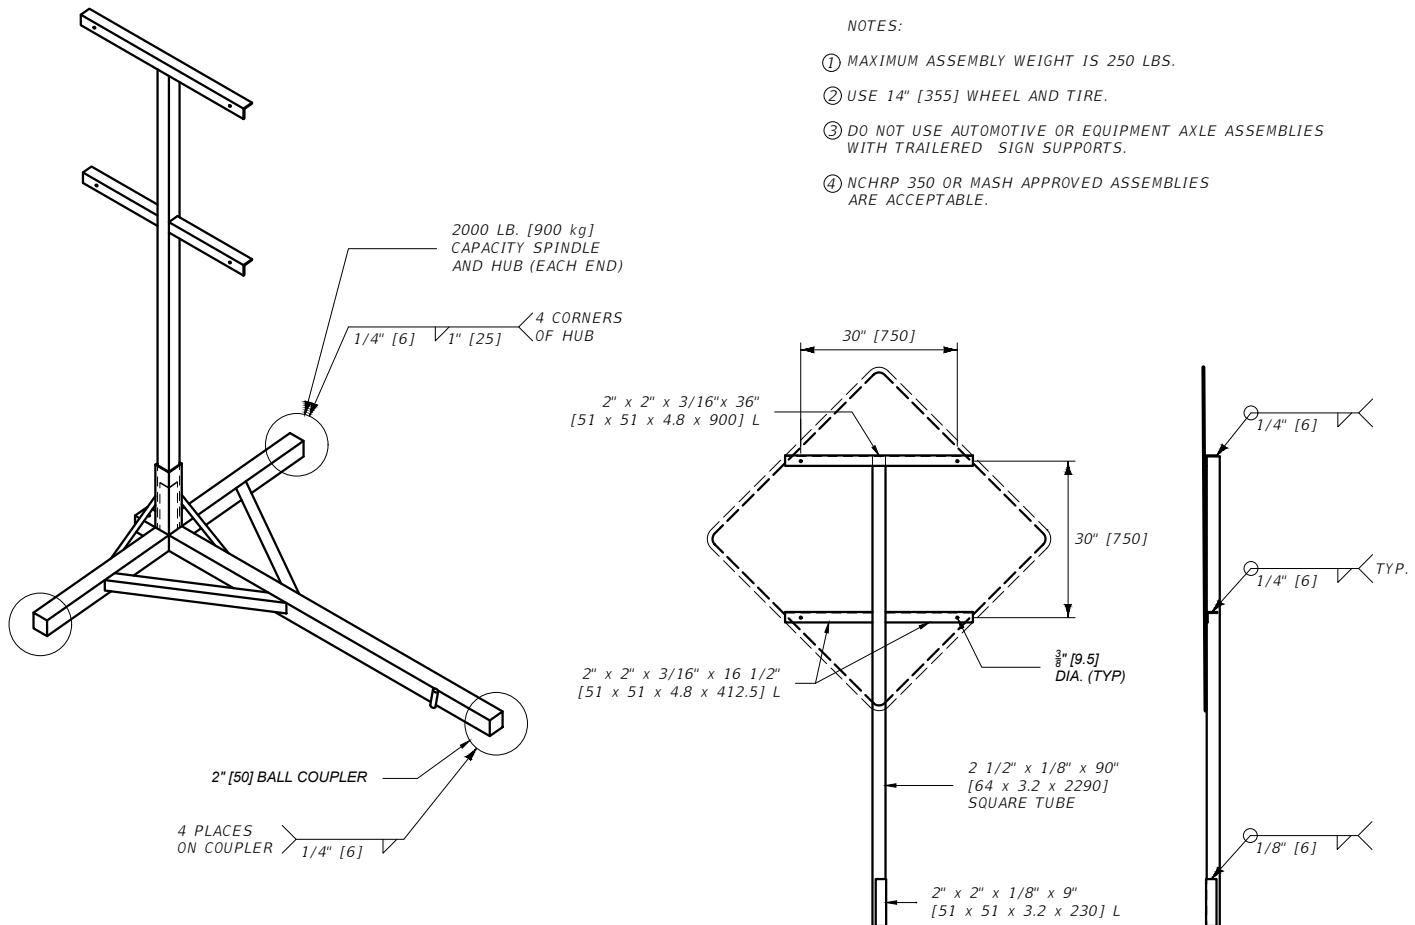


FRONT

RIGHT


SIGN SUPPORT

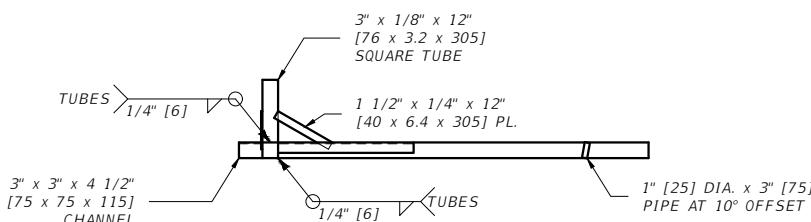

FRONT

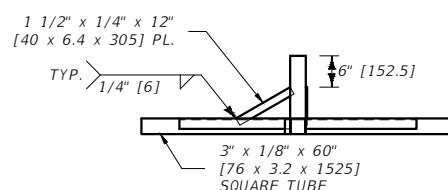

RIGHT

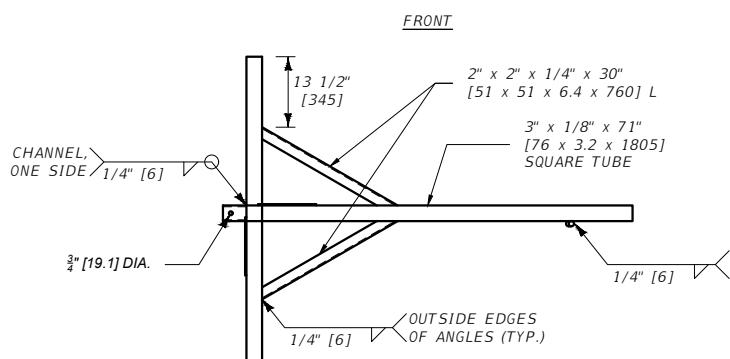

TOP

TRAILER

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 618, 715


DWG. NO.
618-02

PORTABLE SIGN SUPPORT ASSEMBLY


EFFECTIVE: JAN 23, 2020




--REVISED--
JUN 27, 2024

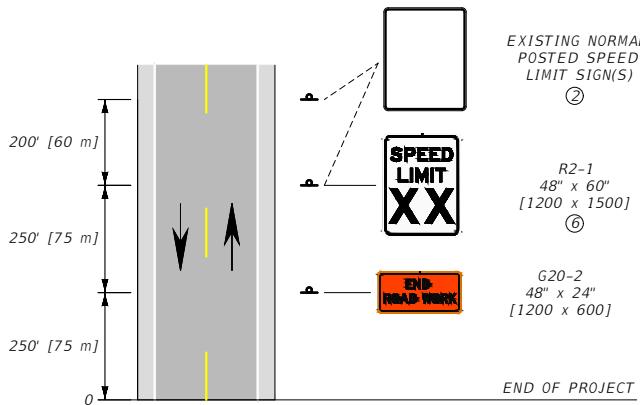

BEGINNING OF PROJECT

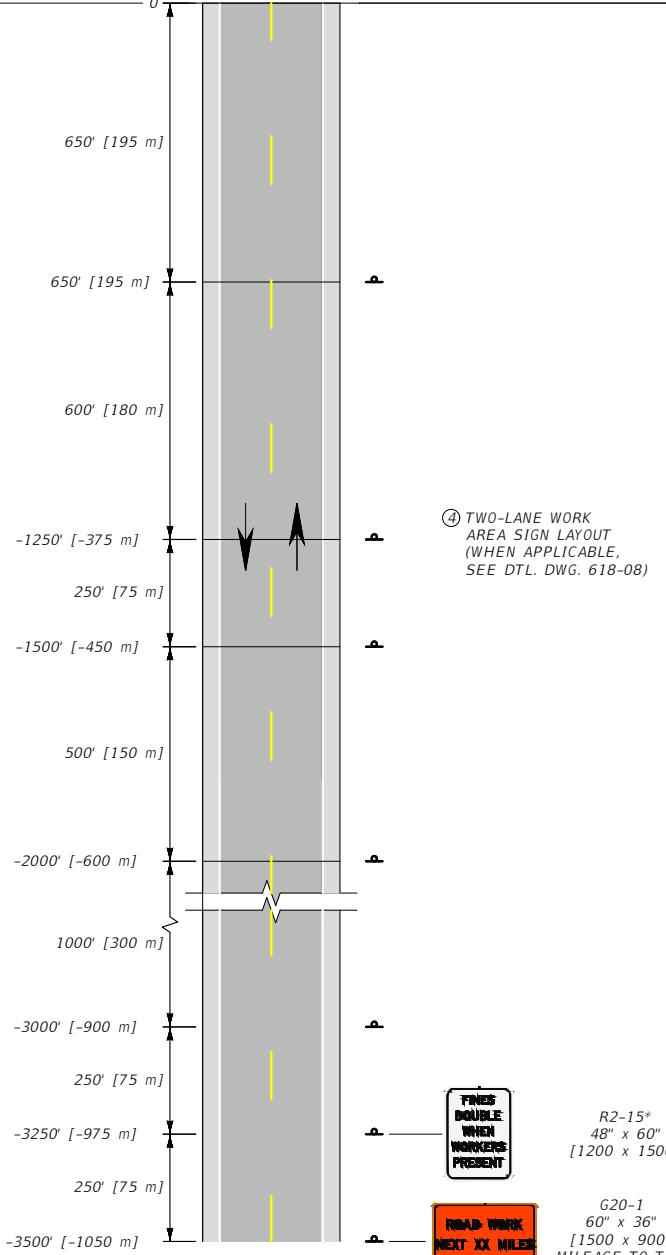

④ TWO-LANE WORK AREA SIGN LAYOUT (WHEN APPLICABLE, SEE DTL. DWG. 618-08)

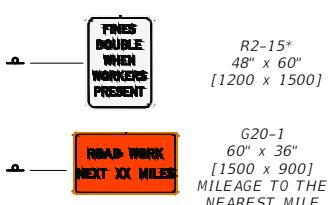

W20-1
48" x 48"
[1200 x 1200]
(USE WHEN LESS THAN 2 MILES)

--REVISED--
JUN 27, 2024

5/19/2025 11:28 AM

STDDRD618004.DWG

NOTES:

① THIS SIGN LAYOUT IS INTENDED TO BE A PERMANENT INSTALLATION FOR THE DURATION OF THE CONSTRUCTION PROJECT, AS APPROVED BY THE PROJECT MANAGER. COVER OR REMOVE ANY SIGNS WHEN NOT IN USE, INCLUDING UNWARRANTED SPEED LIMIT SIGNS. REMOVE ANY SIGN SUPPORTS IF THEY WILL NOT BE NEEDED WITHIN 90 DAYS.

② POST THE END OF WORK ZONE SPEED LIMIT USING ONE SIGN WHEN THE NORMAL POSTED SPEED LIMIT FOR ALL VEHICLES IS THE SAME. USE TWO SIGNS WHEN CAR, TRUCK AND NIGHTTIME SPEED LIMITS ARE DIFFERENT.

③ INCLUDE REGULATORY SIGNING ONLY IF A WORK ZONE OR ROADWAY HAS CONDITIONS THAT WARRANT SPEED RESTRICTIONS. MODIFY REGULATORY SIGNS TO MATCH ADJACENT REGULATIONS.

④ IN ADDITION TO THE SIGNS SHOWN, INCLUDE THE APPROPRIATE TWO-LANE WORK AREA SIGNS (DTL. DWG. 618-08) WHEN A WORK AREA IS LOCATED AT THE BEGINNING OR END OF THE WORK ZONE.

⑤ SET UP THIS SIGN LAYOUT IN EACH TRAFFIC DIRECTION.

⑥ POST THE SPEED LIMIT APPROPRIATE FOR ALL VEHICLES FOR THE REMAINDER OF THE WORK ZONE BEFORE RESUMING TO NORMAL POSTED SPEED LIMITS AT THE END OF THE WORK ZONE.

* DENOTES SIGNS UNIQUE TO MONTANA.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 618	DWG. NO. 618-04
--------------------------------------------	--------------------

TWO-LANE WORK ZONE

EFFECTIVE: JAN 23, 2020



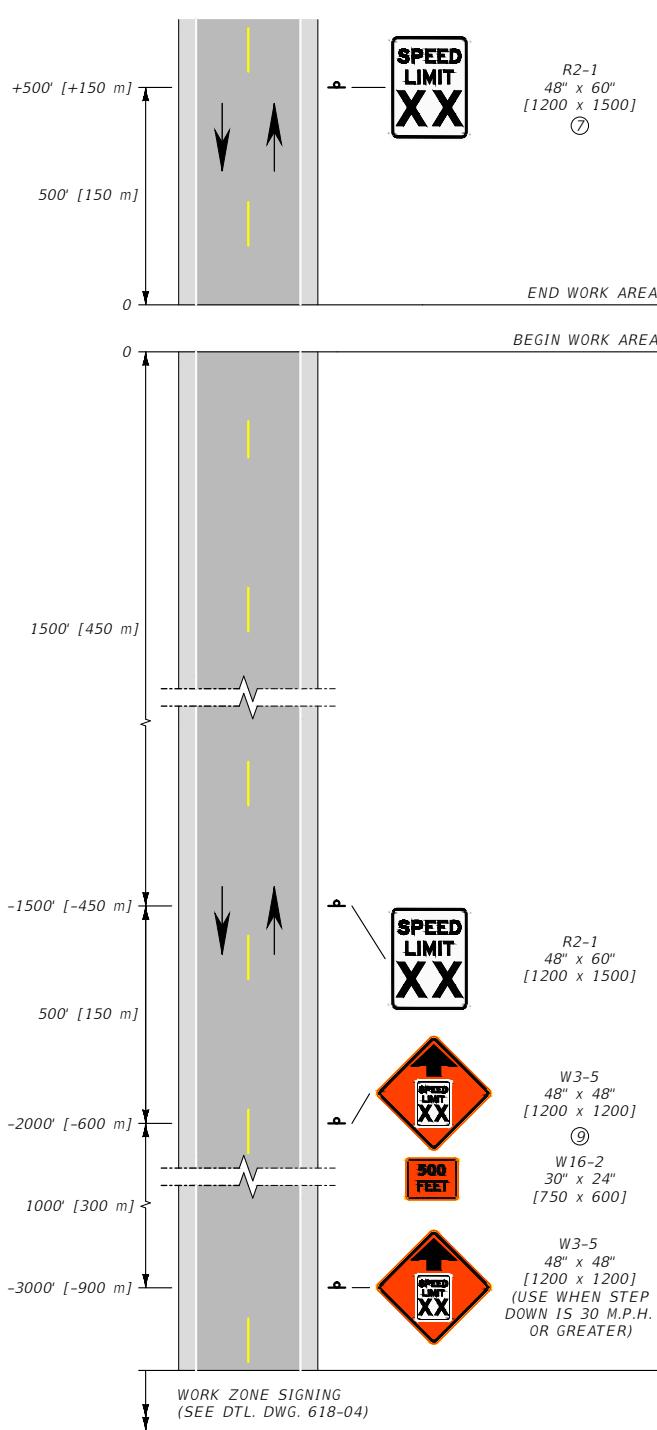

WORK AREA WITH NO FLAGGER

NOTES:

- ① THESE SIGN LAYOUTS ALSO USED IN CONJUNCTION WITH THE PERMANENT LAYOUT ILLUSTRATED ON DTL. DWG. 618-04 FOR WORK AREAS LOCATED AT THE BEGIN AND END OF THE WORK ZONES.
- ② XX = SPEED DETERMINED BY THE PROJECT MANAGER.
- ③ INCLUDE REGULATORY SIGNING ONLY IF THERE IS REASON TO RESTRICT SPEED WITHIN THE WORK ZONE. REMOVE OR COVER EXISTING REGULATORY SIGNS TO MATCH ADJACENT REGULATIONS.
- ④ SET UP THIS SIGN LAYOUT IN EACH TRAFFIC DIRECTION. COMBINE SUCCESSIVE WORK AREAS WHEN LESS THAN 1.0 MILE [1.6 km] APART.
- ⑤ BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.

⑥ PROVIDE A SECOND FLAGGER WHEN REQUIRED PER SECTION 618.

⑦ POST THE SPEED LIMIT APPROPRIATE FOR ALL VEHICLES FOR THE REMAINDER OF THE WORK ZONE BEFORE RESUMING TO NORMAL POSTED SPEED LIMITS AT THE END OF THE WORK ZONE.

⑧ AMBER LED FLASHERS MUST MEET STANDARD SPECIFICATION SECTION 715 AND DTL. DWG. 618-01 REQUIREMENTS.

⑨ INCLUDE THESE SIGNS WITH ALL FLAGGERS. INCLUDE THESE SIGNS WITHIN WORK ZONES WHEN STEP DOWN IS 20 M.P.H. OR GREATER.

* DENOTES SIGNS UNIQUE TO MONTANA.


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 618, 715	DWG. NO. 618-08
-------------------------------------------------	--------------------

EFFECTIVE: JAN 23, 2020

TWO-LANE WORK AREAS

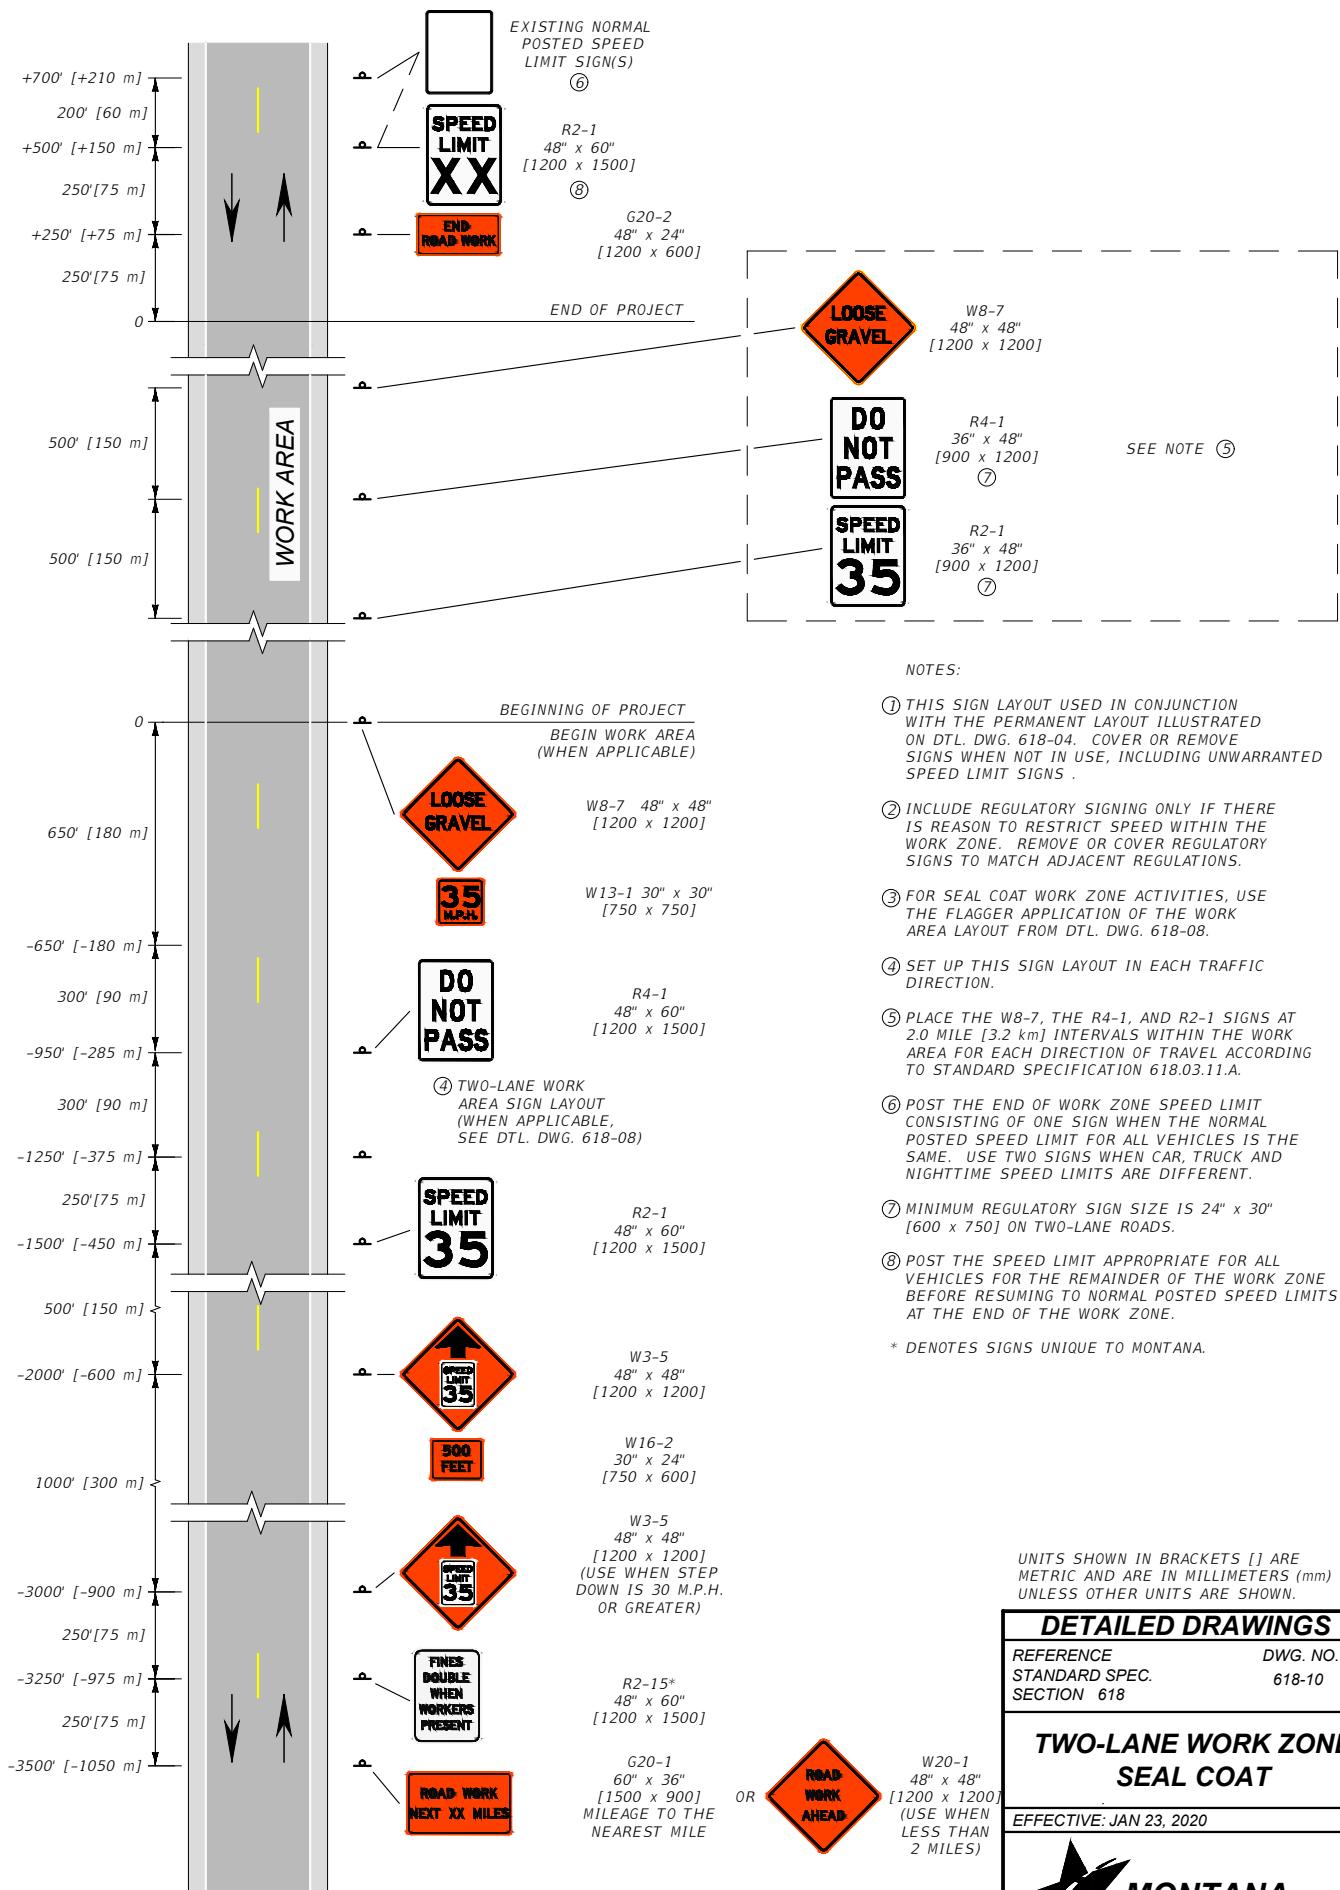


DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 618-10
SECTION 618

TWO-LANE WORK ZONE SEAL COAT

EFFECTIVE: JAN 23, 2020

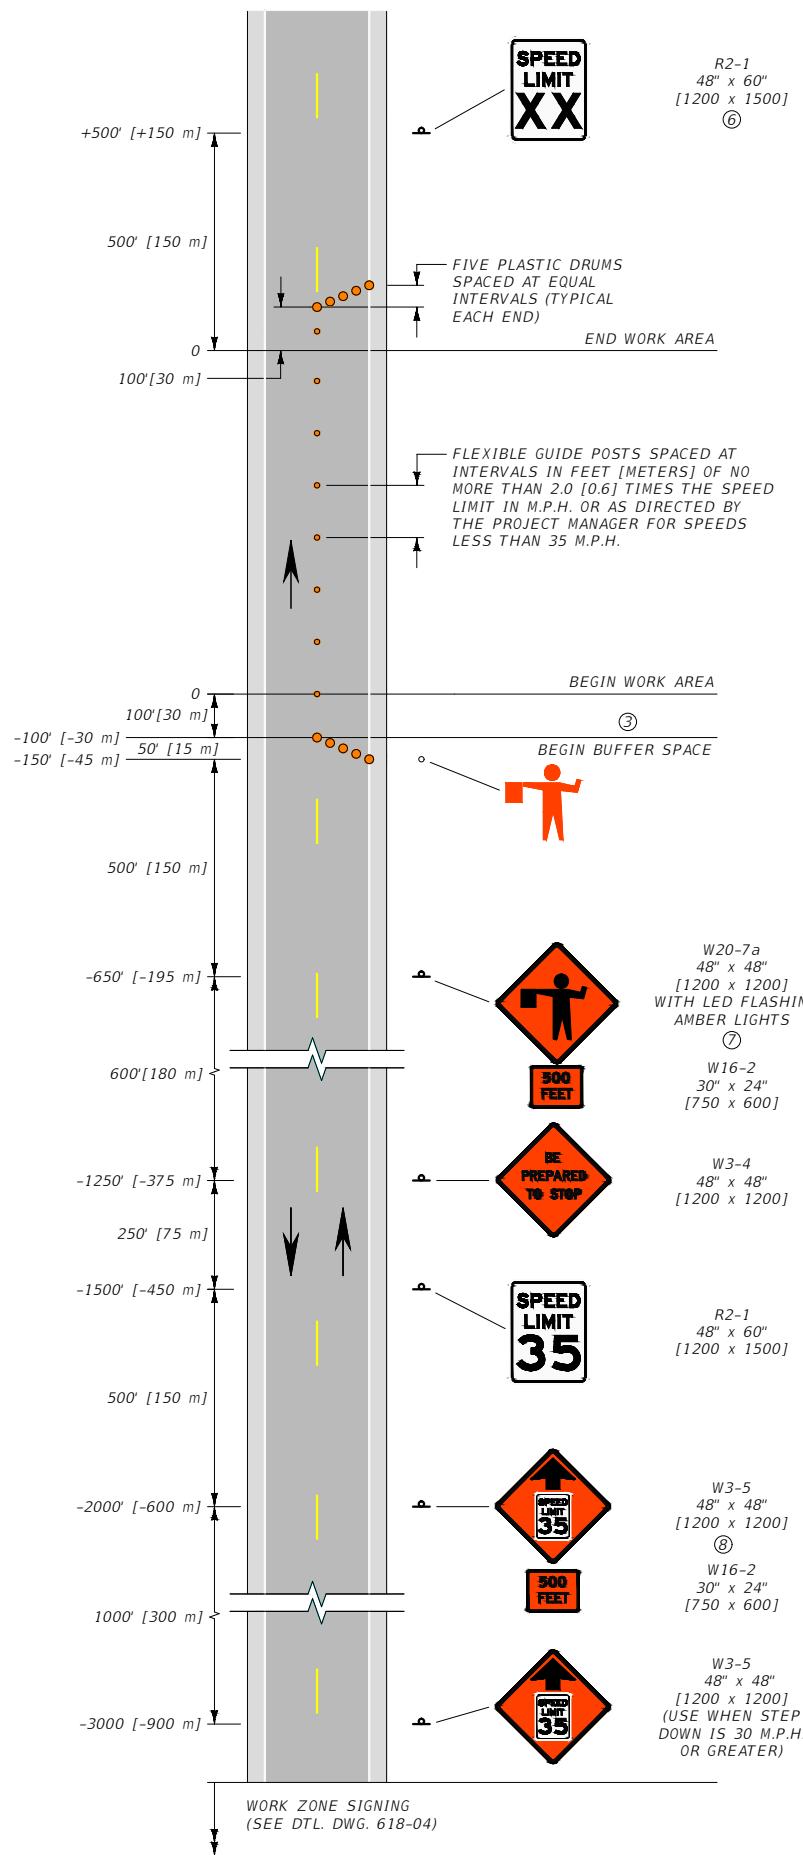

NOTES:

- ① MODIFY REGULATORY SIGNS TO MATCH ADJACENT REGULATIONS.
- ② SET UP THIS SIGN LAYOUT IN EACH TRAFFIC DIRECTION.
- ③ THE BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- ④ PROVIDE A SECOND FLAGGER WHEN REQUIRED BY SECTION 618.03.14.
- ⑤ XX = SPEED DETERMINED BY PROJECT MANAGER.
- ⑥ POST THE SPEED LIMIT APPROPRIATE FOR ALL VEHICLES FOR THE REMAINDER OF THE WORK ZONE BEFORE RESUMING TO NORMAL POSTED SPEED LIMITS AT THE END OF THE WORK ZONE.
- ⑦ AMBER LED FLASHERS MUST MEET STANDARD SPECIFICATION SECTION 715 AND DTL. DWG. 618-01 REQUIREMENTS.
- ⑧ INCLUDE THESE SIGNS WITH ALL FLAGGERS. INCLUDE THESE SIGNS WITHIN WORK ZONES WHEN STEP DOWN IS 20 M.P.H. OR GREATER.

* DENOTES SIGNS UNIQUE TO MONTANA.



UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 618, 715	DWG. NO. 618-12
-------------------------------------------------	--------------------

**TWO-LANE WORK AREA
LANE CLOSURE - FLAGGER
CONTROLLED**

EFFECTIVE: JAN 23, 2020

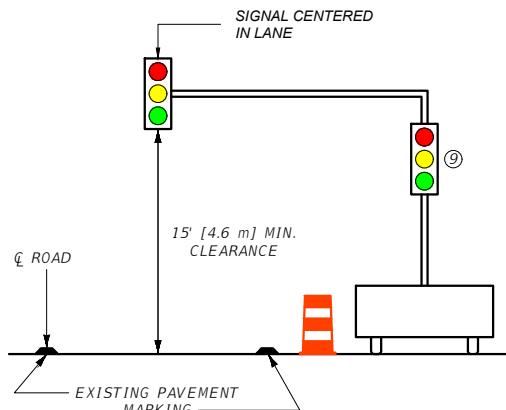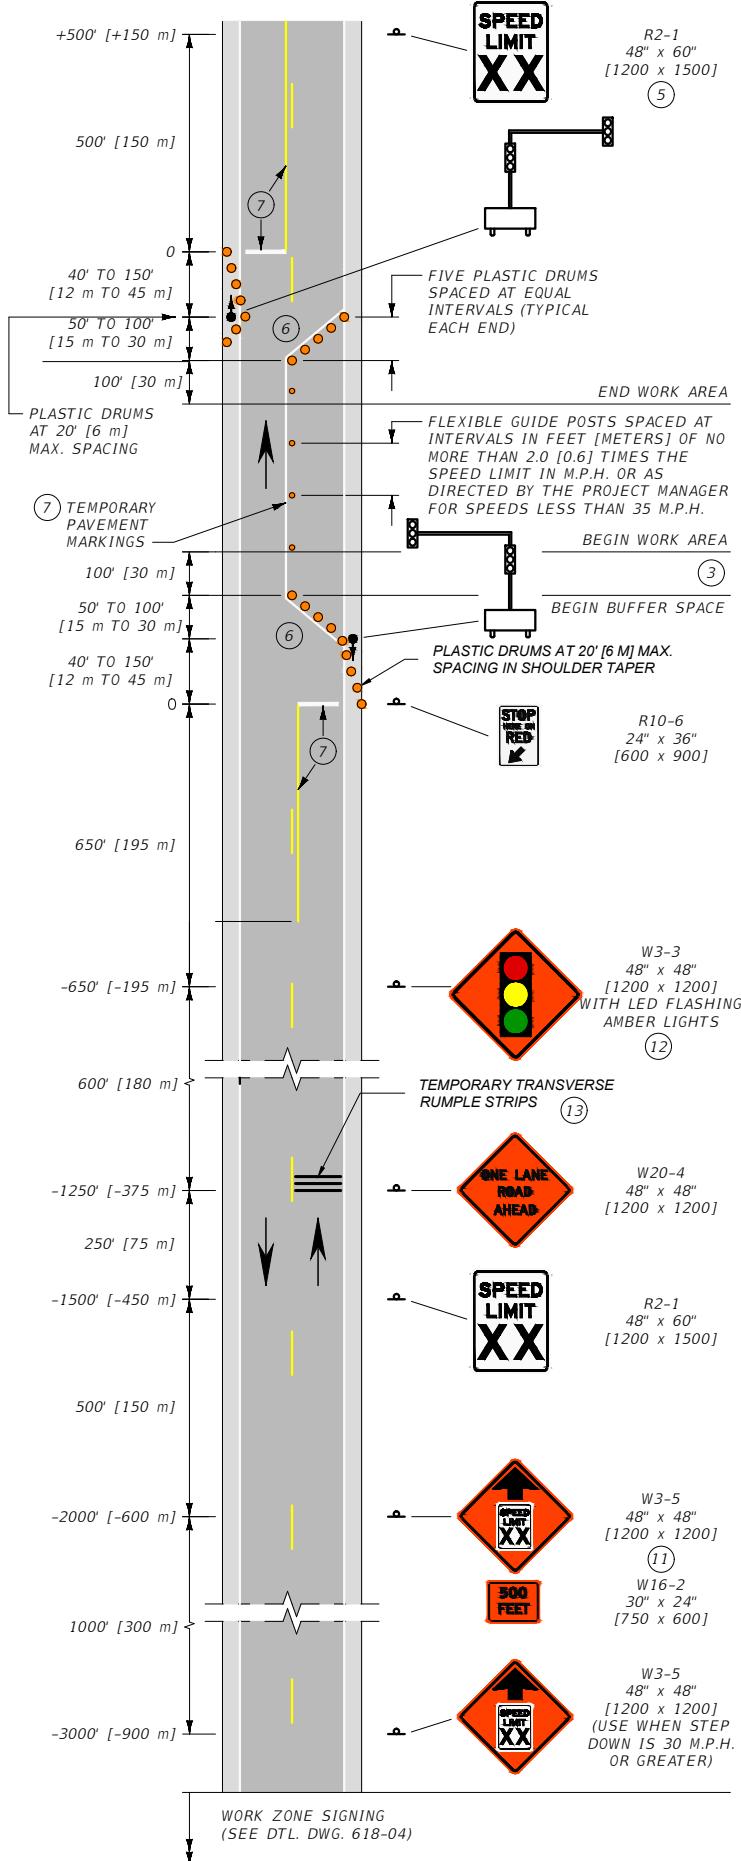

TEMPORARY TRAFFIC CONTROL SIGNAL DETAIL

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION	DWG. NO. 618-13
----------------------------------------	--------------------

TWO-LANE WORK ZONE LANE CLOSURE - SIGNAL CONTROLLED

EFFECTIVE: JAN 23, 2020

--REVISED--
APR 28, 2022
JUN 27, 2024

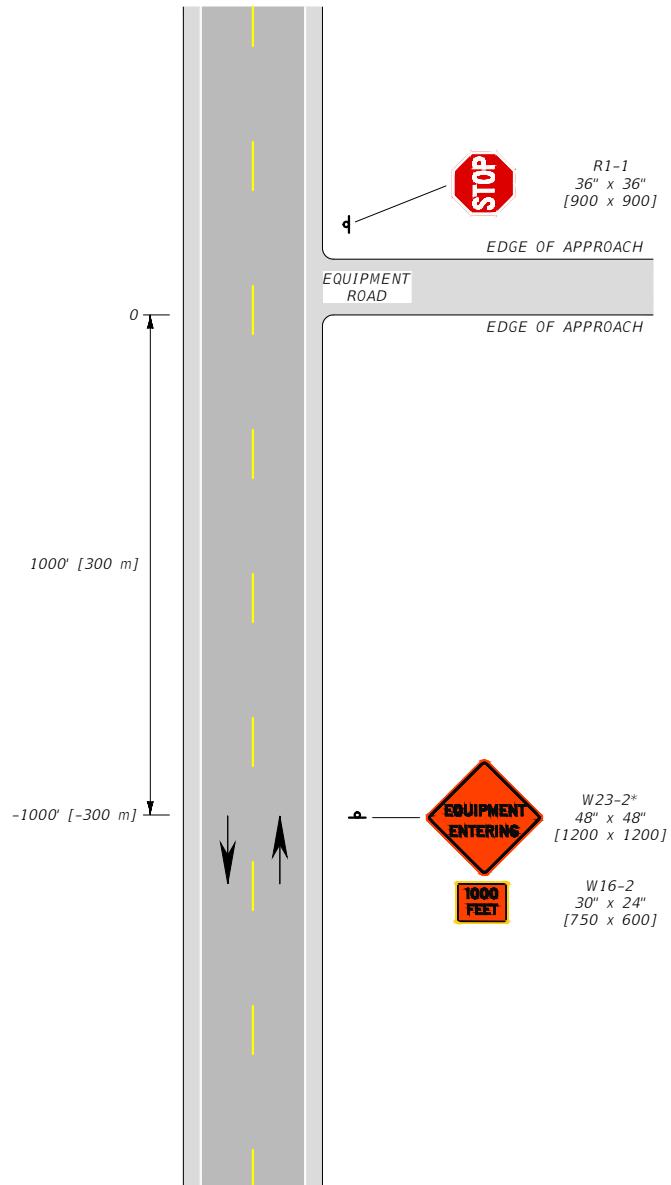

NOTES:

① REFER TO DTL. DWG. 618-16 IF FLAGGER IS NEEDED.
 ② SET UP THIS SIGN LAYOUT IN EACH TRAFFIC DIRECTION, AS NEEDED.

* DENOTES SIGNS UNIQUE TO MONTANA.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS


REFERENCE STANDARD SPEC. SECTION 618	DWG. NO. 618-14
--------------------------------------------	--------------------

TWO-LANE EQUIPMENT ENTRANCES

EFFECTIVE: JAN 23, 2020



--REVISED--
JUN 27, 2024

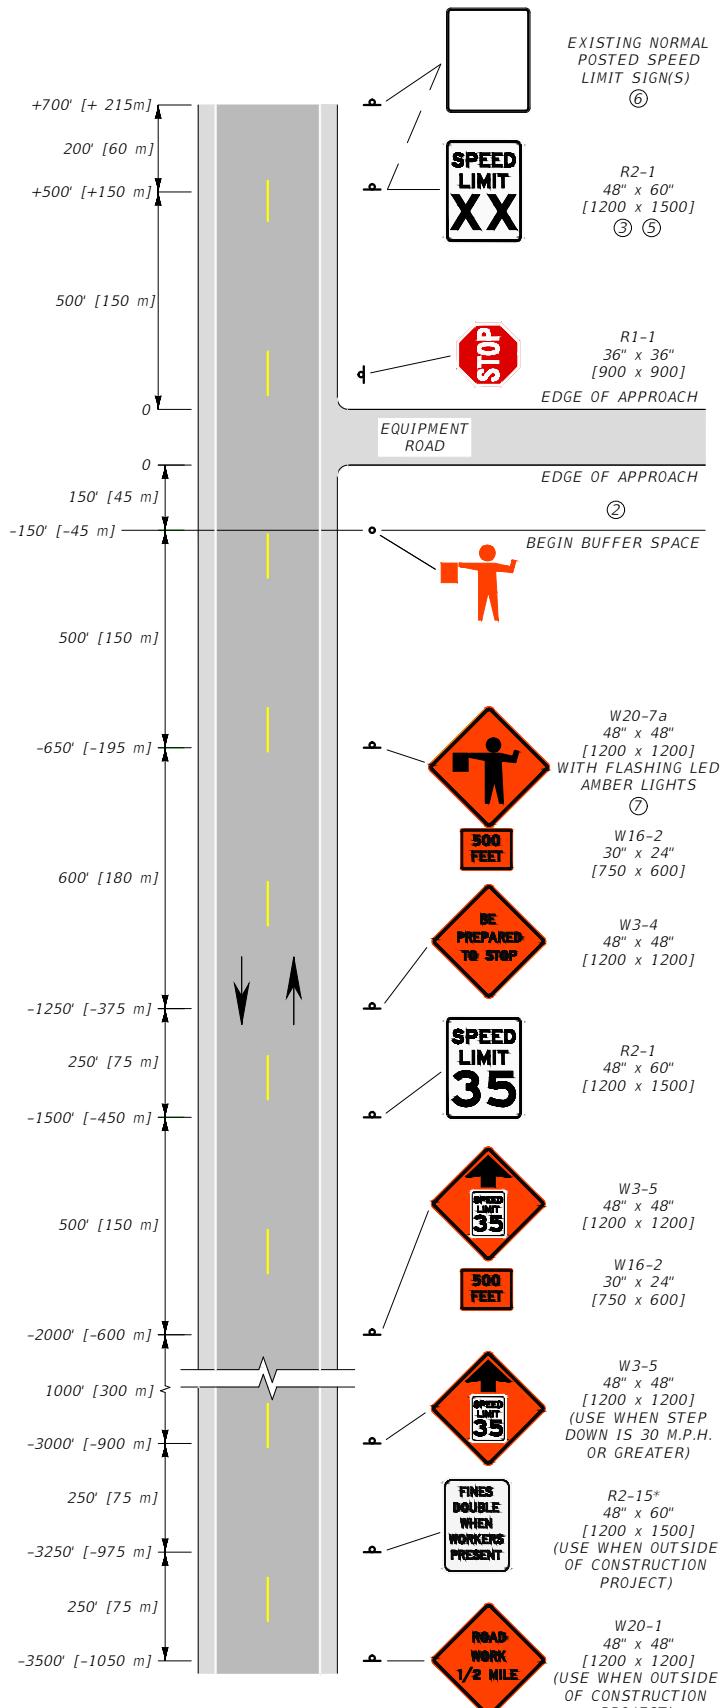

NOTES:

- ① SET UP THIS SIGN LAYOUT IN EACH TRAFFIC DIRECTION, AS NEEDED.
- ② BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- ③ XX = SPEED DETERMINED BY THE PROJECT MANAGER.
- ④ WHEN THIS SIGN LAYOUT OCCURS OUTSIDE A CONSTRUCTION PROJECT, INCLUDE THE W20-1 AND R2-15* SIGNS.
- ⑤ POST THE SPEED LIMIT APPROPRIATE FOR ALL VEHICLES FOR THE REMAINDER OF THE WORK ZONE BEFORE RESUMING TO NORMAL POSTED SPEED LIMITS AT THE END OF THE WORK ZONE.
- ⑥ OUTSIDE THE PROJECT, USE A SINGLE SIGN TO POST THE SPEED LIMIT WHEN THE NORMALLY POSTED SPEED LIMIT IS THE SAME FOR ALL VEHICLES. USE TWO SEPARATE SPEED LIMIT SIGNS TO DENOTE TRUCK SPEED LIMIT, AND CAR DAYTIME/NIGHTTIME SPEED LIMITS.
- ⑦ ENSURE AMBER LED FLASHERS MEET STANDARD SPECIFICATION SECTION 715 AND DTL. DWG. 618-01 REQUIREMENTS.

* DENOTES SIGNS UNIQUE TO MONTANA.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION	DWG. NO. 618-16
----------------------------------------	--------------------


TWO-LANE EQUIPMENT ENTRANCES

EFFECTIVE: JAN 23, 2020



--REVISED--
JUN 27, 2024



EQUIPMENT ENTRANCE WITH FLAGGER

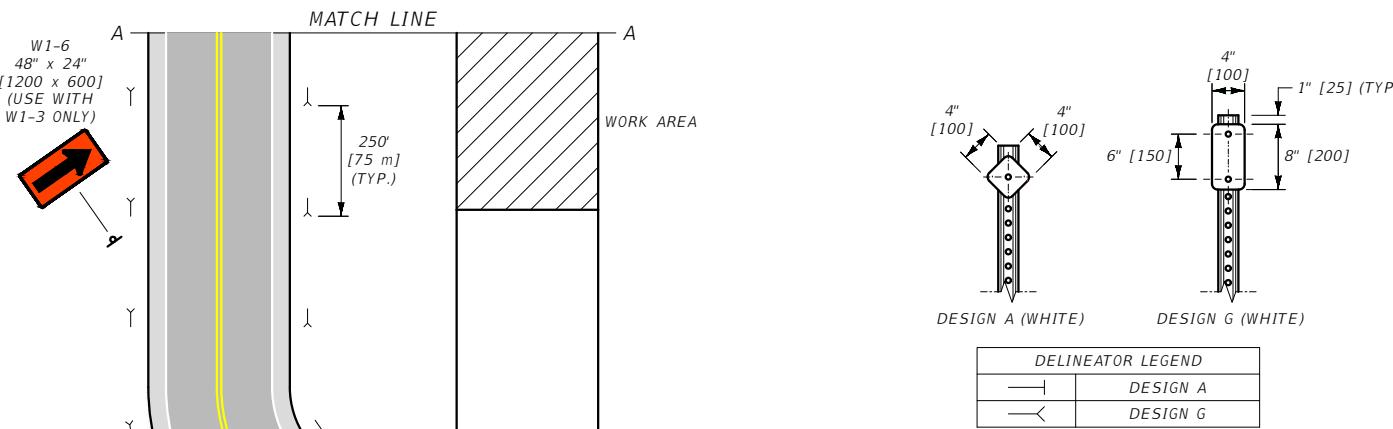

NOTES:

- SET UP THE SIGN LAYOUT IN THIS DRAWING FOR BOTH TRAFFIC DIRECTIONS.
- PAVED DETOURS 24 FEET [7.2 m] WIDE OR GREATER REQUIRE 4 INCH [100] WHITE SHOULDER STRIPES AND APPROPRIATE CENTERLINE STRIPES.
- UNPAVED DETOURS MAY REQUIRE ADDITIONAL DELINEATION.
- USE ONLY POST MOUNTED SIGNS. DO NOT USE PORTABLE SIGN MOUNTS.
- PLACE PLASTIC DRUMS AT INTERVALS IN FEET [METERS] OF NO MORE THAN ONE [0.3] TIMES THE SPEED LIMIT IN M.P.H. OR AS DIRECTED BY THE PROJECT MANAGER FOR SPEEDS LESS THAN 35 M.P.H.
- XX = SPEED DETERMINED BY THE DETOUR DESIGN SPEED OR THE PROJECT MANAGER.
- SEE DTL. DWG. 618-03.
- POST THE SPEED LIMIT APPROPRIATE FOR ALL VEHICLES FOR THE REMAINDER OF THE WORK ZONE BEFORE RESUMING TO NORMAL POSTED SPEED LIMITS AT THE END OF THE WORK ZONE.
- INCLUDE THESE SIGNS WITH ALL FLAGGERS. INCLUDE THESE SIGNS WITHIN WORK ZONES WHEN STEP DOWN IS 20 M.P.H. OR GREATER.
- PROVIDE PAVEMENT MARKINGS TO DELINEATE CENTERLINE AND LANE EDGE LINE THROUGHOUT TRANSITION FROM PAVED TO GRAVELED SURFACE. REMOVE NO LONGER APPLICABLE PERMANENT PAVEMENT MARKINGS WITHIN THE TRAVELED WAY PER STANDARD SPECIFICATION 618.03.5.



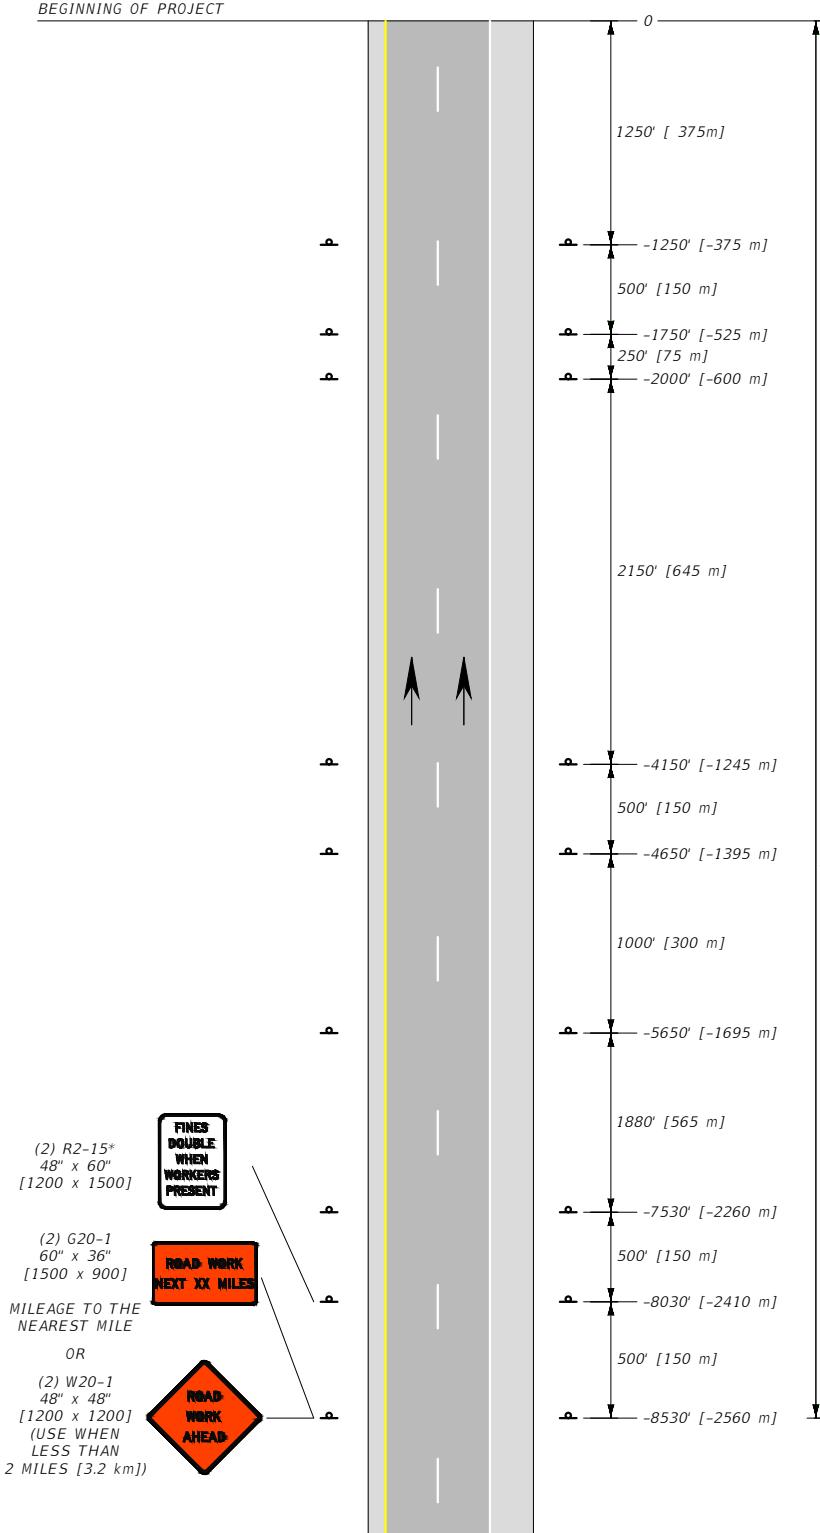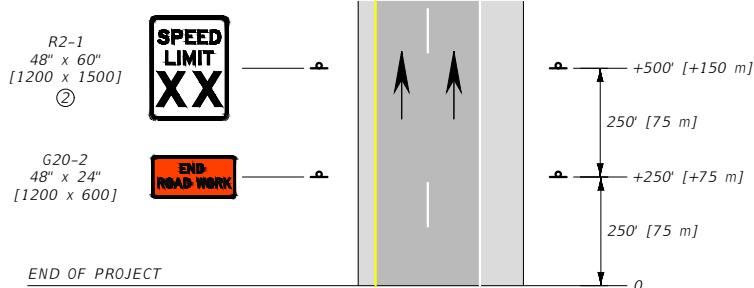

NOTES:

- ① THIS SIGN LAYOUT IS INTENDED TO BE A PERMANENT INSTALLATION FOR THE DURATION OF THE CONSTRUCTION PROJECT, AS APPROVED BY THE PROJECT MANAGER. COVER OR REMOVE SIGNS WHEN NOT IN USE, INCLUDING UNWARRANTED SPEED LIMIT SIGNS. REMOVE ANY SIGN SUPPORTS IF THEY WILL NOT BE NEEDED WITHIN 90 DAYS.
- ② POST THE END OF WORK ZONE SPEED LIMIT CONSISTING OF ONE LIMIT WHEN THE NORMAL POSTED SPEED LIMIT FOR ALL VEHICLES IS THE SAME. WHEN CAR AND TRUCK SPEED LIMITS DIFFER, POST BOTH LIMITS ON A SINGLE SIGN.
- ③ INCLUDE REGULATORY SIGNING ONLY IF A WORK ZONE OR ROADWAY HAS CONDITIONS THAT WARRANT SPEED RESTRICTIONS. MODIFY REGULATORY SIGNS TO MATCH ADJACENT REGULATIONS.
- ④ SET UP THIS SIGN LAYOUT IN EACH TRAFFIC DIRECTION.
- ⑤ IN ADDITION TO THE SIGNS SHOWN, INCLUDE THE APPROPRIATE FOUR-LANE WORK ZONE SIGNS (DTL. DWG. 618-24) WHEN A WORK AREA FALLS AT THE BEGIN OR END OF THE WORK ZONE.
- ⑥ DIVIDED FOUR-LANE IS SHOWN. FOR UN-DIVIDED FOUR-LANE, PLACE SIGNS ON RIGHT SIDE ONLY.

* DENOTES SIGNS UNIQUE TO MONTANA.

FOUR-LANE WORK
AREA SIGN LAYOUT
(WHEN APPLICABLE,
SEE DTL. DWG. 618-24)

⑥

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS


REFERENCE STANDARD SPEC. SECTION	DWG. NO. 618-20

**DIVIDED FOUR-LANE WORK
ZONE**

EFFECTIVE: JAN 23, 2020



--REVISED--
JUN 27, 2024

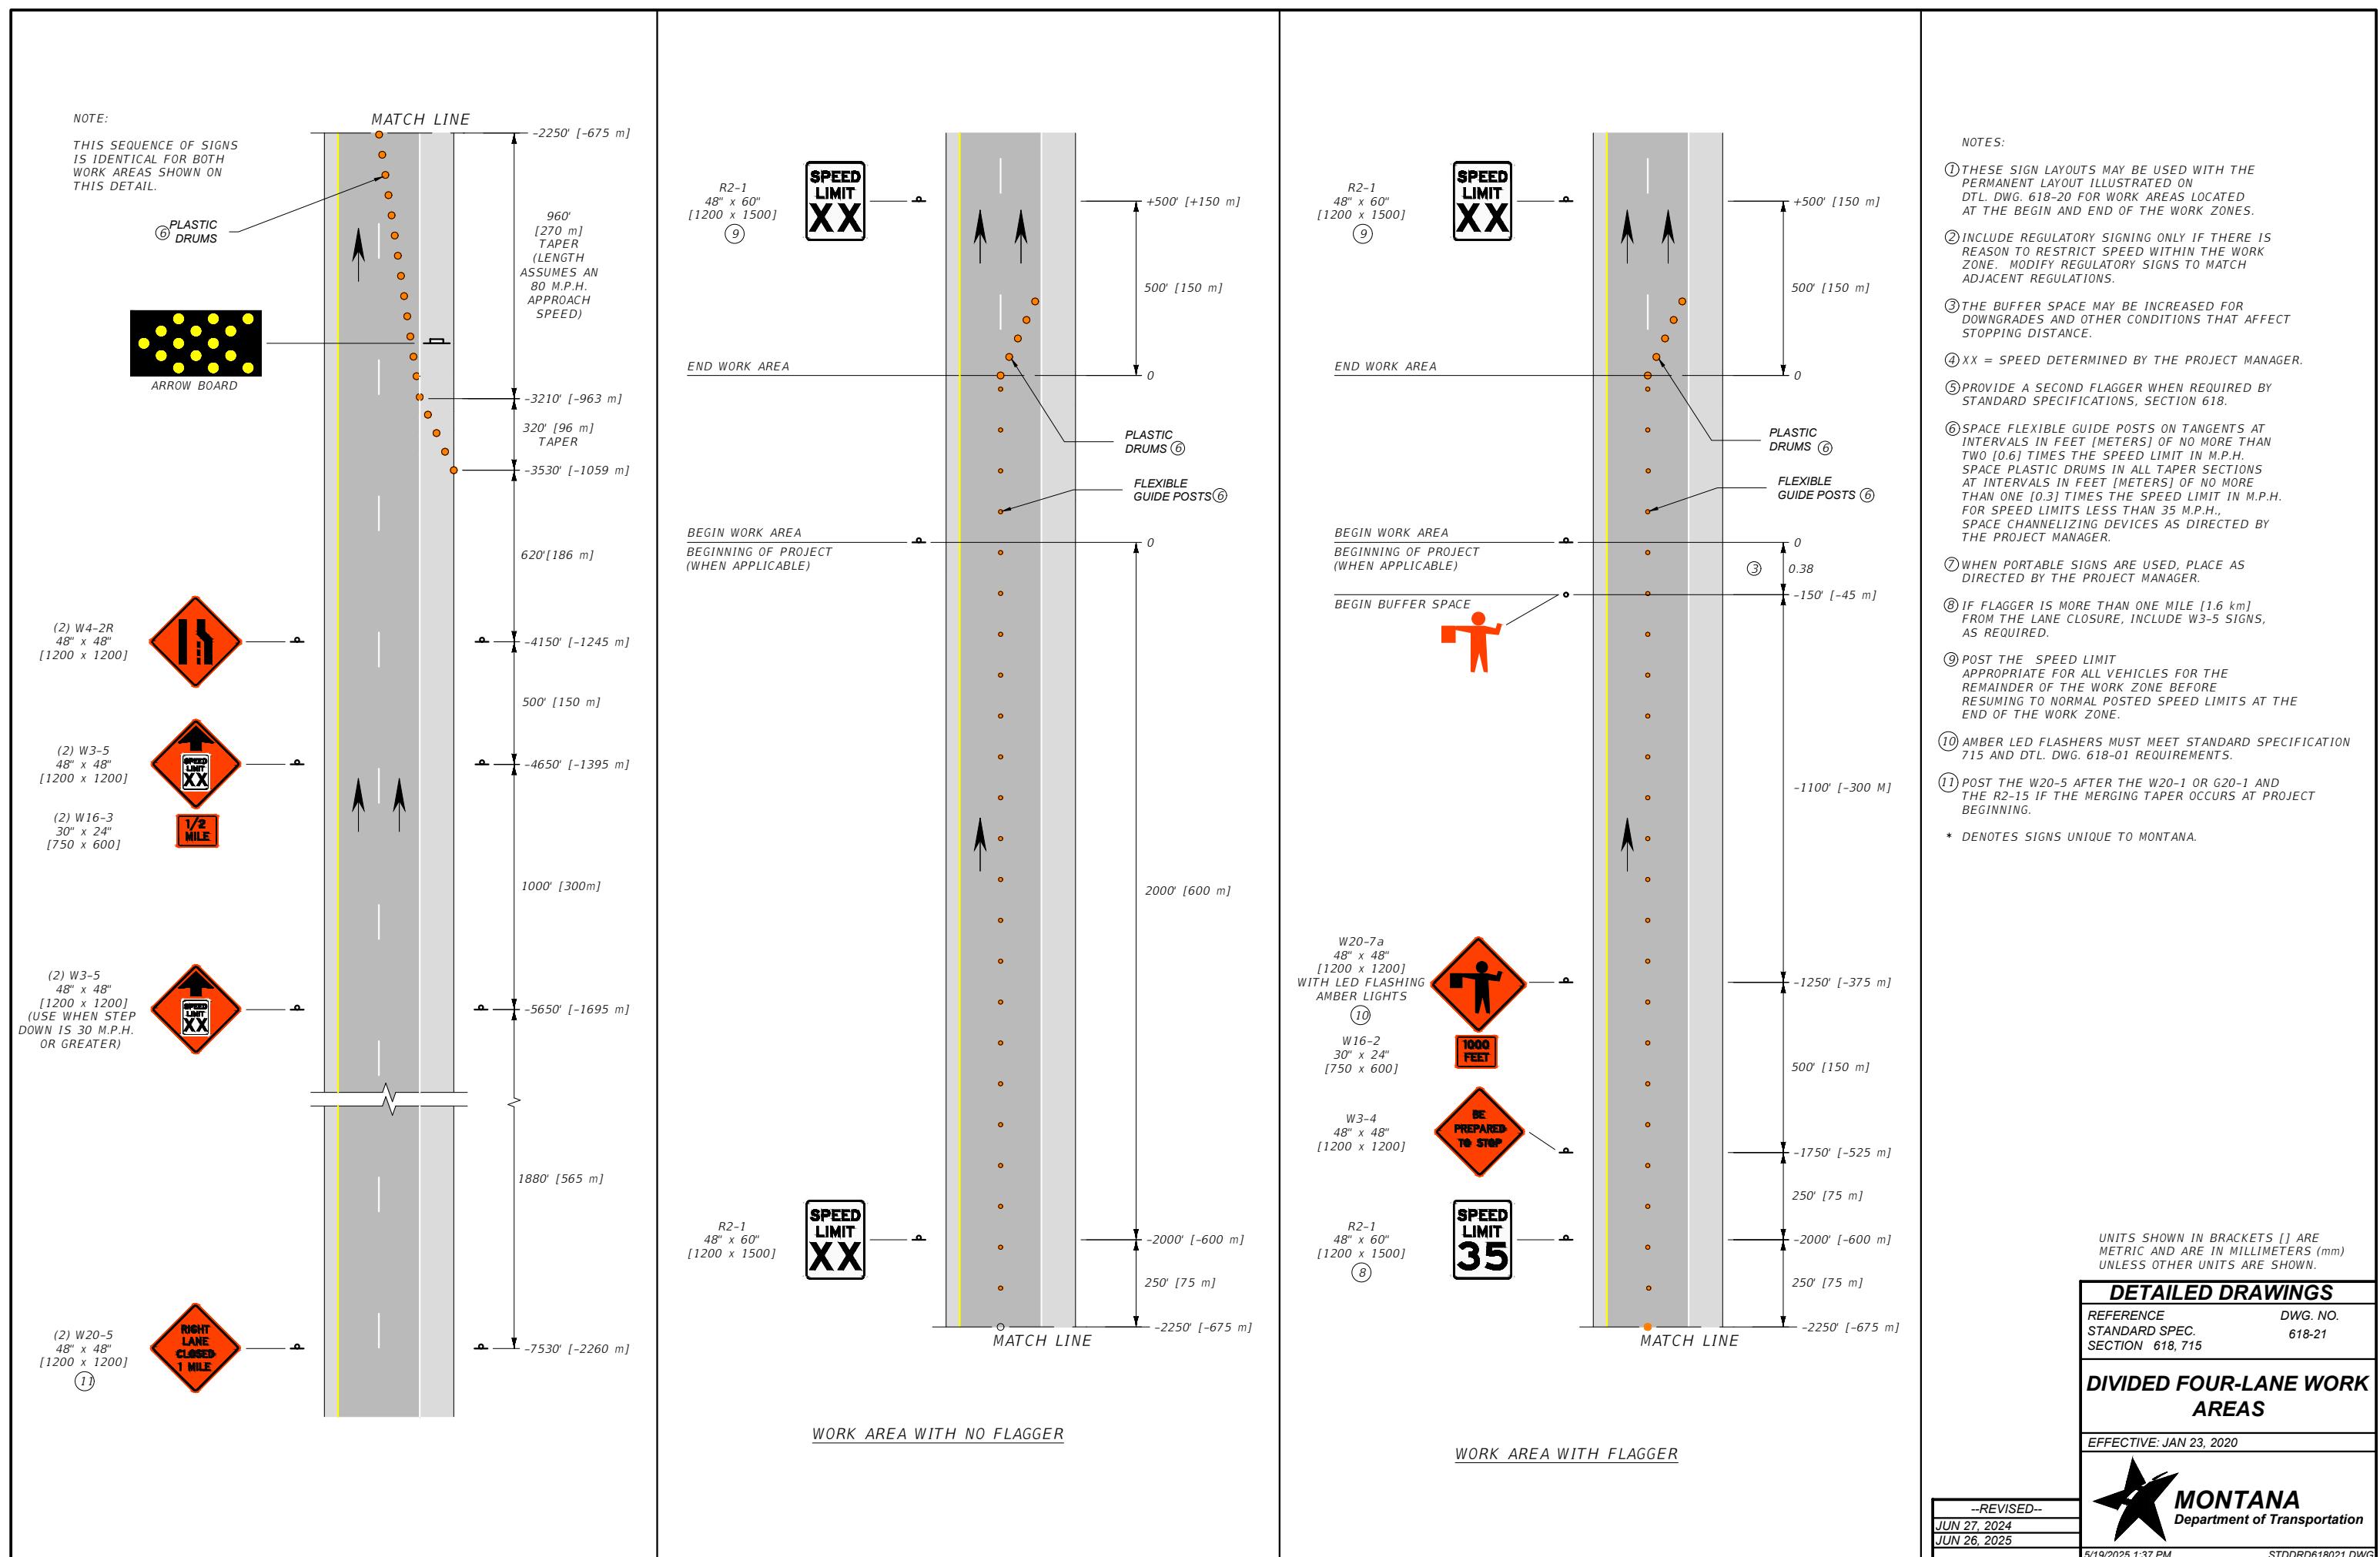

NOTE:
THIS SEQUENCE OF SIGNS
IS IDENTICAL FOR BOTH
WORK AREAS SHOWN ON
THIS DETAIL.

⑤ PLASTIC DRUMS



ARROW BOARD

(2) W4-2R
48" x 48"
[1200 x 1200]



(2) W3-5
48" x 48"
[1200 x 1200]



(2) W16-3
30" x 24"
[750 x 600]



(2) W3-5
48" x 48"
[1200 x 1200]
(USE WHEN STEP
DOWN IS 30 M.P.H.
OR GREATER)



(2) R2-15*
48" x 60"
[1200 x 1500]
(USE WHEN OUTSIDE
OF CONSTRUCTION
PROJECT)



(2) W20-5
48" x 48"
[1200 x 1200]



MATCH LINE

-2250' [-675 m]

960'
[270 m]
TAPER
(LENGTH
ASSUMES AN
80 M.P.H.
APPROACH
SPEED)

-3210' [-963 m]

320' [96 m]

-3530' [-1059 m]

620' [186 m]

-4150' [-1245 m]

500' [150 m]

-4650' [-1395 m]

1000' [300 m]

-5650' [-1695 m]

1000' [300 m]

-6650' [-1995 m]

880' [265 m]

-7530' [-2260 m]


EXISTING NORMAL
POSTED SPEED
LIMIT(S)

⑧

OR

R2-1
48" x 60"
[1200 x 1500]

⑦



⑤ FLEXIBLE
GUIDE
POSTS SPACED
AT HALF NORMAL
SPACING

3 PLASTIC DRUMS

⑤ FLEXIBLE
GUIDE
POSTS



R2-1
48" x 60"
[1200 x 1500]

⑥

EQUIPMENT ENTRANCE WITH NO FLAGGER

NOTES:

① INCLUDE SPEED LIMIT SIGNING
ONLY IF SPEED MUST BE RESTRICTED
WITHIN THE WORK ZONE. REMOVE OR
COVER REGULATORY SIGNS TO MATCH
ADJACENT REGULATIONS.

② THE BUFFER SPACE MAY BE
INCREASED FOR DOWNGRADES
AND OTHER CONDITIONS AFFECTING
STOPPING DISTANCE.

③ XX = SPEED DETERMINED BY
THE PROJECT MANAGER.

④ WHEN THIS OCCURS OUTSIDE
A CONSTRUCTION PROJECT,
INCLUDE THE W20-1 AND
R2-15* SIGNS.

⑤ SPACE FLEXIBLE GUIDE POSTS ON
TANGENTS AT INTERVALS IN
FEET [METERS] OF NO MORE THAN
TWO [0.6] TIMES THE SPEED LIMIT IN
M.P.H. SPACE PLASTIC DRUMS IN
ALL TAPER SECTIONS AT INTERVALS
IN FEET [METERS] OF NO MORE THAN
ONE [0.3] TIMES THE SPEED LIMIT IN
M.P.H. FOR SPEED LIMITS LESS THAN
35 M.P.H., SPACE CHANNELIZING
DEVICES AS DIRECTED BY THE
PROJECT MANAGER.

⑥ IF FLAGGER IS MORE THAN ONE
MILE [1.6 km] FROM THE LANE
CLOSURE, INCLUDE W3-5
SIGNS, AS REQUIRED.

⑦ POST THE SPEED LIMIT APPROPRIATE
FOR ALL VEHICLES FOR THE
REMAINDER OF THE WORK ZONE
BEFORE RESUMING TO NORMAL
POSTED SPEED LIMITS AT THE END
OF THE WORK ZONE.

⑧ WHEN OUTSIDE OF A CONSTRUCTION
PROJECT, POST THE SPEED LIMIT
CONSISTING OF ONE LIMIT WHEN
THE NORMAL POSTED SPEED LIMIT
FOR ALL VEHICLES IS THE SAME.
WHEN CAR AND TRUCK SPEED LIMITS
DIFFER, POST BOTH LIMITS ON A
SINGLE SIGN.

⑨ AMBER LED FLASHERS MUST MEET
STANDARD SPECIFICATION SECTION 715
AND DTL. DWG. 618-01.

⑩ POST THE W20-5 AFTER THE W20-1
OR THE G20-1 AND THE R2-15
IF THE MERGING TAPER OCCURS AT
PROJECT BEGINNING.

* DENOTES SIGNS UNIQUE TO MONTANA.

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 618, 715
DWG. NO.
618-22

DIVIDED FOUR-LANE EQUIPMENT ENTRANCE



EFFECTIVE: JAN 23, 2020



5/20/2025 1:02 PM

STDDRD618022.DWG

-REVISED--
JUN 27, 2024
JUN 26, 2025

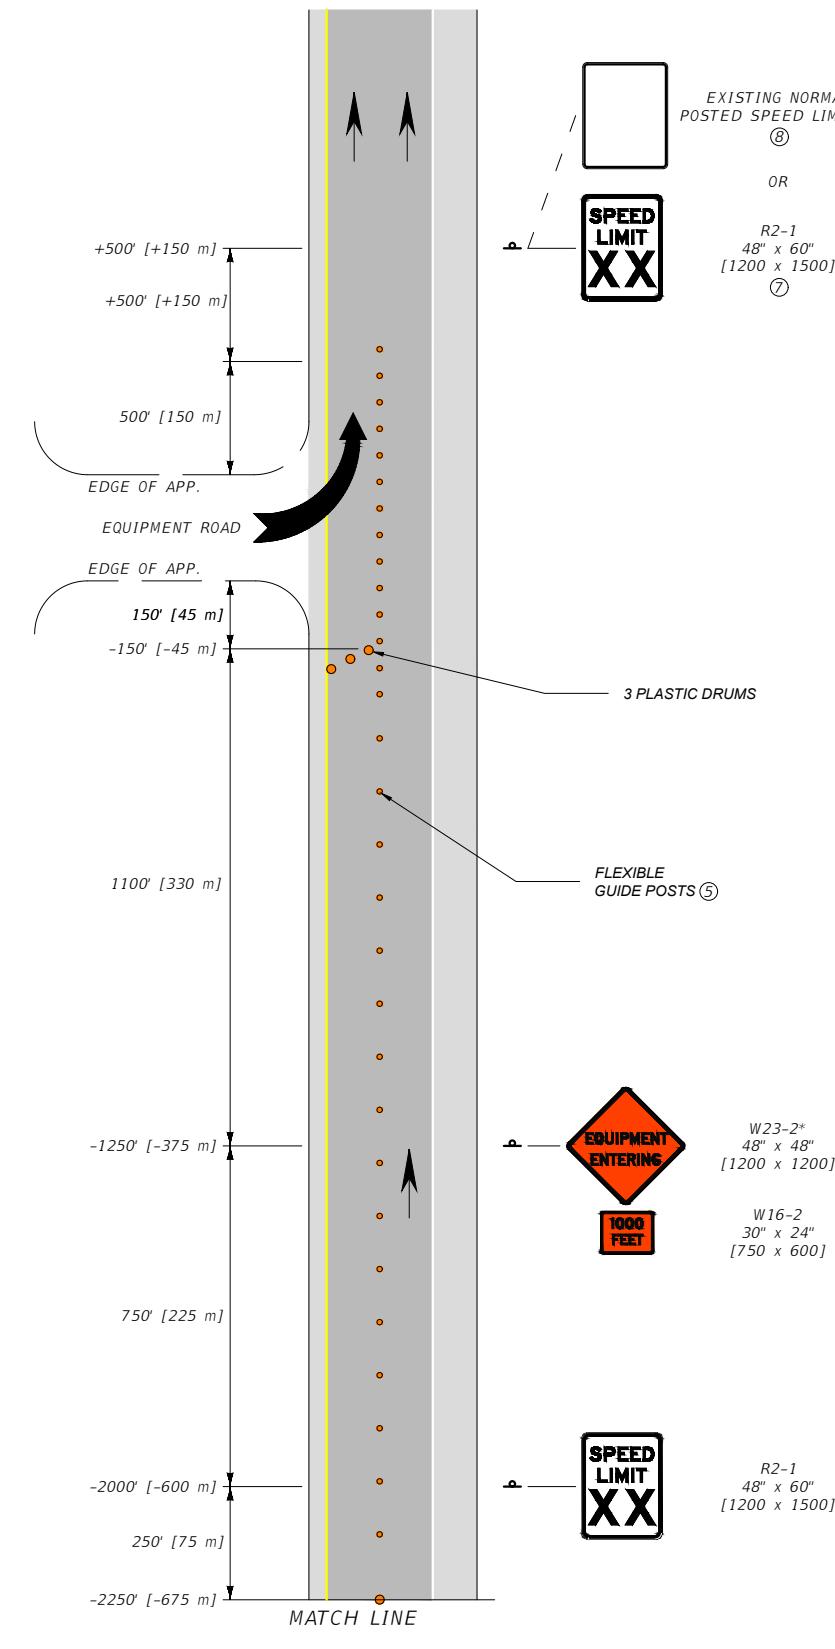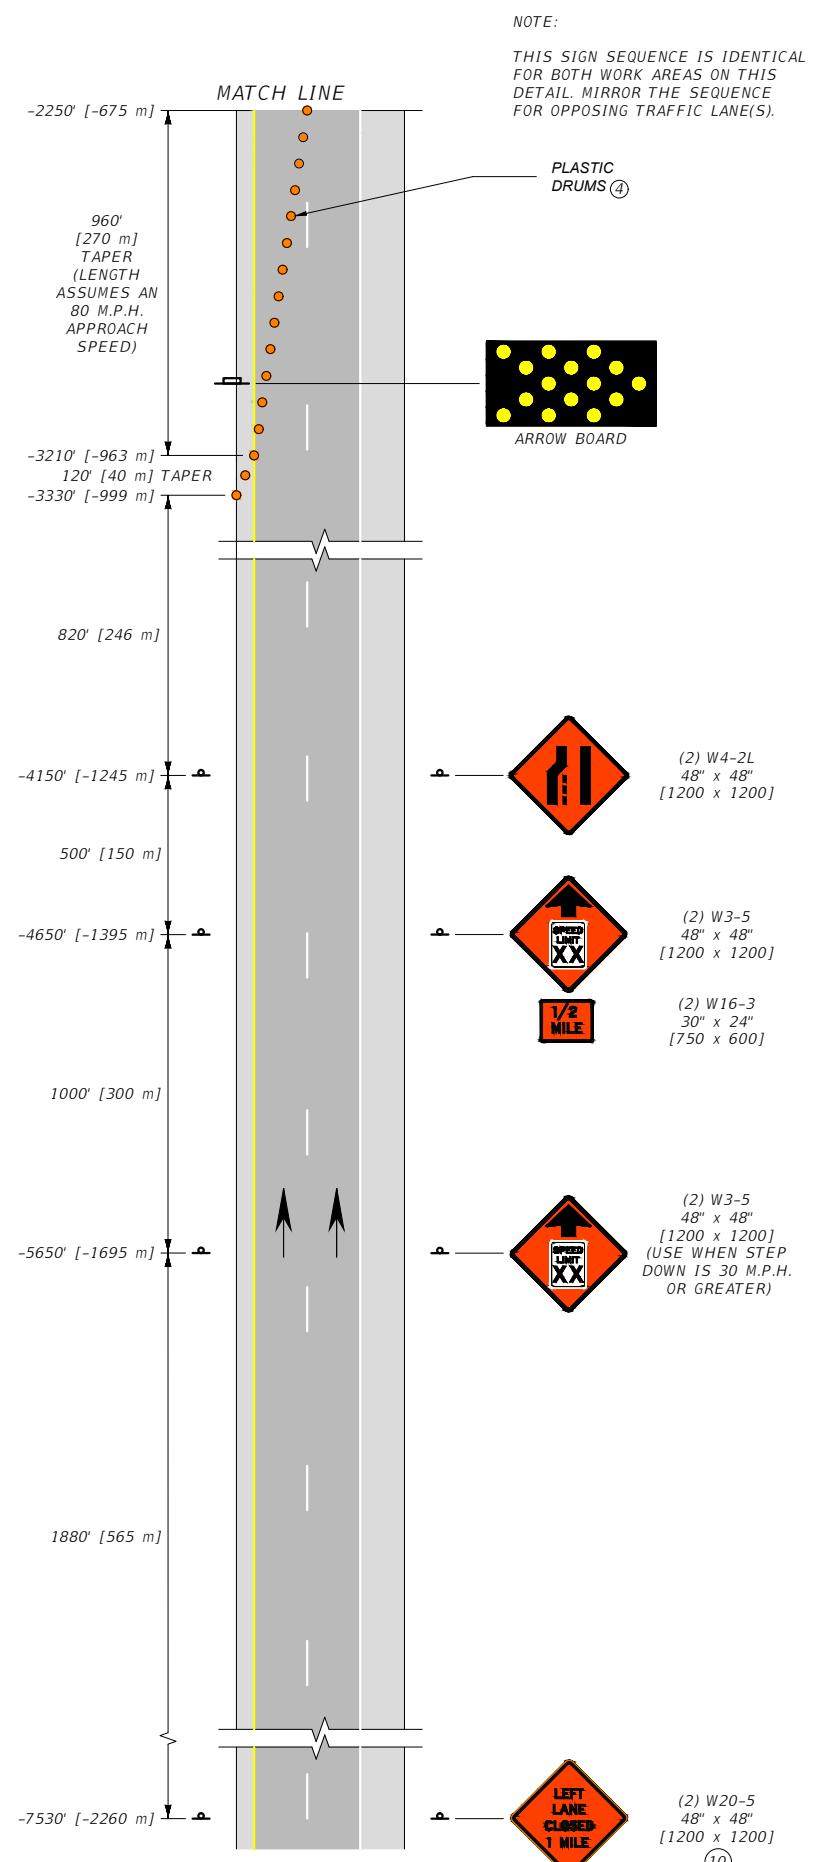

NOTES:

- INCLUDE SPEED LIMIT SIGNING ONLY IF SPEED MUST BE RESTRICTED WITHIN THE WORK ZONE. REMOVE OR COVER REGULATORY SIGNS TO MATCH ADJACENT REGULATIONS.
- THE BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- XX = SPEED DETERMINED BY PROJECT MANAGER.
- WHEN TAPER SECTIONS OCCUR OUTSIDE A CONSTRUCTION PROJECT, INCLUDE THE W20-1 AND R2-15* SIGNS.
- SPACE FLEXIBLE GUIDE POSTS ON TANGENTS AT INTERVALS IN FEET [METERS] OF NO MORE THAN TWO [0.6] TIMES THE SPEED LIMIT IN M.P.H. SPACE PLASTIC DRUMS IN ALL TAPER SECTIONS AT INTERVALS IN FEET [METERS] OF NO MORE THAN ONE [0.3] TIMES THE SPEED LIMIT IN M.P.H. FOR SPEED LIMITS LESS THAN 35 M.P.H., SPACE CHANNELIZING DEVICES AS DIRECTED BY THE PROJECT MANAGER.
- IF FLAGGER IS MORE THAN ONE MILE [1.6 km] FROM THE LANE CLOSURE, INCLUDE W3-5 SIGNS AS REQUIRED.
- POST THE SPEED LIMIT APPROPRIATE FOR ALL VEHICLES FOR THE REMAINDER OF THE WORK ZONE BEFORE RESUMING TO NORMAL POSTED SPEED LIMITS AT THE END OF WORK ZONE.
- WHEN OUTSIDE A CONSTRUCTION PROJECT, POST THE SPEED LIMIT AS ONE LIMIT WHEN THE NORMAL POSTED SPEED LIMIT FOR ALL VEHICLES IS THE SAME. WHEN CAR AND TRUCK SPEED LIMITS DIFFER, POST BOTH LIMITS ON A SINGLE SIGN.
- AMBER LED FLASHERS MUST MEET STANDARD SPECIFICATION SECTION 715 AND DTL. DWG. 618-01 REQUIREMENTS.
- POST THE W20-5 AFTER THE W20-1 OR G20-1 AND THE R2-15 IF THE MERGING TAPER OCCURS AT PROJECT BEGINNING.

* DENOTES SIGNS UNIQUE TO MONTANA.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 618-23
SECTION 618, 715

DIVIDED FOUR-LANE MEDIAN CROSSING


EFFECTIVE: JAN 23, 2020



5/19/2025 1:41 PM

STDDRD618023.DWG

-REVISED-
JUN 27, 2024
JUN 26, 2025

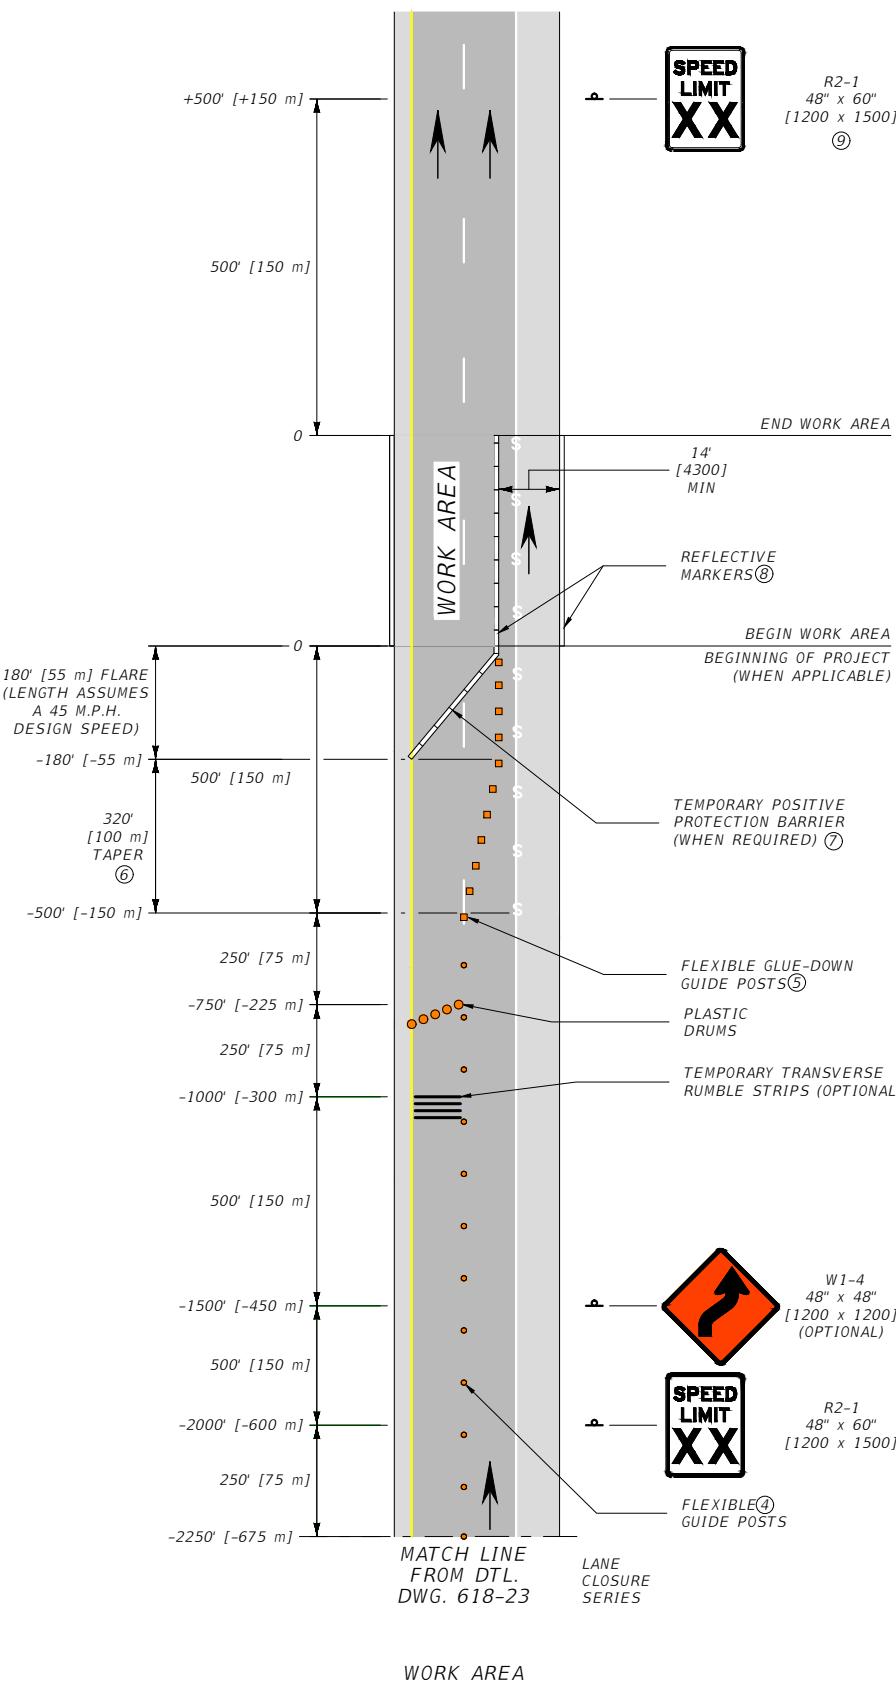

NOTES:

- ① USE THESE SIGN LAYOUTS WITH THE LAYOUT ILLUSTRATED ON DTL. DWG. 618-23.
- ② INCLUDE REGULATORY SIGNING ONLY AS REQUIRED. REMOVE OR COVER REGULATORY SIGNS TO MATCH ADJACENT REGULATIONS.
- ③ XX = SPEED DETERMINED BY THE PROJECT MANAGER.
- ④ SPACE CHANNELIZING DEVICES ON TANGENTS AT INTERVALS IN FEET [METERS] OF NO MORE THAN TWO [0.6] TIMES THE SPEED LIMIT IN M.P.H. AND ON ALL TAPER SECTIONS AT INTERVALS IN FEET [METERS] OF NO MORE THAN ONE [0.3] TIMES THE SPEED LIMIT IN M.P.H. FOR SPEED LIMITS LESS THAN 35 M.P.H., SPACE CHANNELIZING DEVICES AS DIRECTED BY THE PROJECT MANAGER.
- ⑤ SPACE FLEXIBLE GLUE-DOWN GUIDE POSTS USED FOR LANE SHIFT TAPER AT INTERVALS IN FEET [METERS] OF M.P.H.
- ⑥ THE LANE SHIFT TAPER LENGTH ASSUMES AN 8' [2400] LANE SHIFT OFFSET AND AN 80 M.P.H. APPROACH SPEED. CONTACT THE PROJECT MANAGER IF CONDITIONS VARY.
- ⑦ TEMPORARY POSITIVE PROTECTION BARRIER CAN TERMINATE AT THE CENTER OF THE CLOSED LANE FOR ACCESS PURPOSES IF AN APPROVED TEMPORARY IMPACT ATTENUATOR IS USED.
- ⑧ PLACE REFLECTIVE MARKERS ALONG THE TOP OF TEMPORARY BARRIER AND ENSURE EXISTING BARRIER REFLECTORS ARE INTACT.
- ⑨ POST THE SPEED LIMIT APPROPRIATE FOR ALL VEHICLES FOR THE REMAINDER OF THE WORK ZONE BEFORE RESUMING TO NORMAL POSTED SPEED LIMITS AT THE END OF THE WORK ZONE.
- ⑩ OBLITERATE CONFLICTING PAVEMENT MARKINGS IN ACCORDANCE WITH SECTION 620 BEGINNING AT THE SHIFTING TAPER AND THROUGH THE WORK AREA.

* DENOTES SIGNS UNIQUE TO MONTANA.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE	DWG. NO.
STANDARD SPEC.	618-24
SECTION	618

DIVIDED FOUR-LANE SINGLE LANE CLOSURE LANE SHIFT

EFFECTIVE: JAN 23, 2020



MONTANA

Department of Transportation

--REVISED--
JUN 27, 2024
JUN 26, 2025

5/19/2025 2:11 PM


STDDRD618024.DWG

NOTES:

① USE THESE SIGN LAYOUTS WITH THE LAYOUT SHOWN IN DTL. DWG. 618-21.

② SPACE FLEXIBLE GUIDE POSTS AT INTERVALS NO MORE THAN 1 TIMES THE SPEED LIMIT IN FEET[0.3 TIMES IN METERS]. SPACE PLASTIC DRUMS IN ALL TAPER SECTIONS AT INTERVALS NO MORE THAN 1 TIMES THE SPEED LIMIT IN FEET[0.3 TIMES IN METERS].

③ SEE DET. DWG. 618-03.

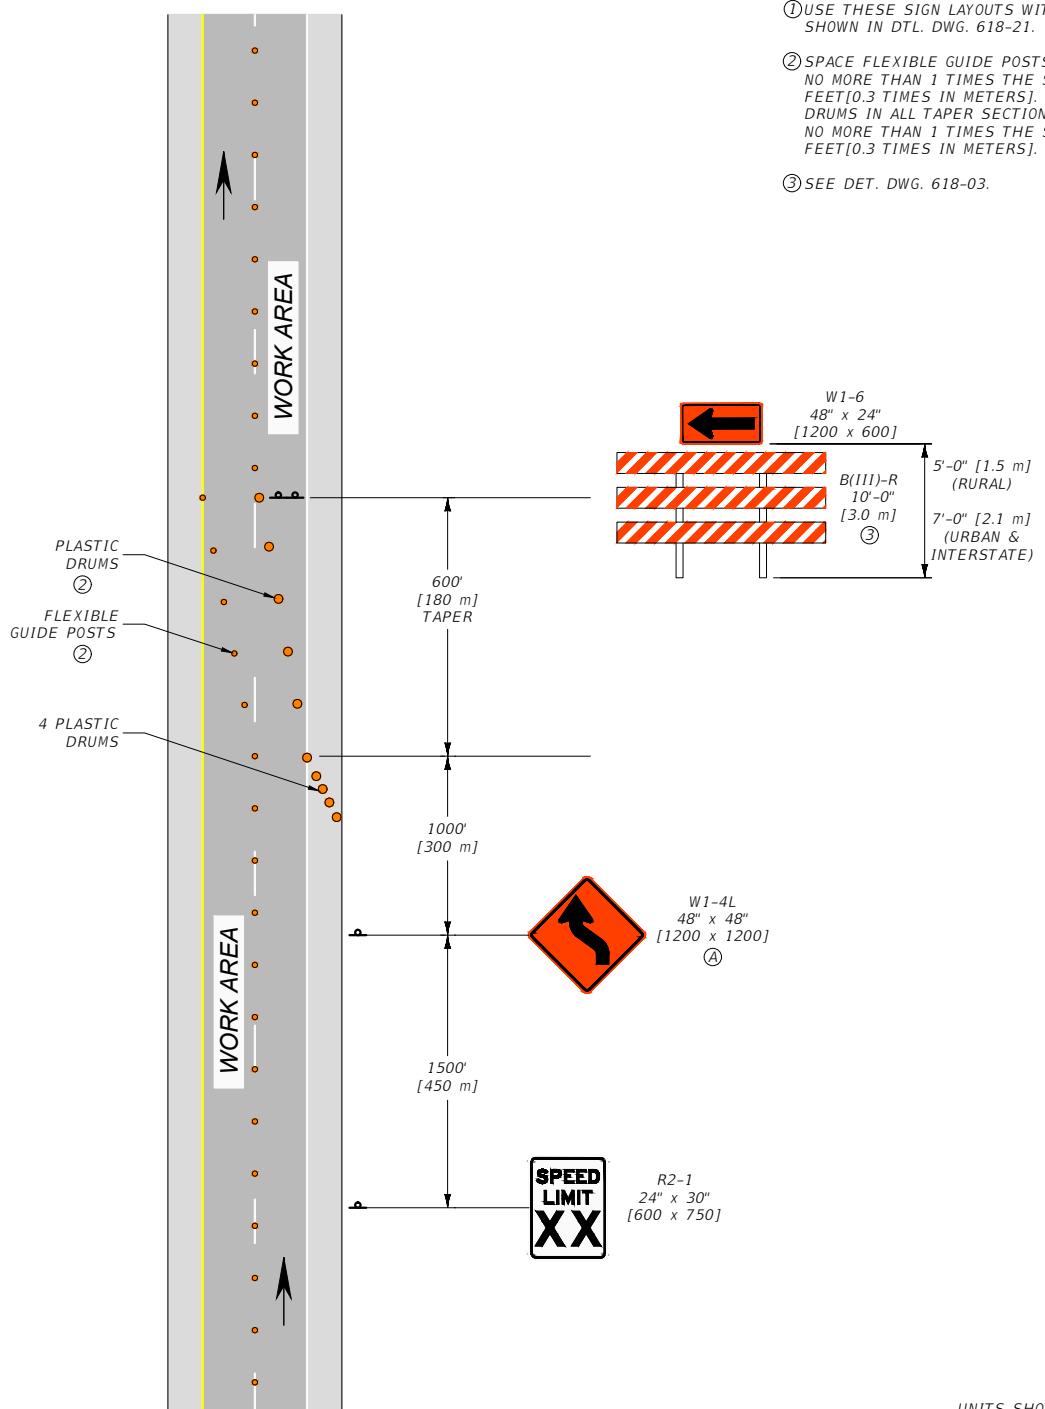

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 618

DWG. NO.
618-25

DIVIDED FOUR-LANE LANE SHIFT


EFFECTIVE: JUN 26, 2025

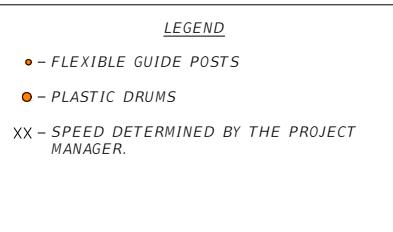

--REVISED--

NOTES:

- ① SPACE PLASTIC DRUMS AT INTERVALS NO MORE THAN 1 TIMES THE SPEED LIMIT IN FEET [0.3 TIMES IN METERS].
- ② DEVICE SPACINGS ARE MAXIMUMS AND CAN BE REDUCED BUT THE TAPER DISTANCE IS A MINIMUM AND CAN BE INCREASED IF CONDITIONS WARRANT.
- ③ CHANGEABLE MESSAGE SIGN MUST BE CAPABLE OF PROVIDING 2 PHASES WITH 3 LINES AND 8 CHARACTERS PER LINE. CHARACTERS MUST BE AT LEAST 18 INCH [450] HIGH. TWO LANE ROADS WITH SPEEDS LESS THAN 50 M.P.H. REQUIRE A MINIMUM 10 INCH [250] CHARACTER HEIGHT.

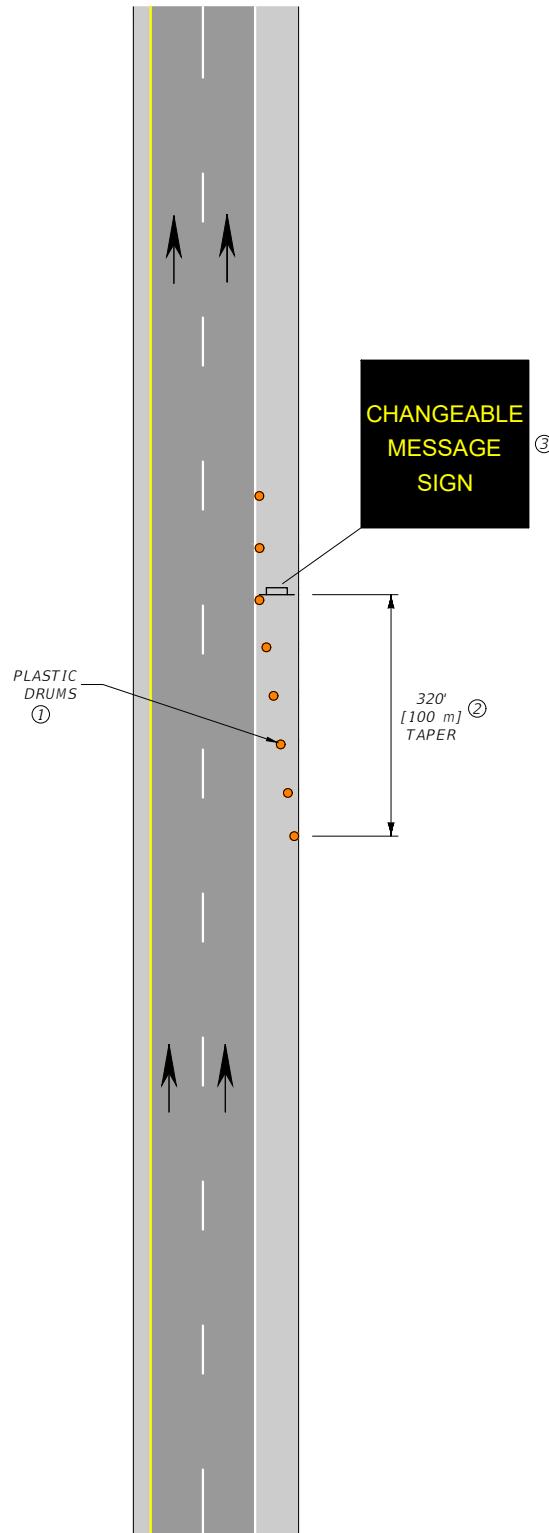

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS


REFERENCE STANDARD SPEC. SECTION 618	DWG. NO. 618-26
--------------------------------------------	--------------------


**DIVIDED FOUR-LANE
SHOULDER MESSAGE SIGN**


EFFECTIVE: JUN 26, 2024




--REVISED--

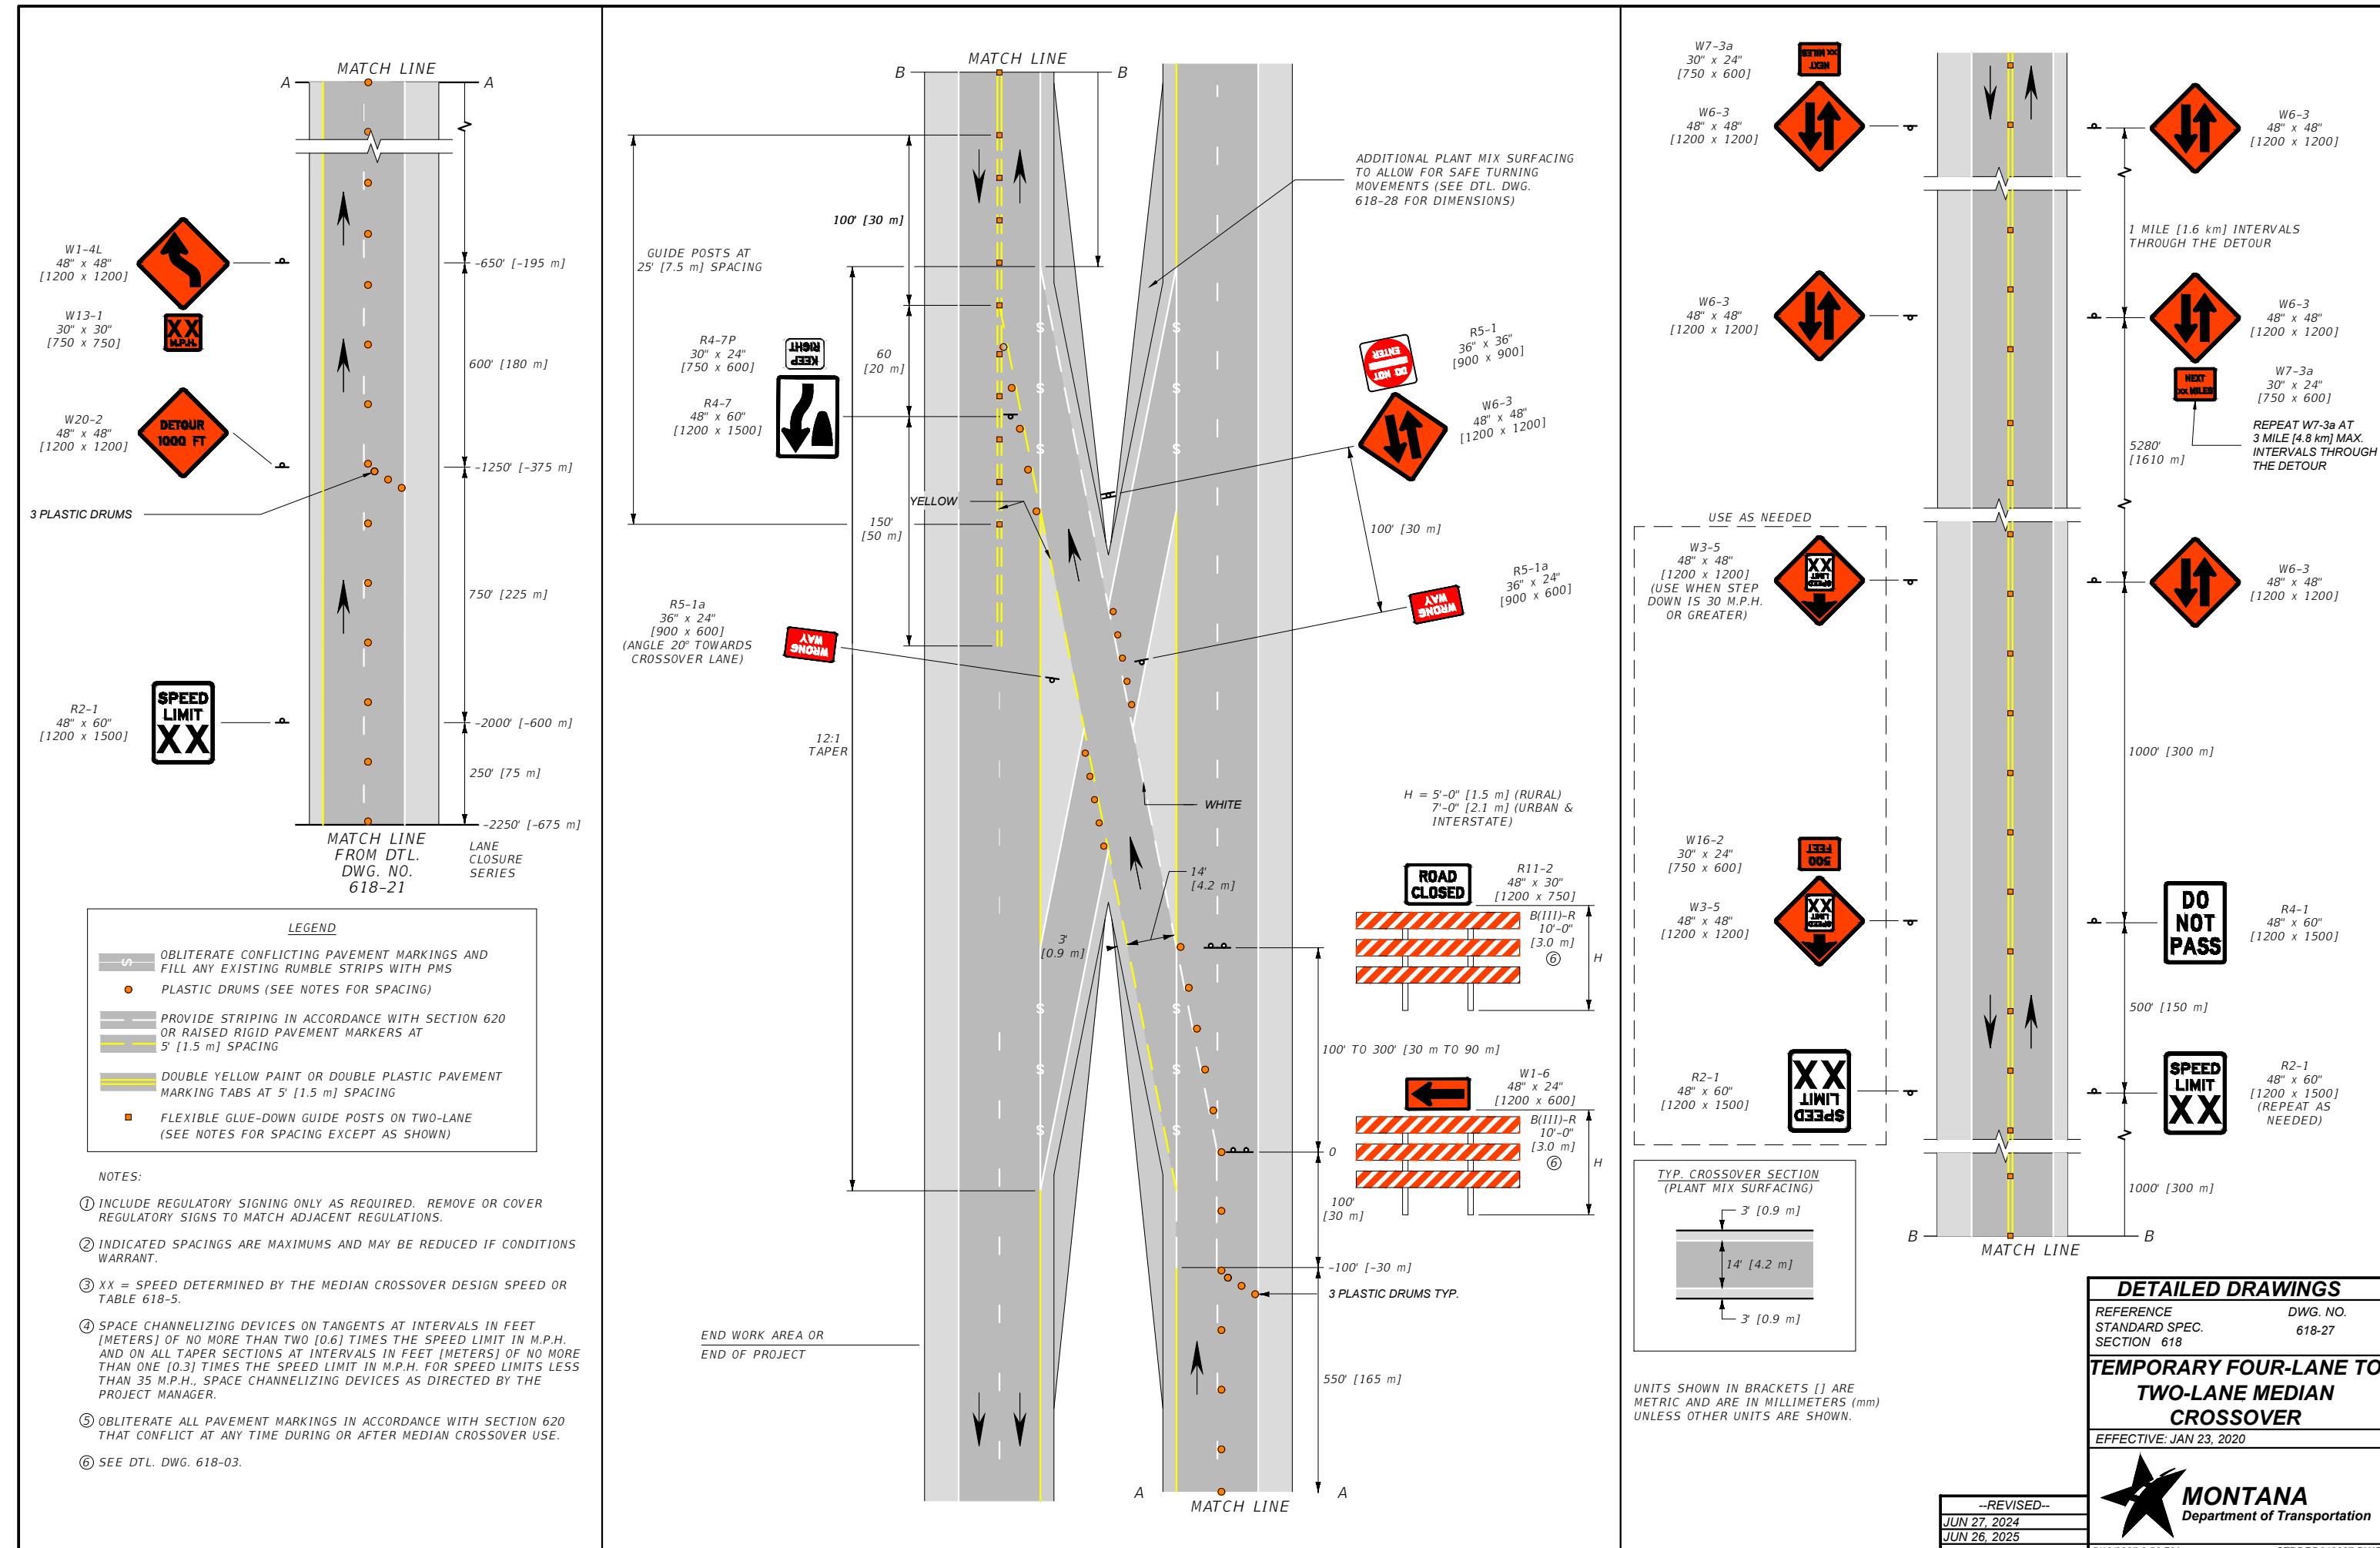

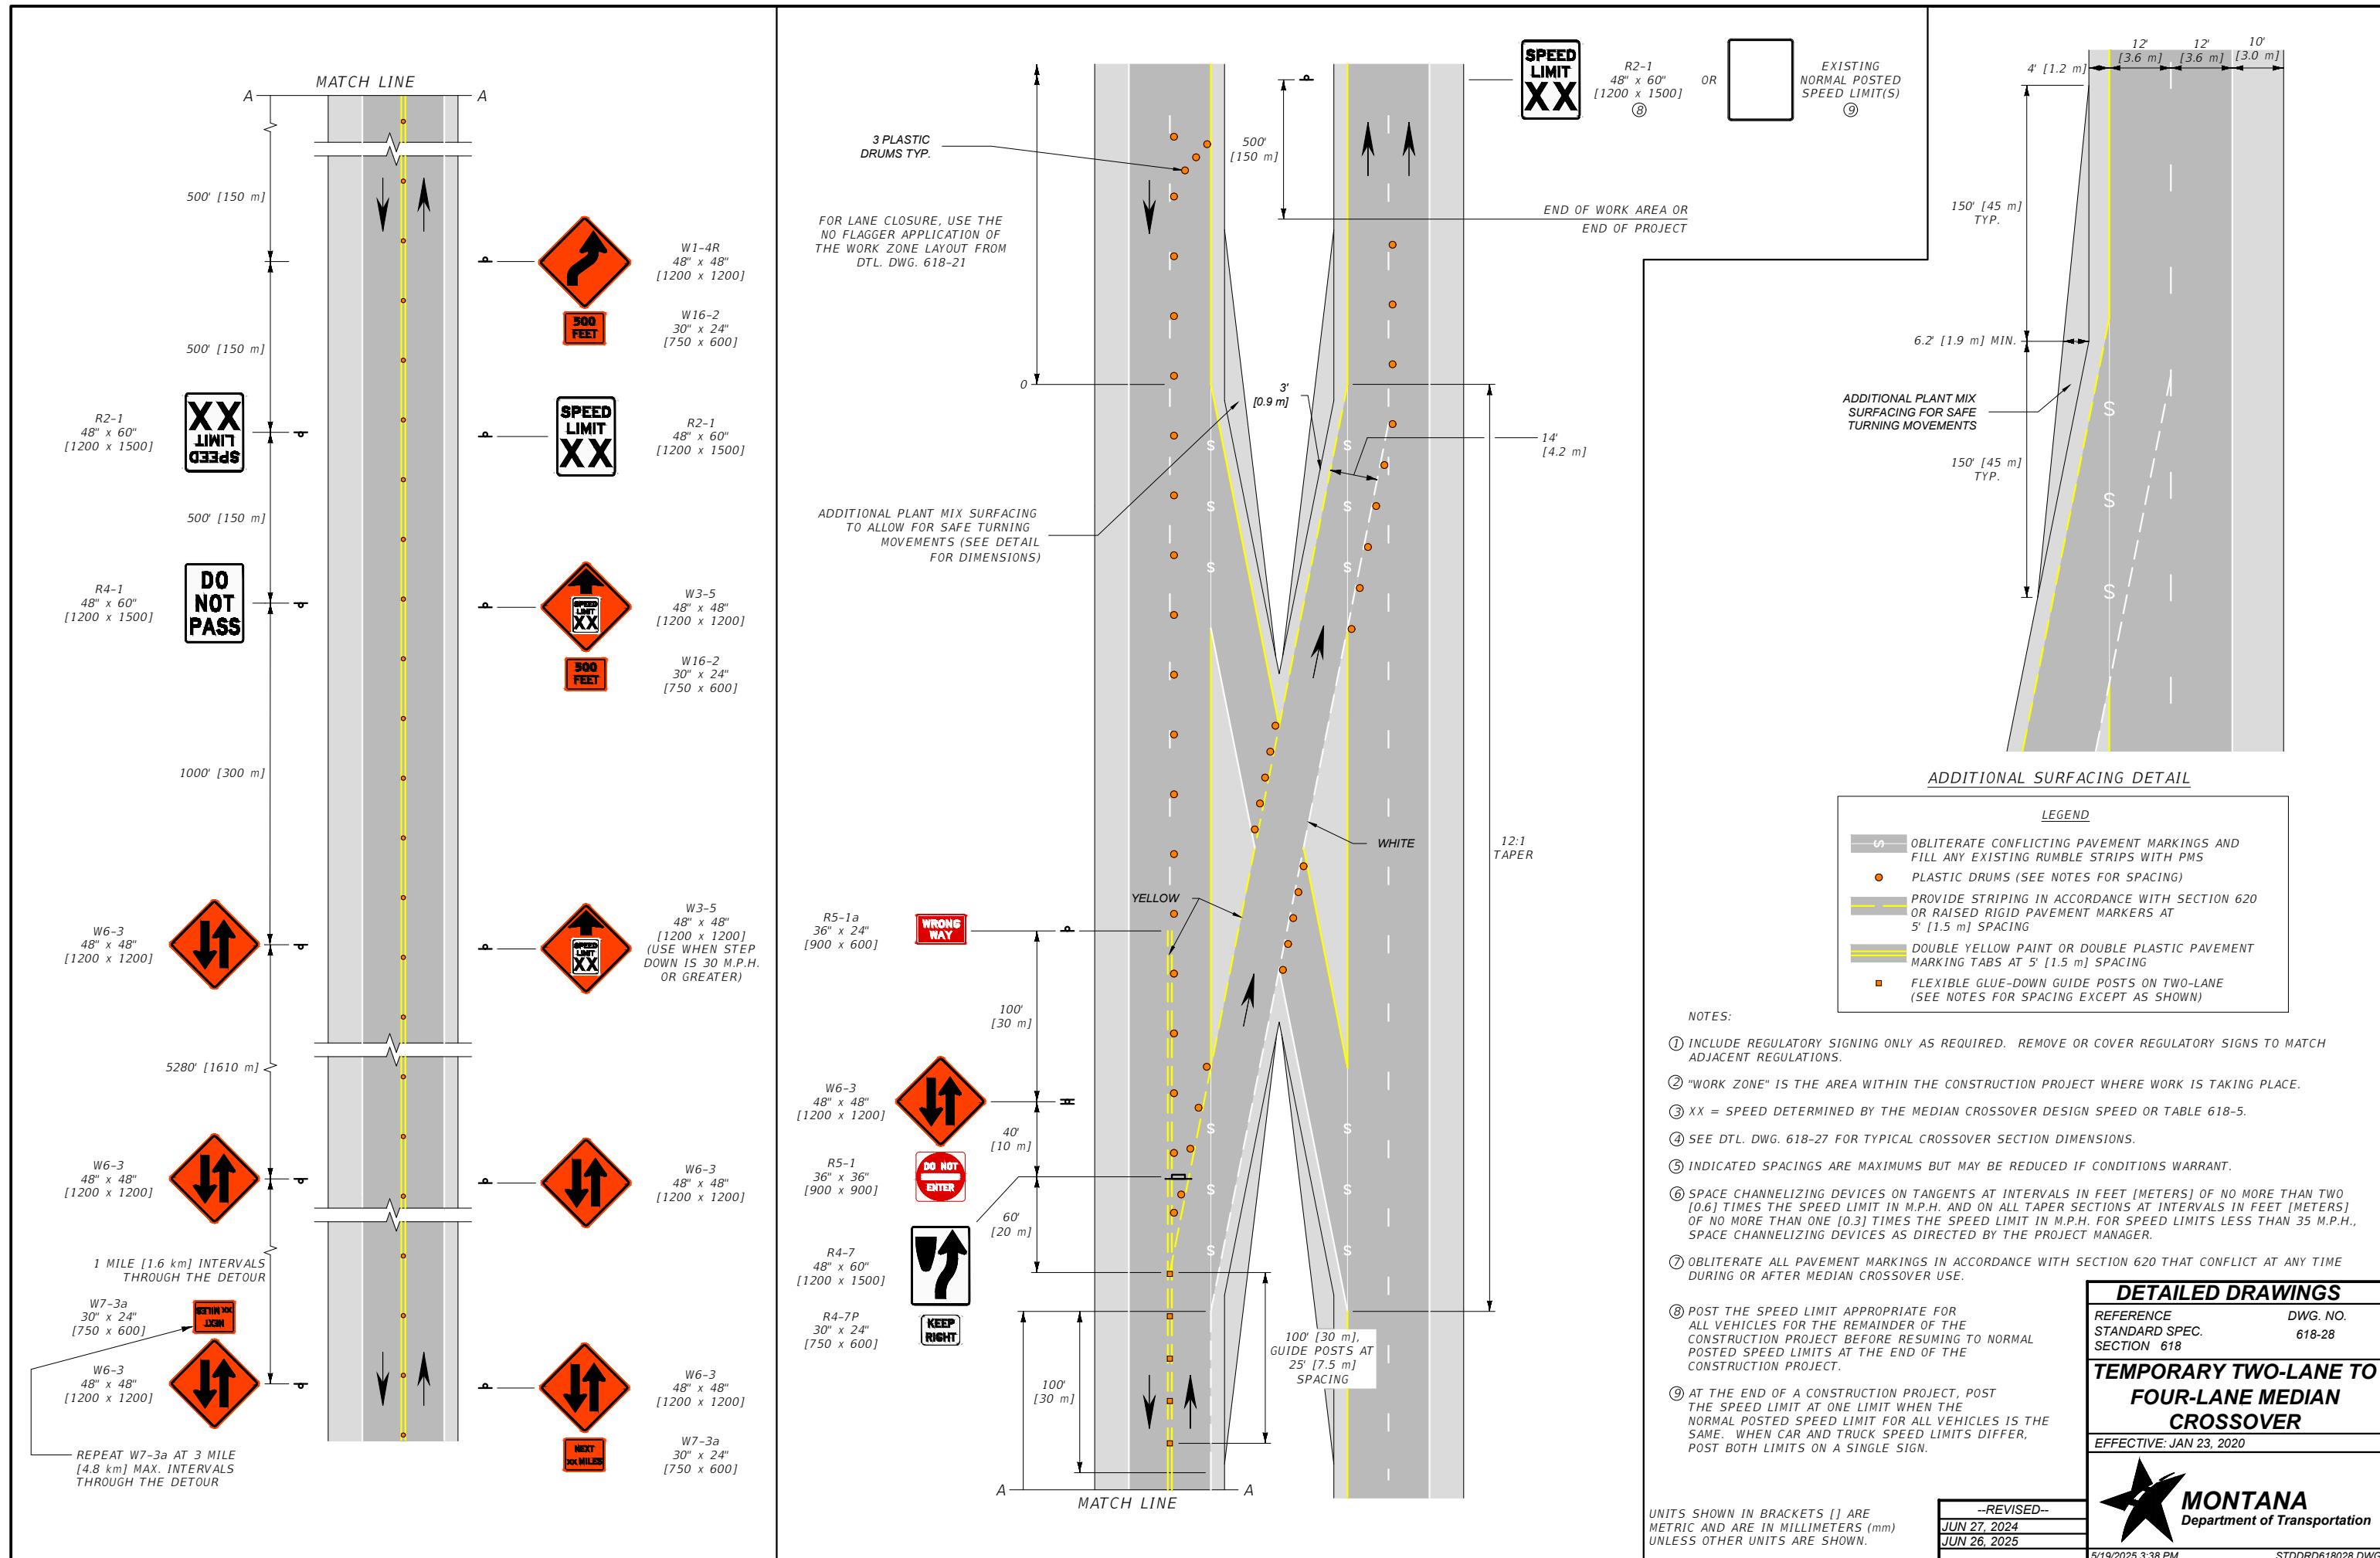


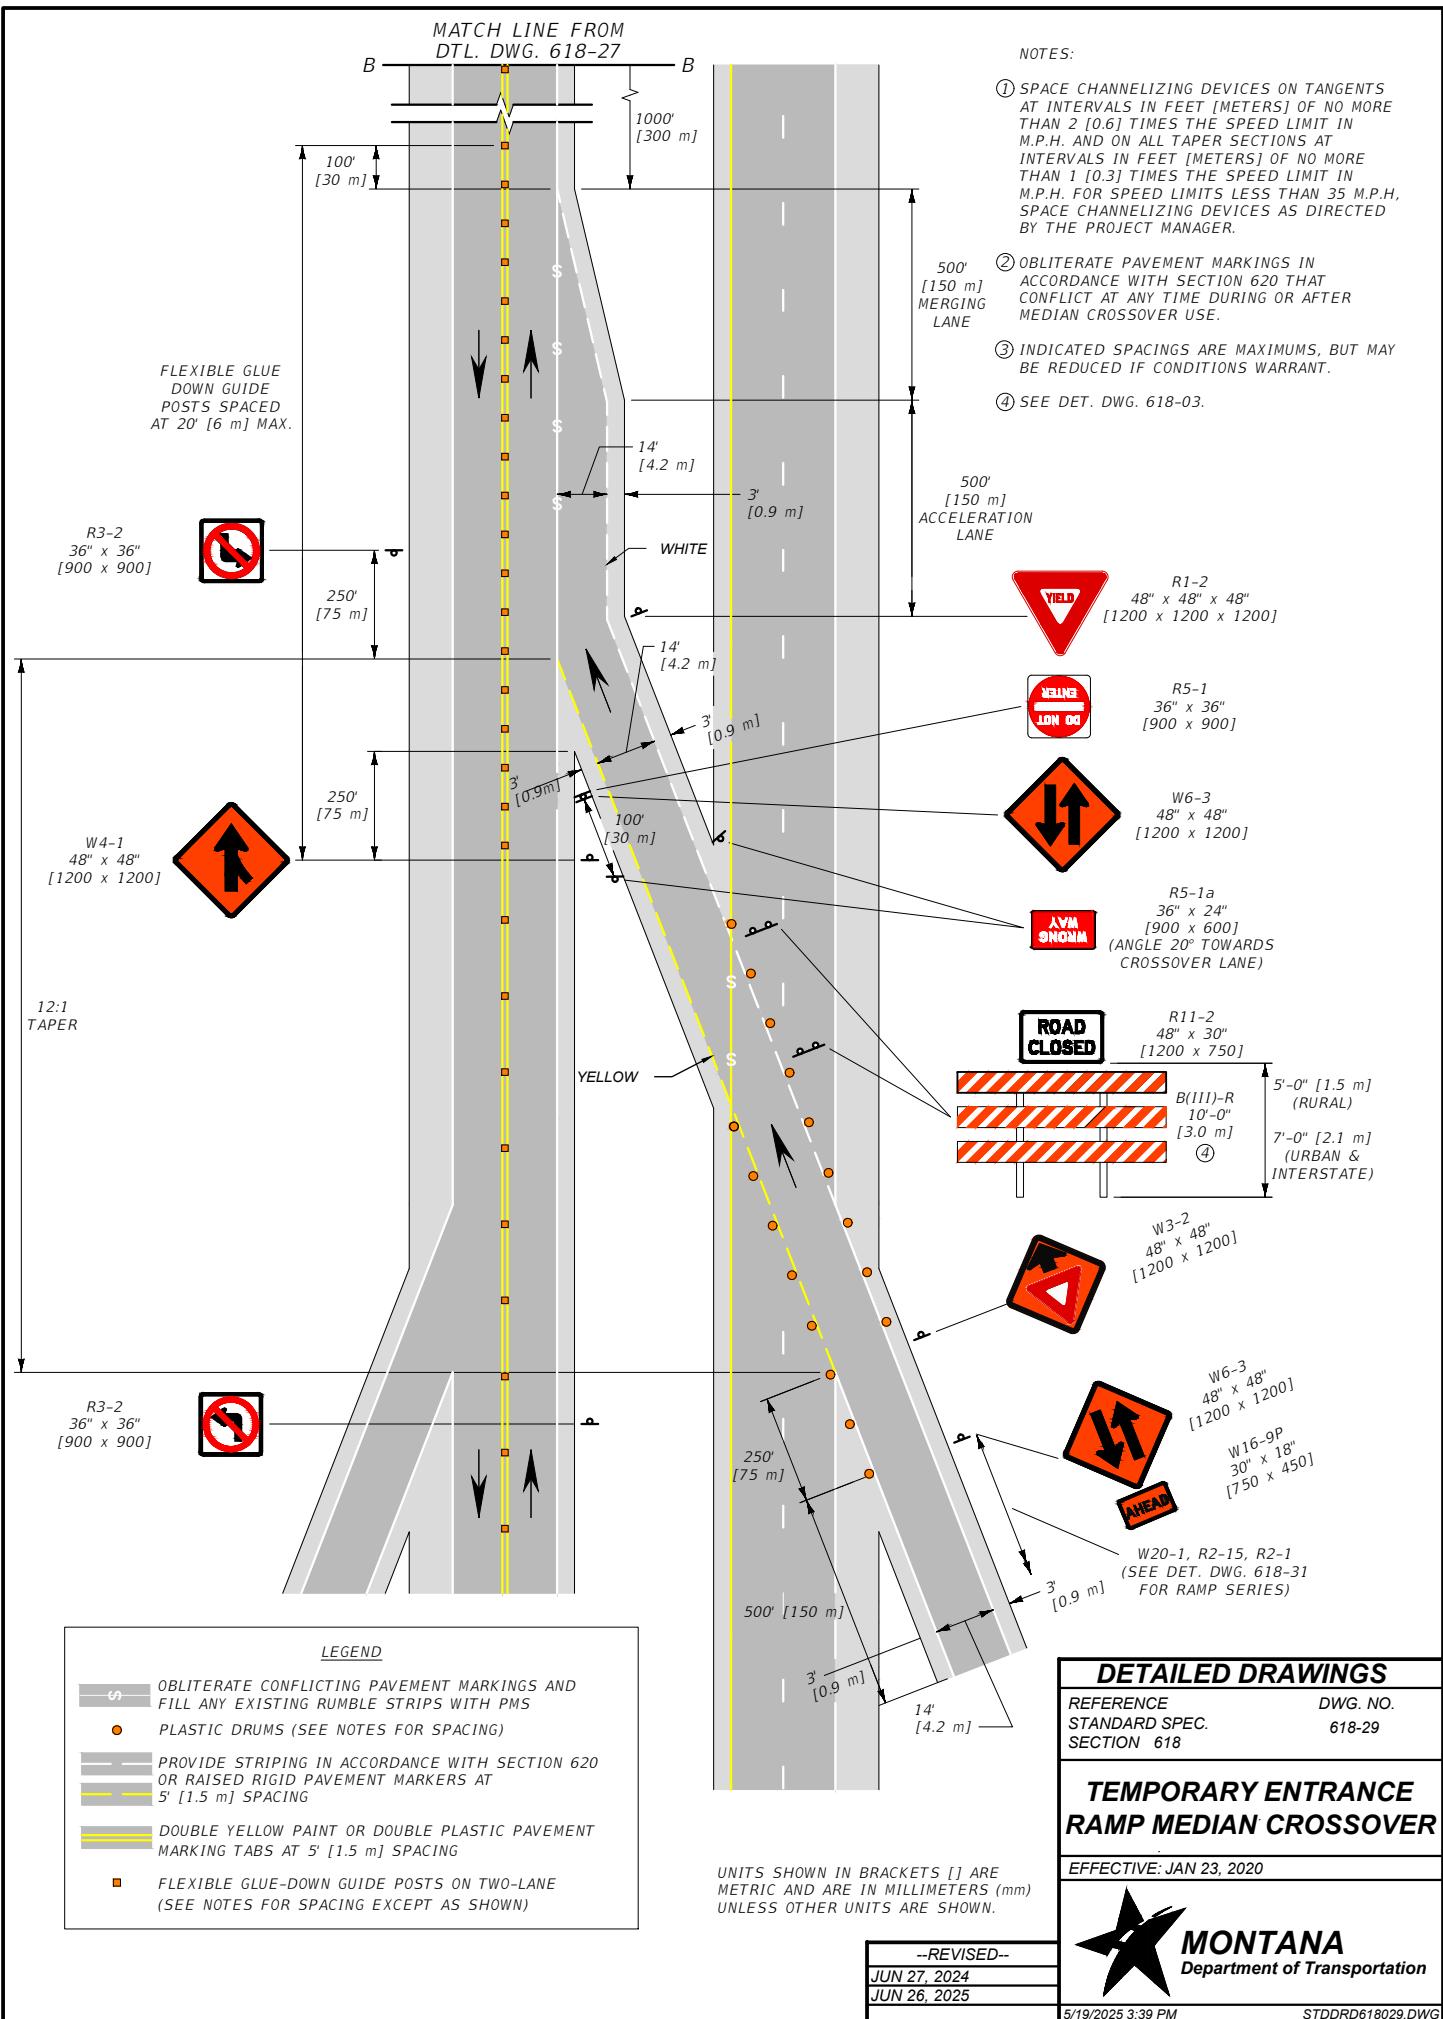


LEGEND	
	OBLITERATE CONFLICTING PAVEMENT MARKINGS AND FILL ANY EXISTING RUMBLE STRIPS WITH PMS
	PLASTIC DRUMS (SEE NOTES FOR SPACING)
	PROVIDE STRIPING IN ACCORDANCE WITH SECTION 620 OR RAISED RIGID PAVEMENT MARKERS AT 5' [1.5 m] SPACING
	DOUBLE YELLOW PAINT OR DOUBLE PLASTIC PAVEMENT MARKING TABS AT 5' [1.5 m] SPACING
	FLEXIBLE GLUE-DOWN GUIDE POSTS ON TWO-LANE (SEE NOTES FOR SPACING EXCEPT AS SHOWN)

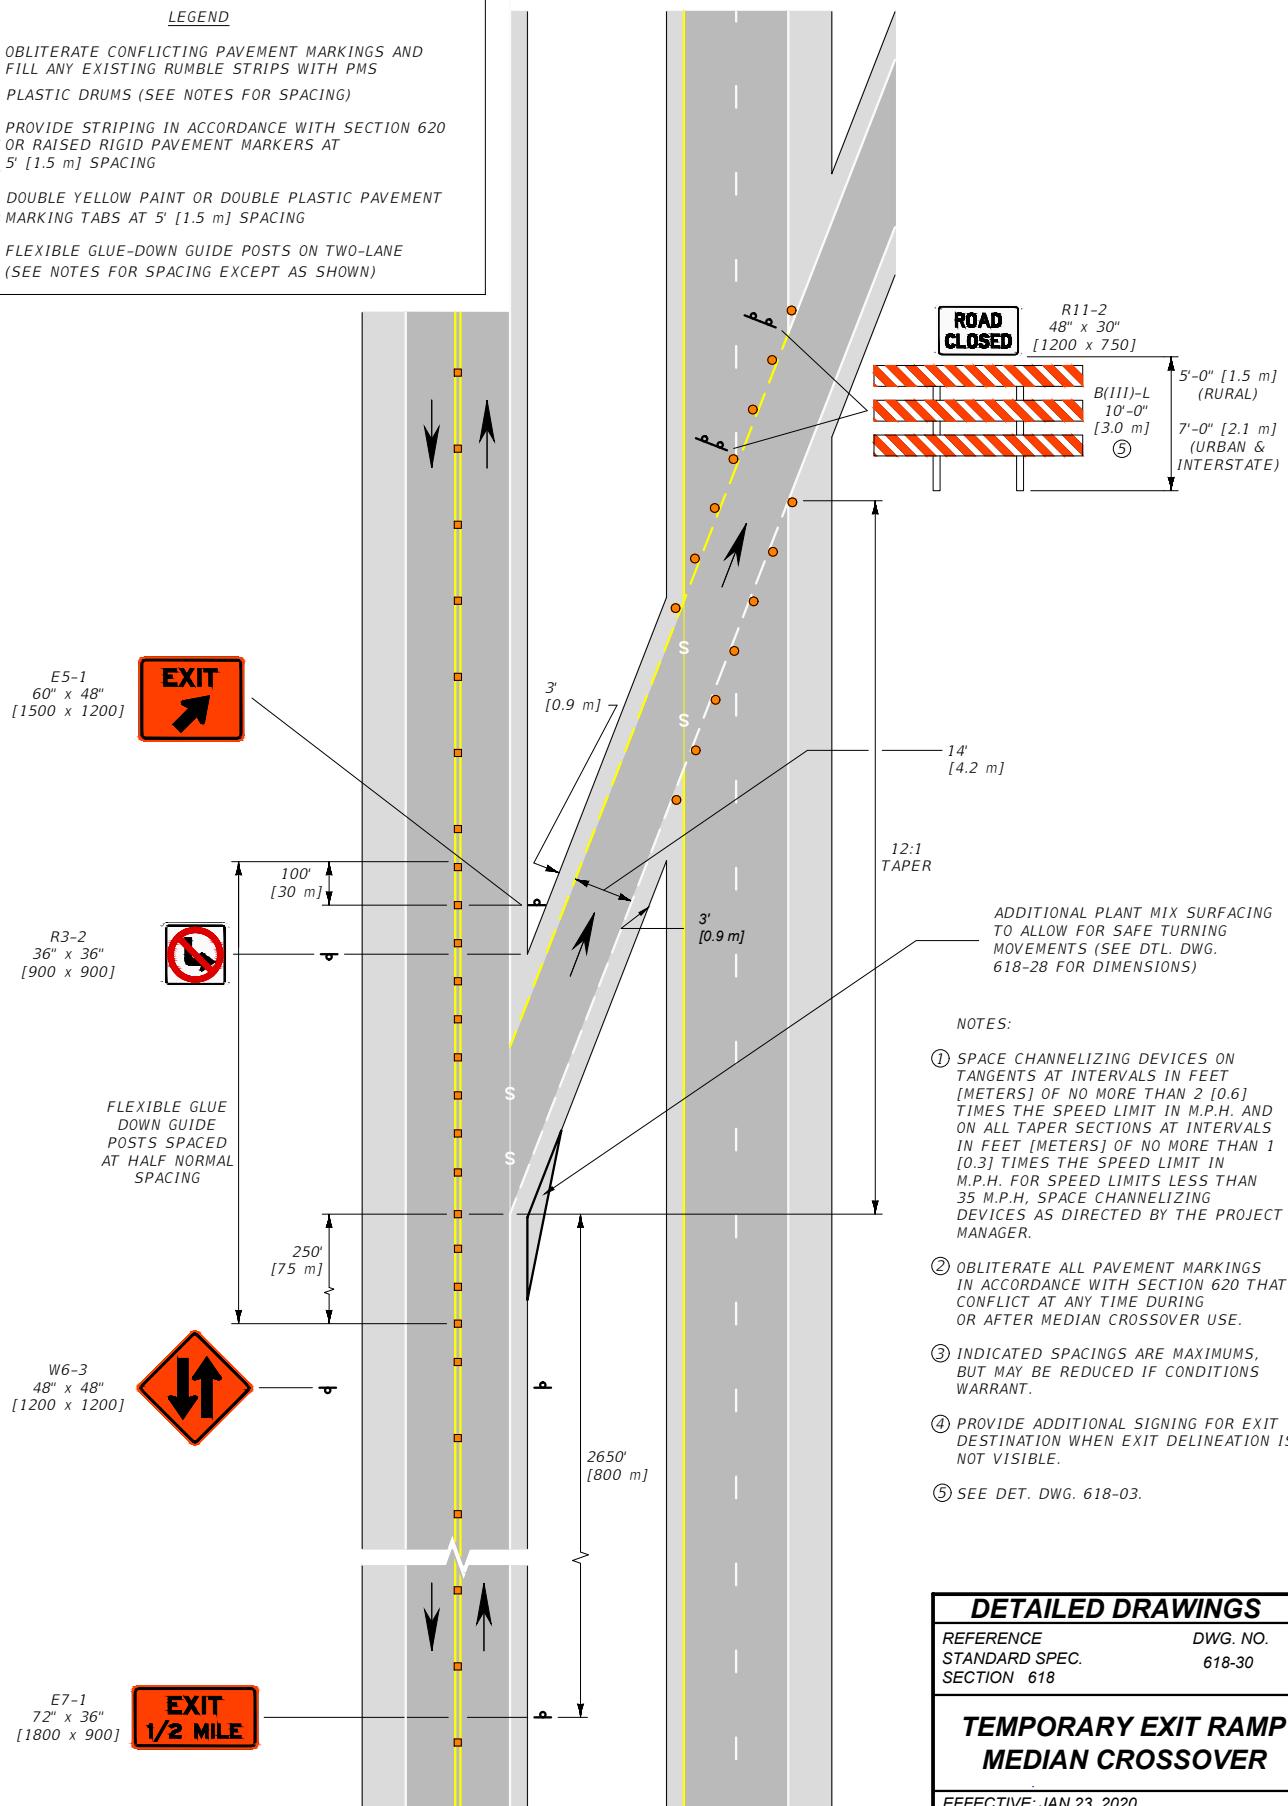

DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 618	DWG. NO. 618-30
TEMPORARY EXIT RAMP MEDIAN CROSSOVER	
EFFECTIVE: JAN 23, 2020	
	MONTANA Department of Transportation
--REVISED--	
JUN 27, 2024	
JUN 26, 2025	
5/19/2025 3:41 PM	STDDRD618030.DWG

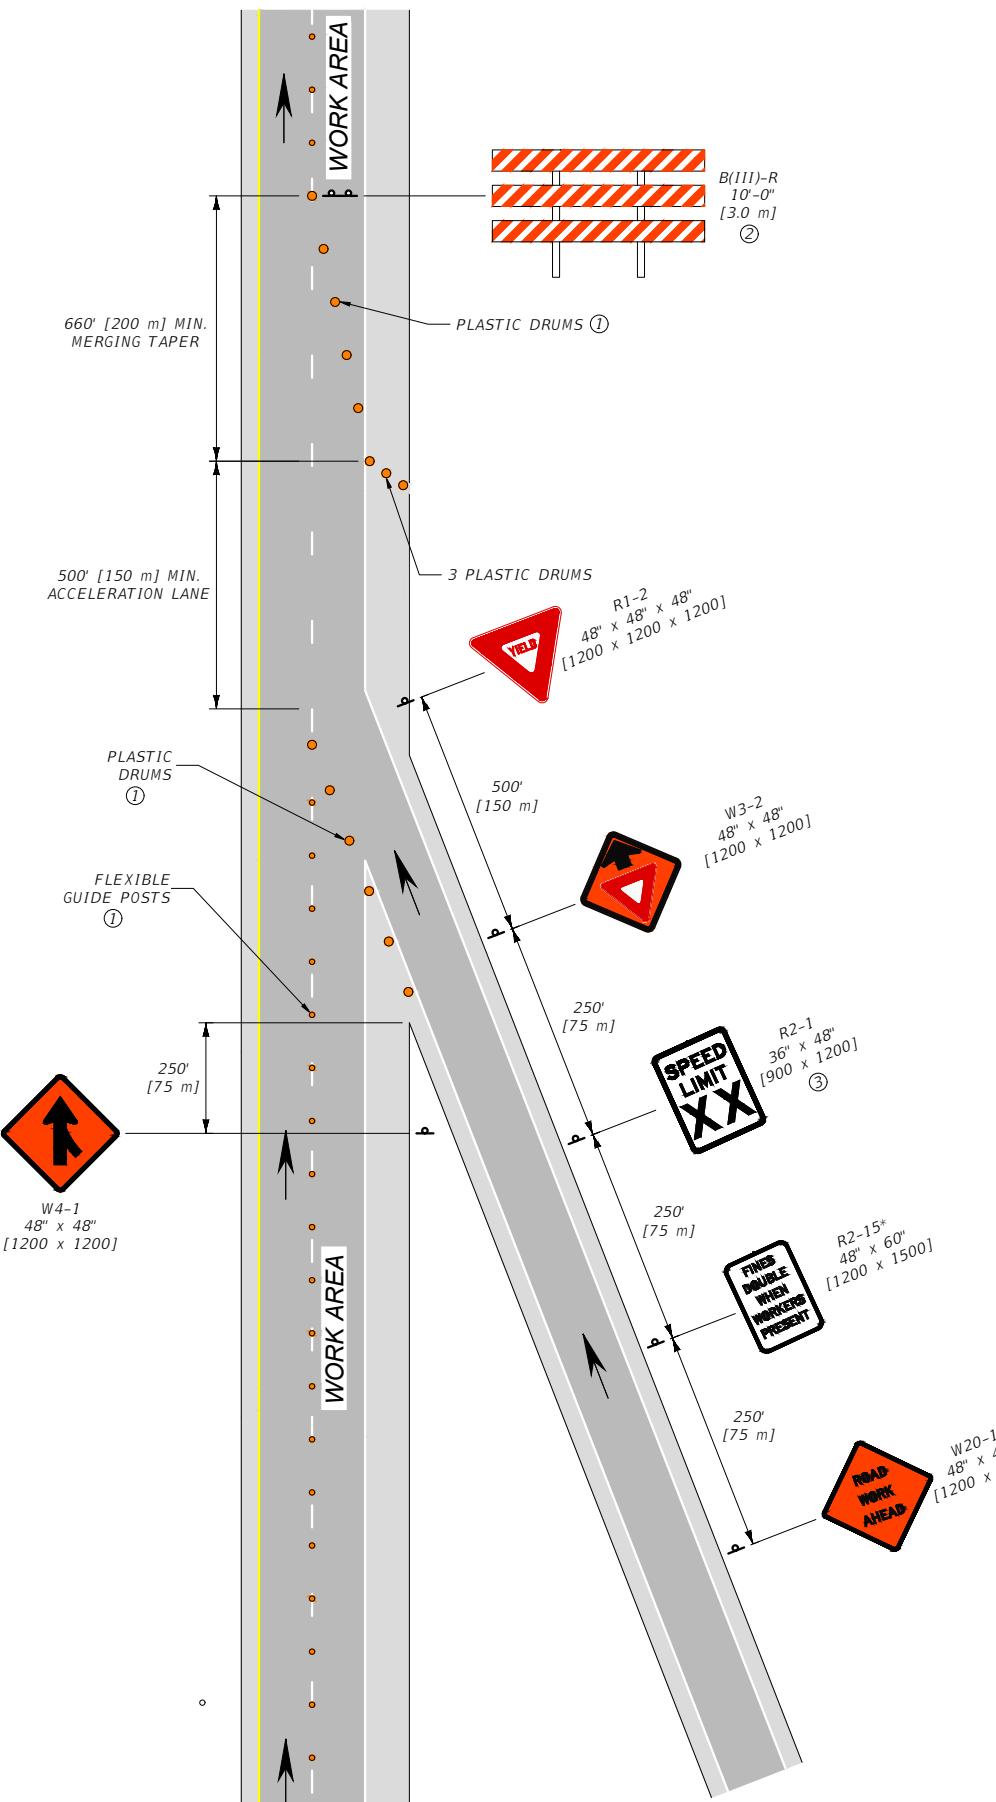

RAMP MERGE WARNING - RIGHT LANE CLOSED

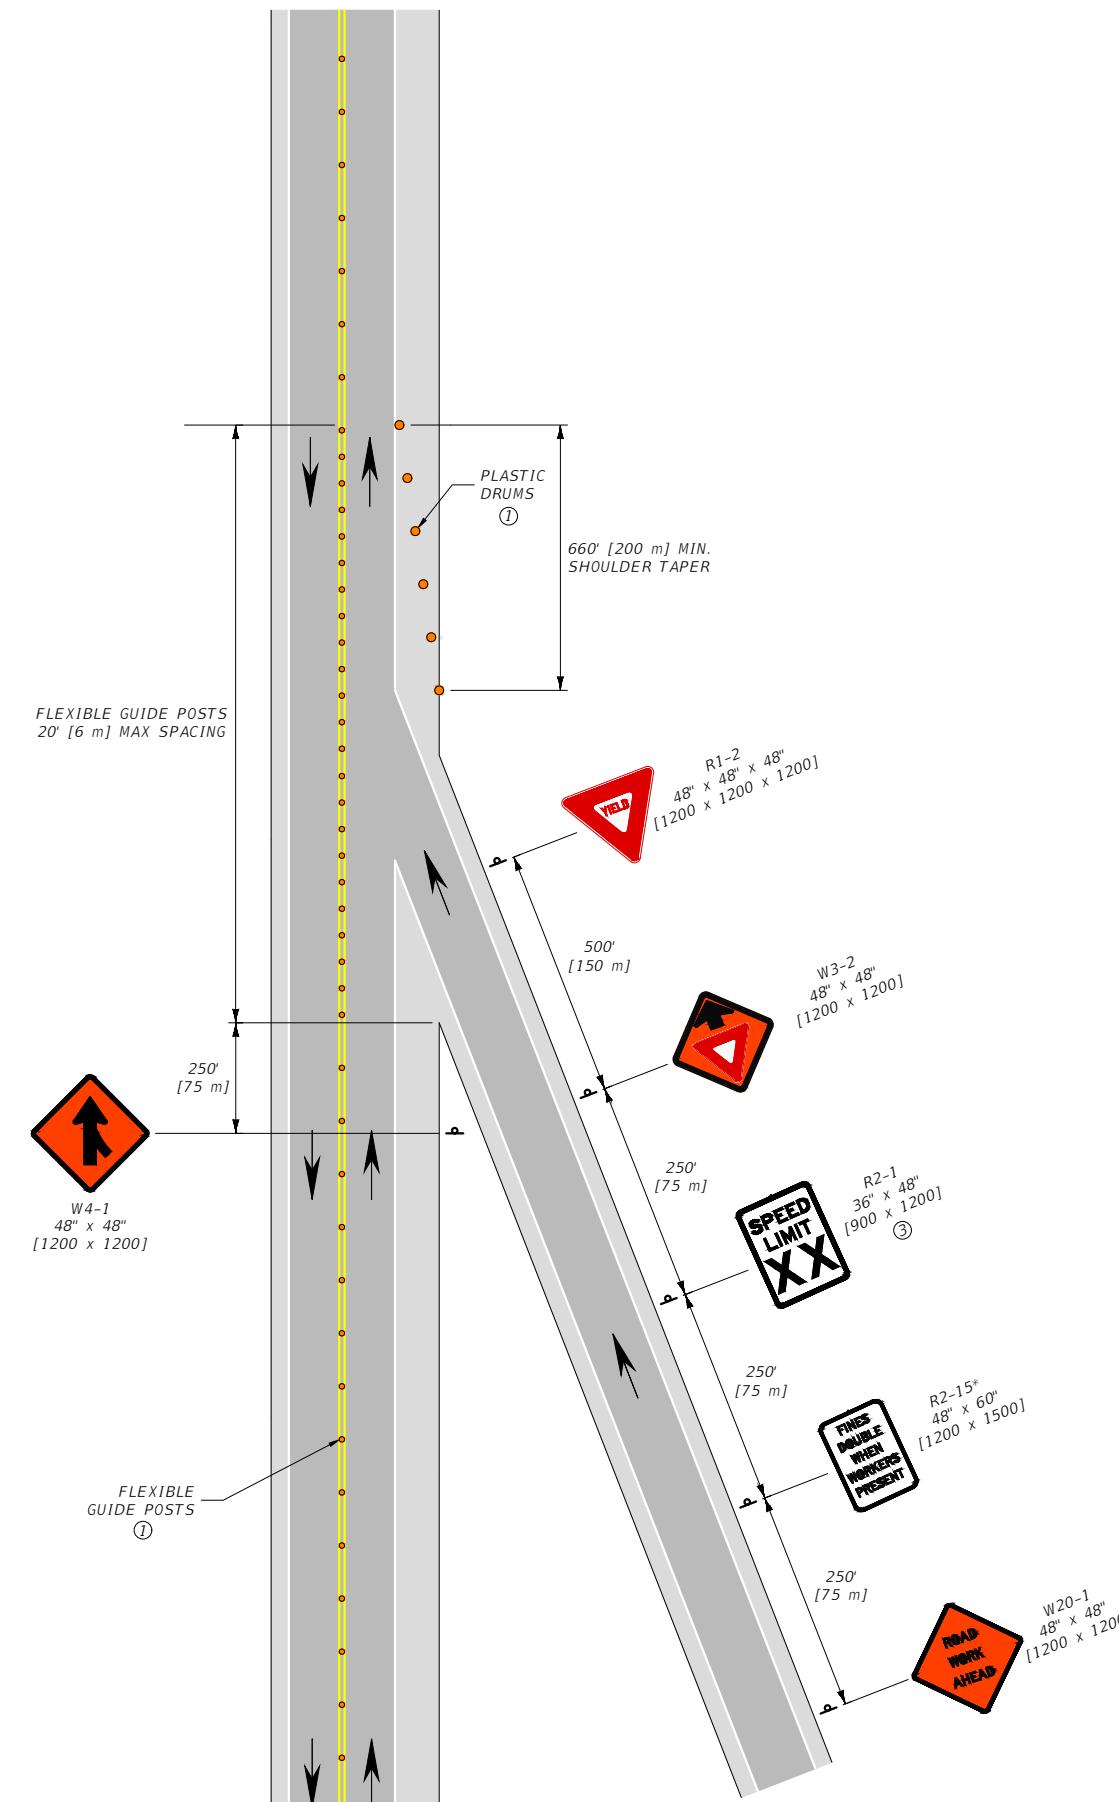

RAMP MERGE WARNING - LEFT LANE CLOSED

NOTES:

- ① SPACE FLEXIBLE GUIDE POSTS ON TANGENTS AT INTERVALS IN FEET [METERS] OF NO MORE THAN 2 [0.6] TIMES THE SPEED LIMIT IN M.P.H. SPACE PLASTIC DRUMS IN ALL TAPER SECTIONS AT INTERVALS IN FEET [METERS] OF NO MORE THAN 1 [0.3] TIMES THE SPEED LIMIT IN M.P.H. FOR SPEED LIMITS LESS THAN 35 M.P.H. SPACE CHANNELIZING DEVICES AS DIRECTED BY THE PROJECT MANAGER.
- ② SEE DET. DWG. 618-03.
- ③ XX = MAINLINE SPEED LIMIT.
- ④ FIELD ADJUST SIGN SPACING BASED ON RAMP LENGTH.


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 618, 715	DWG. NO. 618-31

DIVIDED FOUR-LANE RAMP MERGE

EFFECTIVE: JUN 26, 2025

REVISED--

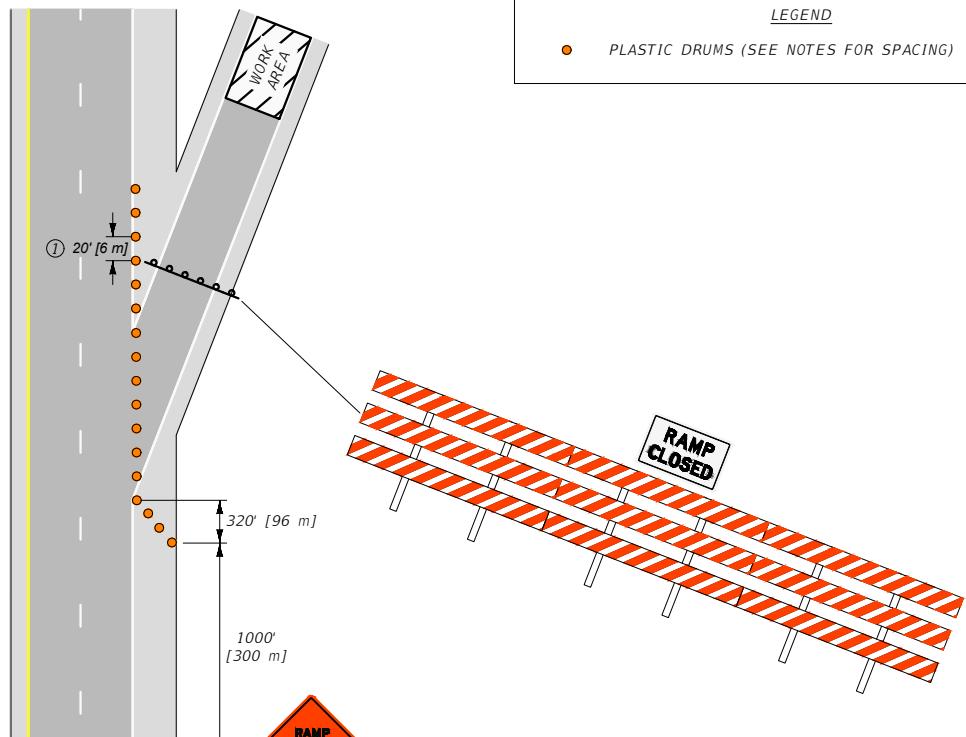

NOTES:

- ① PLASTIC DRUM SPACING IS THE MAXIMUM AND CAN BE REDUCED AS DIRECTED BY THE PROJECT MANAGER.
- ② DETOUR SIGNING SHOULD BE CONSIDERED IF THE RAMP IS CLOSED FOR 15 MINUTES OR GREATER.
- ③ CONSIDER ADDING A PORTABLE CHANGEABLE MESSAGE SIGN BEFORE THE "ROAD WORK AHEAD" SIGN TO PROVIDE ADVANCED NOTIFICATION OF THE RAMP CLOSURE.
- ④ PROVIDE RAMP CLOSURE NOTICE 4 BUSINESS DAYS PRIOR TO THE CLOSURE.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

--REVISED--

DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 618-32	DWG. NO. 618-32
DIVIDED FOUR-LANE EXIT RAMP CLOSURE	
EFFECTIVE: JUN 26, 2025	
 MONTANA Department of Transportation	
5/19/2025 3:48 PM	
STDDRD618032.DWG	

NOTES:

① "SHORT DURATION ACTIVITIES" ARE THOSE LASTING LESS THAN AN HOUR.

SHORT-TERM ACTIVITIES ARE THOSE LASTING LONGER THAN ONE HOUR BUT ENDING WITHIN A FULL SHIFT.

② REGULATORY SPEED SIGNS MUST MOVE AS NEEDED TO REMAIN WITHIN 500 FEET [150 m] OF THE WORK AREA.



③ SIGN BOTH TRAVEL DIRECTIONS ON TWO-LANE, TWO-WAY ROADWAYS OR BOTH SHOULDERS ON TWO-LANE, ONE-WAY ROADWAYS.

④ PROVIDE AT LEAST THE DISTANCE SHOWN FOR DELINEATOR MOUNTED SIGNS.

⑤ USE REFLECTIVE DEVICES.

⑥ XX = NORMAL POSTED SPEED LIMIT(S).

* DENOTES SIGNS UNIQUE TO MONTANA.

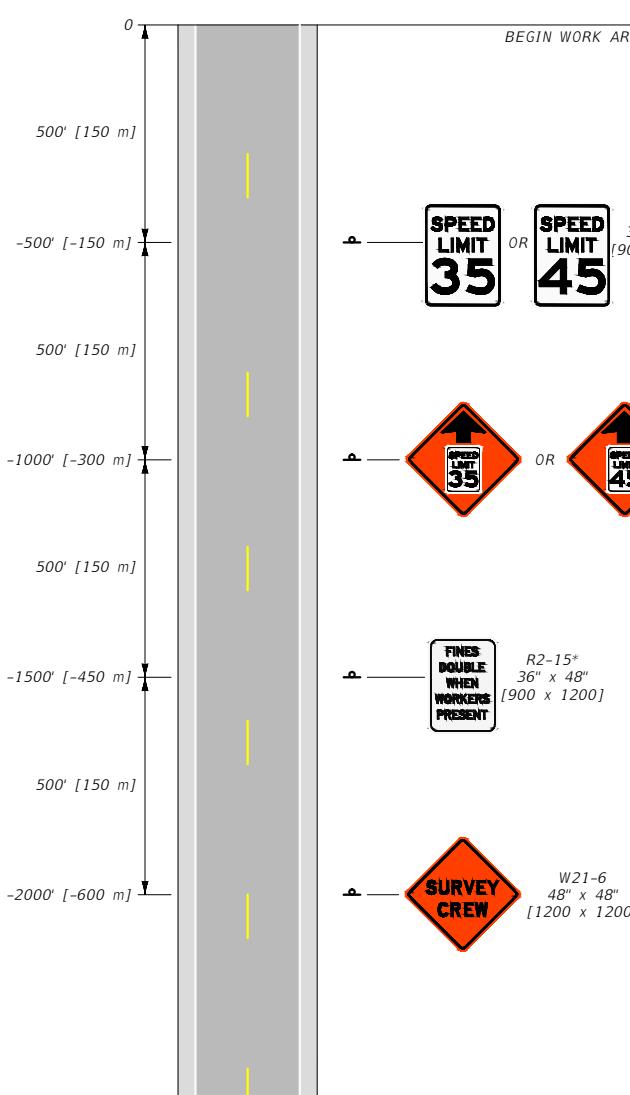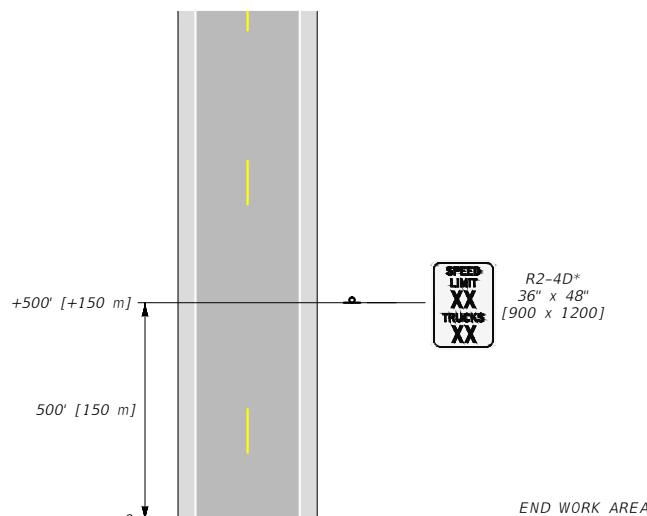

W3-5
48" x 48"
[1200 x 1200]

R2-15*
36" x 48"
[900 x 1200]

W21-6
48" x 48"
[1200 x 1200]

W21-1
48" x 48"
[1200 x 1200]

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 618-40

DWG. NO.
618-40

**SHORT DURATION OR
SHORT-TERM STATIONARY
CREW SIGNING**


EFFECTIVE: JAN 23, 2020



--REVISED--
JUN 27, 2024
JUN 26, 2025

5/19/2025 3:50 PM

STDDRD618040.DWG

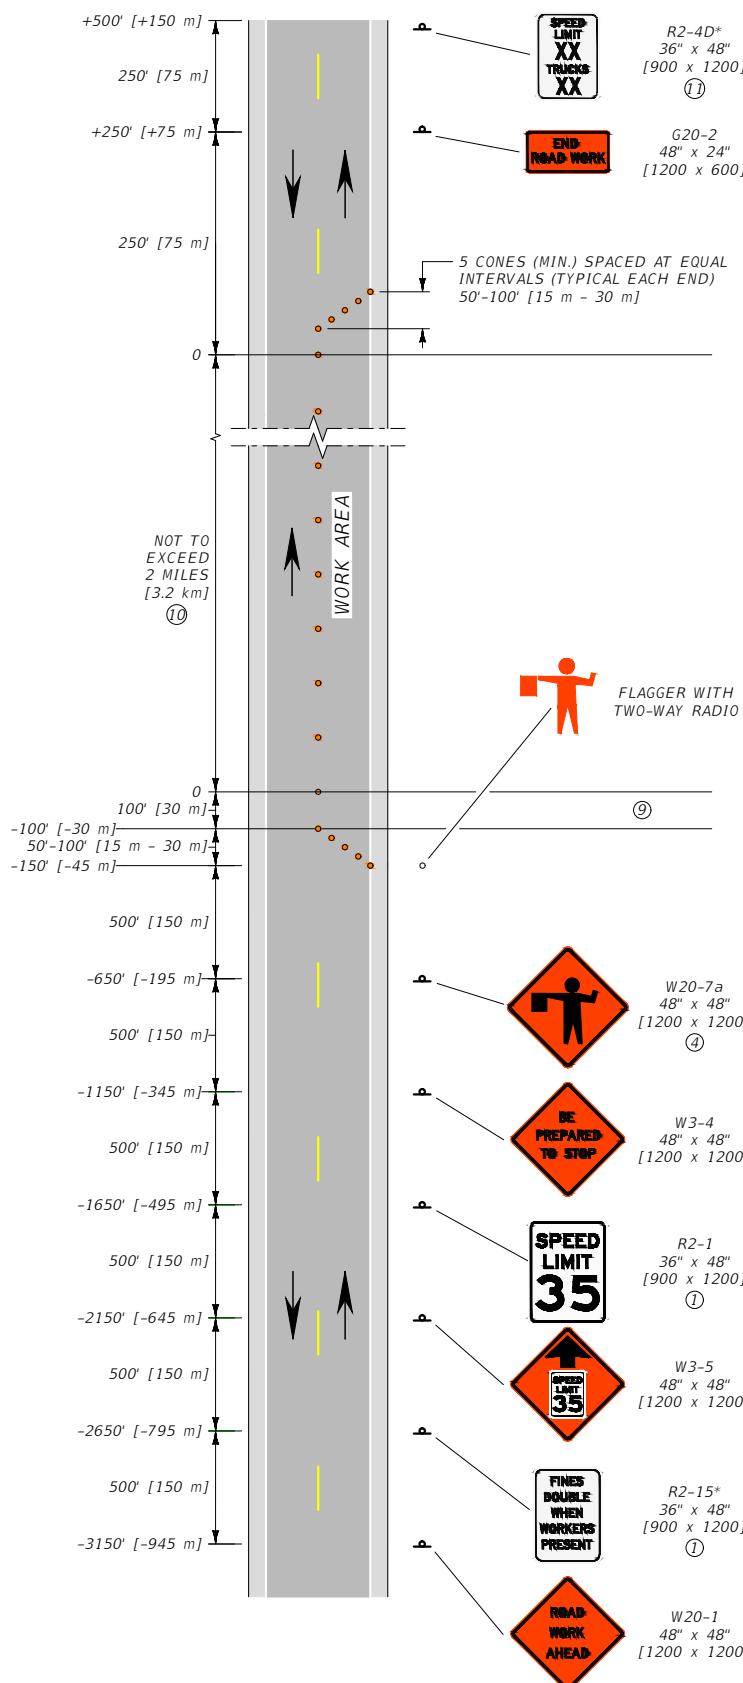

NOTES:

- ① MINIMUM REGULATORY SIGN SIZE IS 24" X 30" [600 x 750] ON TWO-LANE ROADS.
- ② ON ROADWAYS WITH HIGH TRAFFIC VOLUMES OR VISIBILITY RESTRICTIONS, A 500' [150 m] SPACING FOR ALL SIGNS IS RECOMMENDED.
- ③ SPACE CHANNELIZING DEVICES AT INTERVALS IN FEET [METERS] EQUAL TO TWICE [0.6 TIMES] THE SPEED LIMIT IN M.P.H. THROUGH THE BUFFER AND WORK AREA.
- ④ IF INCREASED VEHICLE STORAGE IS NEEDED, ADD AN ADDITIONAL W20-7a "FLAGGER AHEAD" SIGN BETWEEN THE R2-1 AND W3-4 SIGNS AND/OR CONSIDER AN ADDITIONAL ADVANCE FLAGGER.
- ⑤ REPLICATE THIS SIGN SEQUENCE FOR OPPOSING TRAFFIC.
- ⑥ CONTACT THE DISTRICT TRAFFIC ENGINEER FOR CLARIFYING INFORMATION REGARDING THIS LAYOUT OR OTHER SPECIAL SITUATIONS INCLUDING WORK ZONES INVOLVING CURVATURES, BRIDGES, INTERCHANGE OR DECREASED SIGHT DISTANCE.
- ⑦ COVER ANY CONFLICTING SIGNS IN THE WORK ZONE.
- ⑧ SHORT-TERM WORK ZONE SIGNING IS NOT REQUIRED TO BE POST MOUNTED.
- ⑨ THE BUFFER SPACE CAN BE LATERAL AND LONGITUDINAL AND MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- ⑩ TYPICALLY 2 MILES [3.2 km] IS THE MAX. WORK AREA. HOWEVER, WHEN SIGHT DISTANCE, BUFFER ZONES OR ACCOMPLISHMENT RATES FOR EQUIPMENT ARE CONSIDERED, SOME MINOR ADJUSTMENTS TO THIS MAX. MAY BE CONSIDERED.
- ⑪ XX = NORMAL POSTED SPEED LIMIT(S).


* DENOTES SIGNS UNIQUE TO MONTANA.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

FOR USE BY MDT FORCES

DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION	DWG. NO. 618-M1
MAINTENANCE GUIDELINE FOR SHORT-TERM TWO-LANE CRACK SEALING WORK ZONE	
EFFECTIVE: JAN 23, 2020	
--REVISED-- APR 28, 2022 JUN 27, 2024	 MONTANA Department of Transportation
5/20/2025 10:36 AM	STDDRD6180M1.DWG

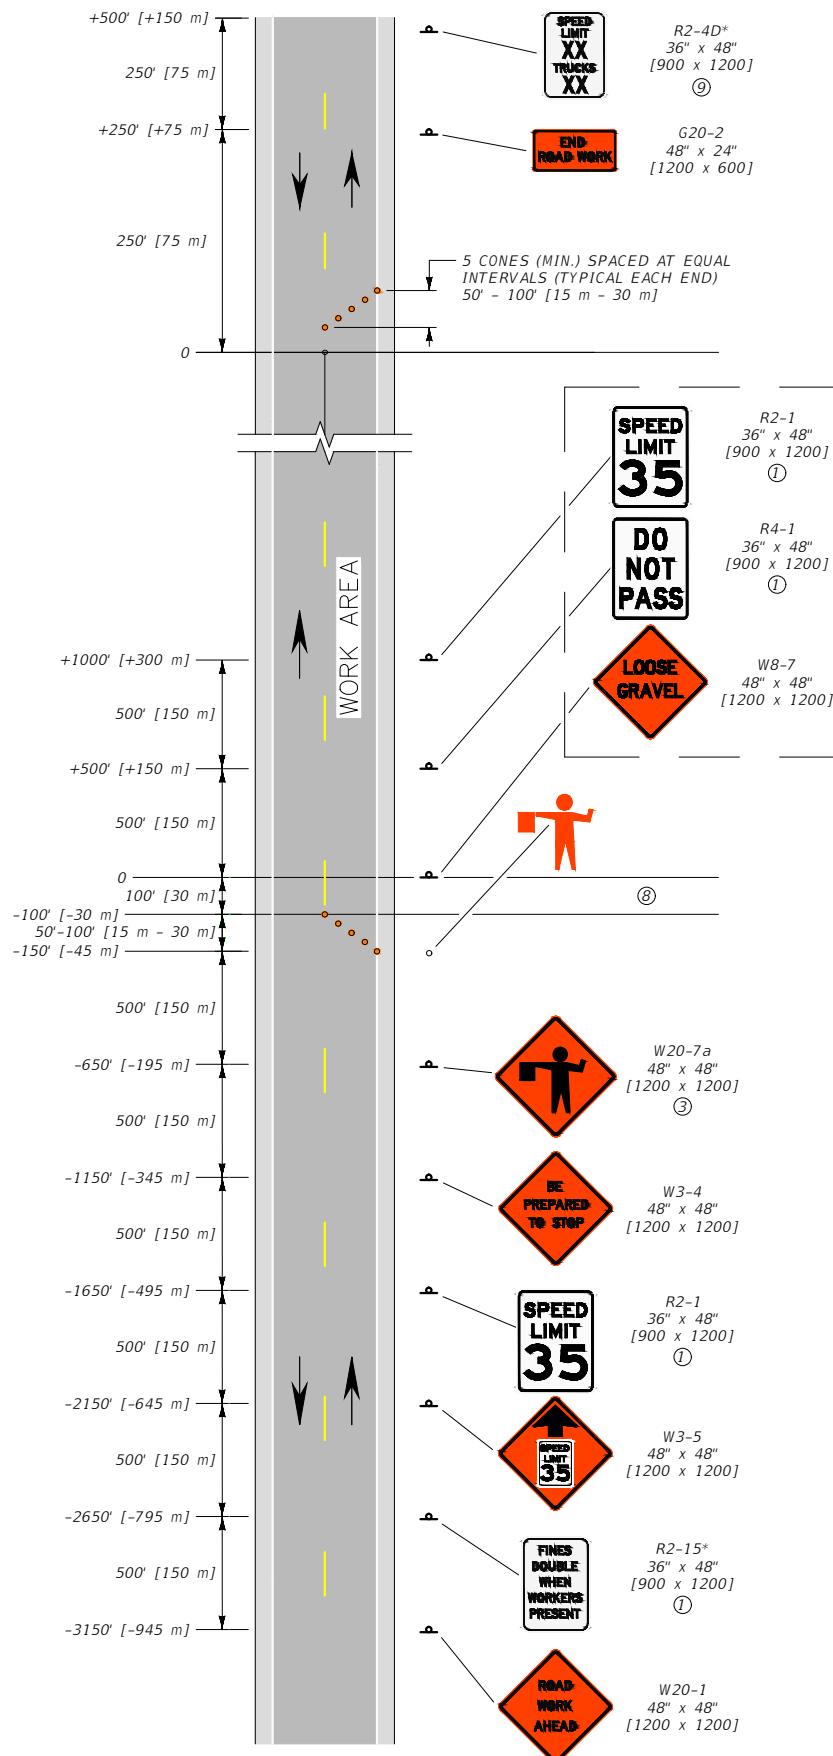

NOTE:

TO BE POSTED AT THE START OF THE WORK AREA AND REPEATED AT TWO-MILE [3.2 km] INTERVALS UNTIL THE SURFACE IS SWEPT AND STRIPED.

NOTES:

- ① MINIMUM REGULATORY SIGN SIZE IS 24" x 30" [600 x 750] ON TWO-LANE ROADS.
- ② ON ROADWAYS WITH HIGH TRAFFIC VOLUMES OR VISIBILITY RESTRICTIONS, A 500' [150 m] SPACING FOR ALL SIGNS IS RECOMMENDED.
- ③ IF INCREASED VEHICLE STORAGE IS NEEDED, ADD AN ADDITIONAL W20-7a "FLAGGER AHEAD" SIGN BETWEEN THE R2-1 AND W3-4 SIGNS AND/OR CONSIDER AN ADDITIONAL ADVANCE FLAGGER.
- ④ REPLICATE THIS SIGN SEQUENCE FOR OPPOSING TRAFFIC.
- ⑤ CONTACT THE DISTRICT TRAFFIC ENGINEER FOR CLARIFYING INFORMATION REGARDING THIS LAYOUT OR OTHER SPECIAL SITUATIONS INCLUDING WORK ZONES INVOLVING CURVATURES, BRIDGES, INTERCHANGES OR DECREASED SIGHT DISTANCE.
- ⑥ COVER CONFLICTING SIGNS IN THE WORK ZONE.
- ⑦ SHORT-TERM WORK ZONE SIGNING IS NOT REQUIRED TO BE POST MOUNTED.
- ⑧ THE BUFFER SPACE CAN BE LATERAL AND LONGITUDINAL AND MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS THAT AFFECT STOPPING DISTANCE.
- ⑨ XX = NORMAL POSTED SPEED LIMIT(S).

* DENOTES SIGNS UNIQUE TO MONTANA.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


FOR USE BY MDT FORCES

DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 618	DWG. NO. 618-M2
--------------------------------------------	--------------------

MAINT. GUIDELINE FOR
SHORT-TERM TWO-LANE
CHIP SEAL & OVERLAY
(PILOTED TRAFFIC)

EFFECTIVE: JAN 23, 2020

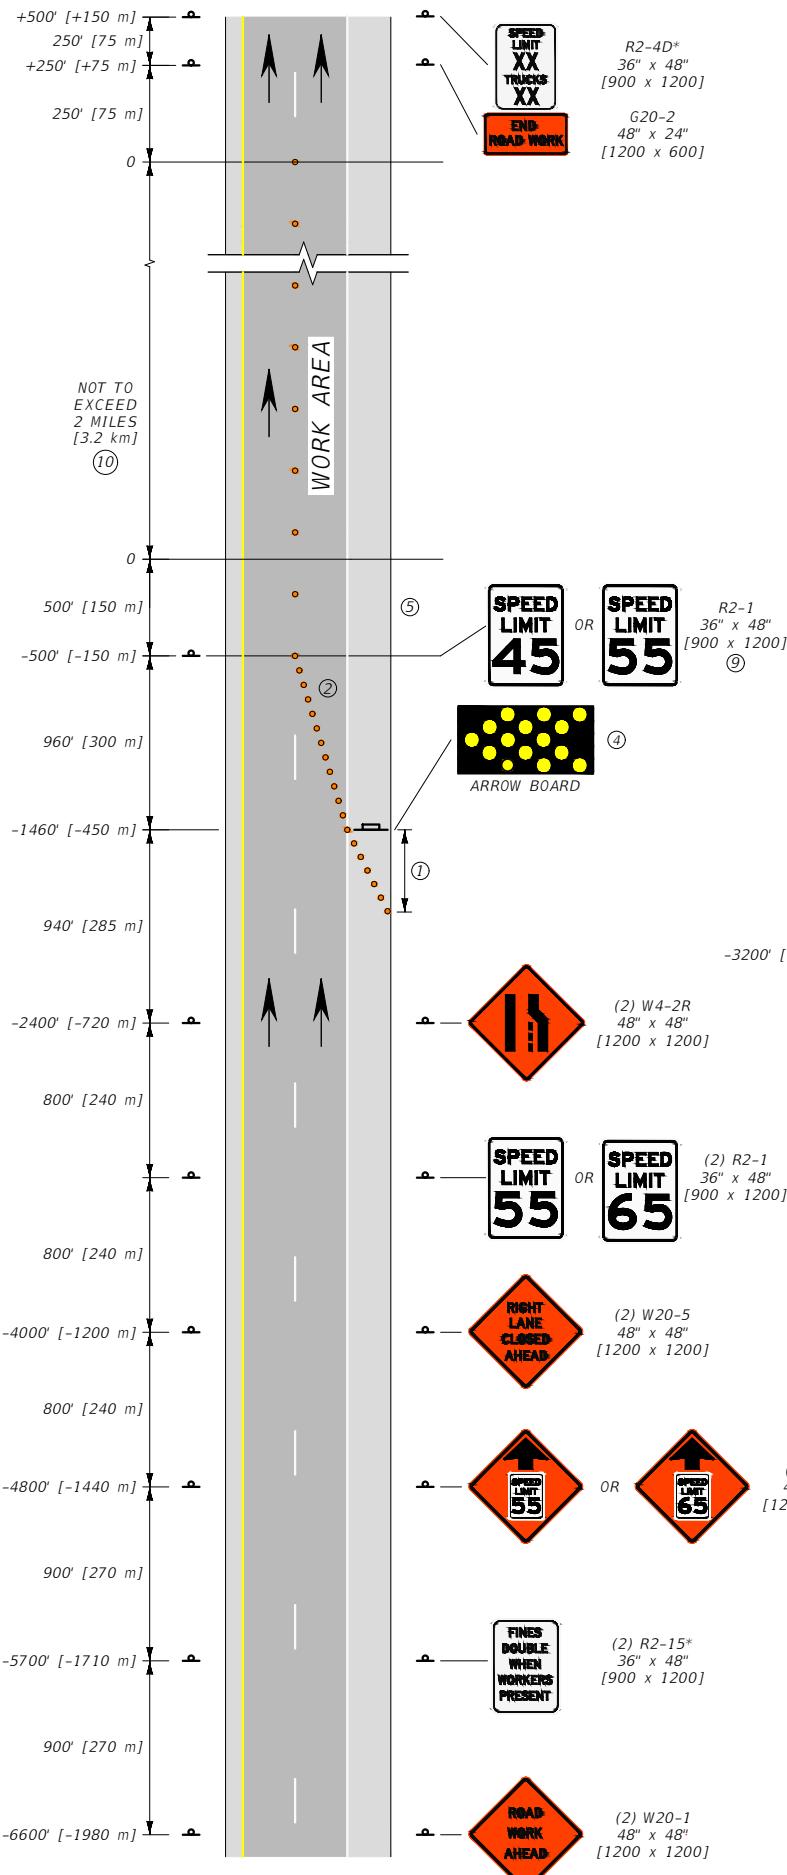

NOTES:

- ① USE A MINIMUM 320' [100 m] SHOULDER TAPER.
- ② USE THIRTEEN APPROVED CHANNELIZING DEVICES FOR A 12' [3.6 m] LANE CLOSURE TAPER (80 M.P.H. SPACED AT 80' [25 m].) ENSURE TAPER IS AT LEAST 960' [300 m].
- ③ SPACE CHANNELIZING DEVICES AT INTERVALS IN FEET [METERS] EQUAL TO TWICE [0.6 TIMES] THE SPEED LIMIT IN M.P.H. THROUGH THE BUFFER AND WORK AREA.
- ④ PLACE THE ARROW BOARD ON THE SHOULDER AT THE START OF THE TRAVEL LANE CLOSURE TAPER.
- ⑤ THE BUFFER SPACE CAN BE LATERAL AND LONGITUDINAL. KEEP THE BUFFER SPACE CLEAR OF EQUIPMENT AND PERSONNEL.
- ⑥ CONTACT THE DISTRICT TRAFFIC ENGINEER FOR CLARIFYING INFORMATION REGARDING THIS LAYOUT OR OTHER SPECIAL SITUATIONS INCLUDING WORK ZONES INVOLVING CURVATURES, BRIDGES, INTERCHANGES OR DECREASED SIGHT DISTANCE.
- ⑦ COVER CONFLICTING SIGNS IN THE WORK AREA.
- ⑧ SHORT-TERM WORK ZONE SIGNING IS NOT REQUIRED TO BE POST MOUNTED.
- ⑨ WHEN THE WORK AREA CHANGES WITHIN THE WORK ZONE, THESE SIGNS SHOULD BE MOVED TO REFLECT THE NEW WORK AREA.
- ⑩ TYPICALLY 2 MILES [3.2 km] IS THE MAX. WORK AREA. HOWEVER, WHEN SIGHT DISTANCE, BUFFER ZONES OR EQUIPMENT WORK RATES ARE CONSIDERED, MINOR ADJUSTMENTS TO THIS MAX. MAY BE CONSIDERED.
- ⑪ XX = NORMAL POSTED SPEED LIMIT(S).

* DENOTES SIGNS UNIQUE TO MONTANA.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

FOR USE BY MDT FORCES

DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 618	DWG. NO. 618-M3
--------------------------------------------	--------------------

**MAINTENANCE GUIDELINE
FOR SHORT-TERM LANE
CLOSURE ON INERSTATE**


EFFECTIVE: JAN 23, 2020




--REVISED--
APR 28, 2022
JUN 27, 2024

5/20/2025 10:36 AM STDDRD6180M3.DWG

MOBILE OPERATIONS ON MULTILANE ROAD

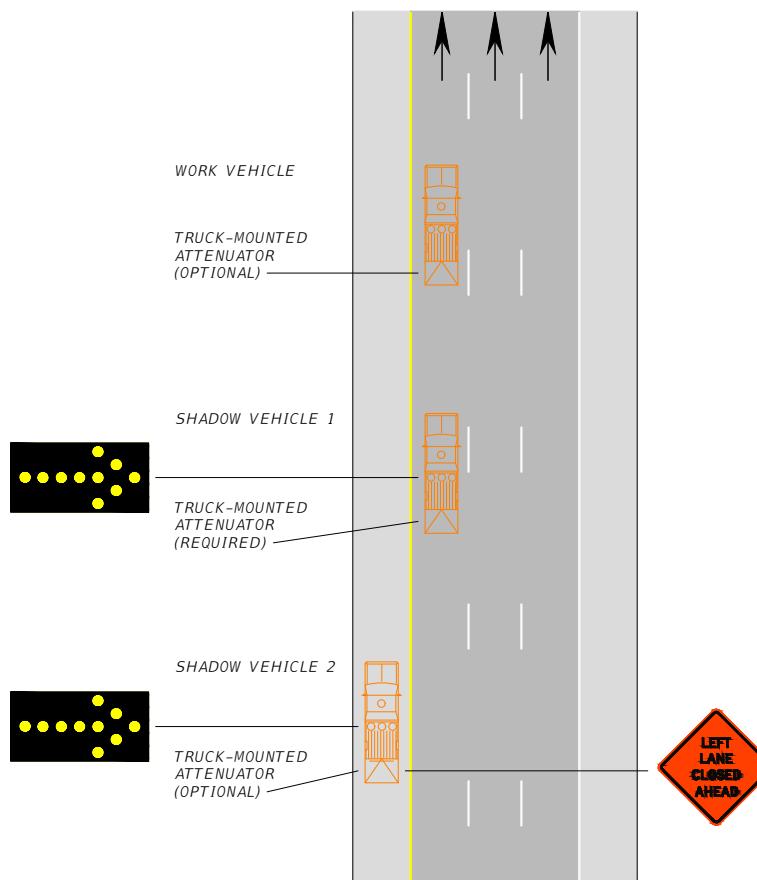

MOBILE OPERATIONS ON TWO-LANE ROAD

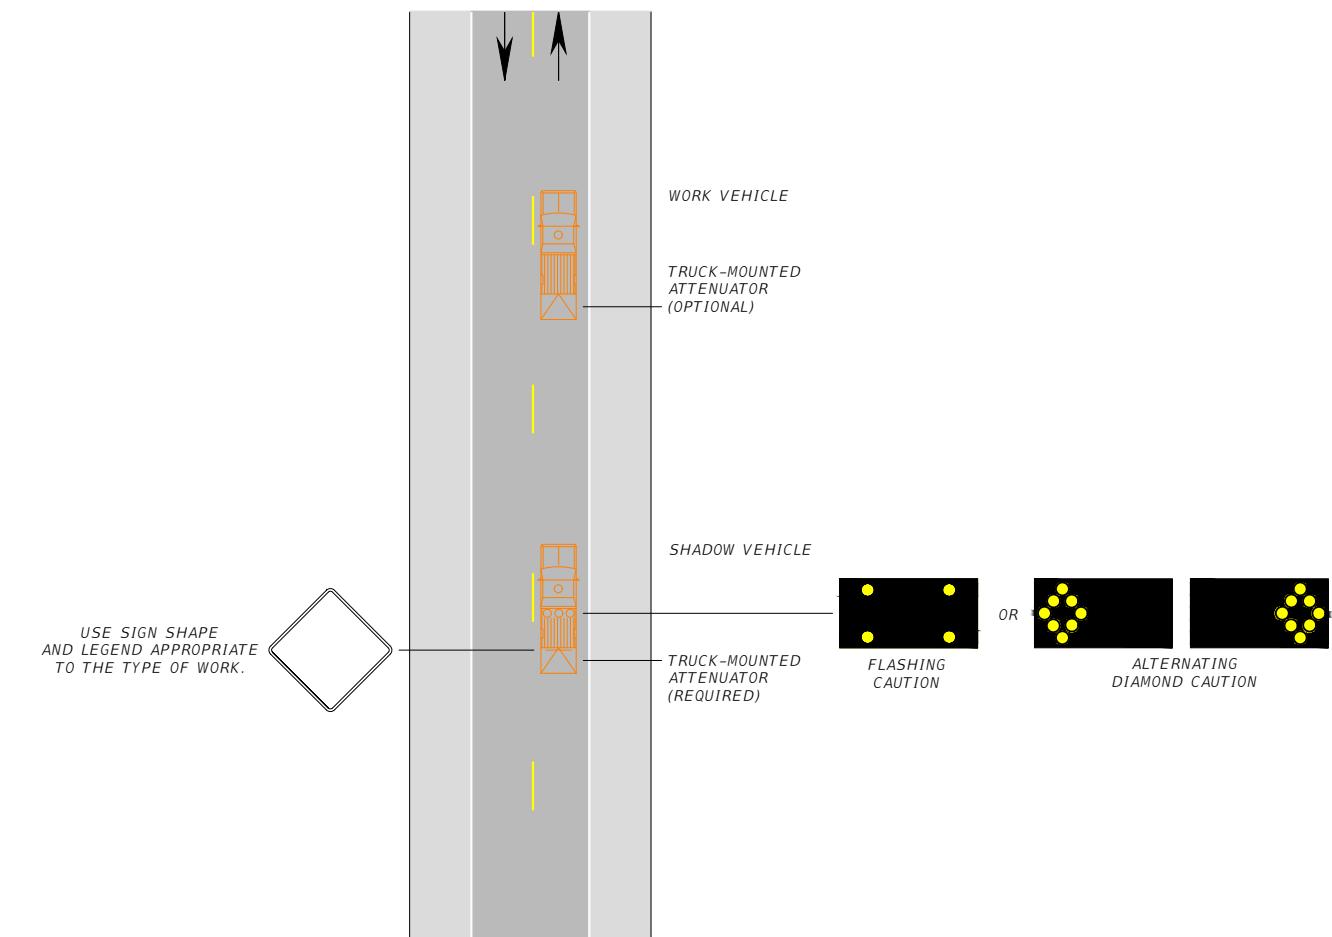

NOTES:

- ① PLACE APPROPRIATE LANE CLOSURE SIGN ON SHADOW VEHICLE 2 SO AS NOT TO OBSCURE THE ARROW BOARD.
- ② FOLLOW THE WORK OPERATION WITH SHADOW VEHICLE 2 SO AS TO PROVIDE ADEQUATE SIGHT DISTANCE FOR VEHICULAR TRAFFIC APPROACHING FROM THE REAR.
- ③ COVER OR TURN THE SIGN LEGENDS ON VEHICLE-MOUNTED SIGNS FROM VIEW WHEN WORK IS NOT IN PROGRESS.
- ④ WHEN THE WORK VEHICLE OCCUPIES AN INTERIOR LANE OF A DIRECTIONAL ROADWAY HAVING A RIGHT SHOULDER 10 FEET [3 m] OR MORE IN WIDTH, DRIVE SHADOW VEHICLE 2 ALONG THE RIGHT-HAND SHOULDER WITH A SIGN INDICATING WORK IS TAKING PLACE IN THE INTERIOR LANE.
- ⑤ ON HIGH-SPEED ROADWAYS, A THIRD SHADOW VEHICLE MAY BE USED WITH SHADOW VEHICLE 1 IN THE CLOSED LANE, SHADOW VEHICLE 2 STRADDLING THE EDGE LINE, AND SHADOW VEHICLE 3 ON THE SHOULDER. WHERE ADEQUATE SHOULDER WIDTH IS NOT AVAILABLE, SHADOW VEHICLE 3 MAY ALSO STRADDLE THE EDGE LINE.
- ⑥ THE MINIMUM ARROW BOARD SIZE IS TYPE B, 60 INCHES X 30 INCHES [1500 x 750].
- ⑦ VARY THE DISTANCE BETWEEN THE WORK LOCATION AND SHADOW VEHICLE 2 TO PROVIDE ADEQUATE SIGHT DISTANCE FOR VEHICULAR TRAFFIC APPROACHING FROM THE REAR.
- ⑧ MAINTAIN A MINIMUM SPACING BETWEEN THE WORK VEHICLE AND SHADOW VEHICLES, AND BETWEEN EACH SHADOW VEHICLE TO DETER ROAD USERS FROM DRIVING IN BETWEEN.

NOTES:

- ① TRUCK-MOUNTED ATTENUATOR IS REQUIRED FOR SHADOW VEHICLE.
- ② EQUIP SHADOW VEHICLE WITH VEHICLE-MOUNTED SIGN. USE SIGN SHAPE AND LEGEND APPROPRIATE TO THE TYPE OF WORK.
- ③ MOUNT VEHICLE-MOUNTED SIGN SO EQUIPMENT OR SUPPLIES DO NOT OBSCURE THE SIGN.
- ④ COVER OR TURN THE SIGN LEGENDS ON VEHICLE-MOUNTED SIGNS FROM VIEW WHEN WORK IS NOT IN PROGRESS.
- ⑤ WHENEVER ADEQUATE STOPPING SIGHT DISTANCE EXISTS TO THE REAR, MAINTAIN A MINIMUM DISTANCE FROM THE WORK VEHICLE WITH THE SHADOW VEHICLE AND PROCEED AT THE SAME SPEED.
- ⑥ SLOW THE SHADOW VEHICLE BEFORE ROADWAY CURVATURES OR SITUATIONS RESTRICTING SIGHT DISTANCE.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 618-M4
SECTION 618


MOBILE OPERATIONS

EFFECTIVE: JAN 23, 2020



-REVISED--
JUN 27, 2024

5/20/2025 10:36 AM STDDRD6180M4.DWG

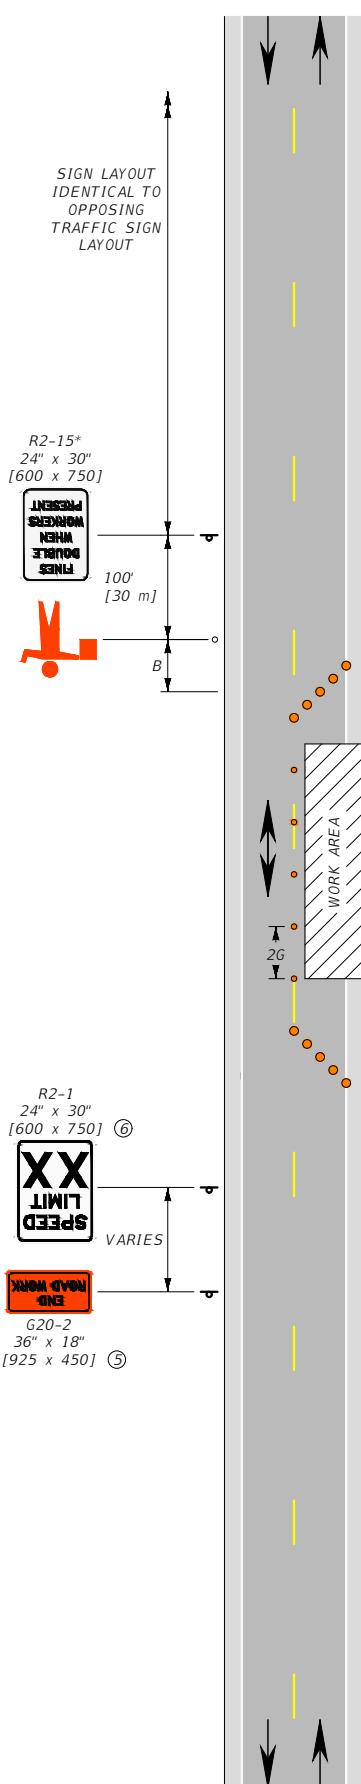

POSTED SPEED LIMIT FOR WORK ZONE (M.P.H.)	SIGN SPACING (A) FEET [m]	SPACING OF CHANNELIZING DEVICES (MAX.) (G) ** FEET [m]	BUFFER SPACE ③ (B) FEET [m]
25	100 [30]	25 [7.6]	155 [45]
35	100 [30]	35 [10.7]	250 [75]
45	350 [105]	45 [14]	360 [110]

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

NOTES:

- ① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.
- ② INCLUDE SPEED LIMIT SIGNS ONLY IF THERE IS A REASON TO RESTRICT SPEED. COVER CONFLICTING EXISTING SPEED LIMIT SIGNS.
- ③ THE BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- ④ LARGER SIGN SIZES MAY BE APPROVED BY THE PROJECT MANAGER.
- ⑤ PLACE "END ROADWORK" SIGN AT END OF PROJECT LIMITS.
- ⑥ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE.
- ⑦ AMBER LED FLASHERS MUST MEET STANDARD SPECIFICATION SECTION 715 AND DTL. DWG. 618-01 REQUIREMENTS.

LEGEND

● - FLEXIBLE GUIDE POSTS

○ - PLASTIC DRUMS

* - DENOTES SIGNS UNIQUE TO MONTANA.

XX - SPEED DETERMINED BY THE PROJECT MANAGER.
(25 M.P.H. OR 35 M.P.H. OR 45 M.P.H.)

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 618

DWG. NO.
618-U01

LANE CLOSURE-FLAGGER
CONTROLLED (URBAN TWO-LANE, TWO-WAY ROAD)

EFFECTIVE: JAN 23, 2020




MONTANA

Department of Transportation

--REVISED--
JUN 27, 2024

POSTED SPEED LIMIT FOR WORK ZONE (M.P.H.)	SIGN SPACING (A) FEET [m]	TAPER LENGTH (L) FEET [m]	SPACING OF CHANNELIZING DEVICES (MAX.) (G) ** FEET [m]	BUFFER SPACE ③ (B) FEET [m]
25	100 [30]	125 [40]	25 [7.6]	155 [45]
35	100 [30]	245 [75]	35 [10.7]	250 [75]
45	350 [105]	540 [165]	45 [14]	360 [110]

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

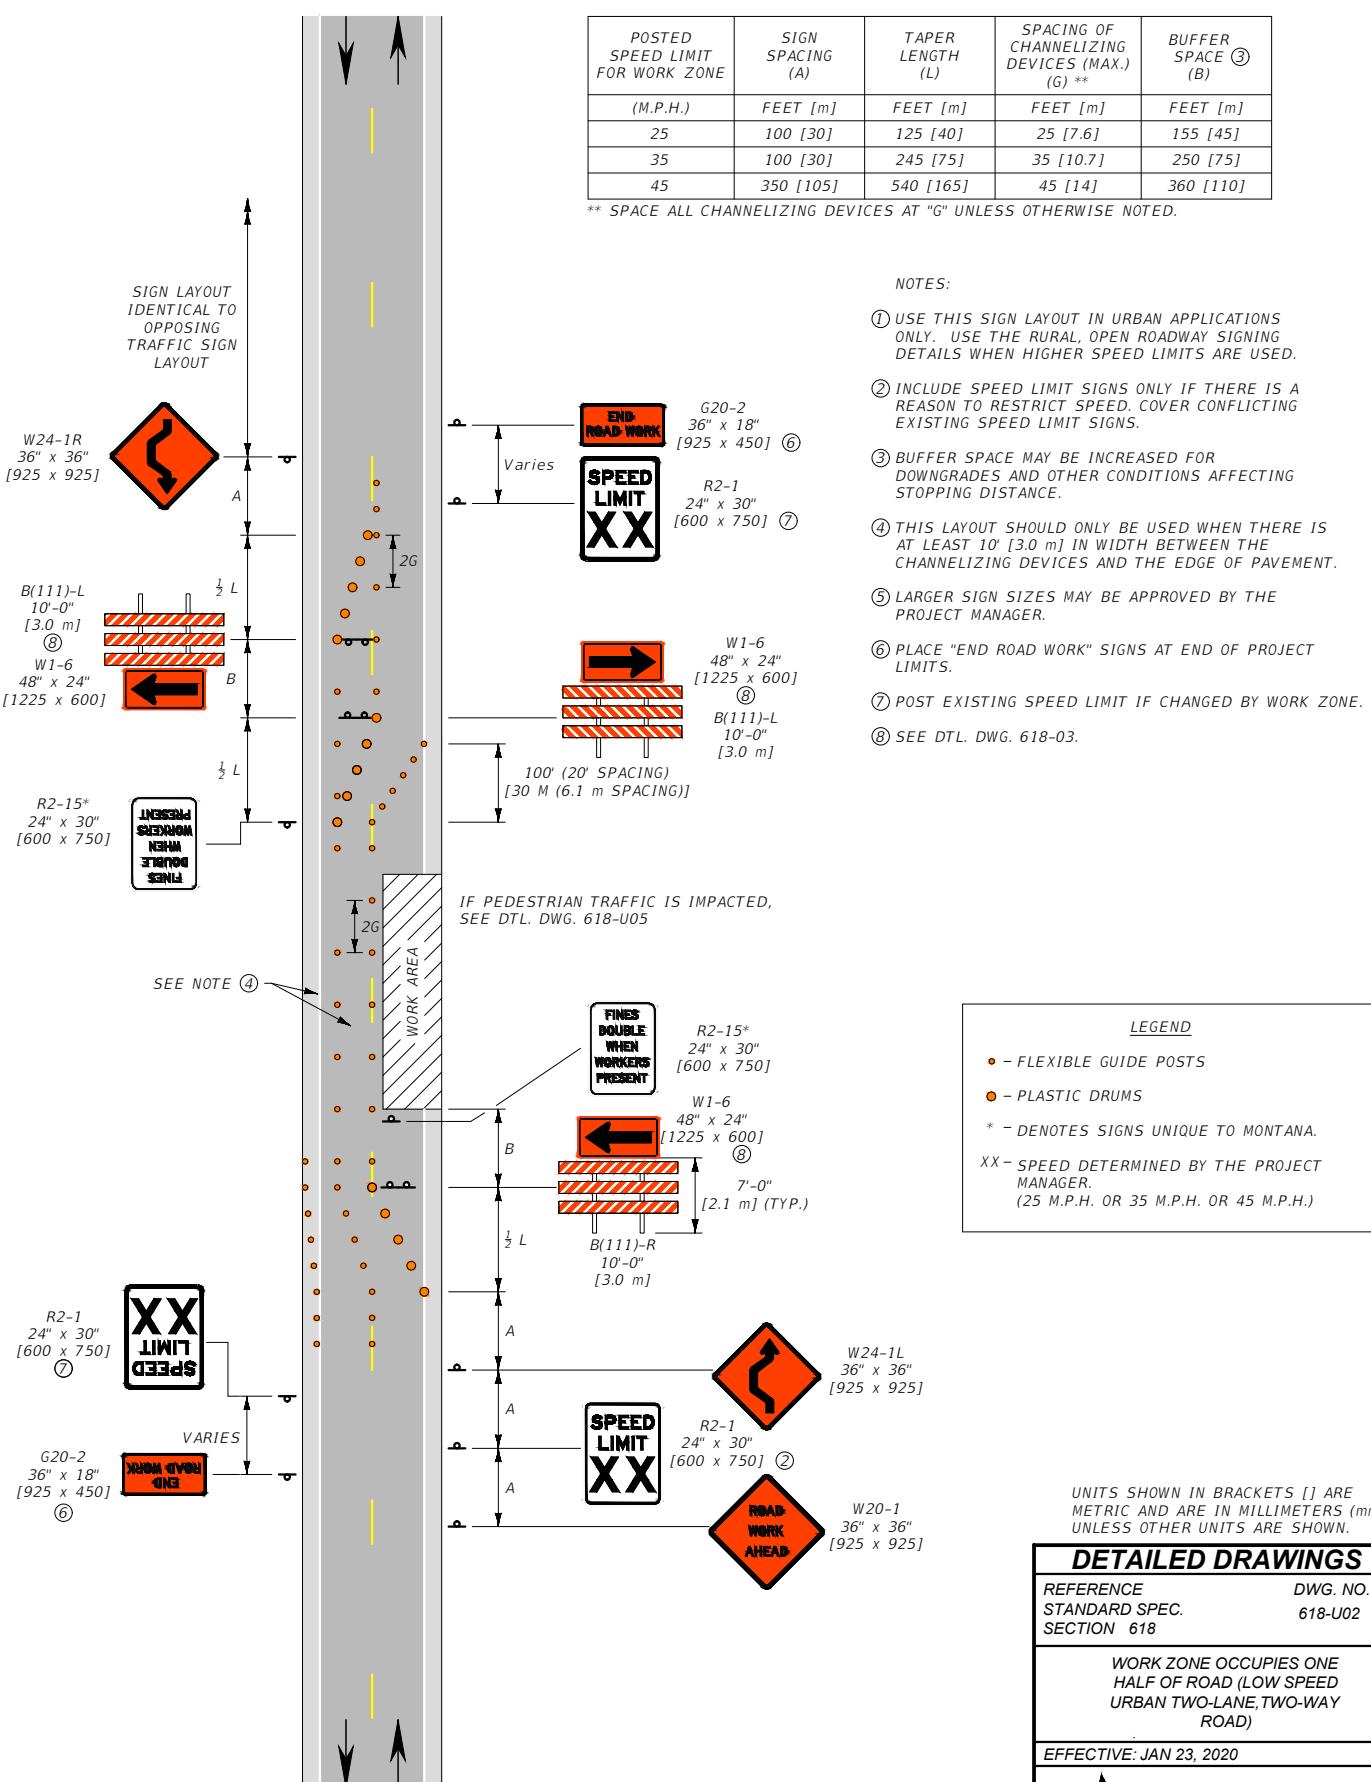


REFERENCE STANDARD SPEC. SECTION 618-U02	DWG. NO. 618-U02
------------------------------------------	------------------

WORK ZONE OCCUPIES ONE HALF OF ROAD (LOW SPEED URBAN TWO-LANE, TWO-WAY ROAD)

EFFECTIVE: JAN 23, 2020

POSTED SPEED LIMIT FOR WORK ZONE (M.P.H.)	SIGN SPACING (A) FEET [m]	TAPER LENGTH (L) FEET [m]	SPACING OF CHANNELIZING DEVICES (MAX.) (G) ** FEET [m]	BUFFER SPACE ③ (B) FEET [m]
25	100 [3]	125 [40]	25 [7.6]	155 [45]
35	100 [30]	245 [75]	35 [10.7]	250 [75]
45	350 [105]	540 [165]	45 [14]	360 [110]

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

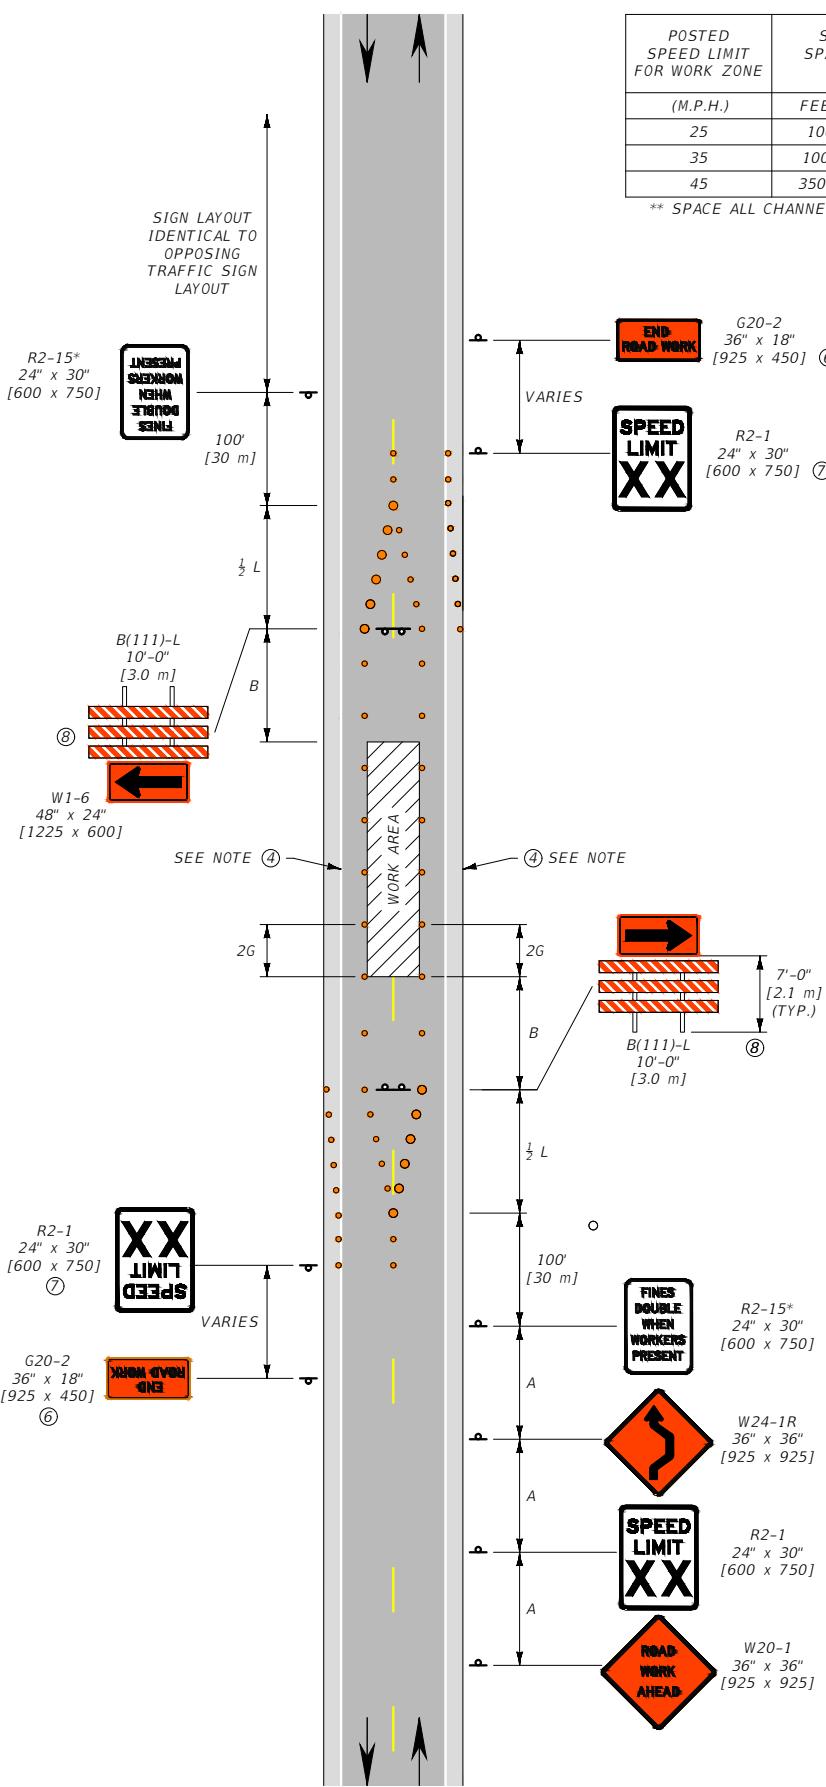

NOTES:

- ① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.
- ② INCLUDE SPEED LIMIT SIGNS ONLY IF THERE IS A REASON TO RESTRICT SPEED. COVER CONFLICTING EXISTING SPEED LIMIT SIGNS.
- ③ BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- ④ USE THIS SIGN LAYOUT ONLY WHEN AT LEAST 10' [3 m] SEPARATION EXISTS BETWEEN THE CHANNELIZING DEVICES AND THE EDGE OF PAVEMENT. PROVIDE NO PARKING SIGNS WHEN APPROPRIATE.
- ⑤ LARGER SIGNS MAY BE APPROVED BY THE PROJECT MANAGER.
- ⑥ PLACE "END ROAD WORK" SIGNS AT END OF PROJECT LIMITS.
- ⑦ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE.
- ⑧ SEE DTL. DWG. 608-03.

LEGEND	
●	- FLEXIBLE GUIDE POSTS
○	- PLASTIC DRUMS
* - DENOTES SIGNS UNIQUE TO MONTANA.	
XX - SPEED DETERMINED BY THE PROJECT MANAGER. (25 M.P.H. OR 35 M.P.H. OR 45 M.P.H.)	

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 618-U03
SECTION 618

WORK ZONE IN CENTER OF ROAD (URBAN TWO-LANE, TWO-WAY ROAD)


EFFECTIVE: JAN 23, 2020

--REVISED--
JUN 27, 2024

NOTES:

- ① MINIMAL TRAFFIC CONTROL DEVICES CONTROLLING PEDESTRIAN FLOWS ARE SHOWN. OTHER DEVICES MAY BE NEEDED TO CONTROL TRAFFIC ON THE STREETS. USE THE APPROPRIATE PARKING LANE CLOSURE WHEN NEEDED.
- ② DO NOT DIRECT PEDESTRIANS INTO A LANE OF MOVING TRAFFIC.
- ③ WHERE SPEEDS EXCEED 25 M.P.H., PHYSICAL BARRIERS SHOULD BE USED TO SEPARATE THE TEMPORARY WALKWAY FROM VEHICULAR TRAFFIC. FLEXIBLE GUIDE POSTS WITH DETECTABLE EDGING IS THE MINIMUM REQUIREMENT FOR SEPARATION. PROVIDE LARGER PHYSICAL BARRIERS, AS DETERMINED BY THE PROJECT MANAGER, ON A CASE BY CASE BASIS.
- ④ SEE DTL. DWG. 618-03.
- ⑤ PROVIDE A PHYSICAL BARRIER, WITH A MINIMUM 6 INCH [150 mm] HEIGHT DETECTABLE EDGING, BETWEEN THE PEDESTRIAN DETOUR WALKWAY AND THE WORK AREA. PROVIDE LARGER PHYSICAL BARRIERS TO PROTECT PEDESTRIANS FROM HAZARDS IN THE WORK AREA, AS DETERMINED BY THE PROJECT MANAGER.
- ⑥ ENSURE WALKWAY IS ADA COMPLIANT THROUGHOUT. PROVIDE A MINIMUM WALKWAY WIDTH OF 5 FEET [1525 mm] AND A FIRM, STABLE, SLIP RESISTANT WALKING SURFACE ALONG ENTIRE WALKWAY.
- ⑦ PROVIDE TEMPORARY RAMPS AND DETECTABLE EDGING (MINIMUM 6 INCH HEIGHT [150 mm] ON BOTH SIDES OF WALKWAY) ALONG TEMPORARY PEDESTRIAN DETOUR ROUTE. SEE MUTCD FOR ADDITIONAL GUIDANCE.
- ⑧ PLACE R9-11 ON SIGN POSTS (AS SHOWN BELOW) IF BUSINESS ACCESS IS REQUIRED. PLACE TYPE I BARRICADE ON SIDEWALK WITH R9-11 SIGN IF BUSINESS ACCESS IS NOT REQUIRED.
- ⑨ PLACE TYPE I BARRICADE ON SIDEWALK WITH R9-9 SIGN.

PEDESTRIAN DETOUR

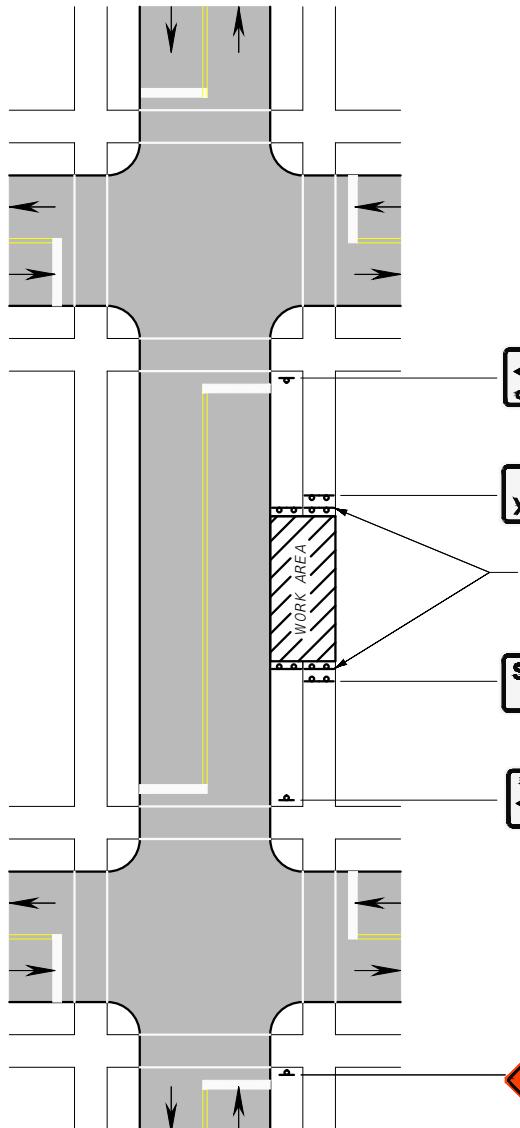

R9-11
24" x 12"
[600 x 300]
⑧

R9-9
24" x 12"
[600 x 300]
⑨


R9-9
24" x 12"
[600 x 300]
⑨

R9-11
24" x 12"
[600 x 300]
⑧

R9-11
24" x 12"
[600 x 300]
⑧

W20-1
36" x 36"
[925 x 925]
(OPTIONAL)

BYPASS WALKWAY PROVIDED
THROUGH WORK ZONE ⑥

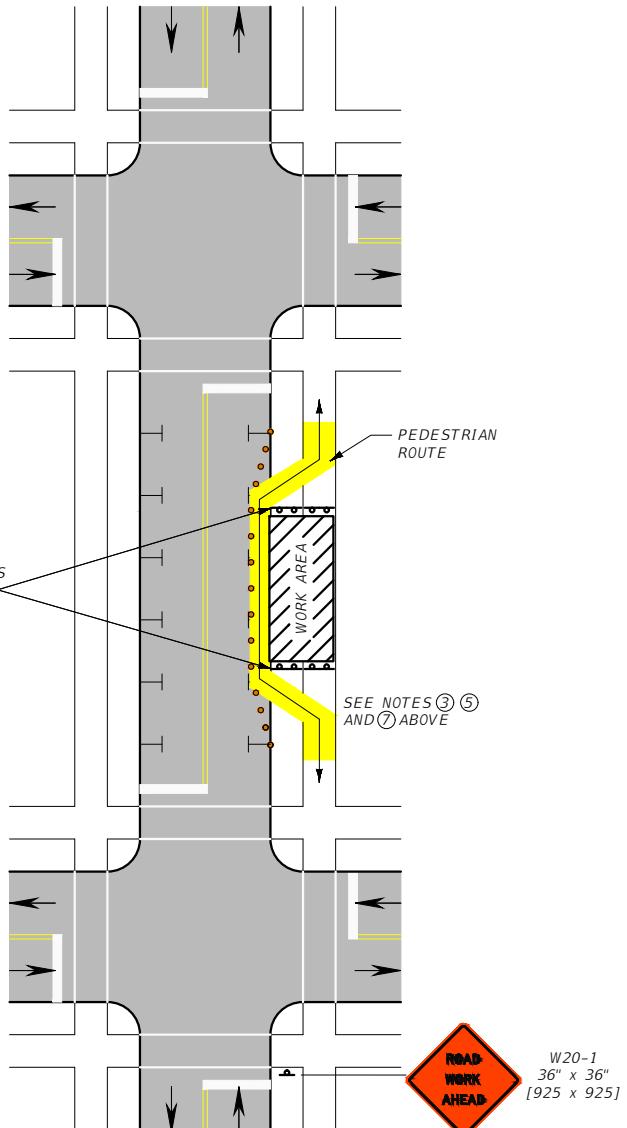

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 618

DWG. NO.
618-U05

**SIDEWALK CLOSURES AND
BYPASS WALKWAY**

EFFECTIVE: JAN 23, 2020



--REVISED--
JUN 27, 2024

5/20/2025 11:56 AM

STDDRD618U05.DWG


LEGEND

• - FLEXIBLE GUIDE POSTS

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

POSTED SPEED LIMIT FOR WORK ZONE (M.P.H.)	SIGN SPACING (A) FEET [m]	TAPER LENGTH (L) FEET [m]	SPACING OF CHANNELIZING DEVICES (MAX.) (G) ** FEET [m]	BUFFER SPACE ③ (B) FEET [m]
25	100 [30]	125 [40]	25 [7.6]	155 [45]
35	100 [30]	245 [75]	35 [10.7]	250 [75]
45	350 [105]	540 [165]	45 [14]	360 [110]

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

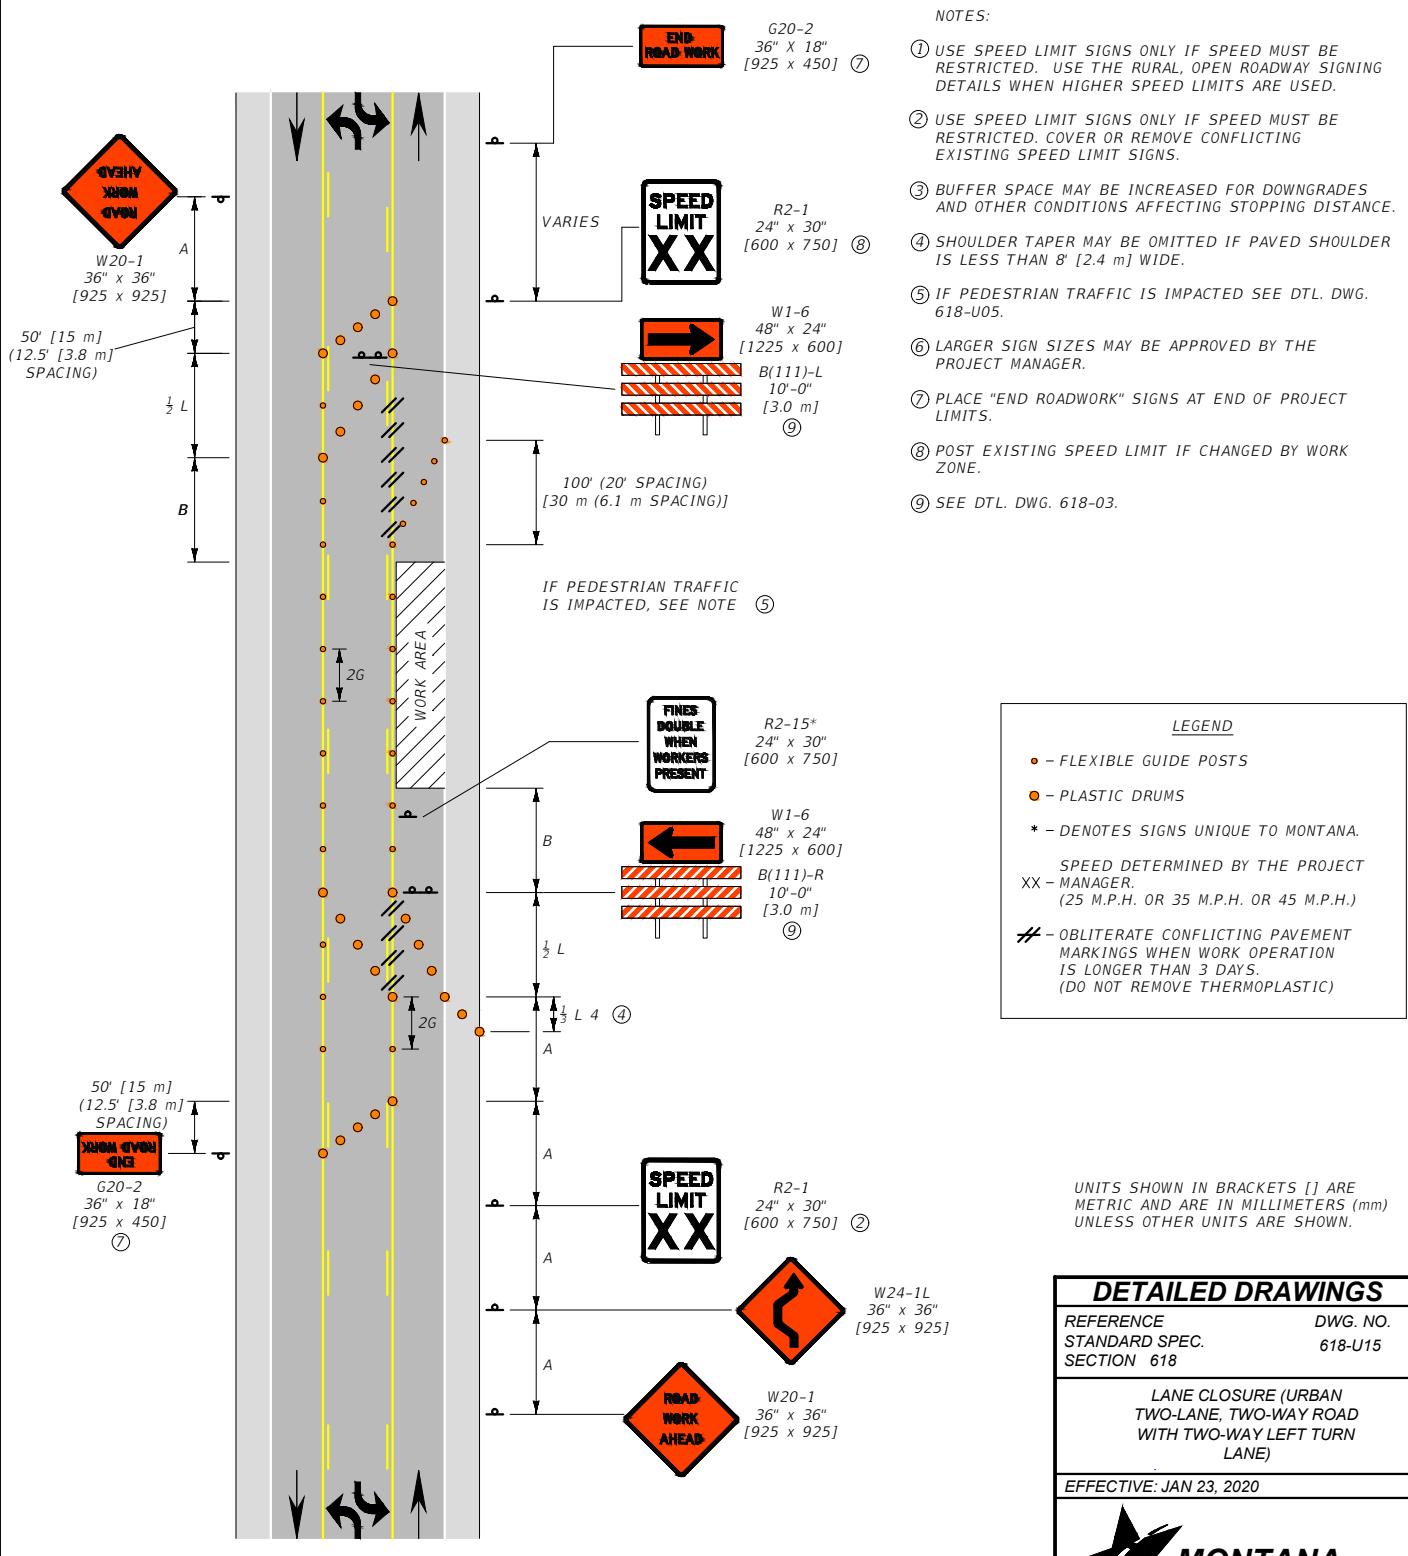

POSTED SPEED LIMIT FOR WORK ZONE	SIGN SPACING (A)	TAPER LENGTH (L)	SPACING OF CHANNELIZING DEVICES (MAX.) (G) **	BUFFER SPACE ③ (B)
(M.P.H.)	FEET [m]	FEET [m]	FEET [m]	FEET [m]
25	100 [30]	125 [40]	25 [7.6]	155 [45]
35	100 [30]	245 [75]	35 [10.7]	250 [75]
45	350 [105]	540 [165]	45 [14]	360 [110]

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

NOTES:

① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.

② USE SPEED LIMIT SIGNS ONLY IF SPEED MUST BE RESTRICTED. COVER OR REMOVE CONFLICTING EXISTING SPEED LIMIT SIGNS.


③ BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.

④ LARGER SIGN SIZES MAY BE APPROVED BY THE PROJECT MANAGER.

⑤ PLACE "END ROADWORK" SIGNS AT END OF PROJECT LIMITS.

⑥ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE.

⑦ SEE DTL. DWG. 618-03.

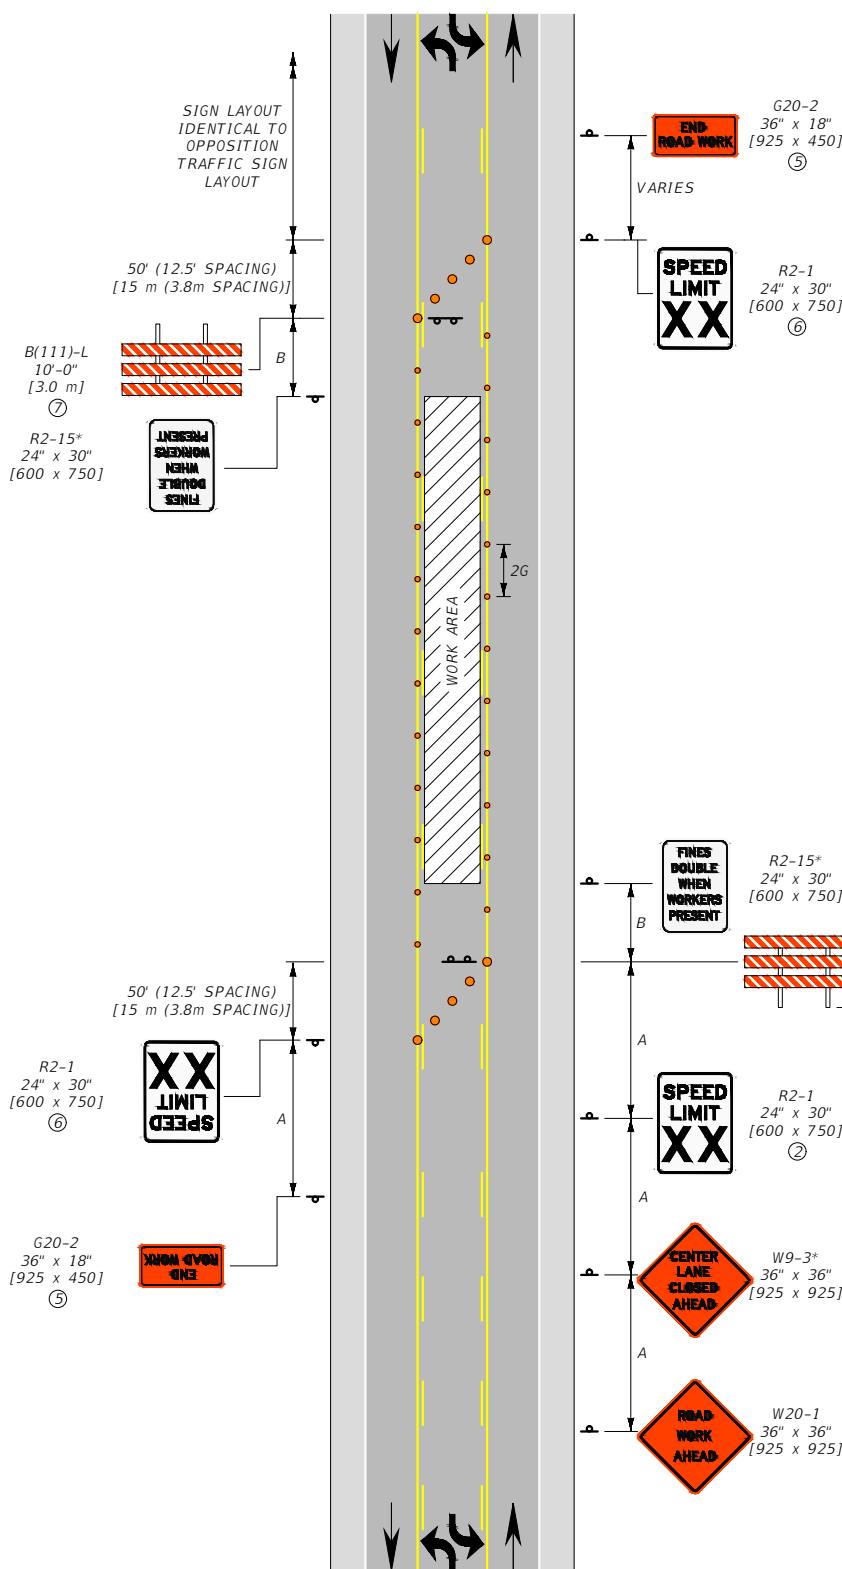

LEGEND

- - FLEXIBLE GUIDE POSTS
- - PLASTIC DRUMS

* - DENOTES SIGNS THAT ARE
UNIQUE TO MONTANA.

XX - SPEED DETERMINED BY THE PROJECT MANAGER.
(25 M.P.H. OR 35 M.P.H. OR 45 M.P.H.)

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 618-U16
SECTION 618

**TURN LANE CLOSURE
(URBAN TWO-LANE,
TWO-WAY LEFT TURN LANE)**

EFFECTIVE: JAN 23, 2020



MONTANA

Department of Transportation


--REVISED--
JUN 27, 2024

POSTED SPEED LIMIT FOR WORK ZONE	SIGN SPACING (A)	TAPER LENGTH (L)	SPACING OF CHANNELIZING DEVICES (MAX.) (G) **	BUFFER SPACE ③ (B)
(M.P.H.)	FEET [m]	FEET [m]	FEET [m]	FEET [m]
25	100 [30]	125 [40]	25 [7.6]	155 [45]
35	100 [30]	245 [75]	35 [10.7]	250 [75]
45	350 [105]	540 [165]	45 [14]	360 [110]

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

NOTES:

- ① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.
- ② USE SPEED LIMIT SIGNS ONLY IF SPEED MUST BE RESTRICTED. COVER OR REMOVE CONFLICTING EXISTING SPEED LIMIT SIGNS.
- ③ BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- ④ SHOULDER TAPER MAY BE OMITTED IF PAVED SHOULDER IS LESS THAN 8' [2.4 m] WIDE.
- ⑤ LARGER SIGN SIZES MAY BE APPROVED BY THE PROJECT MANAGER.
- ⑥ PLACE "END ROADWORK" SIGNS AT END OF PROJECT LIMITS.
- ⑦ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE.
- ⑧ SEE DTL. DWG. 618-03.

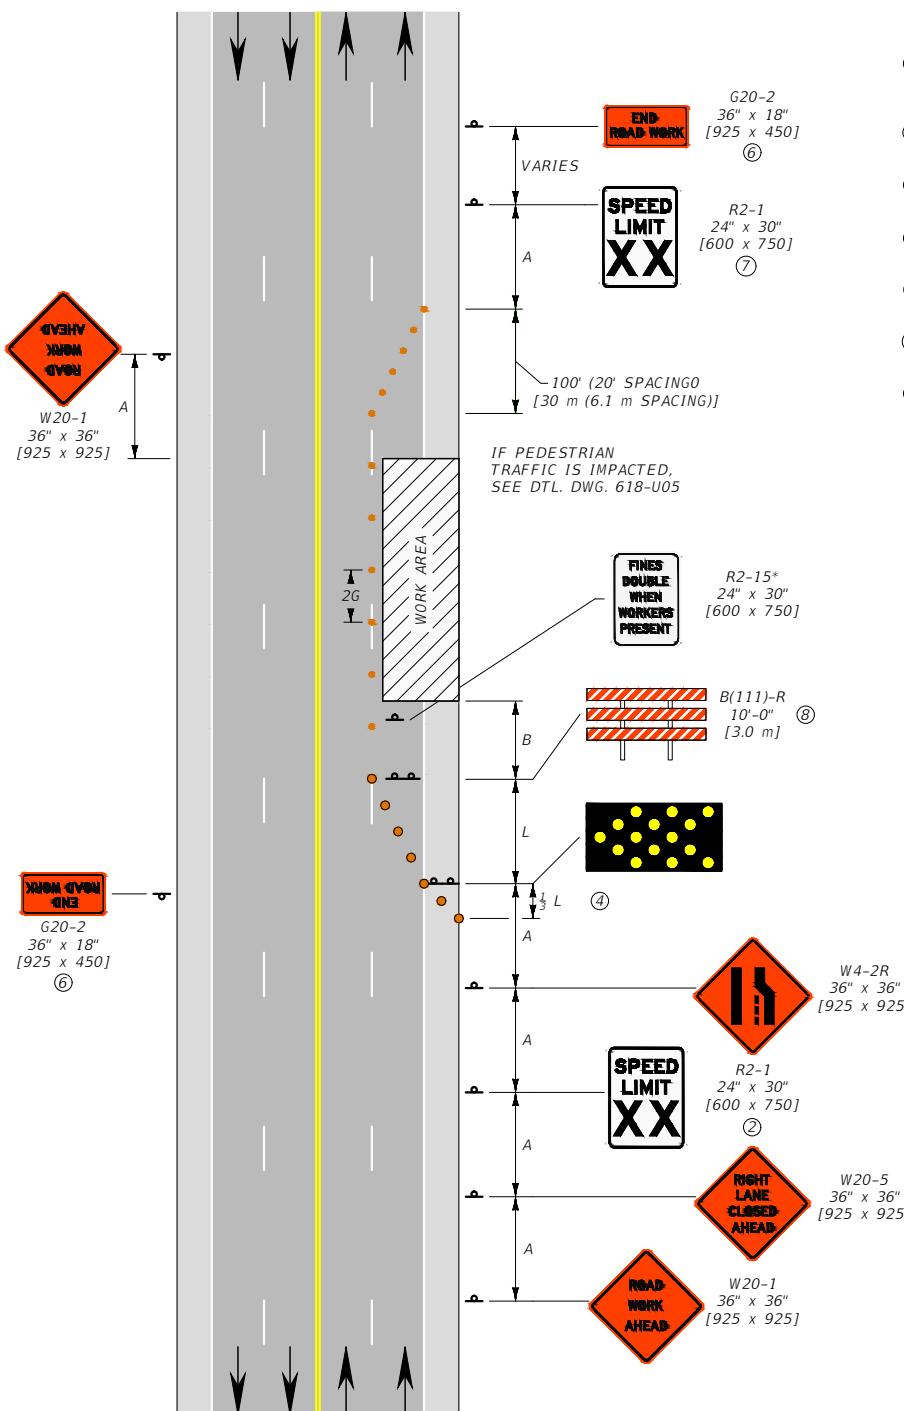

LEGEND

- - FLEXIBLE GUIDE POSTS
- - PLASTIC DRUMS
- * - DENOTES SIGNS UNIQUE TO MONTANA.

XX - SPEED DETERMINED BY THE PROJECT
MANAGER.
(25 M.P.H. OR 35 M.P.H. OR 45 M.P.H.)

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 618-U20
SECTION 618

**RIGHT LANE CLOSURE
(URBAN MULTI-LANE,
UNDIVIDED ROAD)**

EFFECTIVE: JAN 23, 2020



MONTANA

Department of Transportation


--REVISED--
JUN 27, 2024

POSTED SPEED LIMIT FOR WORK ZONE	SIGN SPACING (A)	TAPER LENGTH (L)	SPACING OF CHANNELIZING DEVICES (MAX.) (G) **	BUFFER SPACE ③ (B)
(M.P.H.)	FEET [m]	FEET [m]	FEET [m]	FEET [m]
25	100 [30]	125 [40]	25 [7.6]	155 [45]
35	100 [30]	245 [75]	35 [10.7]	250 [75]
45	350 [105]	540 [165]	45 [14]	360 [110]

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

NOTES:

- ① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.
- ② USE SPEED LIMIT SIGNS ONLY IF SPEED MUST BE RESTRICTED. COVER OR REMOVE CONFLICTING EXISTING SPEED LIMIT SIGNS.
- ③ BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- ④ LARGER SIGN SIZES MAY BE APPROVED BY THE PROJECT MANAGER.
- ⑤ PLACE "END ROADWORK" SIGN AT END OF PROJECT LIMITS.
- ⑥ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE

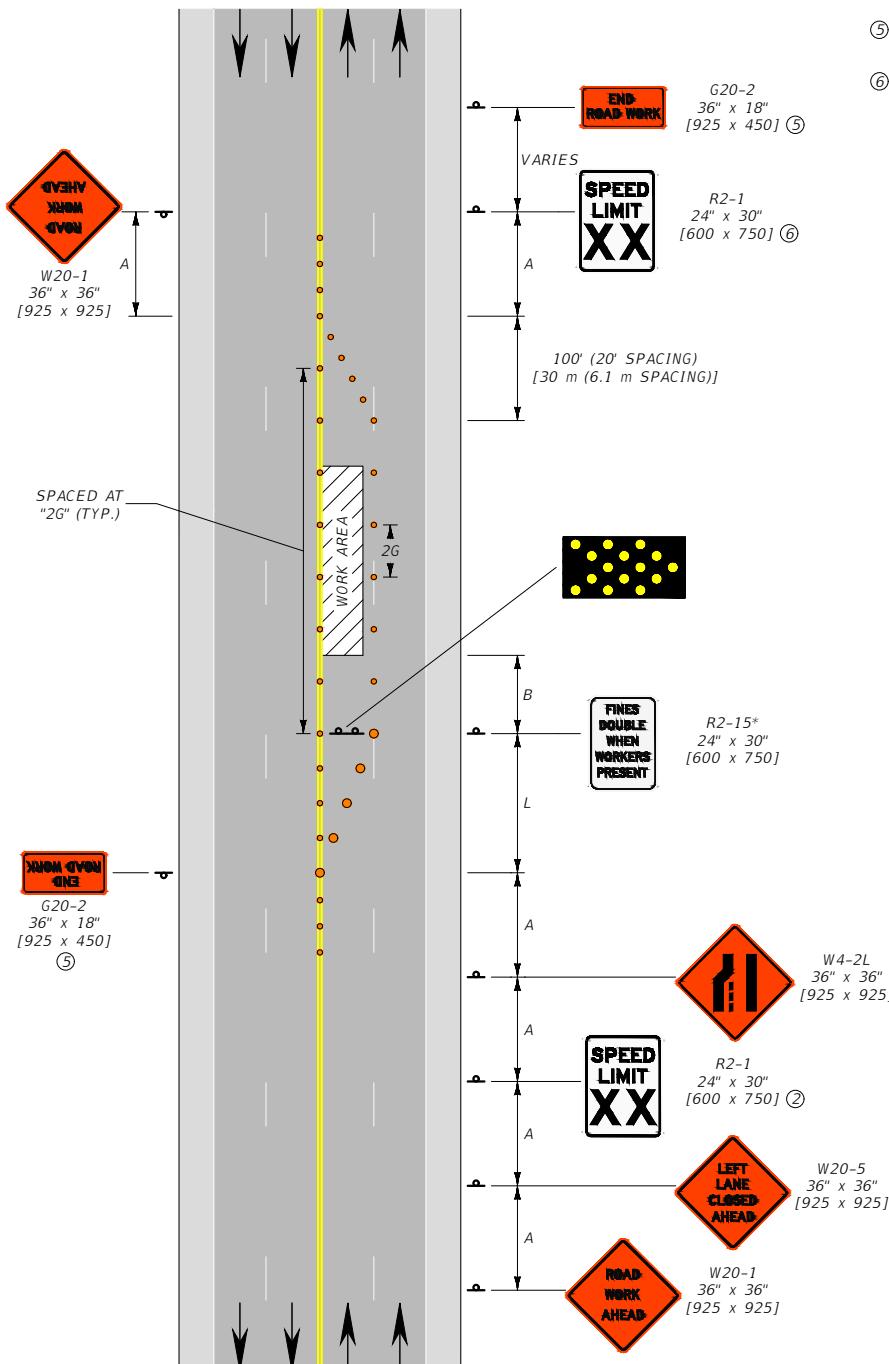

LEGEND

- - FLEXIBLE GUIDE POSTS
- - PLASTIC DRUMS

* - DENOTES SIGNS UNIQUE TO MONTANA.

XX - SPEED DETERMINED BY THE PROJECT MANAGER.
(25 M.P.H. OR 35 M.P.H. OR 45 M.P.H.)

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 618-U25
SECTION 618

LEFT TURN CLOSURE (LOW SPEED URBAN MULTI-LANE, UNDIVIDED ROAD)

EFFECTIVE: JAN 23, 2020




MONTANA

MONTANA Department of Transportation

--REVISED--


POSTED SPEED LIMIT FOR WORK ZONE (M.P.H.)	SIGN SPACING (A) FEET [m]	TAPER LENGTH (L) FEET [m]	SPACING OF CHANNELIZING DEVICES (MAX.) (G) ** FEET [m]	BUFFER SPACE ③ (B) FEET [m]
25	100 [30]	125 [40]	25 [7.6]	155 [45]
35	100 [30]	245 [75]	35 [10.7]	250 [75]
45	350 [105]	540 [165]	45 [14]	360 [110]

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

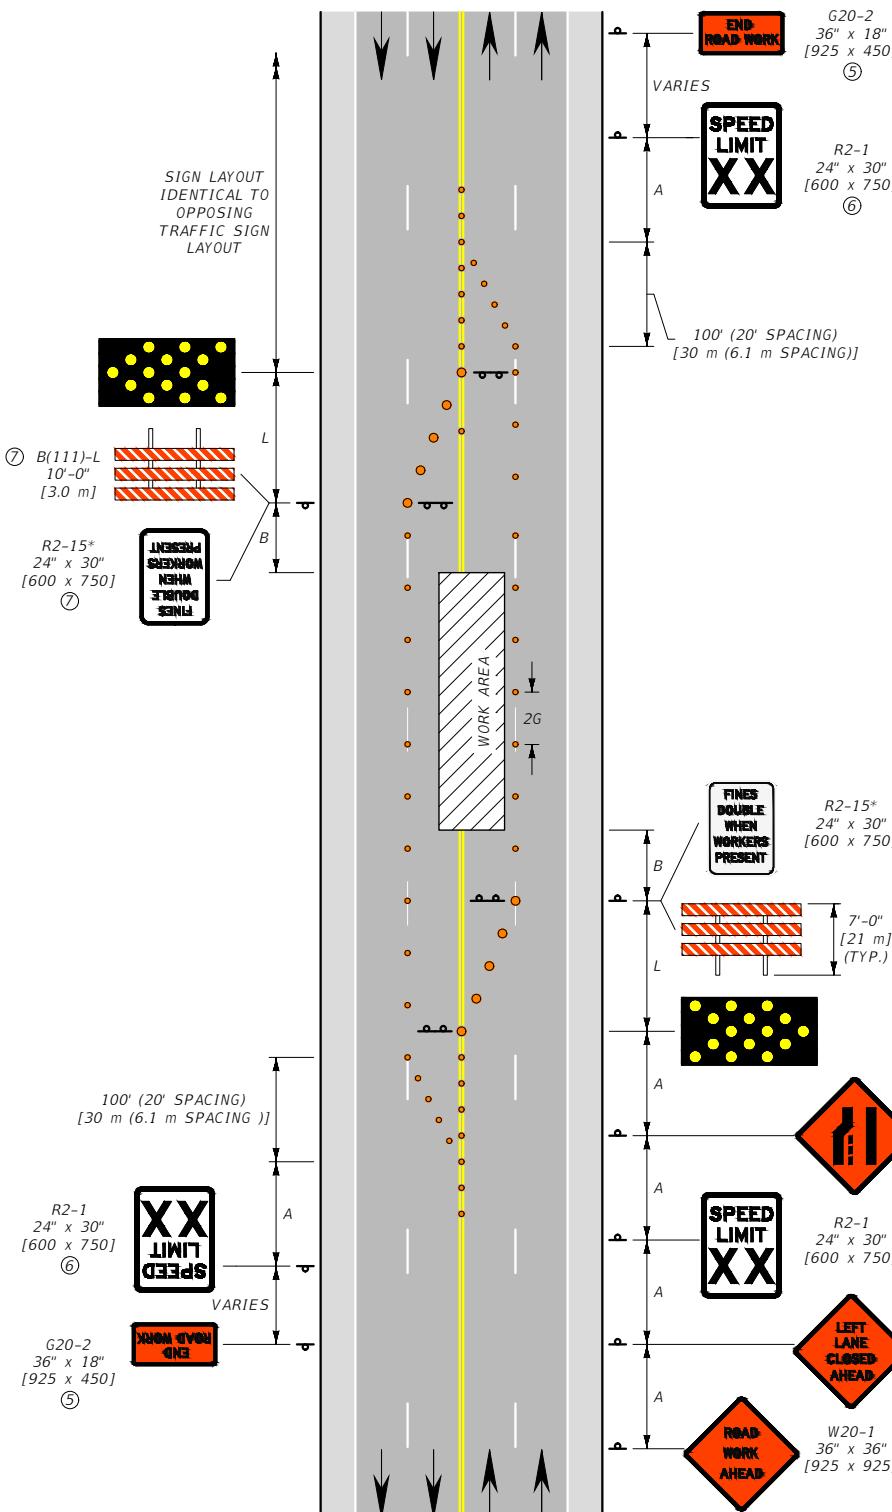

NOTES:

- ① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.
- ② USE SPEED LIMIT SIGNS ONLY IF SPEED MUST BE RESTRICTED. COVER OR REMOVE CONFLICTING EXISTING SPEED LIMIT SIGNS.
- ③ BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- ④ LARGER SIGN SIZES MAY BE APPROVED BY THE PROJECT MANAGER.
- ⑤ PLACE "END ROADWORK" SIGNS AT END OF PROJECT LIMITS.
- ⑥ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE.
- ⑦ SEE DTL. DWG. 618-03.

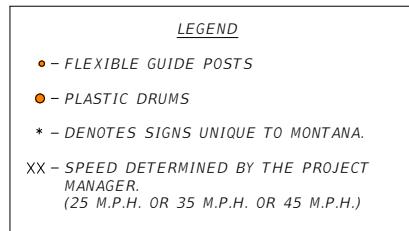


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 618	DWG. NO. 618-U30
--------------------------------------	------------------


LEFT LANE CLOSURES (LOW SPEED URBAN MULTI-LANE, UNDIVIDED ROAD)

EFFECTIVE: JAN 23, 2020

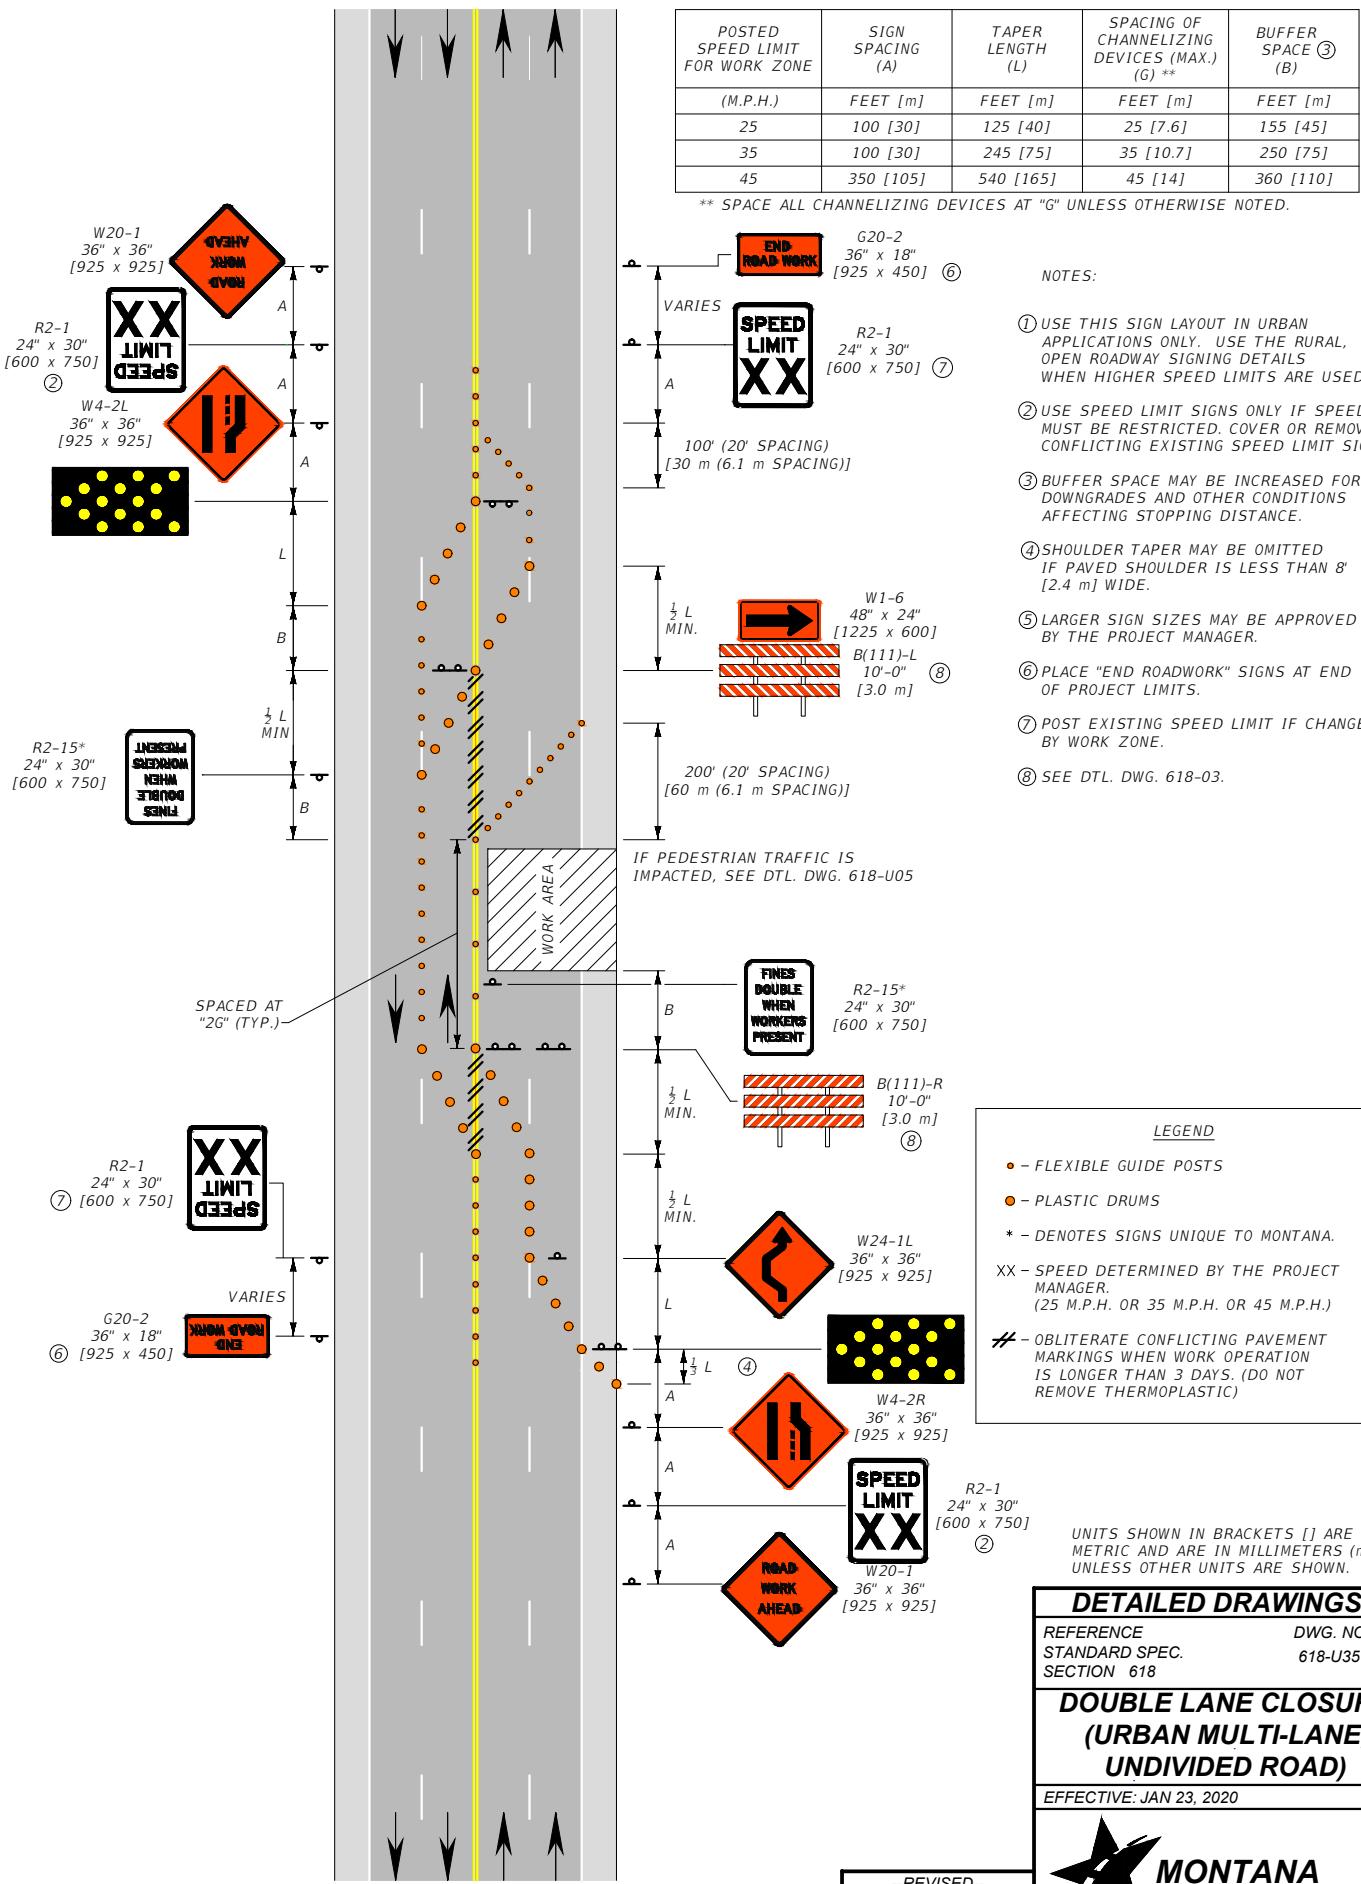

POSTED SPEED LIMIT FOR WORK ZONE	SIGN SPACING (A)	TAPER LENGTH (L)	SPACING OF CHANNELIZING DEVICES (MAX.) (G) **	BUFFER SPACE ① (B)
(M.P.H.)	FEET [m]	FEET [m]	FEET [m]	FEET [m]
25	100 [30]	125 [40]	25 [7.6]	155 [45]
35	100 [30]	245 [75]	35 [10.7]	250 [75]
45	350 [105]	540 [165]	45 [14]	360 [110]

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

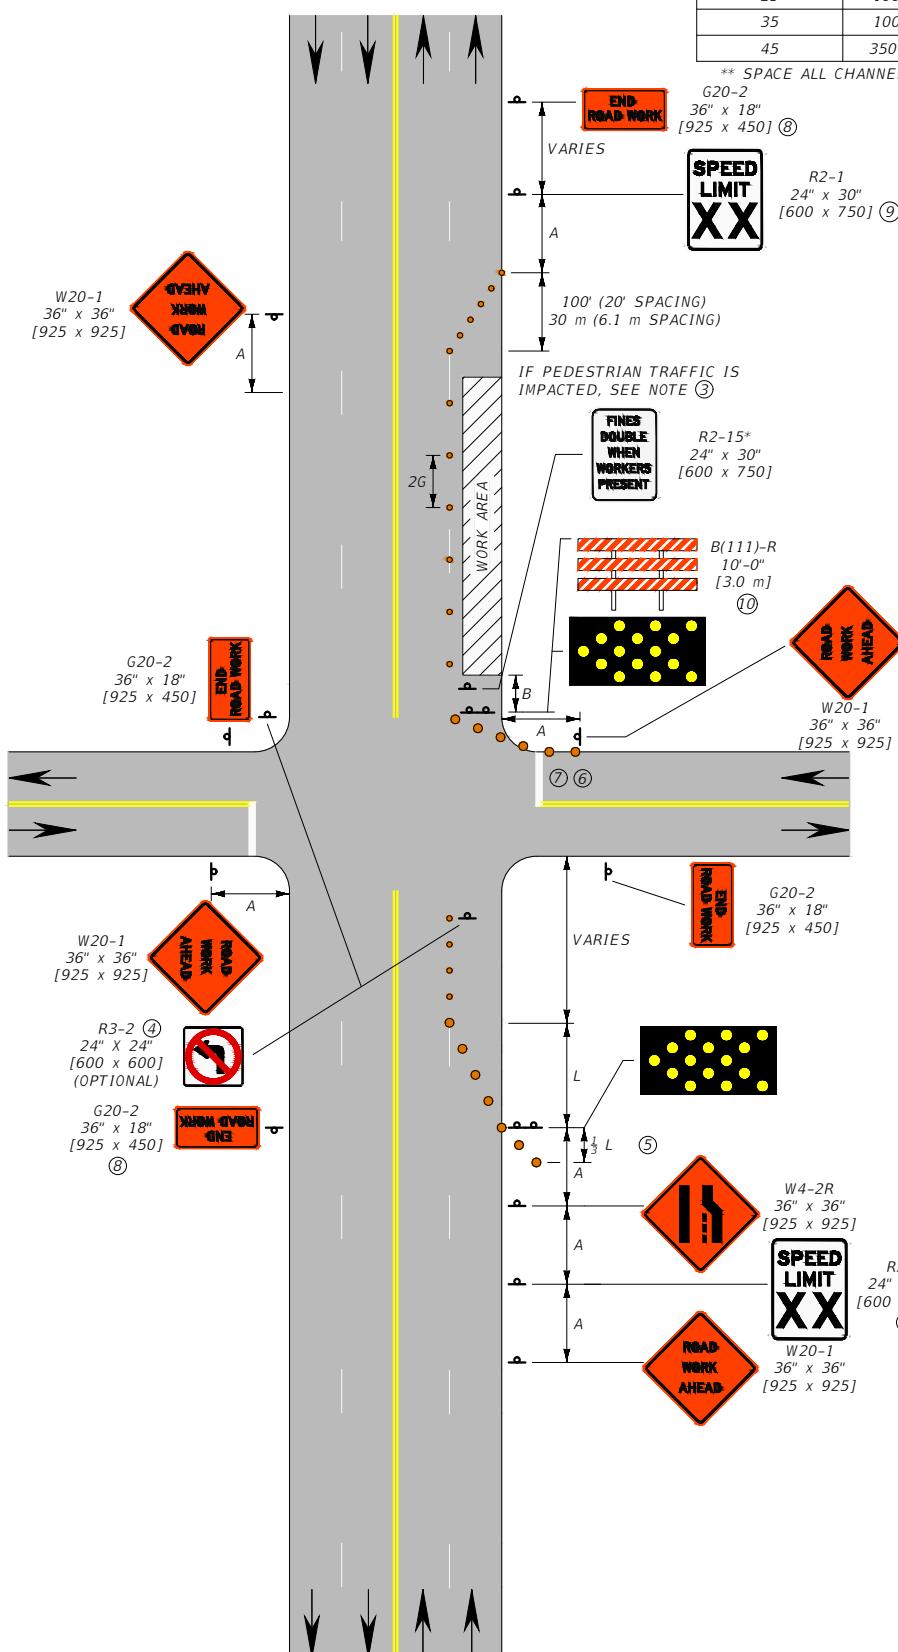

NOTES:

- ① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.
- ② USE SPEED LIMIT SIGNS ONLY IF SPEED MUST BE RESTRICTED. COVER OR REMOVE CONFLICTING EXISTING SPEED LIMIT SIGNS.
- ③ IF PEDESTRIAN TRAFFIC IS IMPACTED BY THE WORK ZONE, USE THE INFORMATION AND DEVICES SHOWN IN DTL. DWG. 618-U05.
- ④ LEFT TURNING MOVEMENTS MAY BE PROHIBITED TO MAINTAIN CAPACITY FOR THROUGH VEHICULAR TRAFFIC (UNLESS CONTROLLED BY TRAFFIC SIGNAL).
- ⑤ INCLUDE A SHOULDER TAPER WHEN PAVED SHOULDER IS 8' [2.4 m] OR GREATER IN WIDTH OR WHEN A PARKING LANE IS PRESENT.
- ⑥ IF LIMITED SIGHT DISTANCE FROM THIS APPROACH, CONSIDER RIGHT TURN ONLY OR CLOSING THE APPROACH.
- ⑦ LARGER SIGN SIZES MAY BE APPROVED BY THE PROJECT MANAGER.
- ⑧ PLACE "END ROADWORK" SIGNS AT END OF PROJECT LIMITS.
- ⑨ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE.
- ⑩ SEE DTL. DWG. 618-03.
- ⑪ BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.

LEGEND

- - FLEXIBLE GUIDE POSTS
- - PLASTIC DRUMS
- * - DENOTES SIGNS UNIQUE TO MONTANA.

XX - SPEED DETERMINED BY THE PROJECT
MANAGER.
(25 M.P.H. OR 35 M.P.H. OR 45 M.P.H.)

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 618-U40
SECTION 618

**RIGHT LANE
CLOSURE-WORK AREA
BEYOND INTERSECTION
(URBAN MULTI-LANE,
UNDIVIDED ROAD)**


EFFECTIVE: JAN 23, 2020



MONTANA

Department of Transportation

--REVISED--
JUN 27, 2024

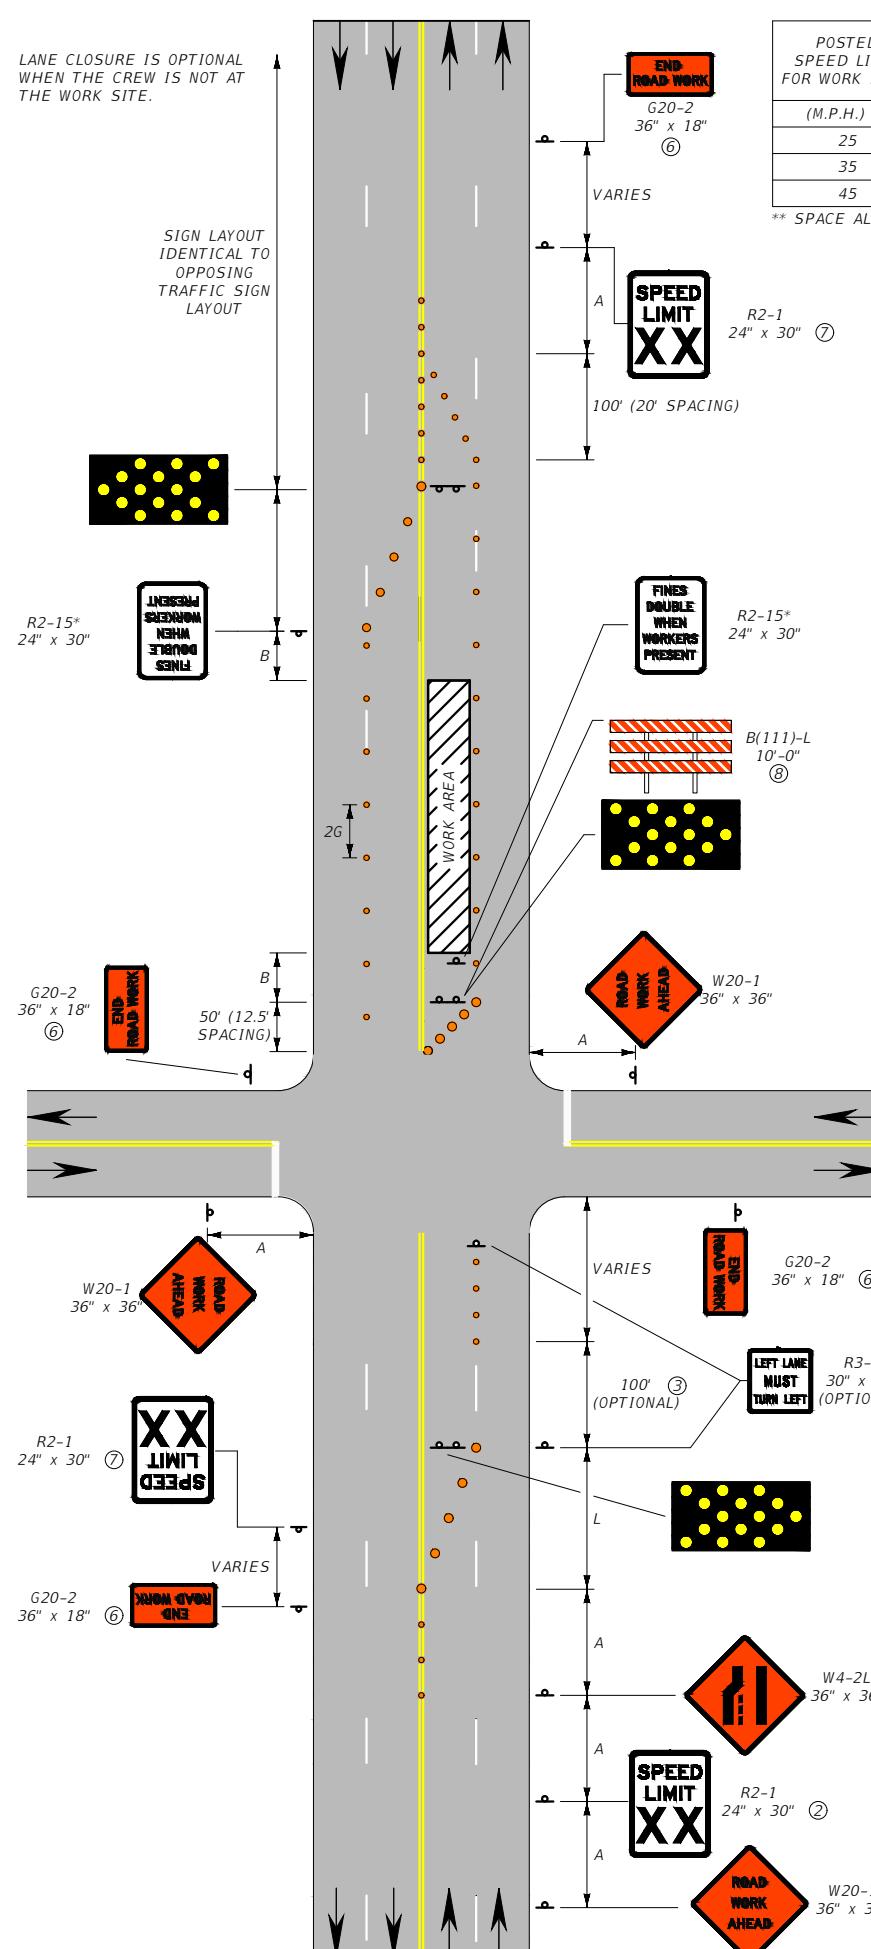

POSTED SPEED LIMIT FOR WORK ZONE (M.P.H.)	SIGN SPACING (A) FEET	TAPER LENGTH (L) FEET	SPACING OF CHANNELIZING DEVICES (MAX.) (G) **	BUFFER SPACE (B) FEET
25	100	125	25	155
35	100	245	35	250
45	350	540	45	360

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.


NOTES:

- ① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.
- ② INCLUDE SPEED LIMIT SIGNS ONLY IF THERE IS A REASON TO RESTRICT SPEED. COVER OR REMOVE CONFLICTING EXISTING SPEED LIMIT SIGNS.
- ③ NORMAL PROCEDURE IS TO COMPLETELY CLOSE THE LEFT LANE, BUT IF THE LEFT LANE HAS SIGNIFICANT LEFT-TURNING TRAFFIC, THE OPTION SHOWN MAY BE USED. ADJUST FLEXIBLE GUIDE POSTS TO ALLOW THE TURNING MOVEMENTS.
- ④ LARGER SIGN SIZES MAY BE APPROVED BY THE PROJECT MANAGER.
- ⑤ IF LIMITED SIGHT DISTANCE FROM EITHER APPROACH, CONSIDER RIGHT TURNS ONLY OR CLOSING EACH APPROACH WHEN CONDITIONS WARRANT.
- ⑥ PLACE END ROAD WORK SIGNS AT END OF PROJECT LIMITS.
- ⑦ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE.
- ⑧ SEE DTL. DWG. 618-03.
- ⑨ THE BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS THAT AFFECT STOPPING DISTANCE.

LEGEND

- - FLEXIBLE GUIDE POSTS
- - PLASTIC DRUMS
- * - DENOTES SIGNS UNIQUE TO MONTANA.

XX - SPEED DETERMINED BY THE PROJECT MANAGER.
(25 M.P.H. OR 35 M.P.H. or 45 M.P.H.)

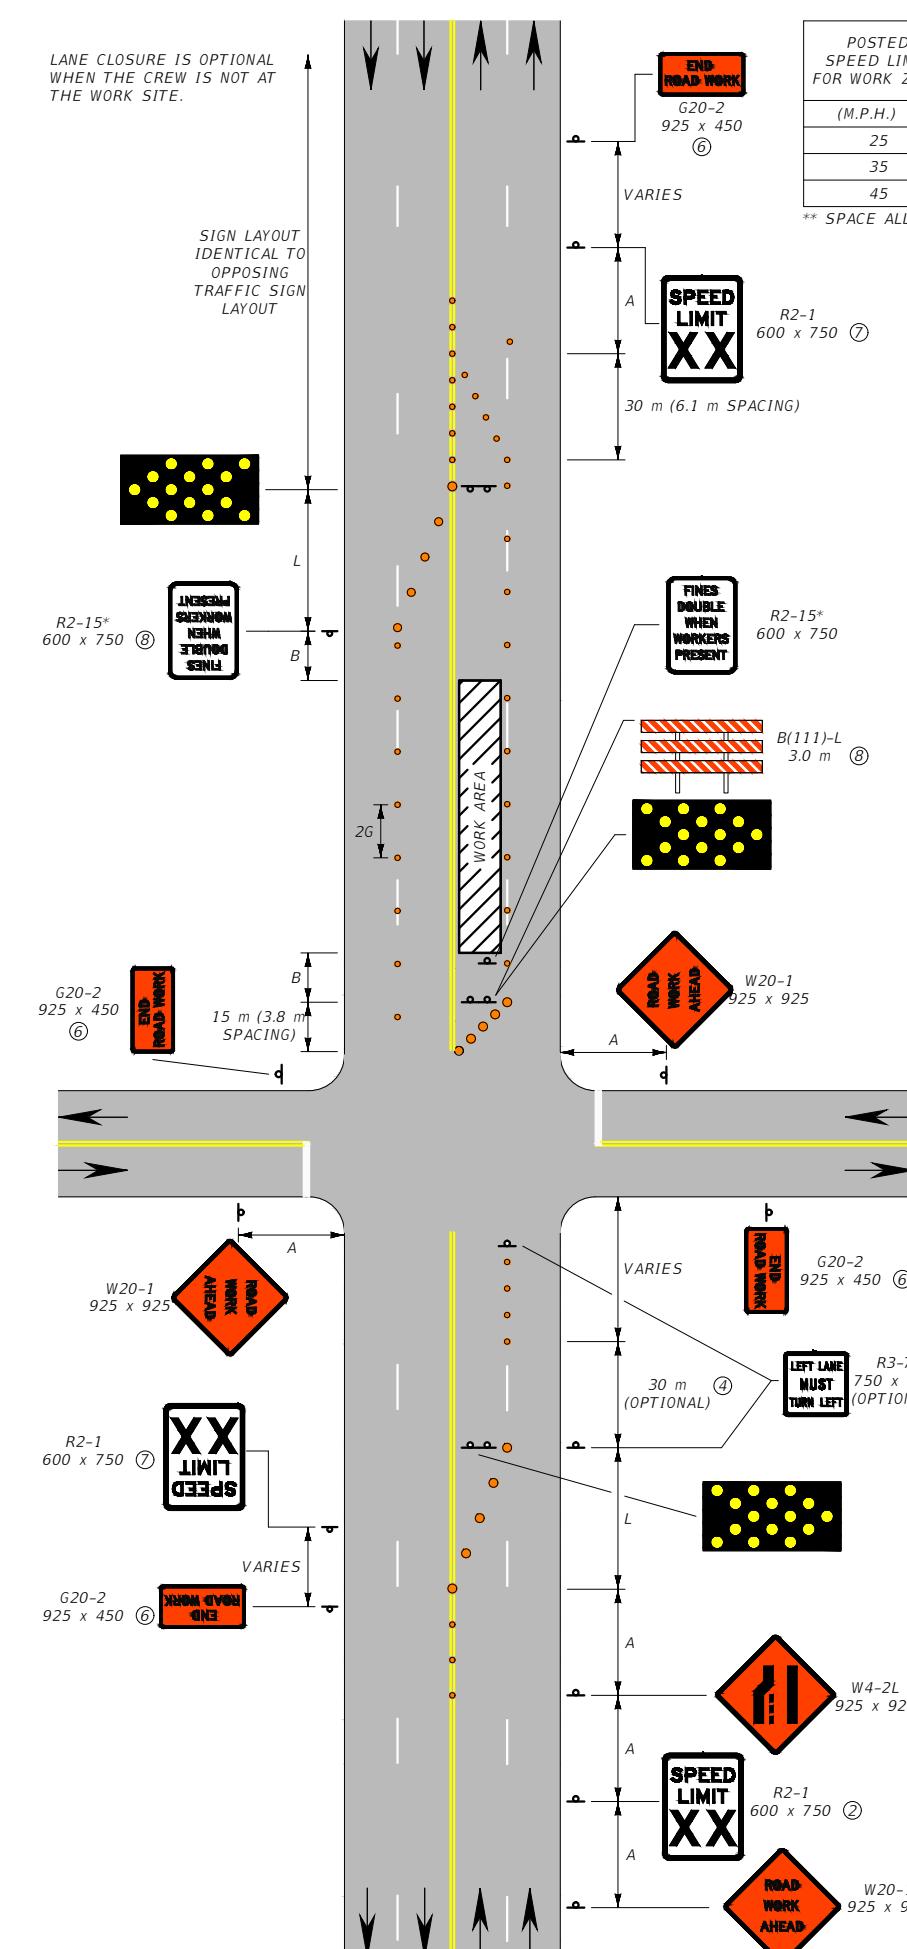

POSTED SPEED LIMIT FOR WORK ZONE (M.P.H.)	SIGN SPACING (A) m	TAPER LENGTH (L) m	SPACING OF CHANNELIZING DEVICES (MAX.) (G) **	BUFFER SPACE (B) m
25	30	40	7.6	45
35	30	75	10.7	75
45	105	165	14	110

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

NOTES:

- ① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.
- ② INCLUDE SPEED LIMIT SIGNS ONLY IF THERE IS A REASON TO RESTRICT SPEED. COVER OR REMOVE CONFLICTING EXISTING SPEED LIMIT SIGNS.
- ③ NORMAL PROCEDURE IS TO COMPLETELY CLOSE THE LEFT LANE, BUT IF THE LEFT LANE HAS SIGNIFICANT LEFT-TURNING TRAFFIC, THE OPTION SHOWN MAY BE USED. ADJUST FLEXIBLE GUIDE POSTS TO ALLOW THE TURNING MOVEMENTS.
- ④ LARGER SIGN SIZES MAY BE APPROVED BY THE PROJECT MANAGER.
- ⑤ IF LIMITED SIGHT DISTANCE FROM EITHER APPROACH, CONSIDER RIGHT TURNS ONLY OR CLOSING EACH APPROACH WHEN CONDITIONS WARRANT.
- ⑥ PLACE END ROAD WORK SIGNS AT END OF PROJECT LIMITS.
- ⑦ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE.
- ⑧ SEE DTL. DWG. 618-03.
- ⑨ THE BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS THAT AFFECT STOPPING DISTANCE.

LEGEND

- - FLEXIBLE GUIDE POSTS
- - PLASTIC DRUMS
- * - DENOTES SIGNS UNIQUE TO MONTANA.

XX - SPEED DETERMINED BY THE PROJECT MANAGER.
(25 M.P.H. OR 35 M.P.H. or 45 M.P.H.)

ALL DIMENSIONS ARE MILLIMETERS (mm) UNLESS OTHERWISE NOTED.

DETAILED DRAWINGS

REFERENCE STANDARD SPEC. SECTION 618 DWG. NO. 618-U45


LEFT LANE CLOSURE-WORK AREA BEYOND INTERSECTION (URBAN MULTI-LANE, UNDIVIDED ROAD)

EFFECTIVE: JAN 23, 2020

MONTANA Department of Transportation

5/20/2025 11:50 AM STDDR618U45.DWG

REVISED--
JUN 27, 2024

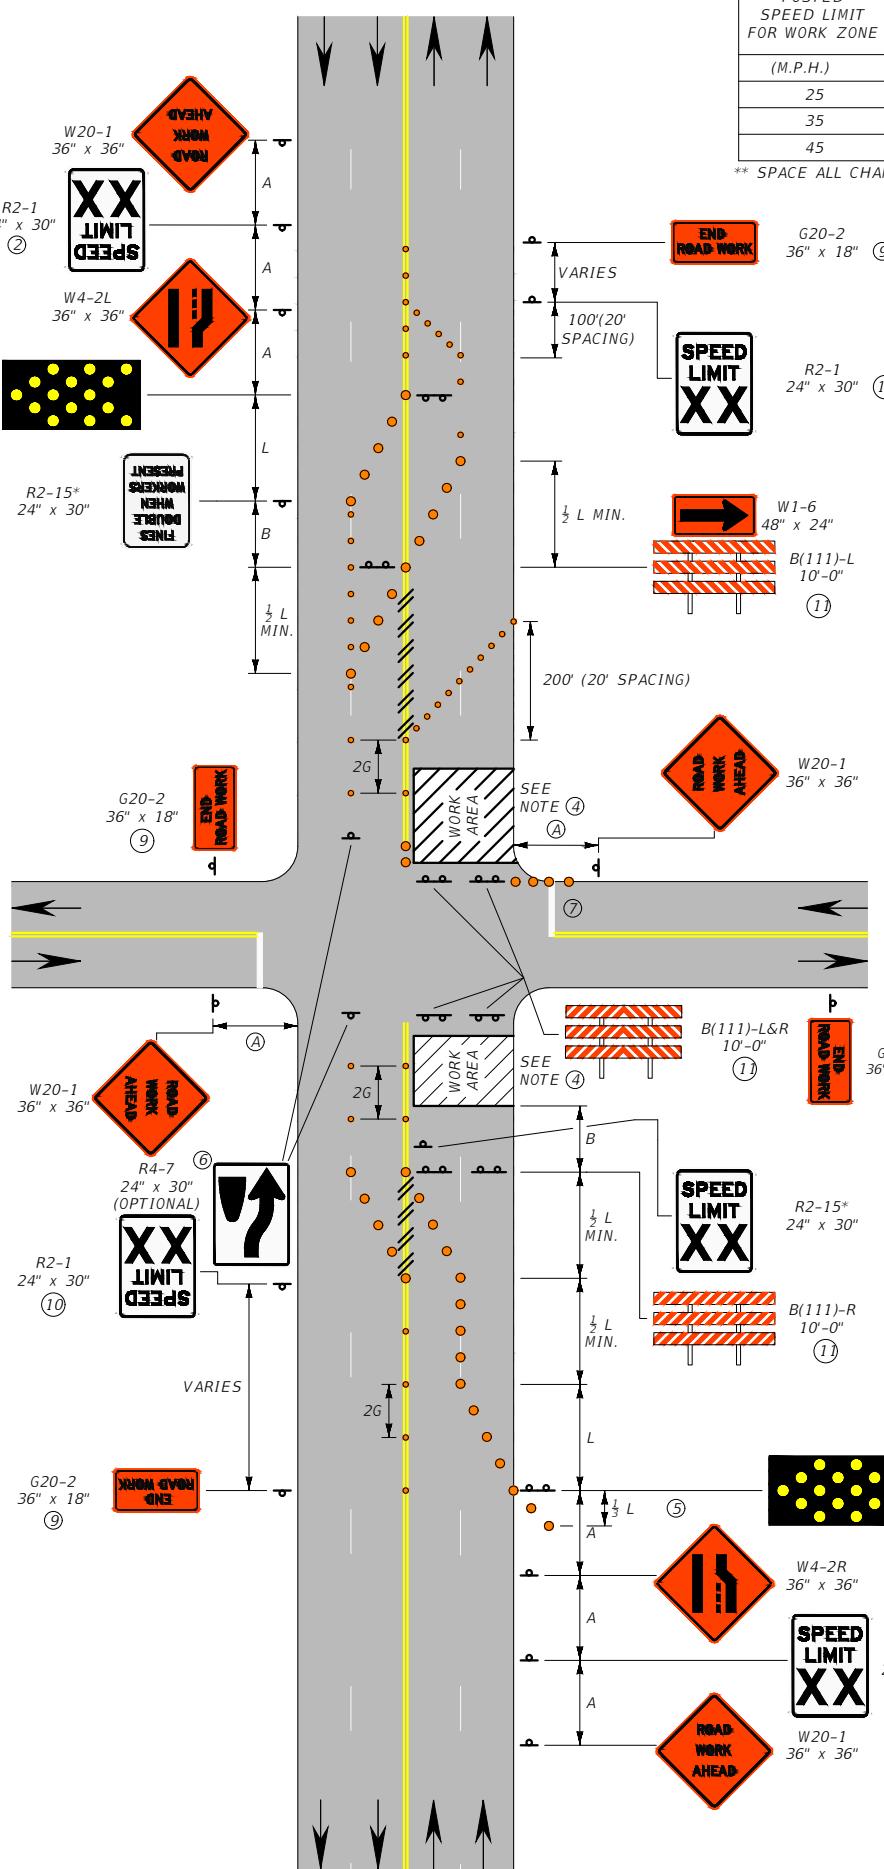

POSTED SPEED LIMIT FOR WORK ZONE (M.P.H.)	SIGN SPACING (FEET)	TAPER LENGTH (L) FEET	SPACING OF CHANNELIZING DEVICES (MAX.) (G) ** FEET	BUFFER SPACE (B) FEET
25	100	125	25	155
35	100	245	35	250
45	350	540	45	360

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

NOTES:


- ① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.
- ② USE SPEED LIMIT SIGNS ONLY IF SPEED MUST BE RESTRICTED. COVER OR REMOVE CONFLICTING EXISTING SPEED LIMIT SIGNS.
- ③ BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- ④ IF PEDESTRIAN TRAFFIC IS IMPACTED BY THE WORK ZONE, USE THE INFORMATION AND DEVICES SHOWN IN DTL. DWG. 618-US.
- ⑤ INCLUDE A SHOULDER TAPER WHEN PAVED SHOULDER IS 8' OR GREATER IN WIDTH OR WHEN A PARKING LANE IS PRESENT.
- ⑥ KEEP RIGHT SIGNS MAY BE OMITTED IF THERE IS INSUFFICIENT SPACE TO PLACE THE BACK-TO-BACK KEEP RIGHT SIGN AND NO LEFT TURN SYMBOL SIGNS.
- ⑦ IF LIMITED SIGHT DISTANCE FROM THIS APPROACH, CONSIDER RIGHT TURN ONLY OR CLOSING THE APPROACH.
- ⑧ LARGER SIGN SIZES MAY BE APPROVED BY THE PROJECT MANAGER.
- ⑨ PLACE "END ROADWORK" SIGNS AT END OF PROJECT LIMITS.
- ⑩ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE.
- ⑪ SEE DTL. DWG. 618-03.

LEGEND

- - FLEXIBLE GUIDE POSTS
- - PLASTIC DRUMS
- * - DENOTES SIGNS UNIQUE TO MONTANA.
- XX - SPEED DETERMINED BY THE PROJECT MANAGER. (25 M.P.H. OR 35 M.P.H. OR 45 M.P.H.)
- ⚡ - OBLITERATE CONFLICTING PAVEMENT MARKINGS WHEN WORK OPERATION IS LONGER THAN 3 DAYS. (DO NOT REMOVE THERMOPLASTIC).



FOR INTERSECTION APPROACHES REDUCED TO A SINGLE LANE, LEFT TURNS MAY BE PROHIBITED TO MAINTAIN CAPACITY FOR THROUGH TRAFFIC. WHEN PROHIBITING A TURN, TWO TURN PROHIBITION SIGNS SHOULD BE USED, ONE ON THE NEAR SIDE AND, SPACE PERMITTING, ONE ON THE FAR SIDE OF THE INTERSECTION.

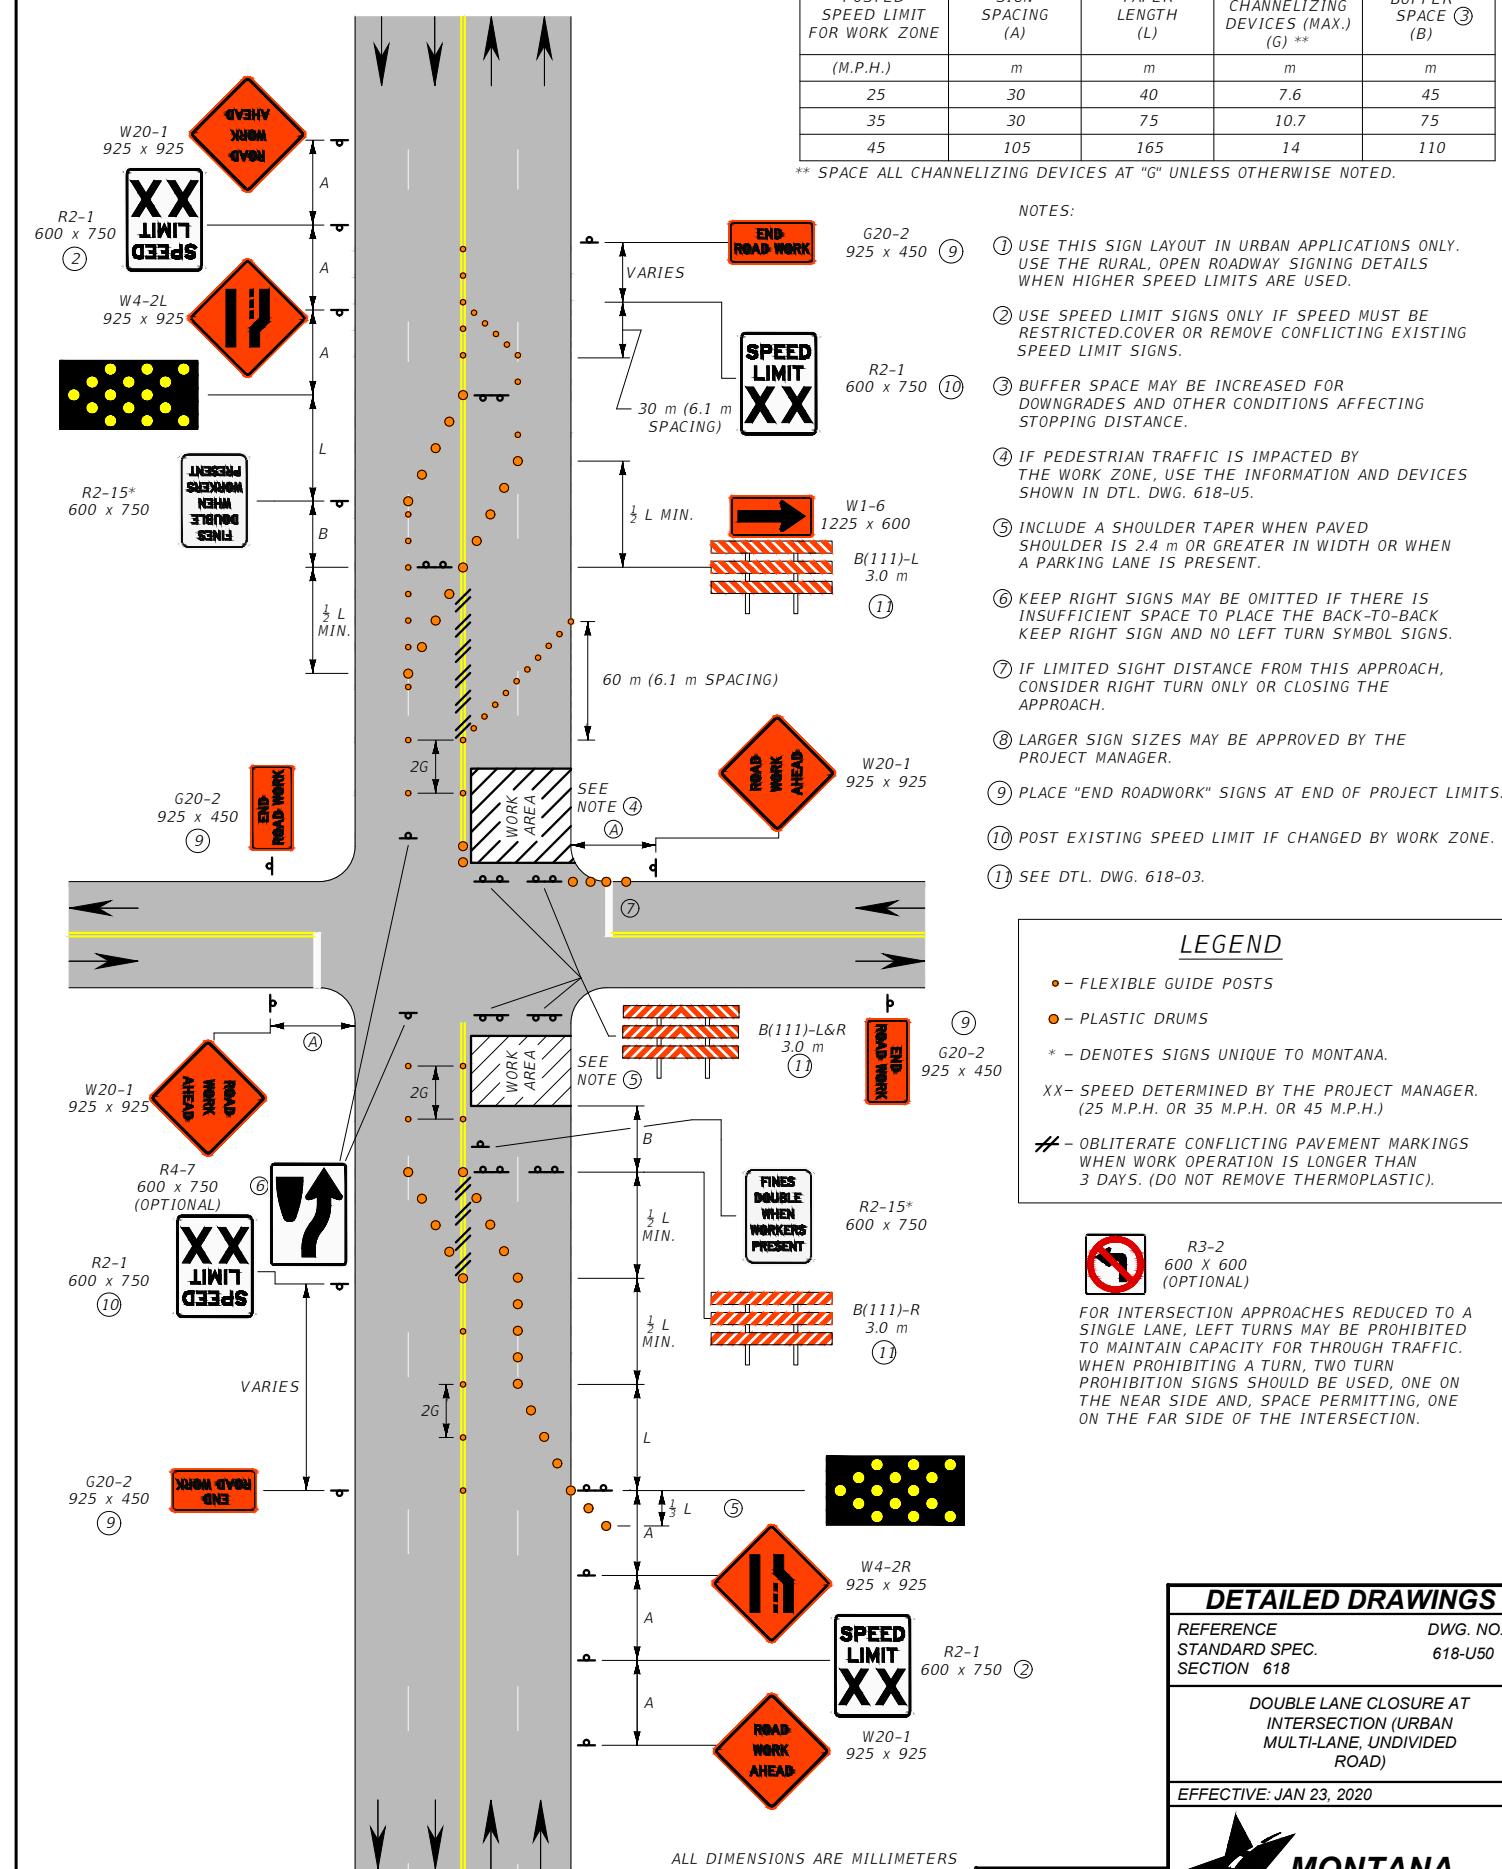

POSTED SPEED LIMIT FOR WORK ZONE (M.P.H.)	SIGN SPACING (m)	TAPER LENGTH (L) m	SPACING OF CHANNELIZING DEVICES (MAX.) (G) ** m	BUFFER SPACE (B) m
25	30	40	7.6	45
35	30	75	10.7	75
45	105	165	14	110

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

NOTES:

- ① USE THIS SIGN LAYOUT IN URBAN APPLICATIONS ONLY. USE THE RURAL, OPEN ROADWAY SIGNING DETAILS WHEN HIGHER SPEED LIMITS ARE USED.
- ② USE SPEED LIMIT SIGNS ONLY IF SPEED MUST BE RESTRICTED. COVER OR REMOVE CONFLICTING EXISTING SPEED LIMIT SIGNS.
- ③ BUFFER SPACE MAY BE INCREASED FOR DOWNGRADES AND OTHER CONDITIONS AFFECTING STOPPING DISTANCE.
- ④ IF PEDESTRIAN TRAFFIC IS IMPACTED BY THE WORK ZONE, USE THE INFORMATION AND DEVICES SHOWN IN DTL. DWG. 618-US.
- ⑤ INCLUDE A SHOULDER TAPER WHEN PAVED SHOULDER IS 2.4 m OR GREATER IN WIDTH OR WHEN A PARKING LANE IS PRESENT.
- ⑥ KEEP RIGHT SIGNS MAY BE OMITTED IF THERE IS INSUFFICIENT SPACE TO PLACE THE BACK-TO-BACK KEEP RIGHT SIGN AND NO LEFT TURN SYMBOL SIGNS.
- ⑦ IF LIMITED SIGHT DISTANCE FROM THIS APPROACH, CONSIDER RIGHT TURN ONLY OR CLOSING THE APPROACH.
- ⑧ LARGER SIGN SIZES MAY BE APPROVED BY THE PROJECT MANAGER.
- ⑨ PLACE "END ROADWORK" SIGNS AT END OF PROJECT LIMITS.
- ⑩ POST EXISTING SPEED LIMIT IF CHANGED BY WORK ZONE.
- ⑪ SEE DTL. DWG. 618-03.

LEGEND

- - FLEXIBLE GUIDE POSTS
- - PLASTIC DRUMS
- * - DENOTES SIGNS UNIQUE TO MONTANA.
- XX - SPEED DETERMINED BY THE PROJECT MANAGER. (25 M.P.H. OR 35 M.P.H. OR 45 M.P.H.)
- ⚡ - OBLITERATE CONFLICTING PAVEMENT MARKINGS WHEN WORK OPERATION IS LONGER THAN 3 DAYS. (DO NOT REMOVE THERMOPLASTIC).

R3-2 600 x 600 (OPTIONAL)
FOR INTERSECTION APPROACHES REDUCED TO A SINGLE LANE, LEFT TURNS MAY BE PROHIBITED TO MAINTAIN CAPACITY FOR THROUGH TRAFFIC. WHEN PROHIBITING A TURN, TWO TURN PROHIBITION SIGNS SHOULD BE USED, ONE ON THE NEAR SIDE AND, SPACE PERMITTING, ONE ON THE FAR SIDE OF THE INTERSECTION.

DETAILED DRAWINGS


REFERENCE STANDARD SPEC. SECTION 618 DWG. NO. 618-U50


DOUBLE LANE CLOSURE AT INTERSECTION (URBAN MULTI-LANE, UNDIVIDED ROAD)

EFFECTIVE: JAN 23, 2020

POSTED SPEED LIMIT FOR WORK ZONE (M.P.H.)	SIGN SPACING (A) FEET [m]	TAPER LENGTH (L) FEET [m]	SPACING OF CHANNELIZING DEVICES (MAX.) (G) ** FEET [m]	BUFFER SPACE ③ (B) FEET [m]
25	100 [30]	125 [40]	25 [7.6]	155 [45]
35	100 [30]	245 [75]	35 [10.7]	250 [75]
45	350 [105]	540 [165]	45 [14]	360 [110]

** SPACE ALL CHANNELIZING DEVICES AT "G" UNLESS OTHERWISE NOTED.

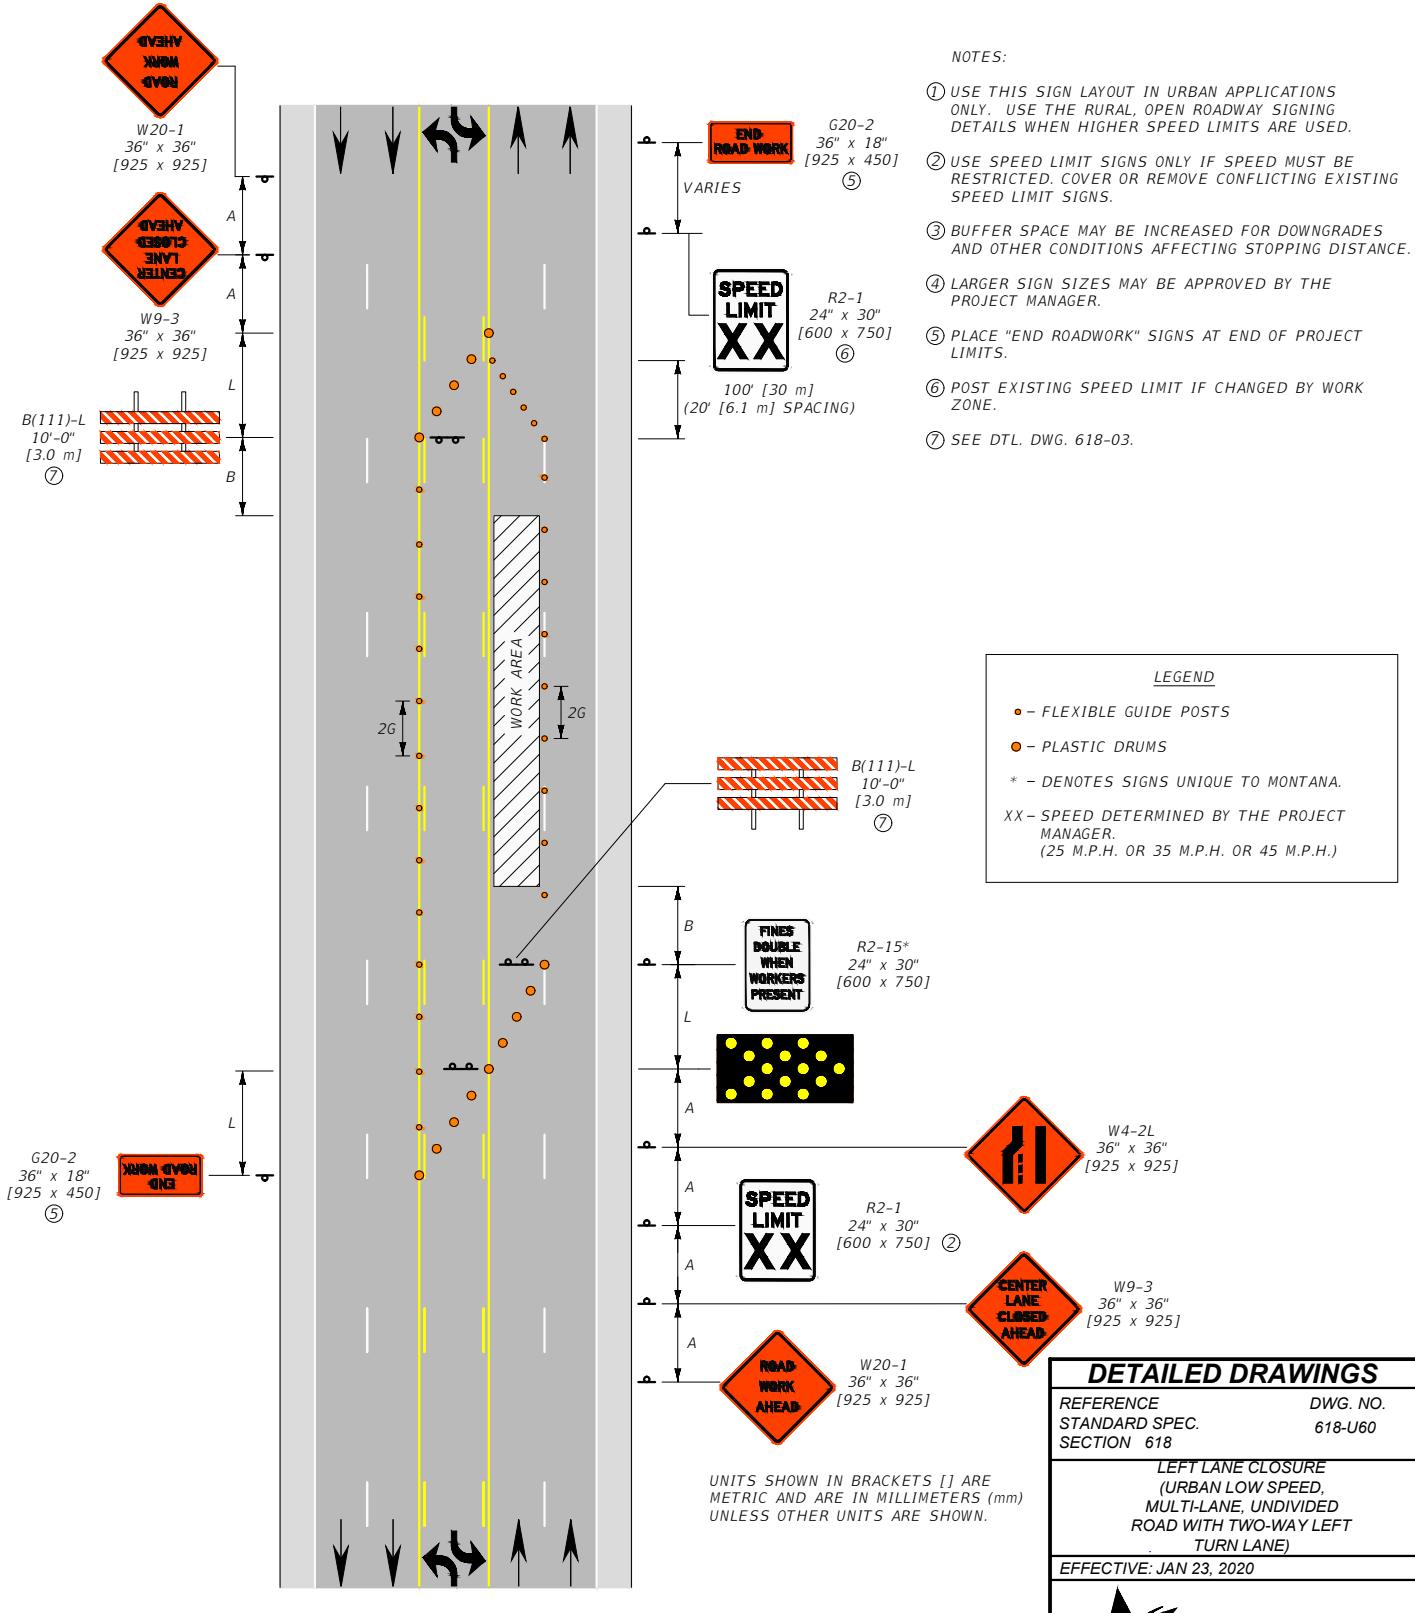

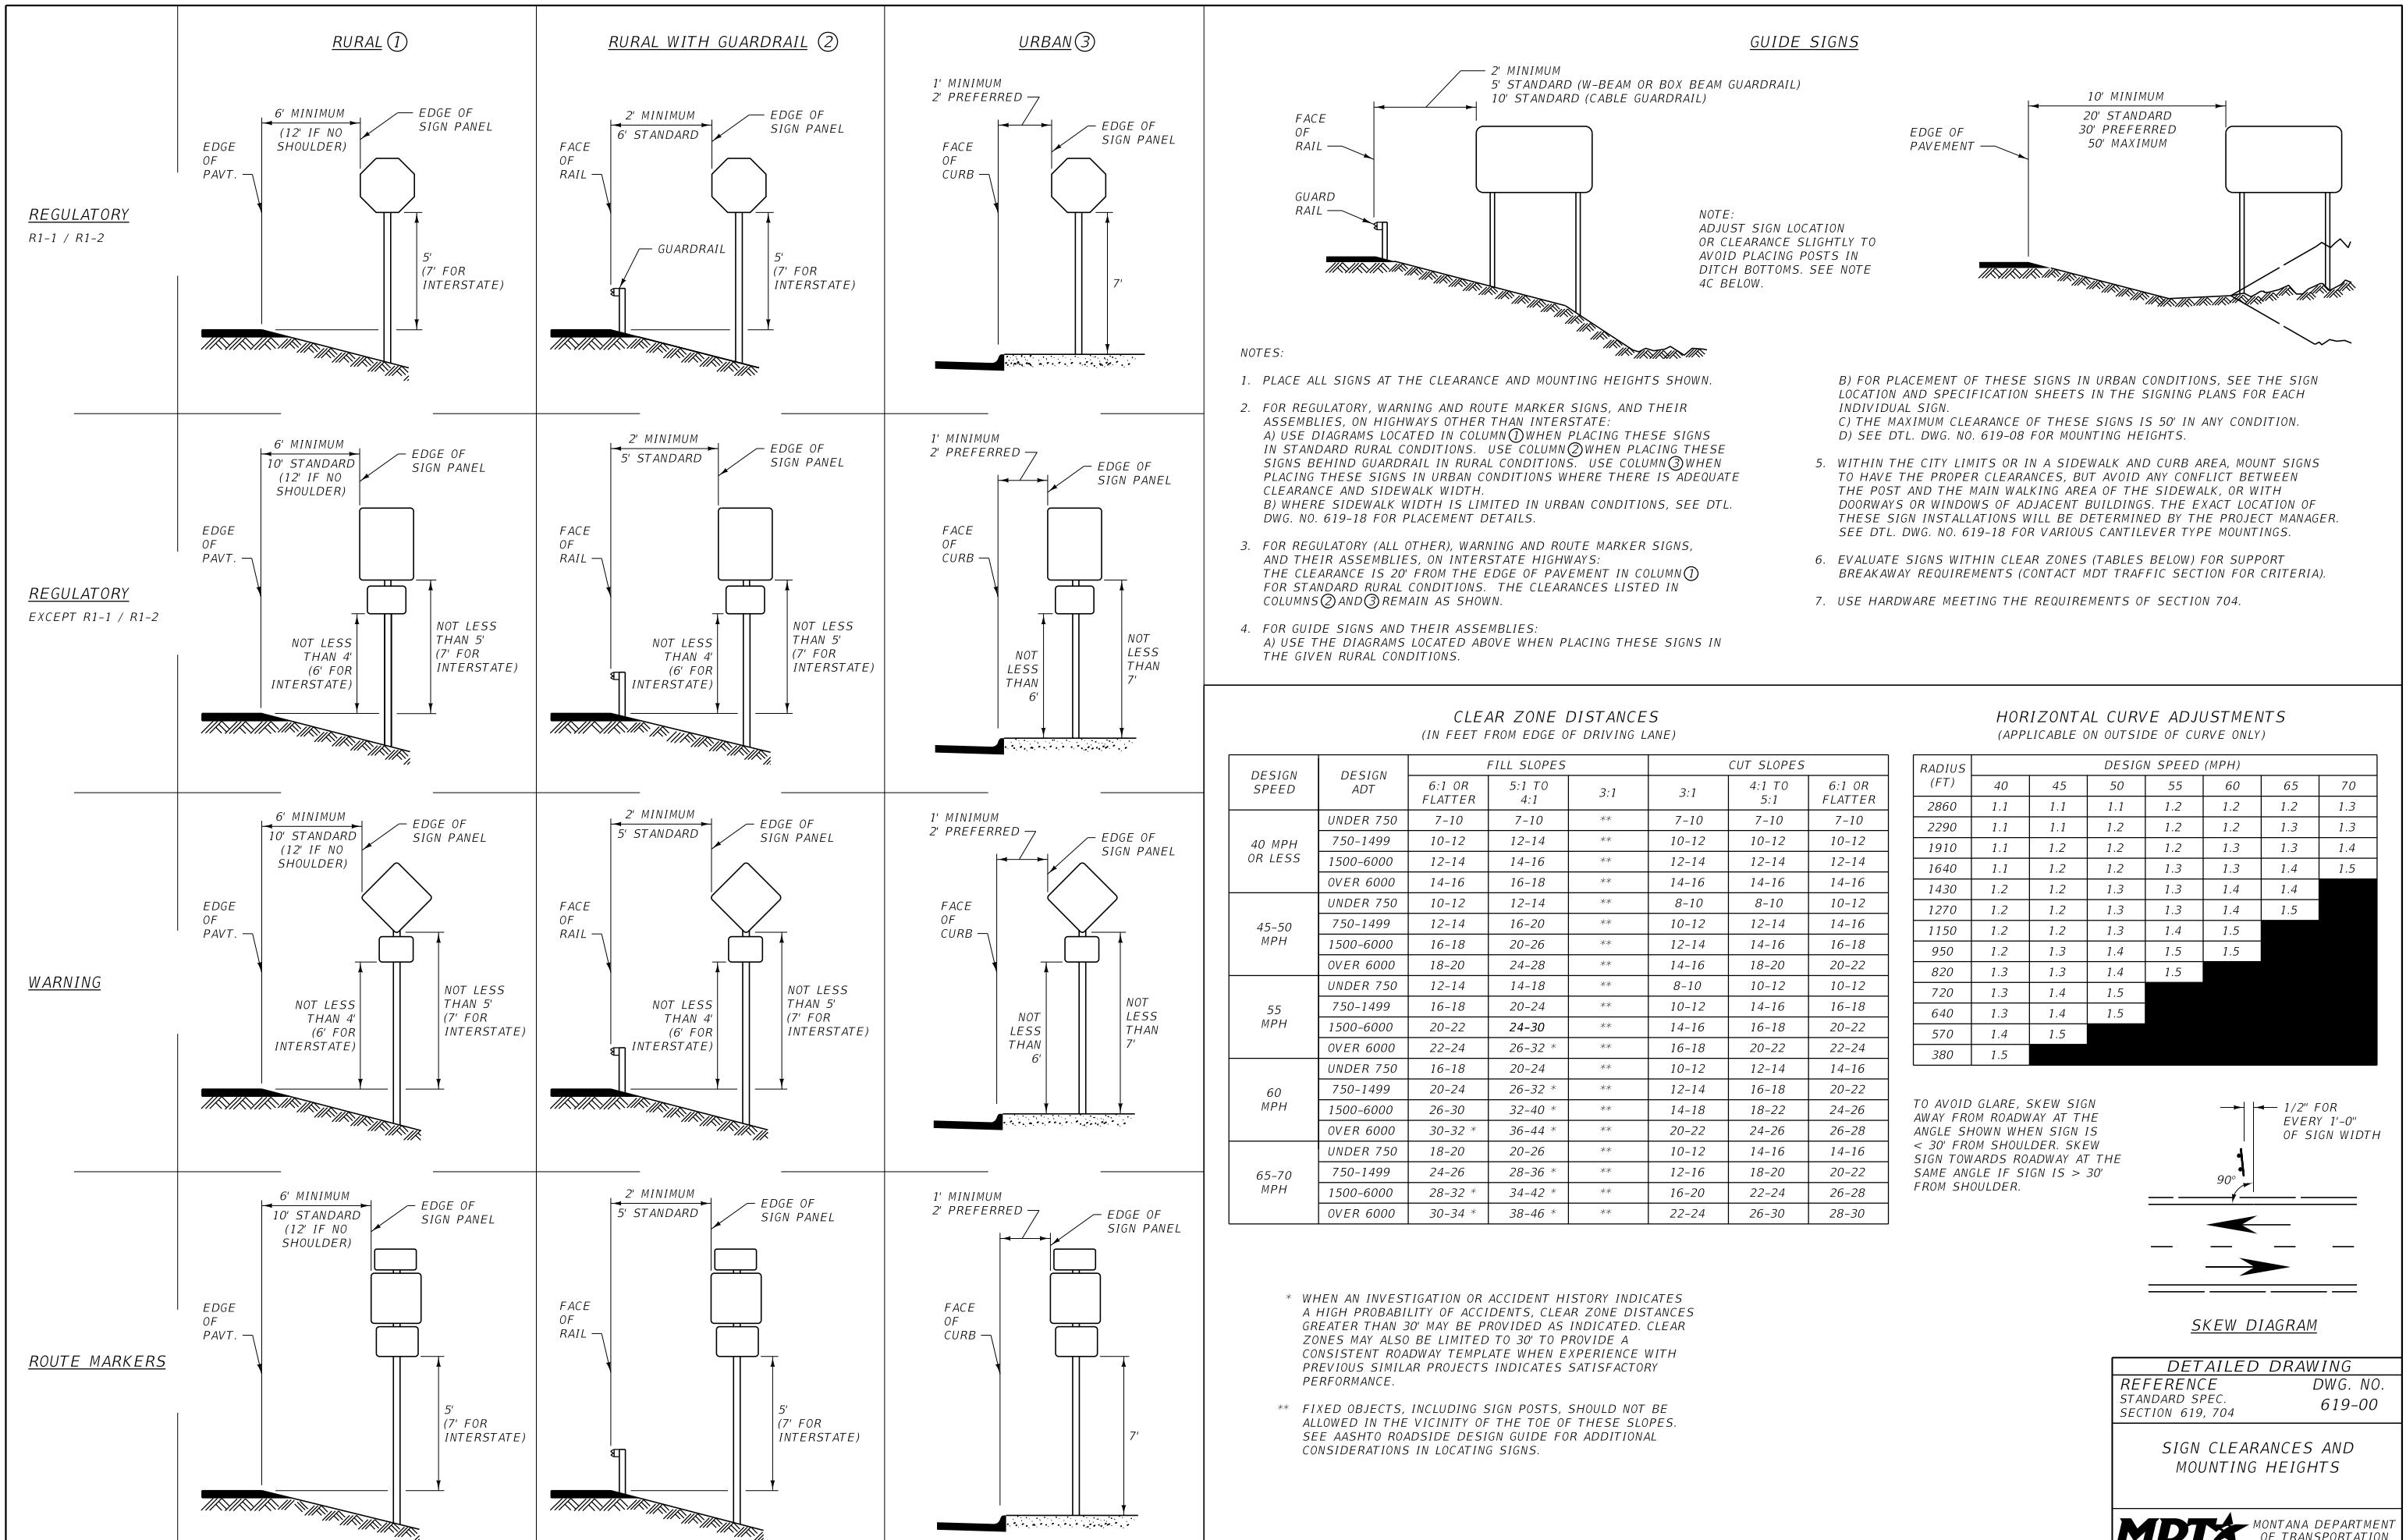

REGULATORY
R1-1 / R1-2

REGULATORY
EXCEPT R1-1 / R1-2

WARNING

ROUTE MARKERS

RURAL ①

RURAL WITH GUARDRAIL ②

URBAN ③

GUIDE SIGNS

NOTES:

- PLACE ALL SIGNS AT THE CLEARANCE AND MOUNTING HEIGHTS SHOWN.
- FOR REGULATORY, WARNING AND ROUTE MARKER SIGNS, AND THEIR ASSEMBLIES, ON HIGHWAYS OTHER THAN INTERSTATE:
 - USE DIAGRAMS LOCATED IN COLUMN ① WHEN PLACING THESE SIGNS IN STANDARD RURAL CONDITIONS. USE COLUMN ② WHEN PLACING THESE SIGNS BEHIND GUARDRAIL IN RURAL CONDITIONS. USE COLUMN ③ WHEN PLACING THESE SIGNS IN URBAN CONDITIONS WHERE THERE IS ADEQUATE CLEARANCE AND SIDEWALK WIDTH.
 - WHERE SIDEWALK WIDTH IS LIMITED IN URBAN CONDITIONS, SEE DTL. DWG. NO. 619-18 FOR PLACEMENT DETAILS.
- FOR REGULATORY (ALL OTHER), WARNING AND ROUTE MARKER SIGNS, AND THEIR ASSEMBLIES, ON INTERSTATE HIGHWAYS: THE CLEARANCE IS 6.1 m FROM THE EDGE OF PAVEMENT IN COLUMN ① FOR STANDARD RURAL CONDITIONS. THE CLEARANCES LISTED IN COLUMNS ② AND ③ REMAIN AS SHOWN.
- FOR GUIDE SIGNS AND THEIR ASSEMBLIES:
 - USE THE DIAGRAMS LOCATED ABOVE WHEN PLACING THESE SIGNS IN THE GIVEN RURAL CONDITIONS.

CLEAR ZONE DISTANCES
(IN METERS FROM EDGE OF DRIVING LANE)

DESIGN SPEED	DESIGN ADT	FILL SLOPES			CUT SLOPES		
		6:1 OR FLATTER	5:1 TO 4:1	3:1	3:1	4:1 TO 5:1	6:1 OR FLATTER
60 km/h OR LESS	UNDER 750	2.0-3.0	2.0-3.0	**	2.0-3.0	2.0-3.0	
	750-1499	3.0-3.5	3.5-4.5	**	3.0-3.5	3.0-3.5	
	1500-6000	3.5-4.5	4.5-5.0	**	3.5-4.5	3.5-4.5	
	OVER 6000	4.5-5.0	5.0-5.5	**	4.5-5.0	4.5-5.0	
70-80 km/h	UNDER 750	3.0-3.5	3.5-4.5	**	2.5-3.0	2.5-3.0	
	750-1499	4.5-5.0	5.0-6.0	**	3.0-3.5	3.5-4.5	
	1500-6000	5.0-5.5	6.0-8.0	**	4.5-5.0	4.5-5.0	
	OVER 6000	6.0-6.5	7.5-8.5	**	4.5-5.0	5.5-6.0	
90 km/h	UNDER 750	3.5-4.5	4.5-5.5	**	2.5-3.0	3.0-3.5	
	750-1499	5.0-5.5	6.0-7.5	**	3.0-3.5	4.5-5.0	
	1500-6000	6.0-6.5	7.5-9.0	**	4.5-5.0	5.0-5.5	
	OVER 6000	6.5-7.5	8.0-10.0 *	**	5.0-5.5	6.0-6.5	
100 km/h	UNDER 750	5.0-5.5	6.0-7.5	**	3.0-3.5	3.5-4.5	
	750-1499	6.0-7.5	8.0-10.0 *	**	3.5-4.5	5.0-5.5	
	1500-6000	8.0-9.0	10.0-12.0 *	**	4.5-5.5	5.5-6.5	
	OVER 6000	9.0-10.0 *	11.0-13.5 *	**	6.0-6.5	7.5-8.0	
110 km/h	UNDER 750	5.5-6.0	6.0-8.0	**	3.0-3.5	4.5-5.0	
	750-1499	7.5-8.0	8.5-11.0 *	**	3.5-5.0	5.5-6.0	
	1500-6000	8.5-10.0 *	10.5-13.0 *	**	5.0-6.0	6.5-7.5	
	OVER 6000	9.0-10.5 *	11.5-14.0 *	**	6.5-7.5	8.0-9.0	

HORIZONTAL CURVE ADJUSTMENTS
(APPLICABLE ON OUTSIDE OF CURVE ONLY)

RADIUS (m)	DESIGN SPEED (km/h)					
	60	70	80	90	100	110
900	1.1	1.1	1.1	1.2	1.2	1.2
700	1.1	1.1	1.2	1.2	1.2	1.3
600	1.1	1.2	1.2	1.2	1.3	1.4
500	1.1	1.2	1.2	1.3	1.3	1.4
450	1.2	1.2	1.3	1.3	1.4	1.5
400	1.2	1.2	1.3	1.3	1.4	1.5
350	1.2	1.2	1.3	1.4	1.5	1.5
300	1.2	1.3	1.4	1.5	1.5	1.5
250	1.3	1.3	1.4	1.5		
200	1.3	1.4	1.5			
150	1.4	1.5				
100	1.5					

TO AVOID GLARE, SKEW SIGN AWAY FROM ROADWAY AT THE ANGLE SHOWN WHEN SIGN IS < 9.1 m FROM SHOULDER. SKEW SIGN TOWARDS ROADWAY AT THE SAME ANGLE IF SIGN IS > 9.1 m FROM SHOULDER.

SKEW DIAGRAM


DETAILED DRAWING

REFERENCE DWG. NO. 619-00
STANDARD SPEC. SECTION 619, 704


SIGN CLEARANCES AND MOUNTING HEIGHTS (METRIC)

ALL DIMENSIONS ARE MILLIMETERS (mm) UNLESS OTHERWISE NOTED.

MDT MONTANA DEPARTMENT OF TRANSPORTATION

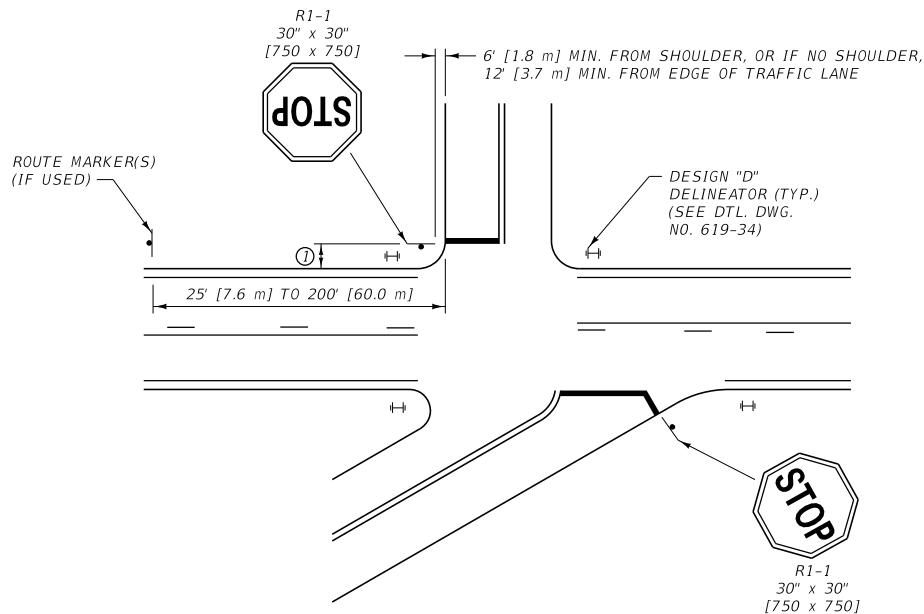

RURAL

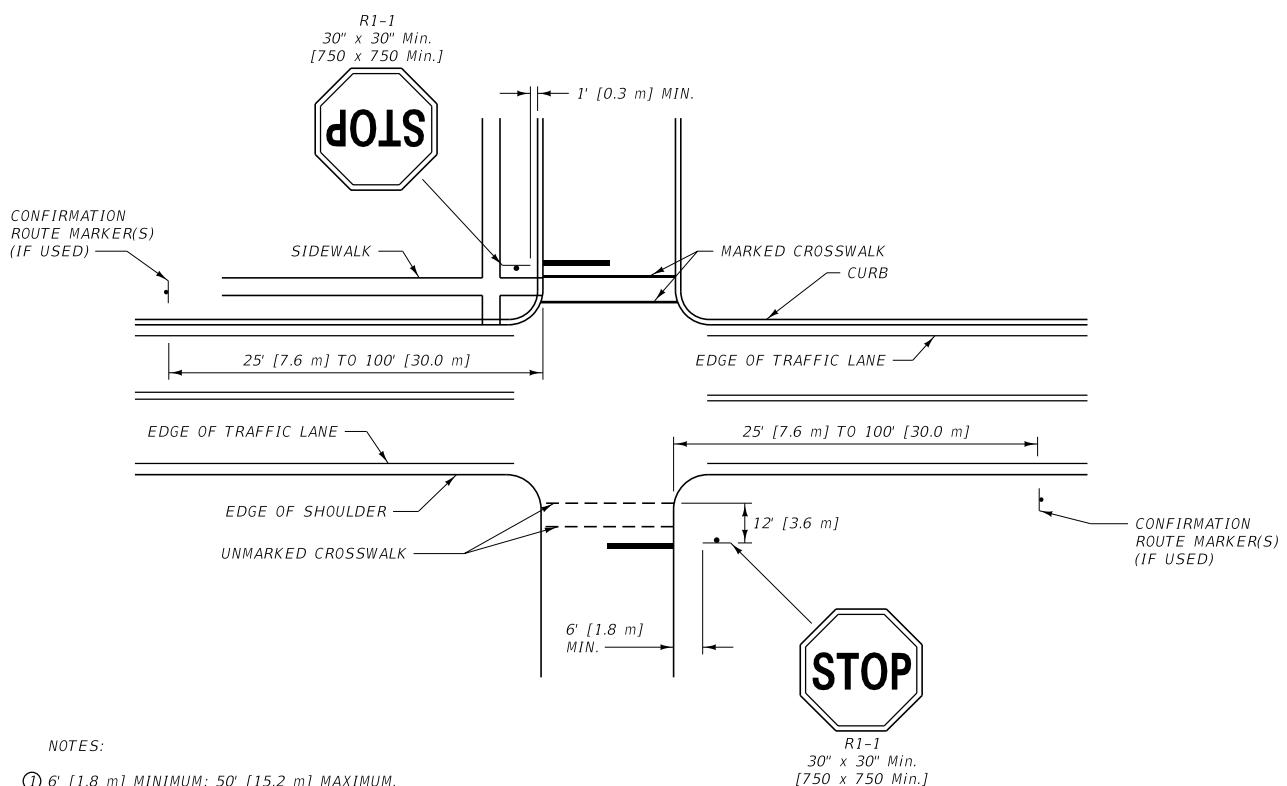

NOTES:


- ① 6' [1.8 m] MINIMUM; 50' [15.2 m] MAXIMUM.
- ② PLACE R1-1 SIGN AT THE BEGINNING OF CURB RADIUS OR SHOULDER RADIUS, OR 4 FEET [1.2 m] IN ADVANCE OF THE MARKED OR UNMARKED CROSSWALK.
- ③ SEE PLANS FOR FINAL SIGNING AND PAVEMENT MARKING LOCATIONS.
- ④ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

URBAN


R1-1
30" x 30" Min.
[750 x 750 Min.]

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	619-02
SECTION 619, 704	
TYPICAL	
RURAL AND URBAN	
APPROACHES	
 MONTANA DEPARTMENT OF TRANSPORTATION	

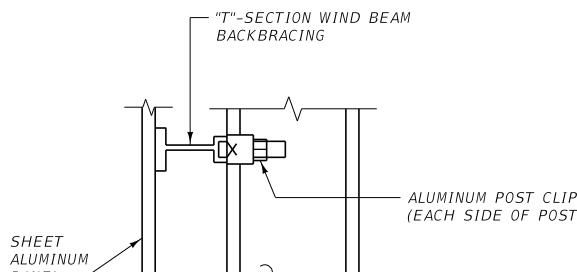

BACKBRACE DETAIL


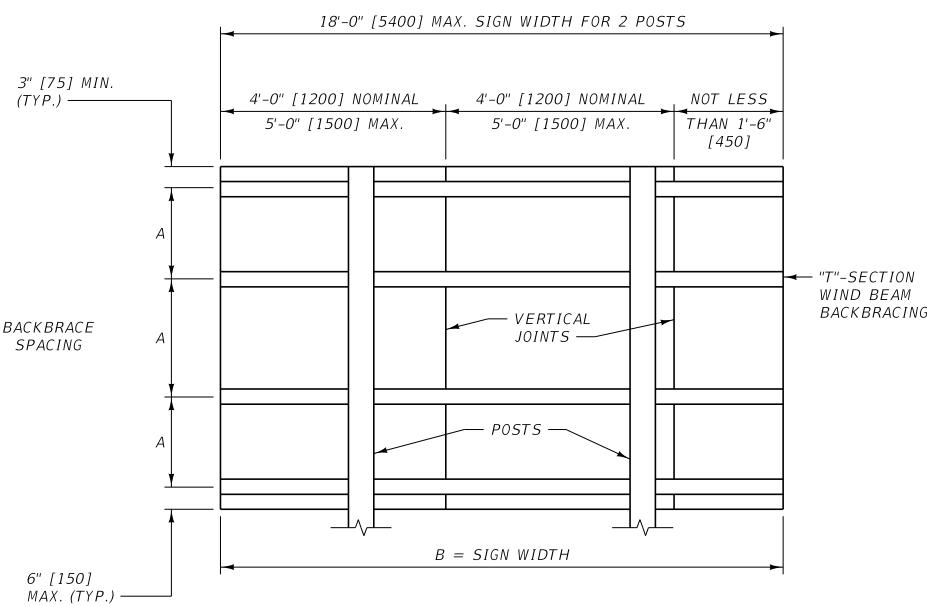


BACKBRACING TABLE - ALUMINUM SIGNS		
MAXIMUM BACKBRACE SPACING "A"	MAXIMUM WIDTH "B"	
	2 POST	3 POST
1'-8"	18'-0"	27'-0"
1'-10"	17'-0"	25'-8"
2'-0"	16'-6"	24'-8"
2'-6"	14'-9"	22'-0"
3'-0"	13'-6"	20'-0"
3'-6"	12'-6"	18'-6"

FOR ALUMINUM PLATE THICKNESS INFORMATION SEE SECTION 704.

METRIC BACKBRACING TABLE - ALUMINUM SIGNS		
MAXIMUM BACKBRACE SPACING "A" (mm)	MAXIMUM WIDTH "B" (mm)	
	2 POST	3 POST
500	5400	8100
550	5100	7700
600	4950	7400
750	4425	6600
900	4050	6000
1050	3750	5550

FOR ALUMINUM PLATE THICKNESS INFORMATION SEE SECTION 704.

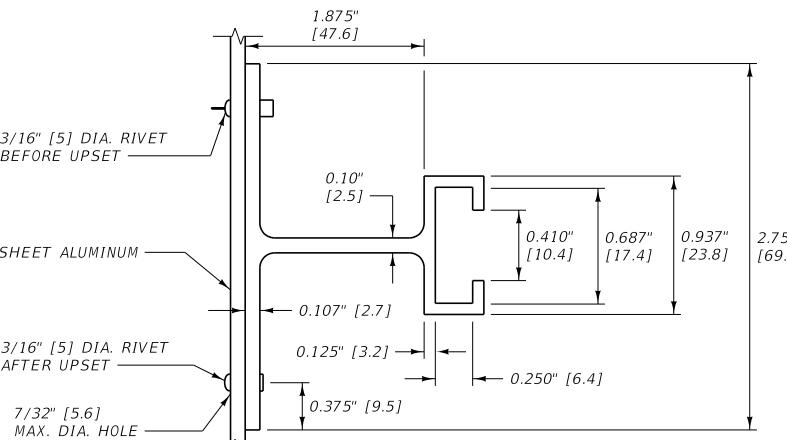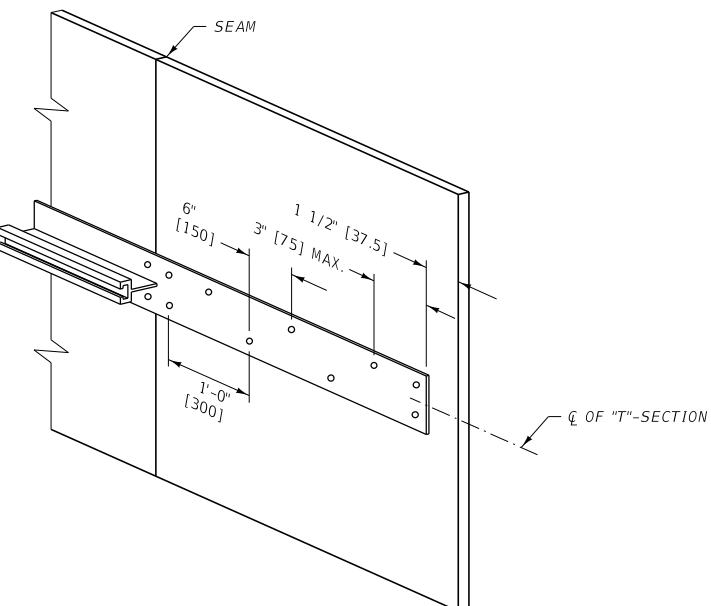

RIVET SPACING DETAIL
LOCATE RIVETS AT 6" [150] ALTERNATE CENTERS ON HORIZONTAL EXTRUDED "T"-SECTION.

DOUBLE RIVETS (TOP AND BOTTOM OR LEFT AND RIGHT OF EXTRUDED "T"-SECTION) AT HORIZONTAL AND VERTICAL JOINTS IN SHEET ALUMINUM FACE AND AT ENDS OF EXTRUDED "T"-SECTION.

COLOR RIVET HEADS TO MATCH ADJACENT SHEETING.

EXTRUDED "T"-SECTION BACKBRACE




NOTES:

- ① CONFORM ALL ALUMINUM SIGNS TO SECTIONS 619, AND 704.
- ② FOR SIGNS 4'-0" [1200] HIGH BY 6'-0" [1800] LONG OR LESS USE A SINGLE SHEET OF ALUMINUM.
- ③ DO NOT USE HORIZONTAL JOINTS ON SIGNS 6'-0" [1800] IN HEIGHT AND SMALLER. THE MINIMUM SHEET WIDTH IS 1'-6" [450].
- ④ SIGNS OVER 6'-0" [1800] HIGH MAY HAVE HORIZONTAL AND VERTICAL JOINTS. THE MINIMUM SHEET SIZE IS 1'-6" [450] WIDE BY 1'-6" [450] HIGH.
- ⑤ CLEAN AND DRY POST CLIP NUTS, THEN TORQUE TO 225 INCH POUNDS [25.4 N·m].
- ⑥ LOCATE ALL HORIZONTAL JOINTS AT A "T"-SECTION.
- ⑦ NO SPLICES ARE ALLOWED IN EXTRUDED "T"-SECTIONS.
- ⑧ USE SCREWS, BOLTS AND LOCKWASHERS MEETING THE REQUIREMENTS OF SECTION 704.
- ⑨ USE ONLY ALUMINUM RIVETS.
- ⑩ THE MAXIMUM GAP BETWEEN INDIVIDUAL SIGN PANELS AT JOINTS IS 1/16" [1.6] AT ANY POINT.
- ⑪ THE PROJECT MANAGER MAY APPROVE ADDITIONAL METHODS TO PREVENT LIGHT LEAKAGE THROUGH SIGN PANEL SEAMS.


DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 619,704	DWG. NO. 619-04
ALUMINUM SHEET INCREMENT SIGN CONSTRUCTION DETAILS	

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


MOUNTING DETAILS

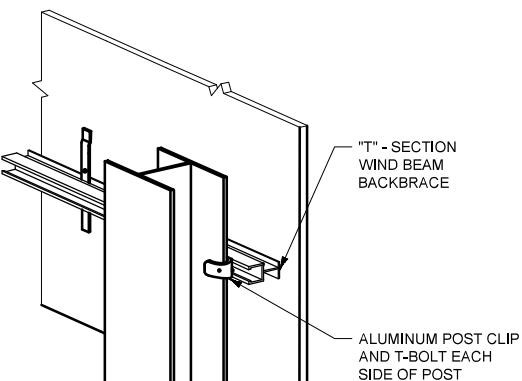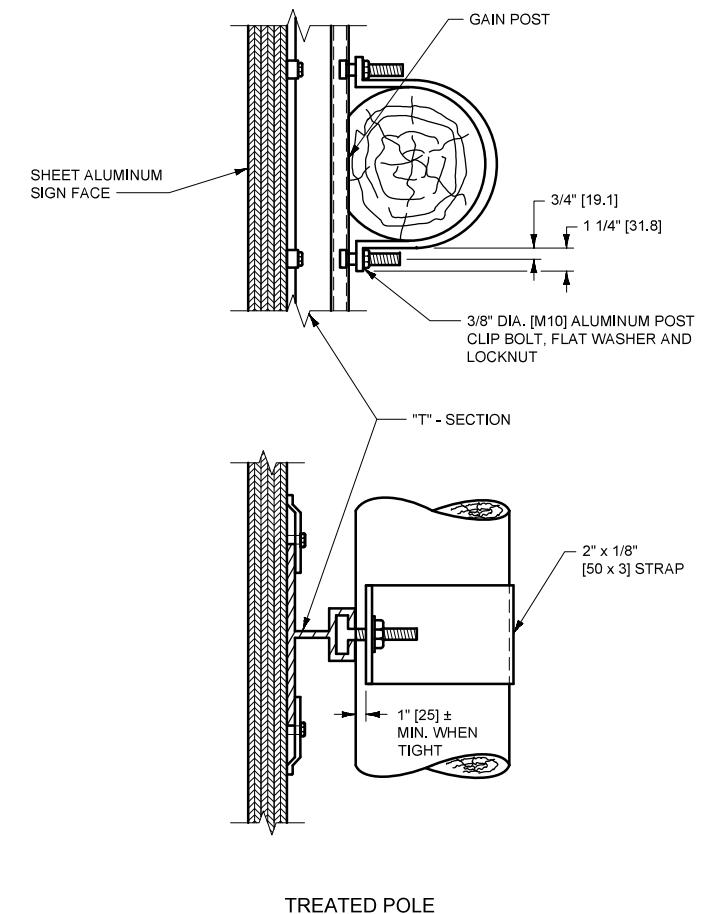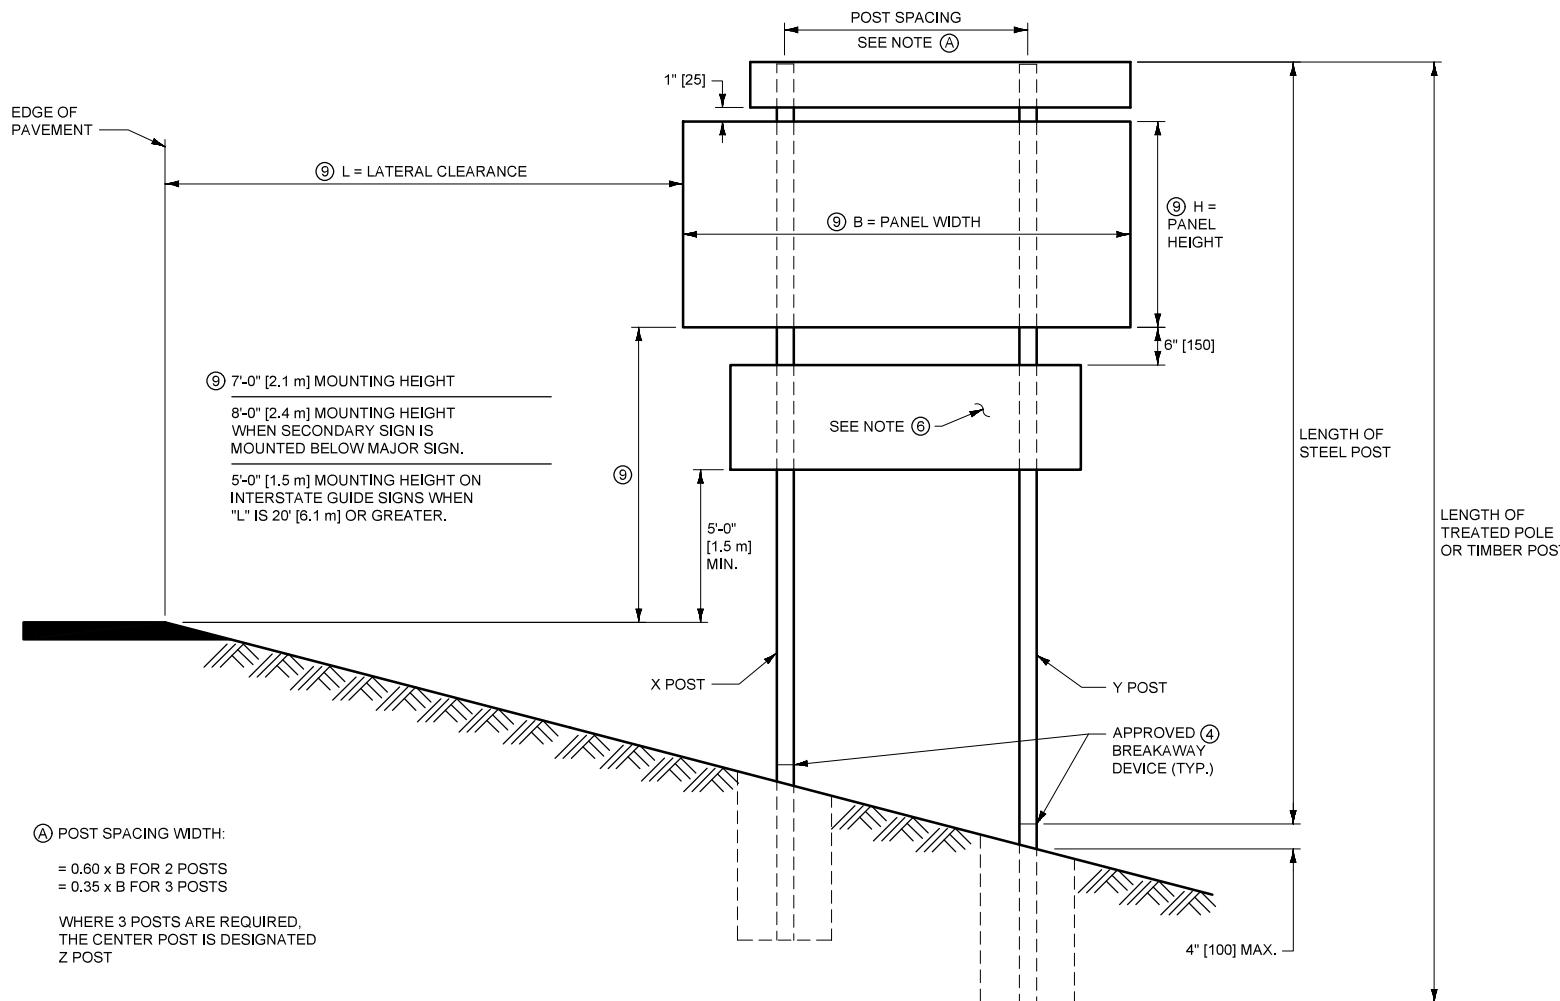

STEEL POST

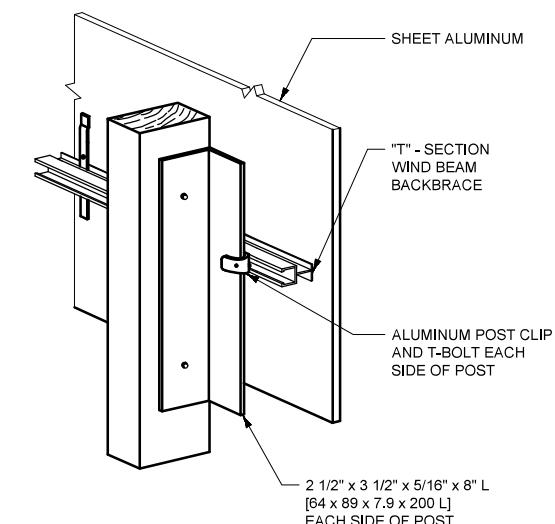

TREATED TIMBER POST

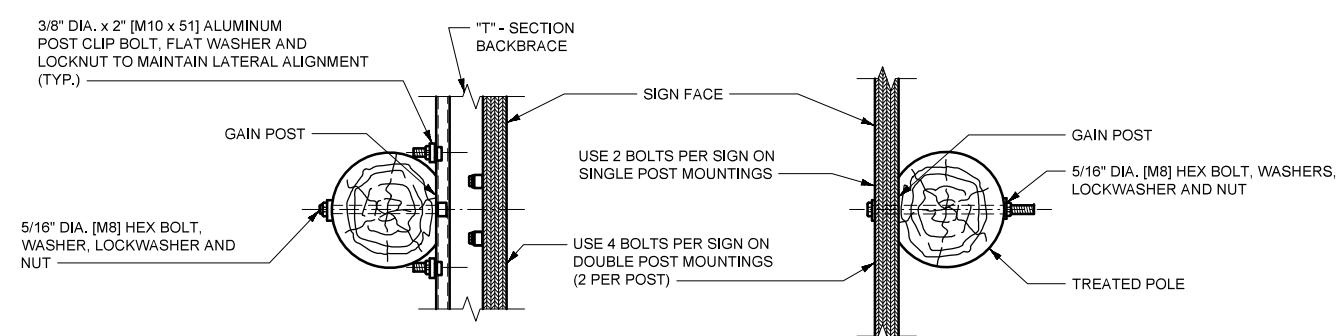

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DOUBLE POLE MOUNT

TREATED POLE
SINGLE OR DOUBLE
(USED WHEN "T"-BAR WIND BEAMS NOT REQUIRED)


DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 619-08	DWG. NO. 619-08

GUIDE SIGN CLEARANCE AND MOUNTING DETAILS


EFFECTIVE: JAN 23, 2020



REVISED--
JUN 27, 2024

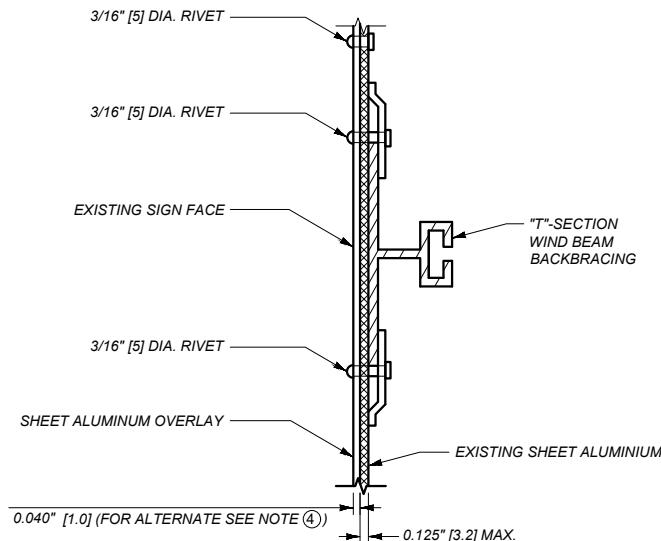

EXISTING ALUMINUM SIGNS

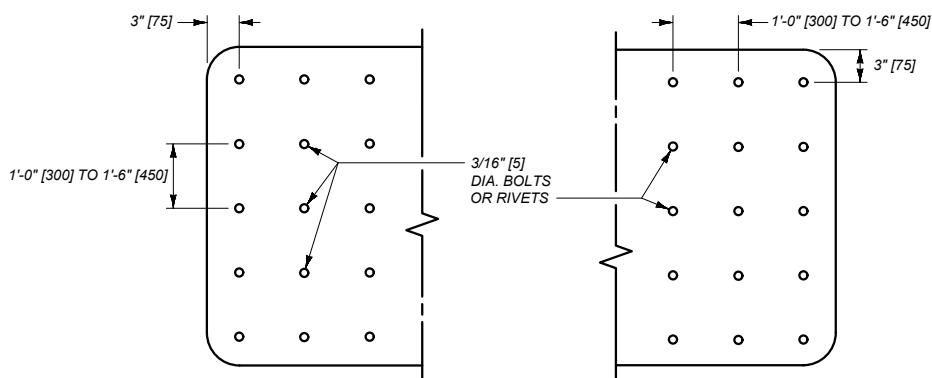

NOTES:

FASTENER PATTERN

- ① REMOVE ALL RAISED LETTERS, NUMERALS, SYMBOLS, BORDERS AND PREVIOUS SIGN OVERLAYS TO BE REPLACED, AND CLEAN SIGN FACE TO A SMOOTH SURFACE BEFORE OVERLAYING.
- ② ALL LETTERS, NUMERALS, SYMBOLS AND BORDERS ARE TYPE "C" CUTOUT UNLESS OTHERWISE SPECIFIED, AND APPLIED TO THE BACKGROUND SHEETING PRIOR TO FIELD APPLICATION OF THE SIGN.
- ③ THE SIZE OF ALL GUIDE SIGN OVERLAYS AND LEGENDS MUST BE VERIFIED BY THE PROJECT MANAGER PRIOR TO FABRICATION.
- ④ AN ADHESIVE-BACKED SHEETING MAY BE USED AS AN ALTERNATIVE ON SIGN WIDTHS OF 6'-0" [1800] OR LESS IF IT IS PREFABRICATED TO A MINIMUM THICKNESS OF 0.005" [.13] AND CONSTRUCTED OF PREAPPLIED REFLECTIVE SHEETING ON ADHESIVE-BACKED ALUMINUM. APPLY ADHESIVE-BACKED OVERLAY SHEETING WHEN AIR AND SURFACE TEMPERATURES ARE ABOVE 50°F (10°C). DO NOT USE THIS TYPE OF OVERLAY MATERIAL ON OVERHEAD SIGNS.
- ⑤ PROVIDE A MINIMUM REFLECTIVE SHEETING INTENSITY OF TYPE 4, MEETING THE REQUIREMENTS OF THE STANDARD SPECIFICATIONS, UNLESS SPECIFIED OTHERWISE.
- ⑥ APPLY ALL MATERIALS IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS AND RECOMMENDATIONS.
- ⑦ USE ALUMINUM ALLOY TYPE 6061-T6 OR AA5052-H38. CONVERSION COAT ALL ALUMINUM WITH A PROCESS SUCH AS ALODINE 1200 (OR EQUAL), AND RINSE AND DRY THOROUGHLY. PROTECT IT FROM SOIL BY ACCEPTABLE METHODS.
- ⑧ SIGN OVERLAYS MAY REQUIRE REMOVAL OF THE SIGN FROM THE POSTS TO AVOID PROJECTING BOLT HEADS. DO NOT LEAVE WARNING AND REGULATORY SIGNS TO BE OVERLAYER UNDISPLAYED FOR MORE THAN ONE (1) HOUR DURING DAYLIGHT. DO NOT LEAVE GUIDE SIGNS UNDISPLAYED FOR MORE THAN TEN (10) HOURS DURING DAYLIGHT. INSURE SIGNS TO BE OVERLAYER ARE OPERATIONAL PRIOR TO DARKNESS.
- ⑨ OVERLAY SIGNS SMALLER THAN 4'-0" x 6'-0" [1200 x 1800] WITH ONE PANEL OF MATERIAL. FOR SEAMS IN LARGE OVERLAYS, USE RIVETS OR BOLTS SPACED AS SHOWN ON THIS DRAWING AND PLACE PARALLEL TO AND NO MORE THAN 3" [75] LATERALLY FROM THE SEAM.
- ⑩ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 619-10
SECTION 619, 704

SHEET ALUMINUM OVERLAY

EFFECTIVE: JAN 23, 2020




MONTANA


MONTANA *Department of Transportation*

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN

--REVISED--
JUN 27, 2024
JUN 26, 2025

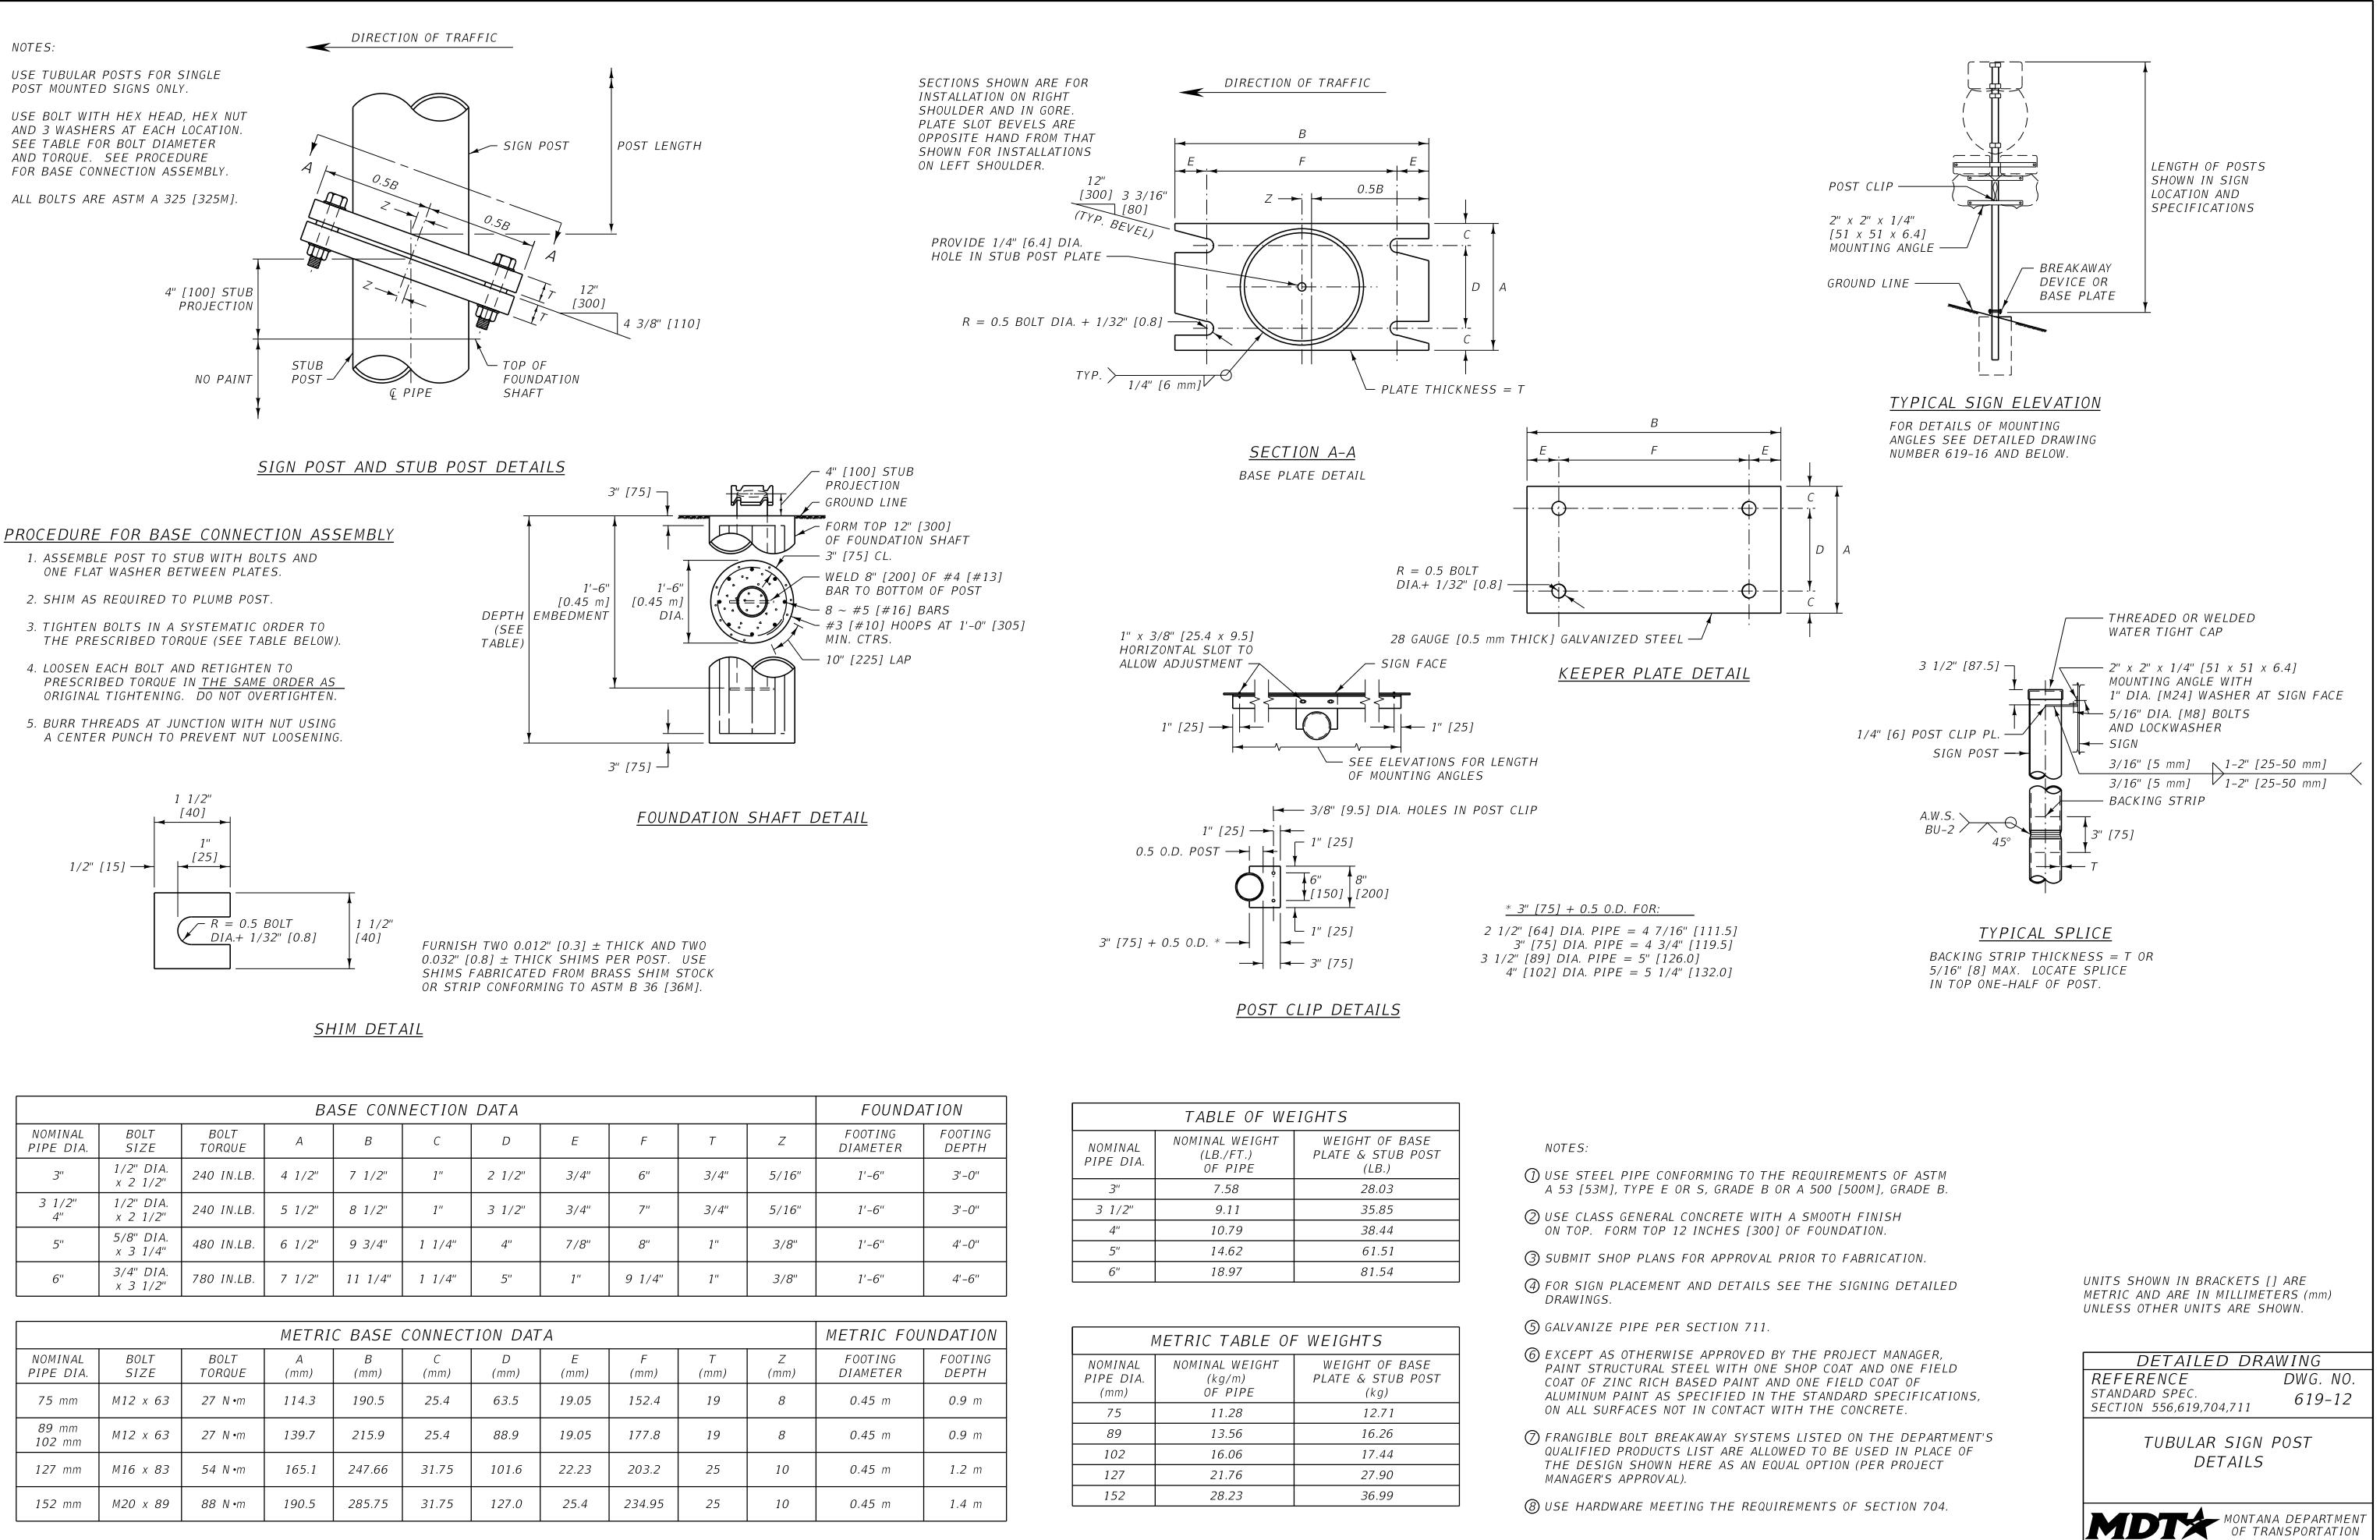

BASE CONNECTION DATA								FUSE PLATE DATA								FOUNDATION DATA										
POST SIZE (mm x kg/m)	BOLT SIZE	BOLT TORQUE	DIMENSIONS						BASE PLATES (kg)	DIMENSIONS						BOLT DIA.	FUSE DEVICE (kg)	FTG. DEPTH	STUB LENGTH	FTG. DIA.	BAR C SIZE	STUB POST (kg)				
			A	B	C	D	E	t ₁	W	F	G	H	J	K	L	N	t ₃	Y								
W100 x 19 M100 x 19.3	M16 x 70	54 N·m	215	125	18.6	69.8	27.6	19	8	9.79	95	50.8	28.2	100	57.2	21.4	16.0	10	20.6	M16	0.73	1.1 m	600	0.45 m	#16	11.79
W200 x 27			320	160	20.3	101.6	29.2	19	8	16.78	115	63.5	31.5	135	69.8	32.6	20.0	13	22.2	M20	1.48	1.7 m	750	0.60 m	#22	20.41
W200 x 36	M20 x 89	88 N·m	330	190	19.0	127.0	31.5	25	8	27.61	120	63.5	36.5	150	88.8	30.6	20.0	14	23.8	M20	2.11	2.1 m	900	0.60 m	#29	32.66
W310 x 45			430	190	21.3	127.0	31.5	25	8	35.63	135	76.2	38.8	165	88.8	38.1	22.0	14	30.2	M22	2.46	2.4 m	900	0.75 m	#29	40.82
S75 x 8	M12 x 63	27 N·m	205	75	20.0	38.0	18.5	16	6	4.70	80	38.1	29.9	65	38.0	13.5	12.0	6	17.5	M12	0.29	1.1 m	450	0.45 m	#13	3.88
S100 x 11			205	75	20.0	38.0	18.5	16	6	4.74	80	38.1	29.9	65	38.0	13.5	12.0	6	20.6	M12	0.29	1.1 m	450	0.45 m	#13	5.24
S130 x 15	M16 x 70	54 N·m	240	100	18.4	50.8	24.6	19	6	8.65	80	38.1	29.9	75	47.6	13.7	12.0	6	20.6	M12	0.30	1.1 m	450	0.45 m	#16	6.80

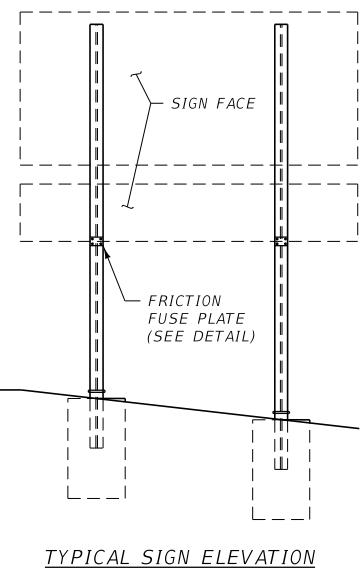




PROCEDURE FOR BASE CONNECTION ASSEMBLY

1. ASSEMBLE POST TO STUB WITH BOLTS AND ONE FLAT WASHER BETWEEN PLATES.
2. SHIM AS REQUIRED TO PLUMB POST.
3. TIGHTEN BOLTS IN A SYSTEMATIC ORDER TO THE PRESCRIBED TORQUE (SEE TABLE).

4. LOOSEN EACH BOLT AND RETIGHTEN TO PRESCRIBED TORQUE IN THE SAME ORDER AS ORIGINAL TIGHTENING. **DO NOT OVERTIGHTEN.**

5. BURR THREADS AT JUNCTION WITH NUT USING A CENTER PUNCH TO PREVENT NUT LOOSENING.



NOTE:
ALL BOLTS MUST BE ASTM A 325M AND BE TIGHTENED BY USE OF A DIRECT TENSION INDICATING DEVICE (LOAD INDICATING WASHER) IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.

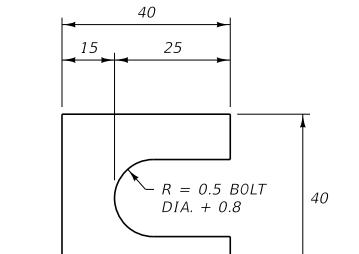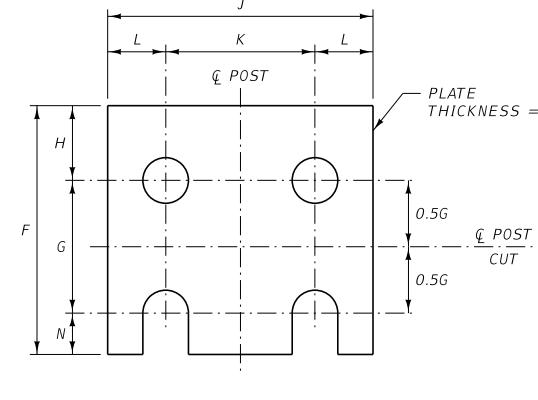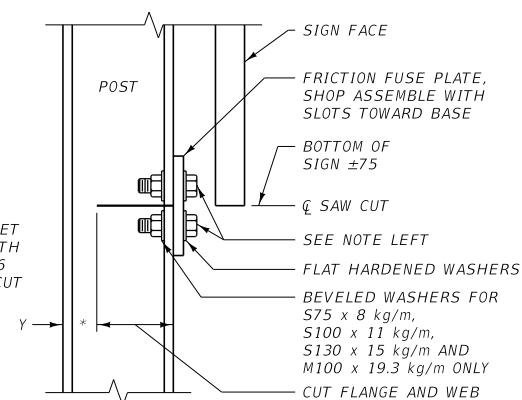

FURNISH TWO 0.3 mm ± THICK AND TWO 0.8 mm ± THICK SHIMS PER POST. USE SHIMS FABRICATED FROM BRASS SHIM STOCK OR STRIP CONFORMING TO ASTM B 36M.

SHIM DETAIL

FRICITION FUSE PLATE DETAIL
DO NOT USE ON SINGLE POST SIGNS. NOT NECESSARY WHEN SIGN IS MOUNTED BEHIND GUARDRAIL OR BARRIER RAIL.

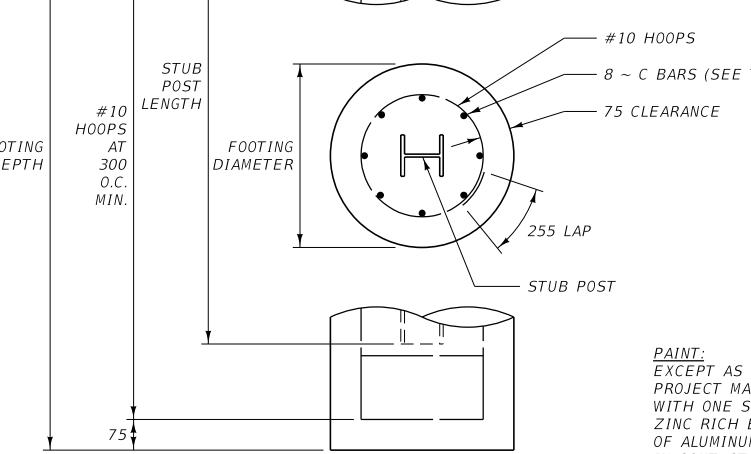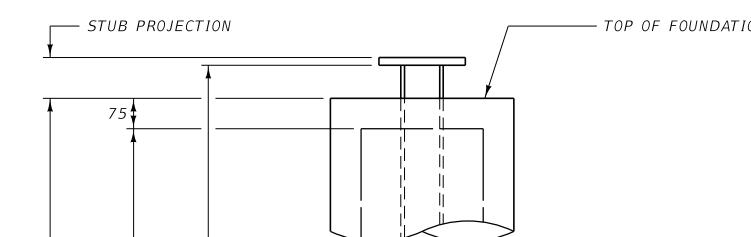

FOUNDATION DETAIL

NOTES:

- ① USE CLASS GENERAL CONCRETE WITH A SMOOTH FINISH ON TOP. FORM TOP 300 mm OF FOUNDATION.
- ② SEE THE STANDARD SPECIFICATIONS FOR REQUIREMENTS GOVERNING STRUCTURAL STEELS AND THEIR FABRICATIONS. TO AVOID OVERSIGHT, NOTE THESE REQUIREMENTS ON THE SHOP DRAWINGS.
- ③ SUBMIT SHOP PLANS FOR APPROVAL BEFORE FABRICATION BEGINS.
- ④ FOR GUIDE SIGN PLACEMENT AND DETAILS, SEE SIGNING DTL. DWG. NO. 619-08.
- ⑤ FRANGIBLE BOLT BREAKAWAY SYSTEMS LISTED ON THE DEPARTMENT'S QUALIFIED PRODUCTS LIST ARE ALLOWED TO BE USED IN PLACE OF THE DESIGN SHOWN HERE AS AN EQUAL OPTION (PER PROJECT MANAGER'S APPROVAL).
- ⑥ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

ALL DIMENSIONS ARE MILLIMETERS (mm) UNLESS OTHERWISE NOTED.


DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC.
SECTION 619, 704
619-13

**STRUCTURAL STEEL
SIGN POST DETAILS
(METRIC)**

PAINT:
EXCEPT AS OTHERWISE APPROVED BY THE PROJECT MANAGER, PAINT STRUCTURAL STEEL WITH ONE SHOP COAT AND ONE FIELD COAT OF ZINC RICH BASED PAINT AND ONE FIELD COAT OF ALUMINUM PAINT ON ALL SURFACES NOT IN CONTACT WITH CONCRETE.

**TELESCOPED SQUARE TUBES SIGN
POST INSTALLATION ON SLIP BASE**


AS NOTED BY THE STAR SYMBOL
ON THE LOCATION AND
SPECIFICATION SHEETS.

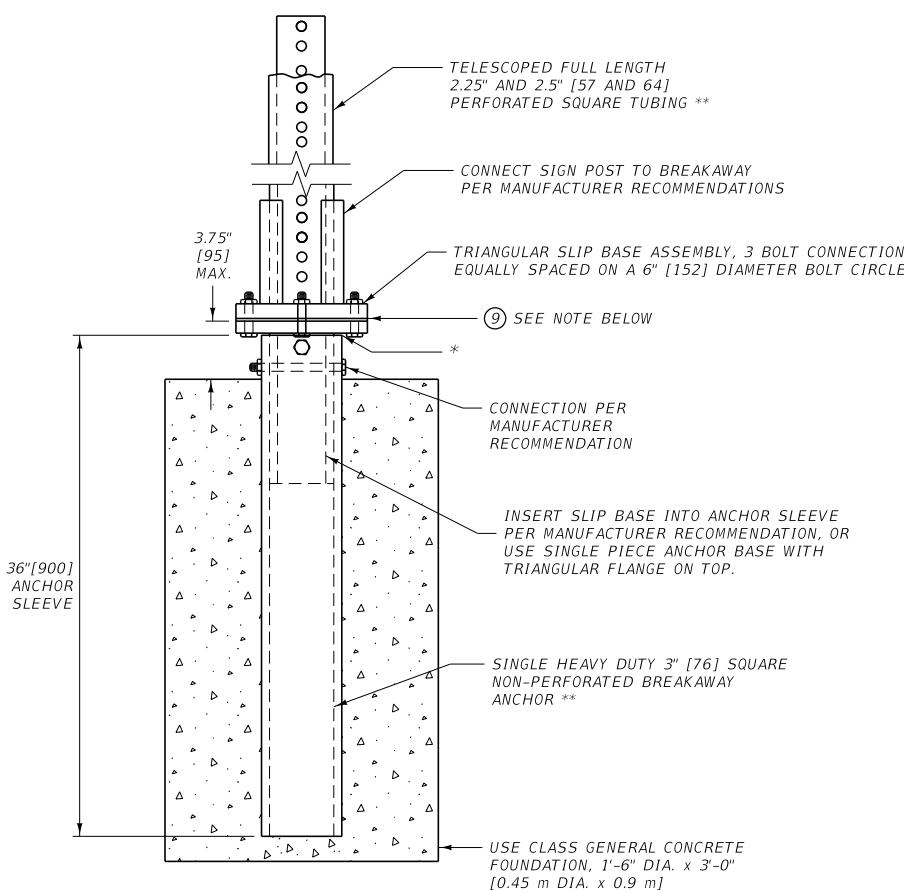

* SHIM AS REQUIRED PER MANUFACTURER RECOMMENDATION
TO TAKE UP TOLERANCE BETWEEN SLIP BASE STUB
AND ANCHOR SLEEVE.

**SINGLE SQUARE TUBE SIGN TO
POST INSTALLATION ON SLIP BASE**

AS NOTED BY THE CIRCLE SYMBOL
ON THE LOCATION AND
SPECIFICATION SHEETS.

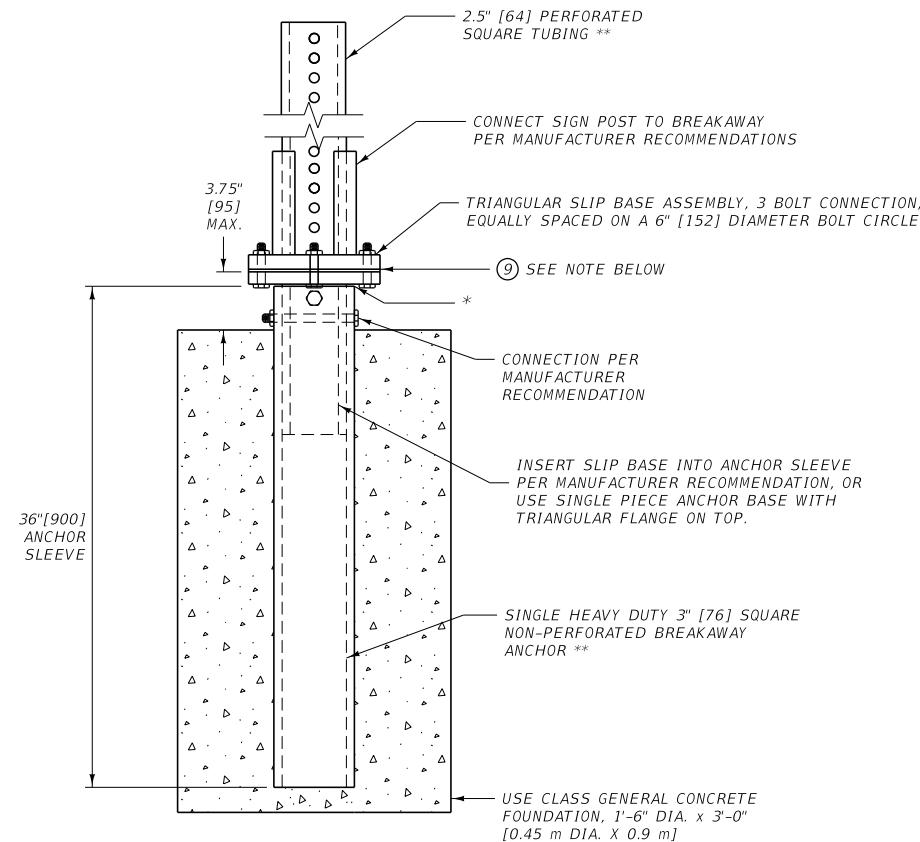


* SHIM AS REQUIRED PER MANUFACTURER RECOMMENDATION
TO TAKE UP TOLERANCE BETWEEN SLIP BASE STUB
AND ANCHOR SLEEVE.

**SINGLE SQUARE TUBE SIGN
POST INSTALLATION**

AS NOTED BY THE TRIANGLE SYMBOL
ON THE LOCATION AND
SPECIFICATION SHEETS.

(SURFACE MOUNT SYSTEMS LISTED ON THE DEPARTMENT'S QUALIFIED
PRODUCTS LIST ARE ALLOWED TO BE USED IN PLACE OF THE DESIGN
SHOWN HERE AS AN EQUAL OPTION.)

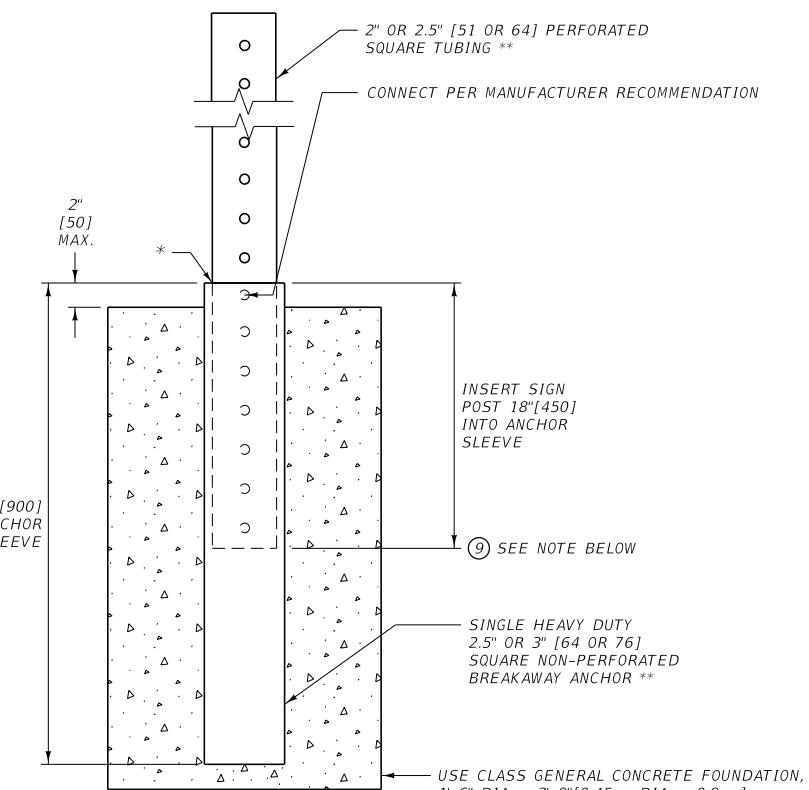

* MINIMUM OF 2 SHIMS REQUIRED PER INSTALLATION TO TAKE UP
TOLERANCE BETWEEN SUPPORT AND ANCHOR SLEEVE.

NOTES:

① BREAKAWAY DEVICES MUST BE LISTED ON
THE DEPARTMENT'S QUALIFIED PRODUCTS
LIST.

② USE CLASS GENERAL CONCRETE WITH
WOOD FLOAT FINISH ON TOP. FORM TOP
6" [150] OF FOUNDATION.

③ GALVANIZE PIPE PER AASHTO M 111.

④ PAINT PIPE WITH ONE SHOP COAT AND ONE
FIELD COAT OF ZINC RICH BASED PAINT AND
ONE FIELD COAT OF ALUMINUM PAINT, AS
SPECIFIED IN THE STANDARD SPECIFICATIONS
SECTION 710, ON ALL SURFACES NOT IN
CONTACT WITH THE CONCRETE.

⑤ CONFORM STEEL PIPE TO THE REQUIREMENTS
OF ASTM A 53 TYPE E OR S, GRADE B.

⑥ SUBMIT SHOP DRAWINGS TO BE APPROVED BY
THE MONTANA DEPARTMENT OF TRANSPORTATION
BEFORE FABRICATION HAS BEGUN.

⑦ STEEL POSTS AND FOOTINGS IN PLACE,
INCLUDING ALL CONCRETE, WELDING, EXCAVATION,
AND ALL INCIDENTALS ARE INCLUDED IN THE UNIT
PRICE BID PER POUND FOR TUBULAR STEEL POSTS.


⑧ USE HARDWARE MEETING THE REQUIREMENTS
OF SECTION 704.

⑨ POST LENGTH IS MEASURED FROM POINT
INDICATED TO TOP OF POST. TYPE OF
POSTS AND FOUNDATIONS, AS WELL
AS LENGTHS ARE NOTED IN THE SIGNING
QUANTITIES.



⑩ POST AND ANCHOR COMPONENTS MEASURED BY
WEIGHT ACCORDING TO "SUPPORT AND ANCHOR
COMPONENT UNIT WEIGHT" TABLE.

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 619-14
SECTION 556.619.704,710	
SQUARE TUBULAR SIGN POST BREAKAWAY DEVICES	

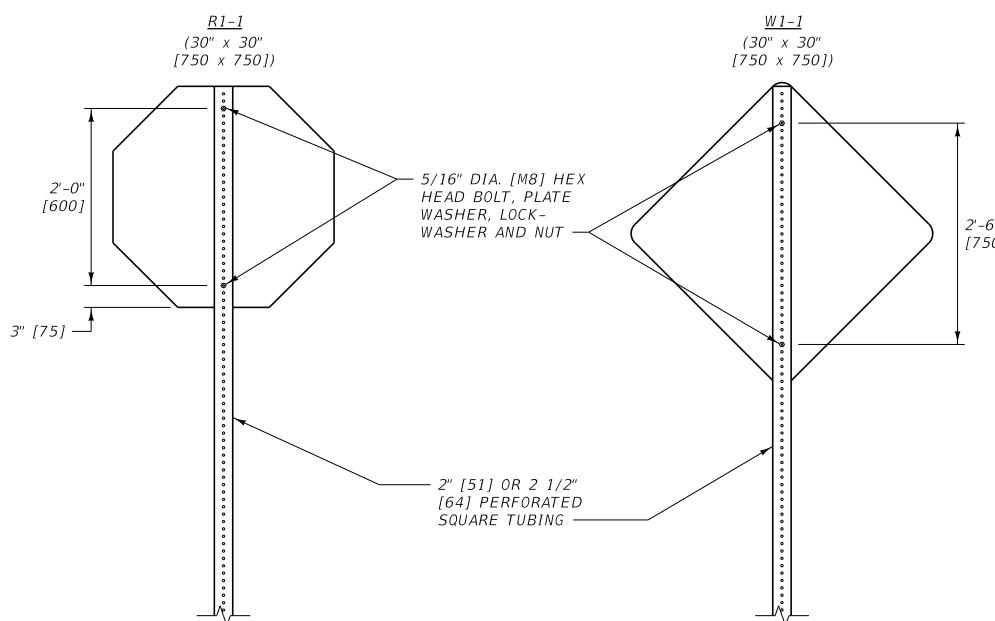

SIGNS WITHOUT BACKBRACING
(SEE PLANS FOR BACKBRACING REQUIREMENTS)

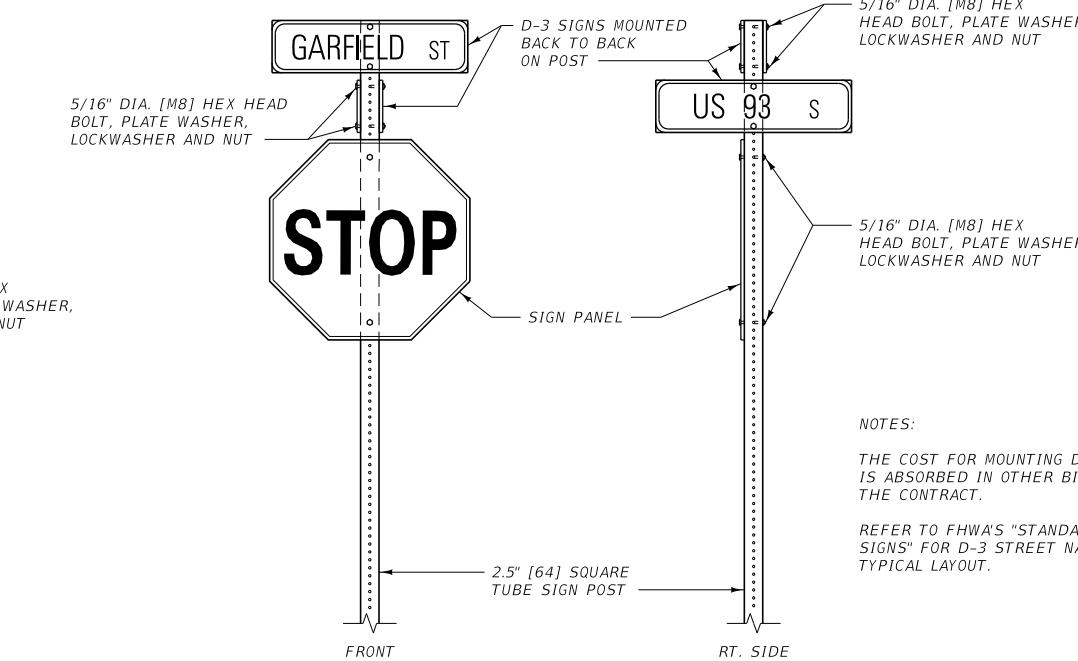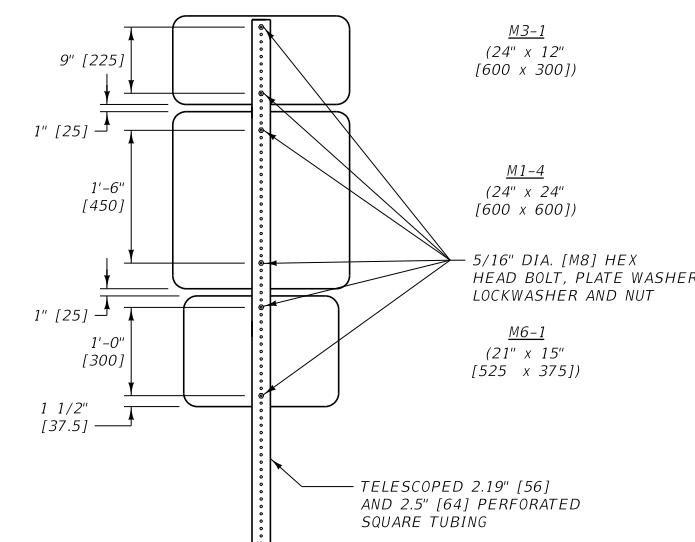

STREET NAME SIGN INSTALLATION

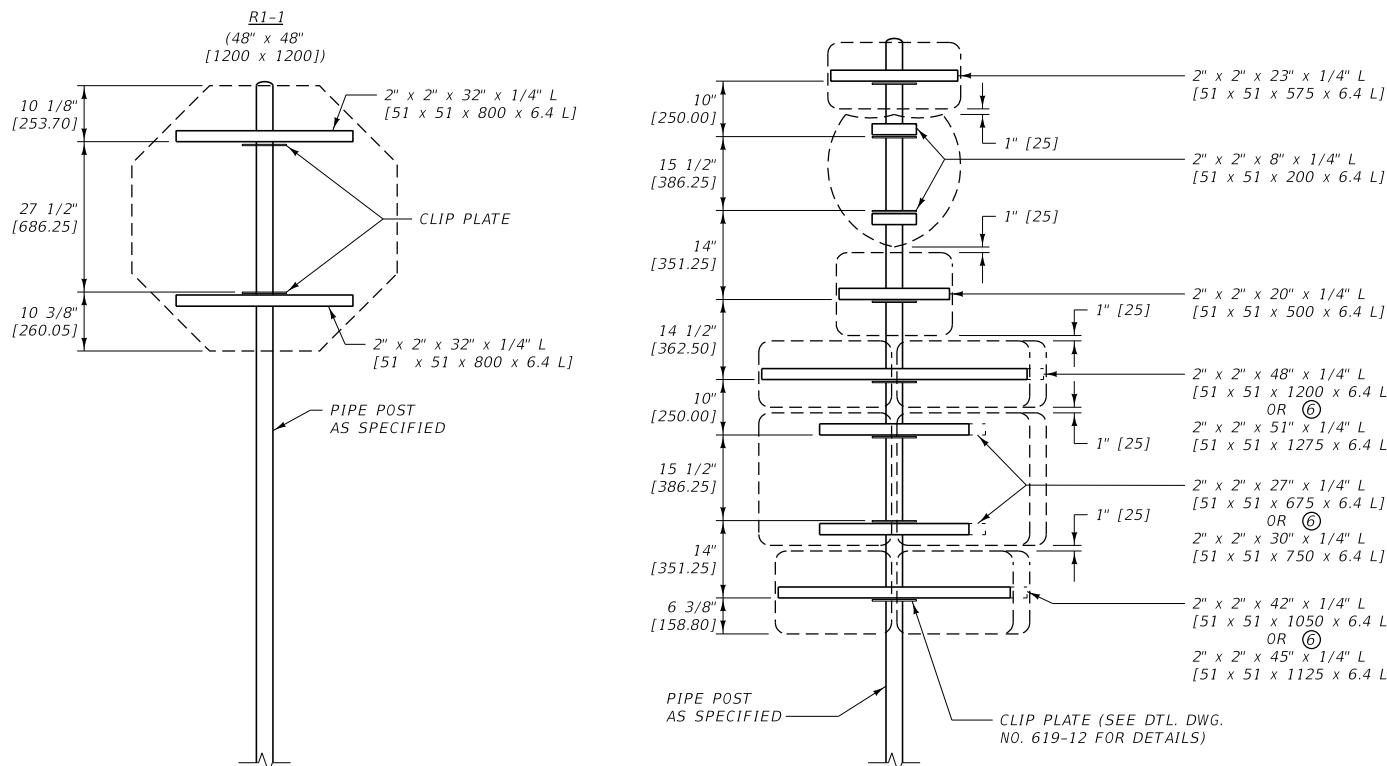

SIGNS WITH BACKBRACING
(SEE PLANS FOR BACKBRACING REQUIREMENTS.
SIGN FACE IS SHOWN IN FRONT OF BACKBRACING.)

M3-1a
(24" x 12")
[600 x 300])


M1-1
(24" x 24")
[600 x 600])

M6-1
(21" x 15")
[525 x 375])


M3-1
(2 SIGNS)
(24" X 12")
[600 X 300])

M1-4
(2 SIGNS)
(24" X 24")
[600 X 600])
OR
⑥
(30" X 24")
[750 X 600])

M6-1
(2 SIGNS)
(21" X 15")
[525 X 375])

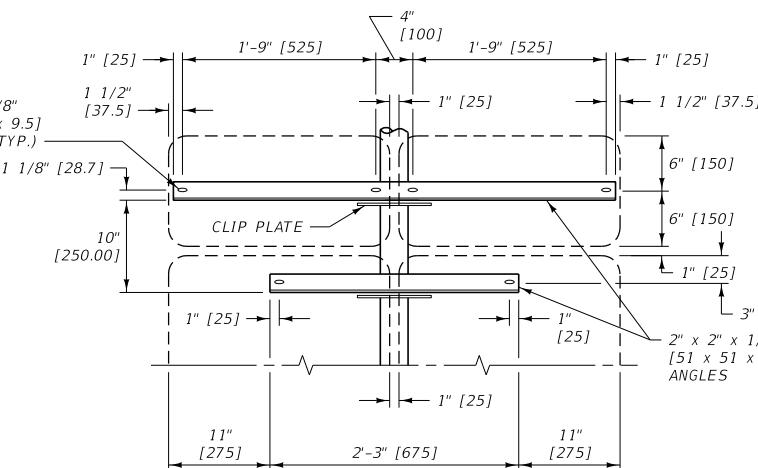

ELEVATION

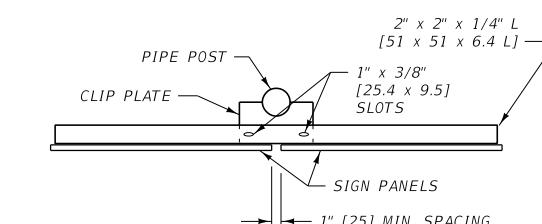

PLAN VIEW


NOTES:

- ① VERTICAL DIMENSIONS SHOWN ARE FROM TOP TO TOP OF ALL POST CLIP PLATES.
- ② PLACE A SUITABLE WATERTIGHT CAP ON TOP OF ALL PIPE POSTS.
- ③ CONFORM MATERIAL USED IN FABRICATION OF POST CLIPS AND ANGLE BRACKETS TO SECTION 556.
- ④ THE LENGTH OF EACH ANGLE BRACKET DEPENDS ON THE MOUNTING ASSEMBLY AND HOLE SPACING OF EACH SIGN. THE ASSEMBLIES SHOWN ARE TYPICAL INSTALLATIONS. ERECT SIMILAR ASSEMBLIES IN A LIKE MANNER.
- ⑤ REFER TO FHWA'S "STANDARD HIGHWAY SIGNS" FOR STANDARD HOLE SPACING IN SIGNS.
- ⑥ SEE SIGNING PLANS FOR ROUTE MARKER ASSEMBLY LAYOUT.
- ⑦ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.




DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 619-16
SECTION 556,619,704

TYPICAL STEEL POST MOUNTING DETAILS

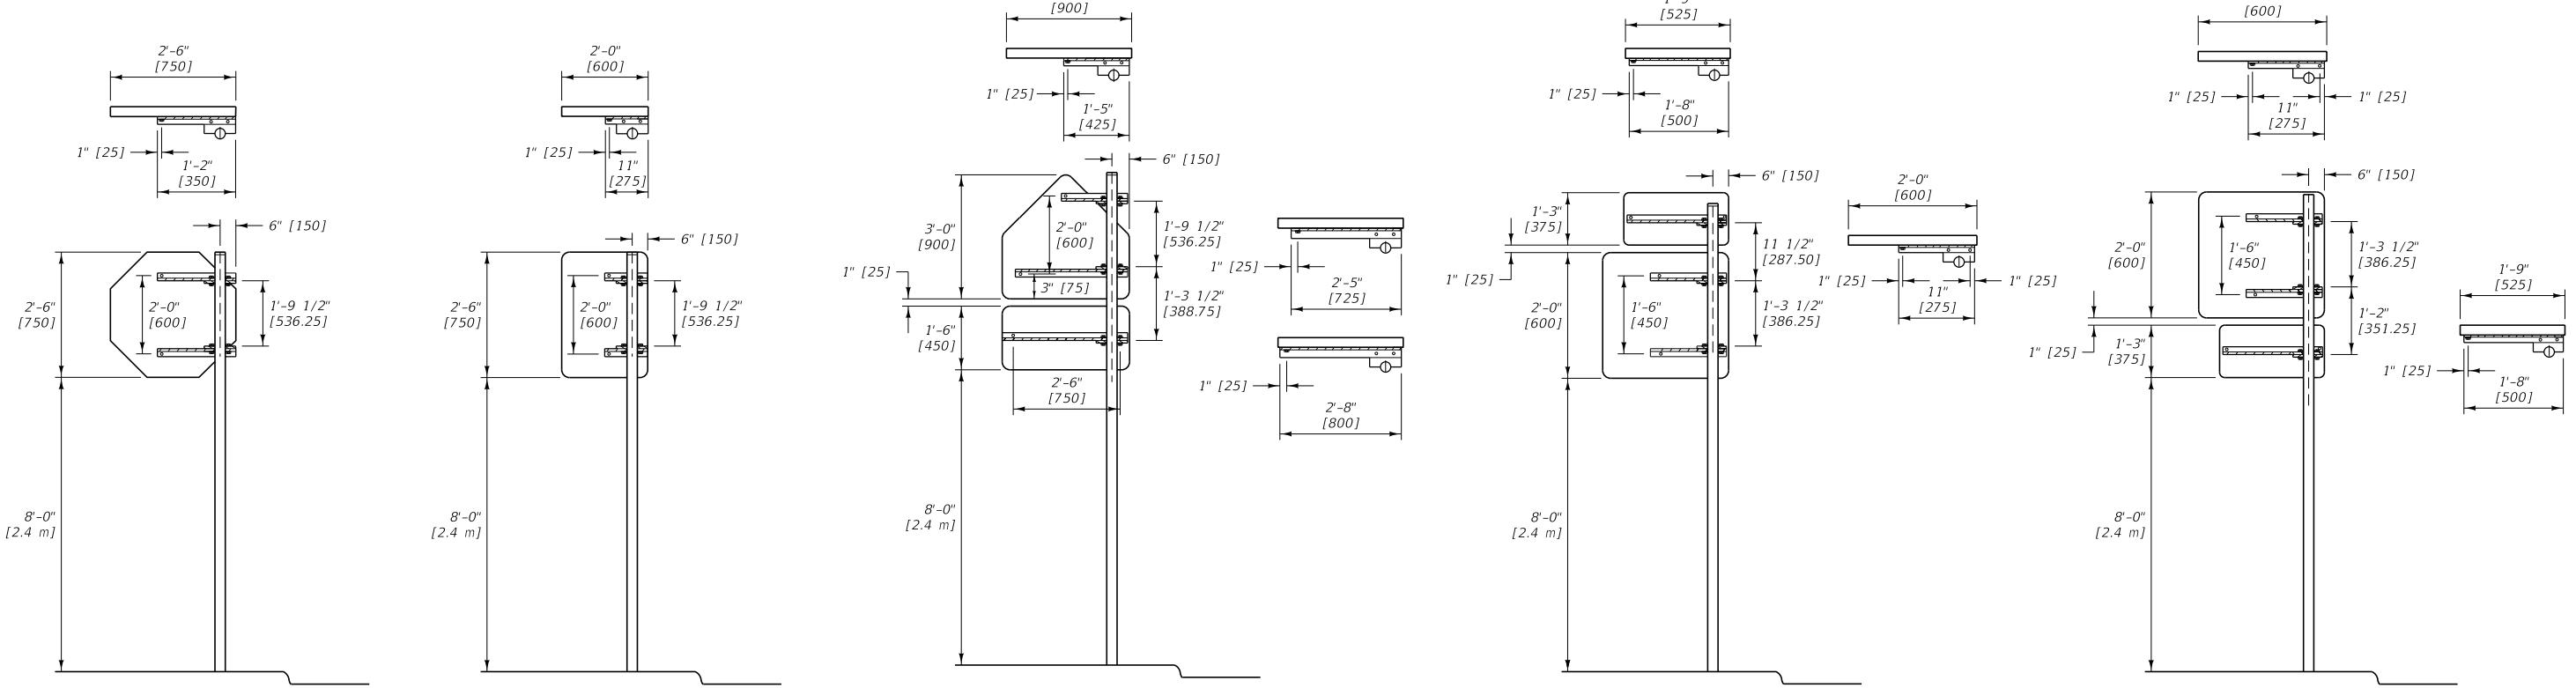

NOTES:

- ① REFER TO FHWA'S MANUAL "STANDARD HIGHWAY SIGNS" FOR STANDARD HOLE SPACING IN SIGNS.
- ② USE POST CLIPS AS SHOWN IN SIGNING DETAILED DRAWING NO. 619-12 WHEN CANTILEVER MOUNTING IS NECESSARY.
- ③ USE POSTS ONE SIZE LARGER THAN THOSE REQUIRED FOR STANDARD MOUNTINGS.
- ④ DIMENSIONS FOR POST CLIP SPACING ARE SHOWN TO THE TOP OF EACH CLIP.
- ⑤ ALTERNATE MOUNTING MUST BE APPROVED BY THE PROJECT MANAGER.
- ⑥ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

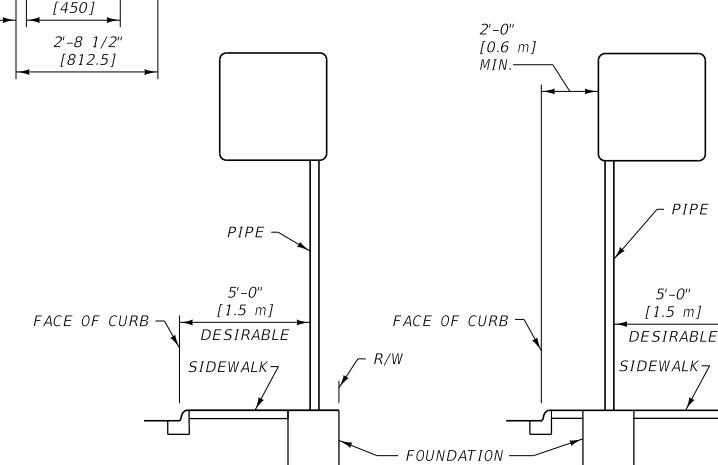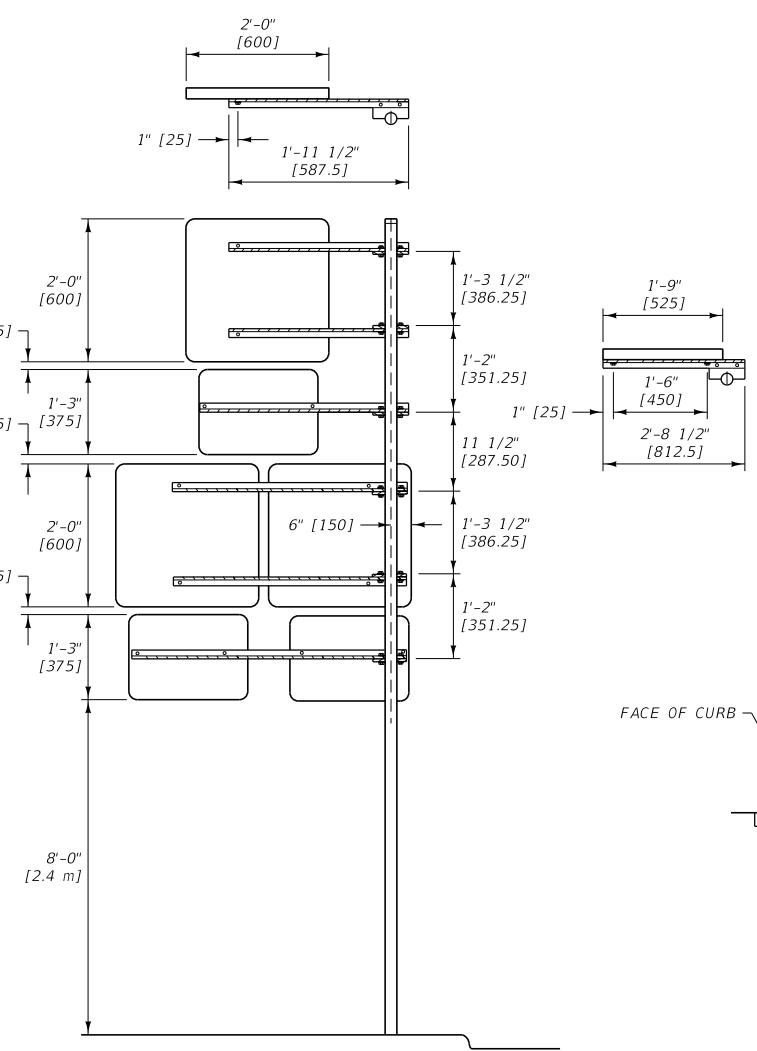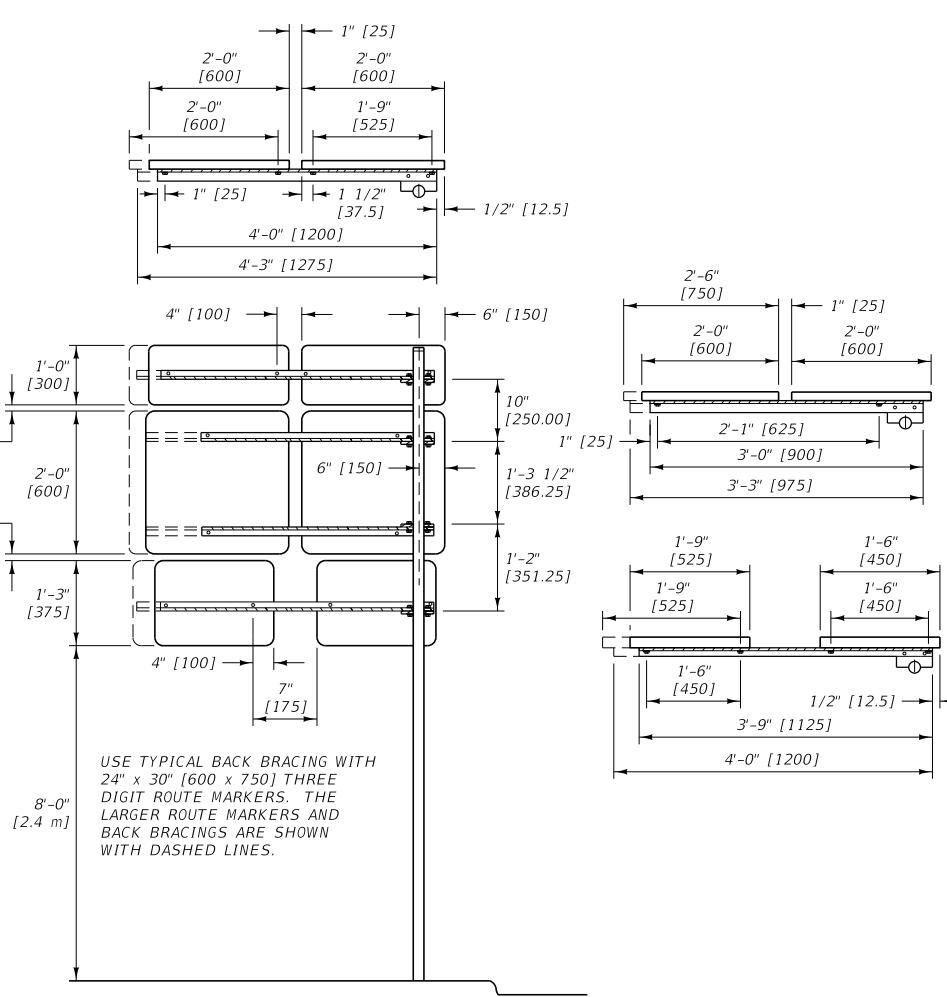


ALTERNATE A

USE THE STANDARD TYPE MOUNTING BEHIND SIDEWALKS IF R/W LIMITS PERMIT. IF R/W DOES NOT PERMIT, THEN ALTERNATE A SHOULD BE USED BEHIND SIDEWALKS OR IN THE SIDEWALK NEXT TO A BUILDING. IF CONDITIONS ARE SUCH THAT THE SIGN CANNOT BE MOUNTED ON THE BACKSIDE OF THE SIDEWALK THEN USE ALTERNATE B.

ALTERNATE B

USE THE STANDARD TYPE MOUNTING BEHIND SIDEWALKS IF R/W LIMITS PERMIT. IF R/W DOES NOT PERMIT, THEN ALTERNATE A SHOULD BE USED BEHIND SIDEWALKS OR IN THE SIDEWALK NEXT TO A BUILDING. IF CONDITIONS ARE SUCH THAT THE SIGN CANNOT BE MOUNTED ON THE BACKSIDE OF THE SIDEWALK THEN USE ALTERNATE B.


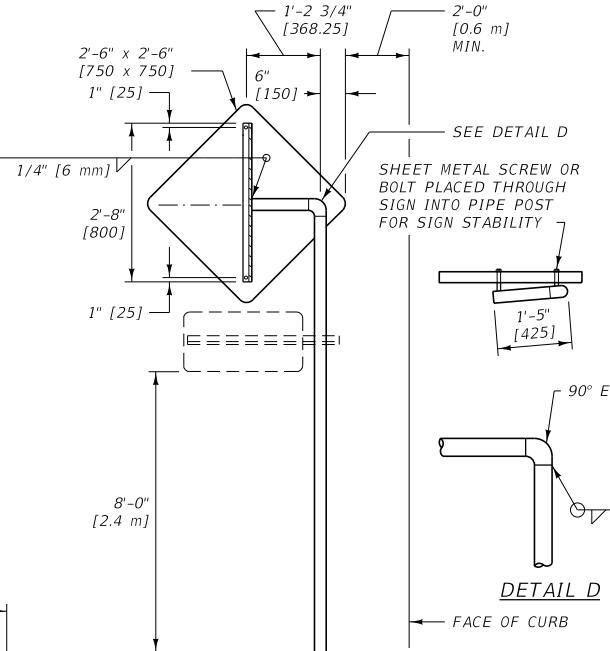


DETAIL C



UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 619-18
SECTION 556.619.704

CANTILEVER TYPE SIGN
SUPPORT DETAILS
FOR SIDEWALK AREAS

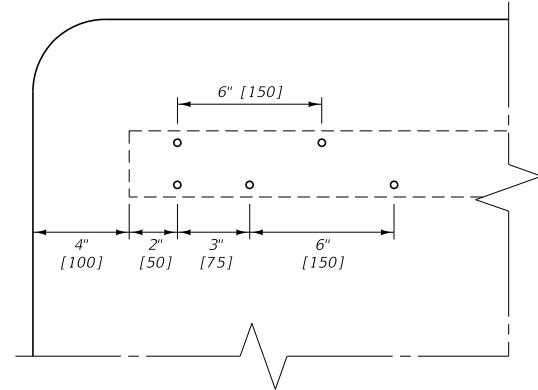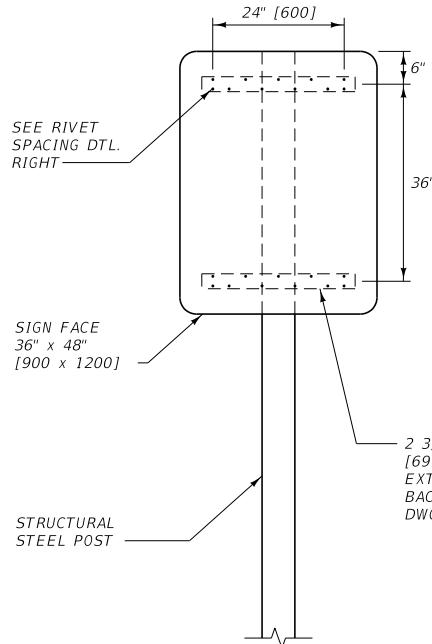

RIVET SPACING

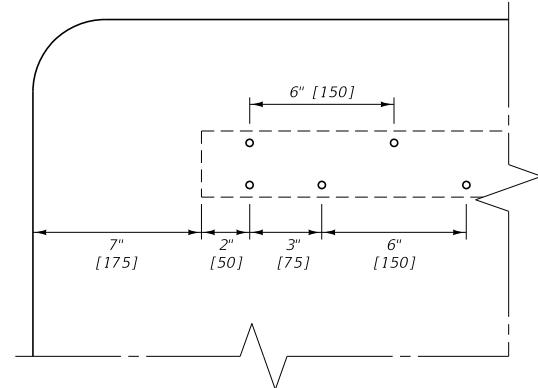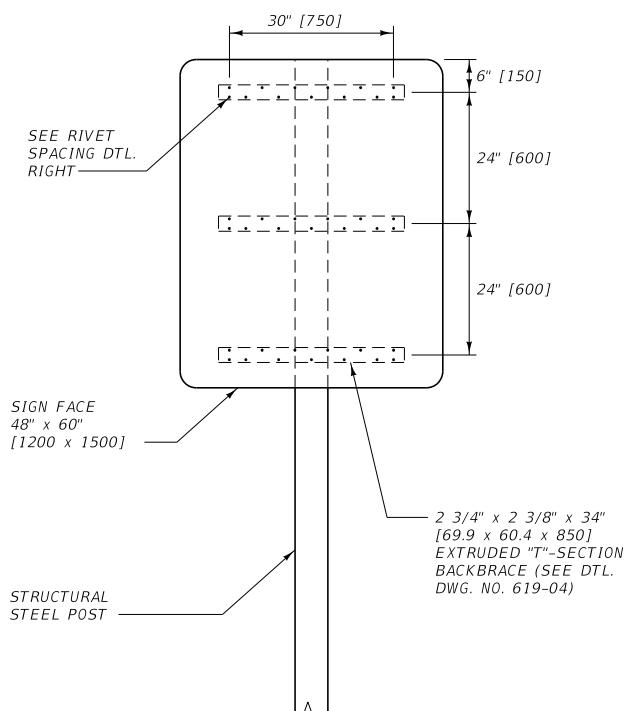



RIVET SPACING

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

NOTES:

- ① SEE THE PLANS FOR BACKBRACING REQUIREMENTS.
- ② USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 619,704	DWG. NO. 619-19
STRUCTURAL STEEL POST SIGN MOUNTING DETAILS	
 MONTANA DEPARTMENT OF TRANSPORTATION	

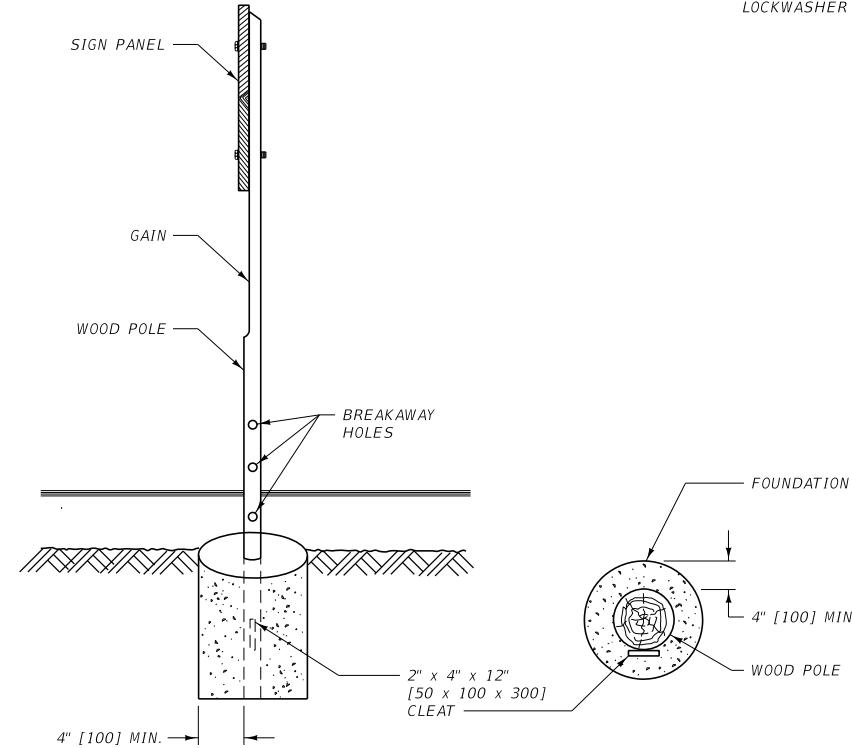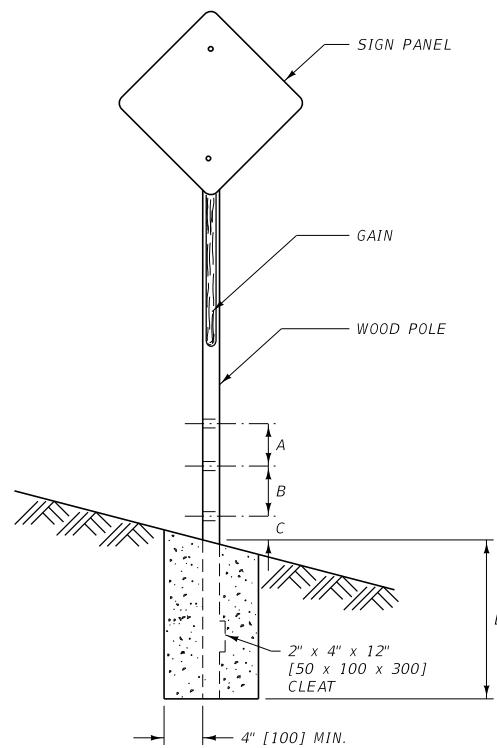

5/16" [M8] DIA. HEX HEAD
BOLT, PLATE WASHER,
LOCKWASHER AND NUT

5/16" [M8] DIA. HEX HEAD
BOLT, PLATE WASHER,
LOCKWASHER AND NUT

5/16" [M8] DIA. HEX HEAD
BOLT, PLATE WASHER,
LOCKWASHER AND NUT

SIGN FACE
36" x 36" [900 x 900] MAX. SIZE


SIGN FACE
30" x 36" [750 x 900] MAX. SIZE

SIGN FACE
36" x 36" [900 x 900] MAX. SIZE

REGULATORY SIGNS

WARNING SIGNS



TYPICAL SIGN MOUNTINGS

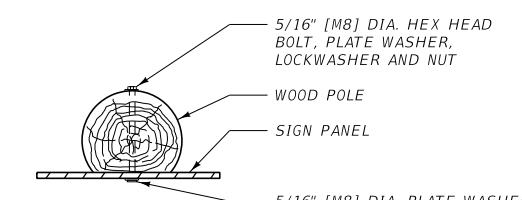


NOTES:

- ① CONFORM ALL WOOD POLES TO THE REQUIREMENTS OF SECTION 704.
- ② GAIN ALL POLES ON THE SIGN SIDE THE MINIMUM WIDTH SHOWN IN THE TABLE, FOR HALF THE LENGTH OF EACH POLE.
- ③ BREAKAWAY DETAILS ARE STANDARD FOR ALL WOOD POLES LISTED IN THE TABLE, ON SINGLE AND MULTIPLE SIGN SUPPORTS.
- ④ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.
- ⑤ ATTACH A 2" x 4" x 12" [50 x 100 x 300] BOARD 12" [300] FROM THE BOTTOM OF THE POLE TO PREVENT SPINNING. ATTACH THIS CLEAT BY DRIVING TWO 16d NAILS THROUGH THE CLEAT AND INTO THE POLE. TREAT THE 2" x 4" [50 x 100] CLEAT.
- ⑥ THE MAXIMUM CROSS-SECTIONAL AREA AT A POINT 4" [100] ABOVE GROUND LEVEL MAY NOT EXCEED 24 SQUARE INCHES [15 480 mm²] EXCLUSIVE OF DRILLED BREAKAWAY HOLES FOR UNPROTECTED POST INSTALLATIONS. THE HOLE DIAMETER MAY BE ENLARGED IF NECESSARY TO ENSURE THIS REQUIREMENT IS MET.
- ⑦ USE SOIL CEMENT FOR THE FOUNDATION - PER SECTION 619.
- ⑧ FOR SIGNS REQUIRING BACKBRACING, CONSULT DTL. DWG. NO. 619-21 AND 619-22 FOR BACKBRACING OPTIONS AND DETAILS.

BREAKAWAY AND FOOTING DETAILS

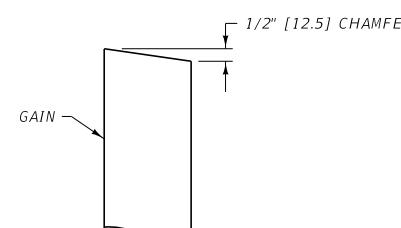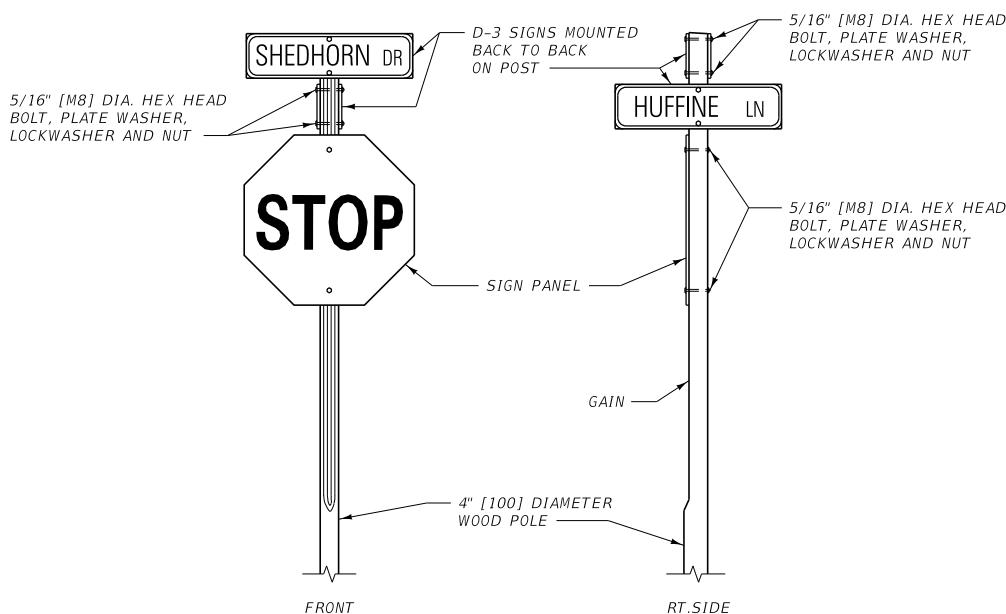

TOP END TREATMENT

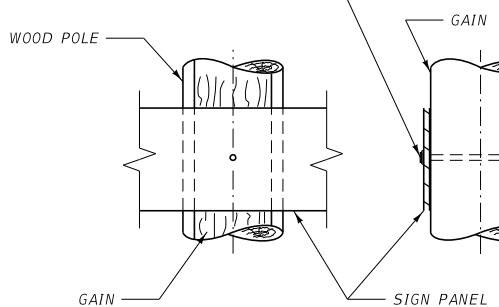

SIGN MOUNTING DETAIL


POLE SIZE	A	B	C	HOLE DIA. (SEE NOTE ⑥)	EMBEDMENT	GAIN
3" TOP DIA.	~	~	~	~	3'-0"	2 3/4"
4" TOP DIA.	~	~	~	~	3'-0"	3 1/2"
5" TOP DIA.	~	12"	4"	2"	3'-6"	4"
6" TOP DIA.	~	12"	4"	2 1/2"	4'-6"	4"
CLASS 4	~	12"	4"	2"	5'-0"	4"
CLASS 3	~	12"	4"	2 1/2"	5'-6"	4"
CLASS 2	6"	6"	4"	2"	6'-0"	4"
CLASS 1	6"	6"	4"	2 1/2"	6'-6"	4"

POLE SIZE (mm)	A (mm)	B (mm)	C (mm)	HOLE DIA. (SEE NOTE ⑥) (mm)	EMBEDMENT	GAIN (mm)
75 TOP DIA.	~	~	~	~	0.9 m	70
100 TOP DIA.	~	~	~	~	0.9 m	90
130 TOP DIA.	~	300	100	51	1.1 m	100
150 TOP DIA.	~	300	100	64	1.4 m	100
CLASS 4	~	300	100	51	1.5 m	100
CLASS 3	~	300	100	64	1.7 m	100
CLASS 2	150	150	100	51	1.8 m	100
CLASS 1	150	150	100	64	2.0 m	100

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

REFERENCE STANDARD SPEC. SECTION 619,704	DWG. NO. 619-20
------------------------------------------------	--------------------

TREATED WOOD POLE
SIGN MOUNTING AND
SUPPORT DETAILS

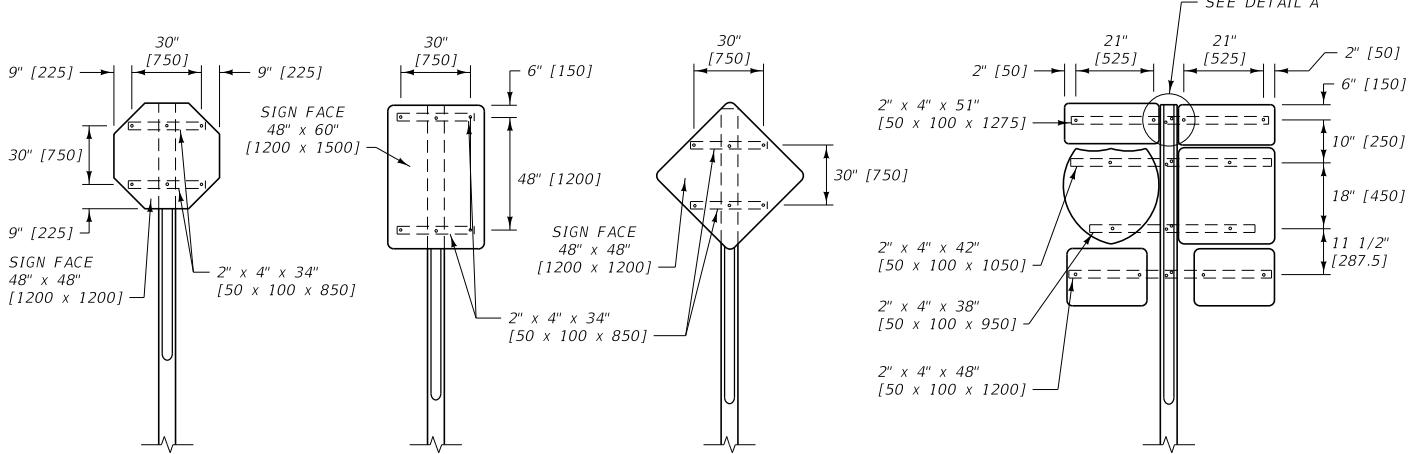

REGULATORY SIGNS


WARNING SIGNS

ROUTE MARKER ASSEMBLY


NOTE:

- ① SIGNS OF THESE SIZES AND LARGER REQUIRE WOOD BACKBRACING.
- ② SMALLER SIGNS MAY REQUIRE BACKBRACING IF THE CONDITIONS WARRANT (SEE SIGNING PLANS). IN THIS CASE, THE CONTRACTOR HAS THE OPTION OF USING WOOD OR STEEL BACKBRACING (SEE DTL. DWG. NO. 619-22).

WOOD BACKBRACE INSTALLATIONS

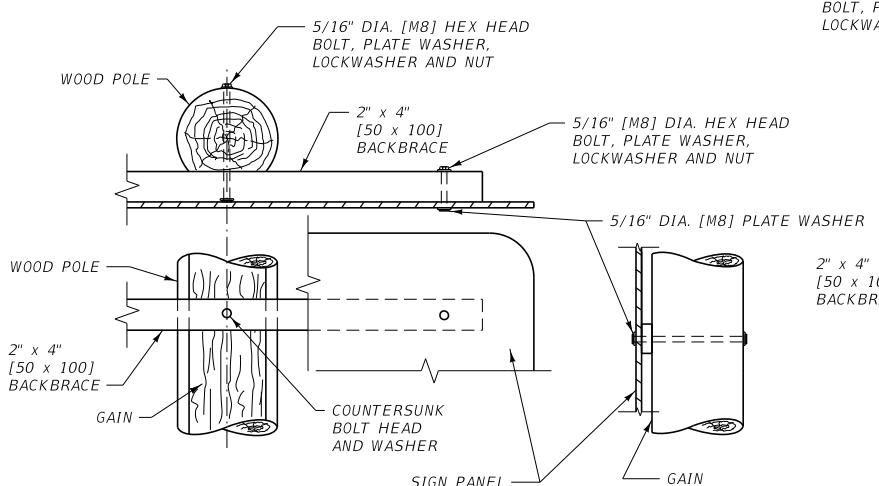



SIGN MOUNTING DETAIL

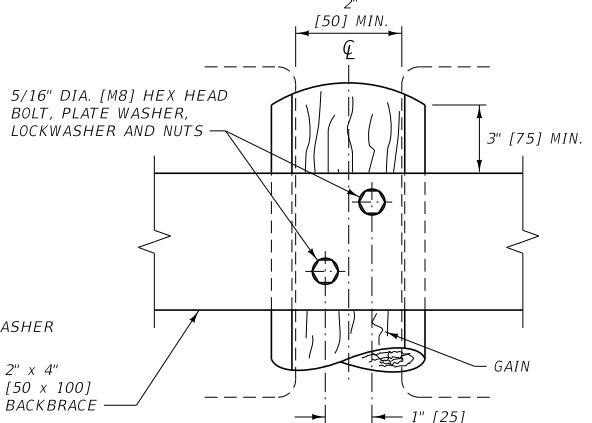

DETAIL A
(BACKBRACE)

NOTES:

- ① CONFORM ALL WOOD POLES TO THE REQUIREMENTS OF SECTION 704.
- ② GAIN ALL POLES ON THE SIGN SIDE THE MINIMUM WIDTH SHOWN IN THE TABLE ON DTL. DWG. NO. 619-20, FOR HALF THE LENGTH OF EACH POLE.
- ③ USE TREATED 2" x 4" [50 x 100] S4S LUMBER FOR ALL WOOD BACKBRACING, CONFORMING TO THE REQUIREMENTS OF SECTION 704.
- ④ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.
- ⑤ SEE DTL. DWG. NO. 619-20 FOR BREAKAWAY AND SUPPORT DETAILS.


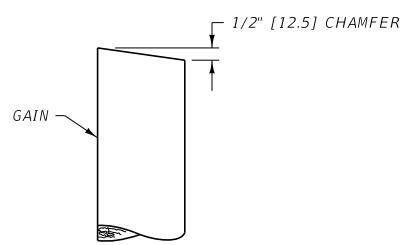
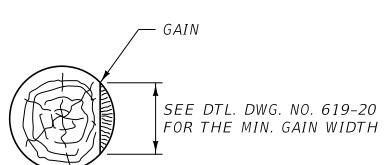


GAIN DETAIL

TOP END TREATMENT

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 619,704	DWG. NO. 619-21
TREATED WOOD POLE SIGN MOUNTING DETAILS	

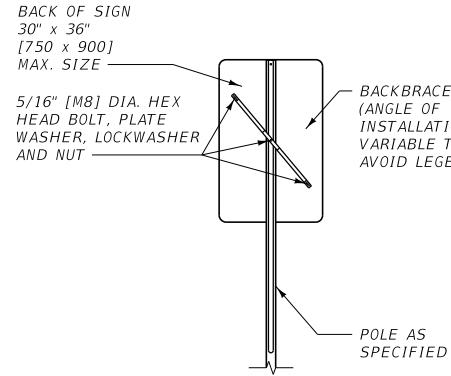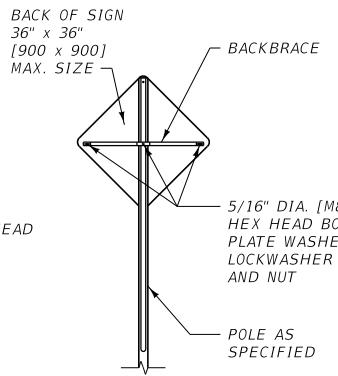
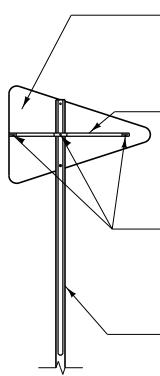


NO PASSING PENNANTS

WARNING SIGNS

REGULATORY SIGNS

STEEL BACKBRACE INSTALLATIONS

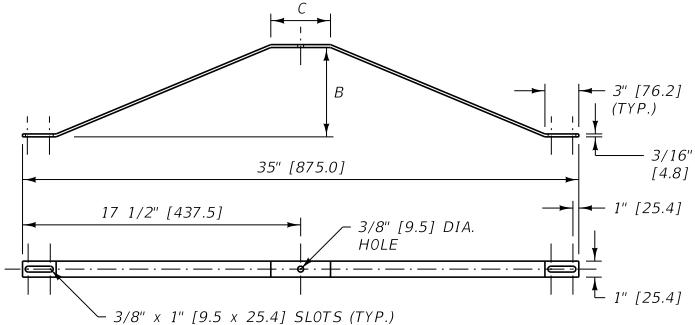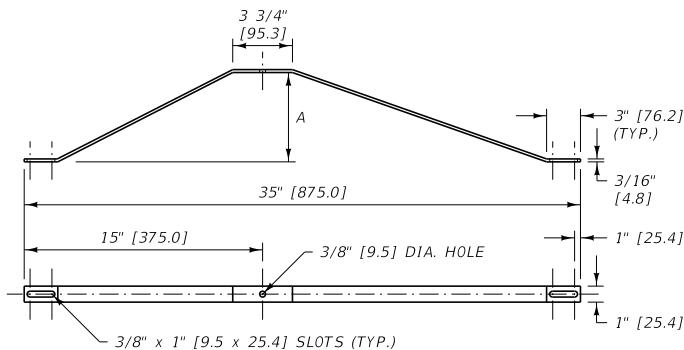


NO PASSING PENNANTS

REGULATORY AND WARNING SIGNS


POLE DIA.	A	B	C
3" [75]	2 1/8" [54.0]	2 1/8" [54.0]	3 3/4" [95.3]
4" [100]	3" [76.2]	3" [76.2]	3 3/4" [95.3]
5" [130]	~	4" [101.6]	4 1/4" [108.0]
6" [150]	~	5 1/4" [133.4]	4 1/4" [108.0]

STEEL BACKBRACE DETAILS

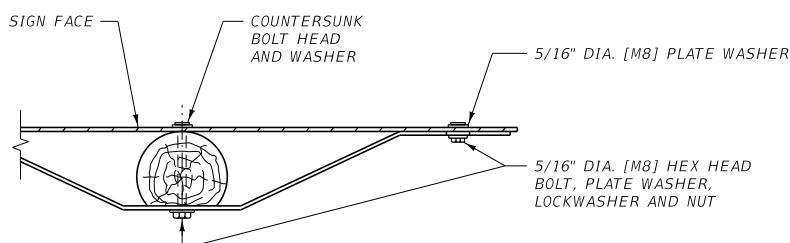

NOTES:


- ① USE COMMERCIAL QUALITY, MILD STEEL, THAT IS HOT-DIPPED AFTER FABRICATION. GALVANIZE IN ACCORDANCE WITH SUBSECTION 711.08.
- ② SEE DTL. DWG. NO. 619-20 FOR ADDITIONAL SIGN MOUNTING REQUIREMENTS. MOUNT SIGN FACE TO POLE BEFORE INSTALLING BACKBRACING.
- ③ SEE DTL. DWG. NO. 619-20 FOR BREAKAWAY AND SUPPORT DETAILS.
- ④ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

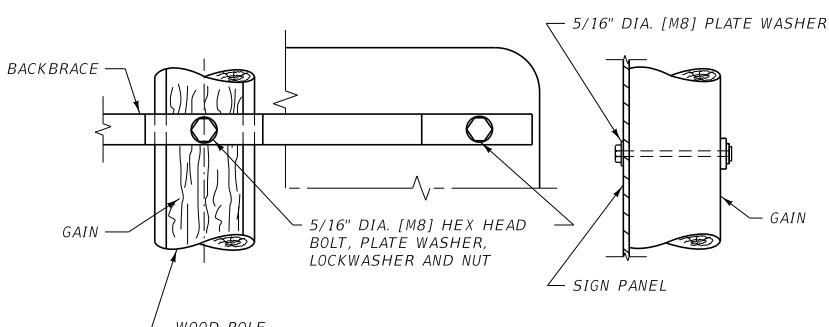


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 619, 704, 711	DWG. NO. 619-22
TREATED WOOD POLE OPTIONAL BACKBRACE	

5/16" DIA. [M8] HEX HEAD BOLT,
PLATE WASHER, LOCKWASHER
AND NUT (TYP.)

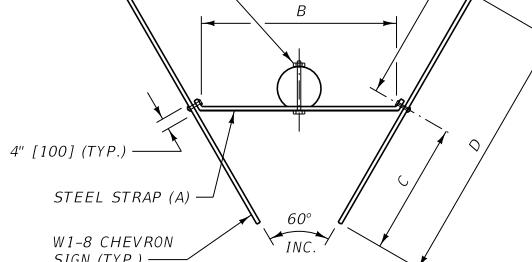


PLAN VIEW

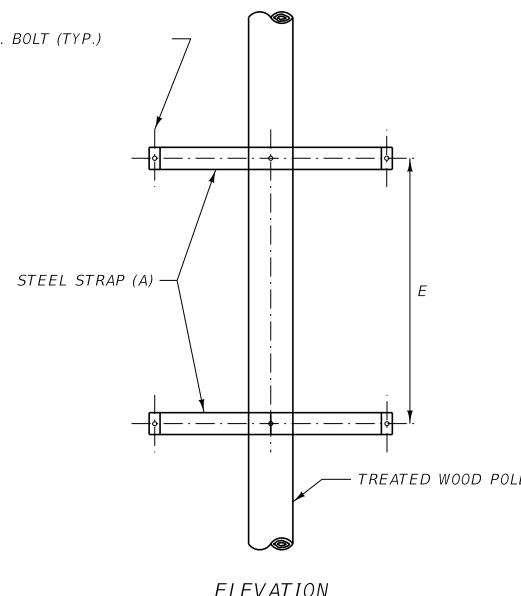

ELEVATION

SIGN SIZE	DIMENSIONS				
	A	B	C	D	E
18" x 24"	1/4" x 2" x 1'-11"	15"	9"	18"	18"
24" x 30"	1/4" x 2" x 2'-2"	18"	12"	24"	24"
30" x 36"	1/4" x 2" x 2'-5"	21"	15"	30"	30"
36" x 48"	1/4" x 2" x 2'-8"	24"	18"	36"	36"


SIGN SIZE (mm)	METRIC DIMENSIONS (mm)				
	A	B	C	D	E
450 x 600	6 x 50 x 580	380	225	450	450
600 x 750	6 x 50 x 655	455	300	600	600
750 x 900	6 x 50 x 735	535	375	750	750
900 x 1200	6 x 50 x 810	610	450	900	900



W1-8 CHEVRON ALIGNMENT SIGNS
MAY BE USED AS AN ALTERNATE OR
AS A SUPPLEMENT TO DELINEATION
TO PROVIDE ADDITIONAL EMPHASIS
AND GUIDANCE WHEN A CHANGE IN
HORIZONTAL ALIGNMENT EXISTS IN
THE ROADWAY.

WOOD POST MOUNTING

MOUNT 2 CHEVRON SIGNS ON EACH POST WITH EACH
PANEL ADJUSTED TO APPROXIMATE RIGHT ANGLE TO
ROADWAY CENTERLINE. EXACT LOCATION AND ANGLE
TO BE DETERMINED BY THE PROJECT MANAGER.

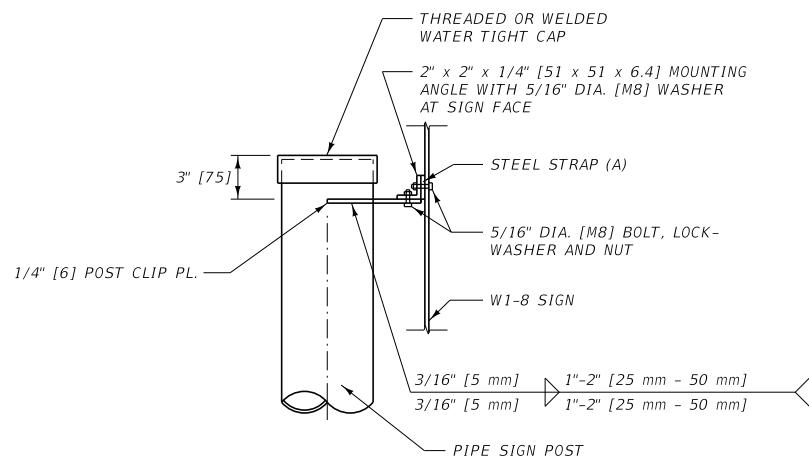


NOTES:

- ① INSTALL CHEVRONS WITH A MINIMUM 10'-0" [3.1 m] HORIZONTAL CLEARANCE AND A 5'-0" [1.5 m] VERTICAL MOUNTING HEIGHT.
- ② SPACING FOR DESIGN PURPOSES IS DOUBLE THE SPACING
SHOWN IN THE TABLE ON DTL. DWG. NO. 619-36, UP
TO A MAXIMUM CHEVRON SPACING OF 200' [60 m]. A MINIMUM
OF 3 VISIBLE CHEVRONS ARE REQUIRED THROUGH A CURVE.
- ③ FIELD INSPECT THE CHEVRONS AT NIGHT AND ADJUST
THEIR LOCATIONS TO ACHIEVE 500' [150 m] OF VISIBILITY.
- ④ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

STEEL PIPE MOUNTING

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 619, 704	DWG. NO. 619-24
CHEVRON MOUNTING DETAILS	

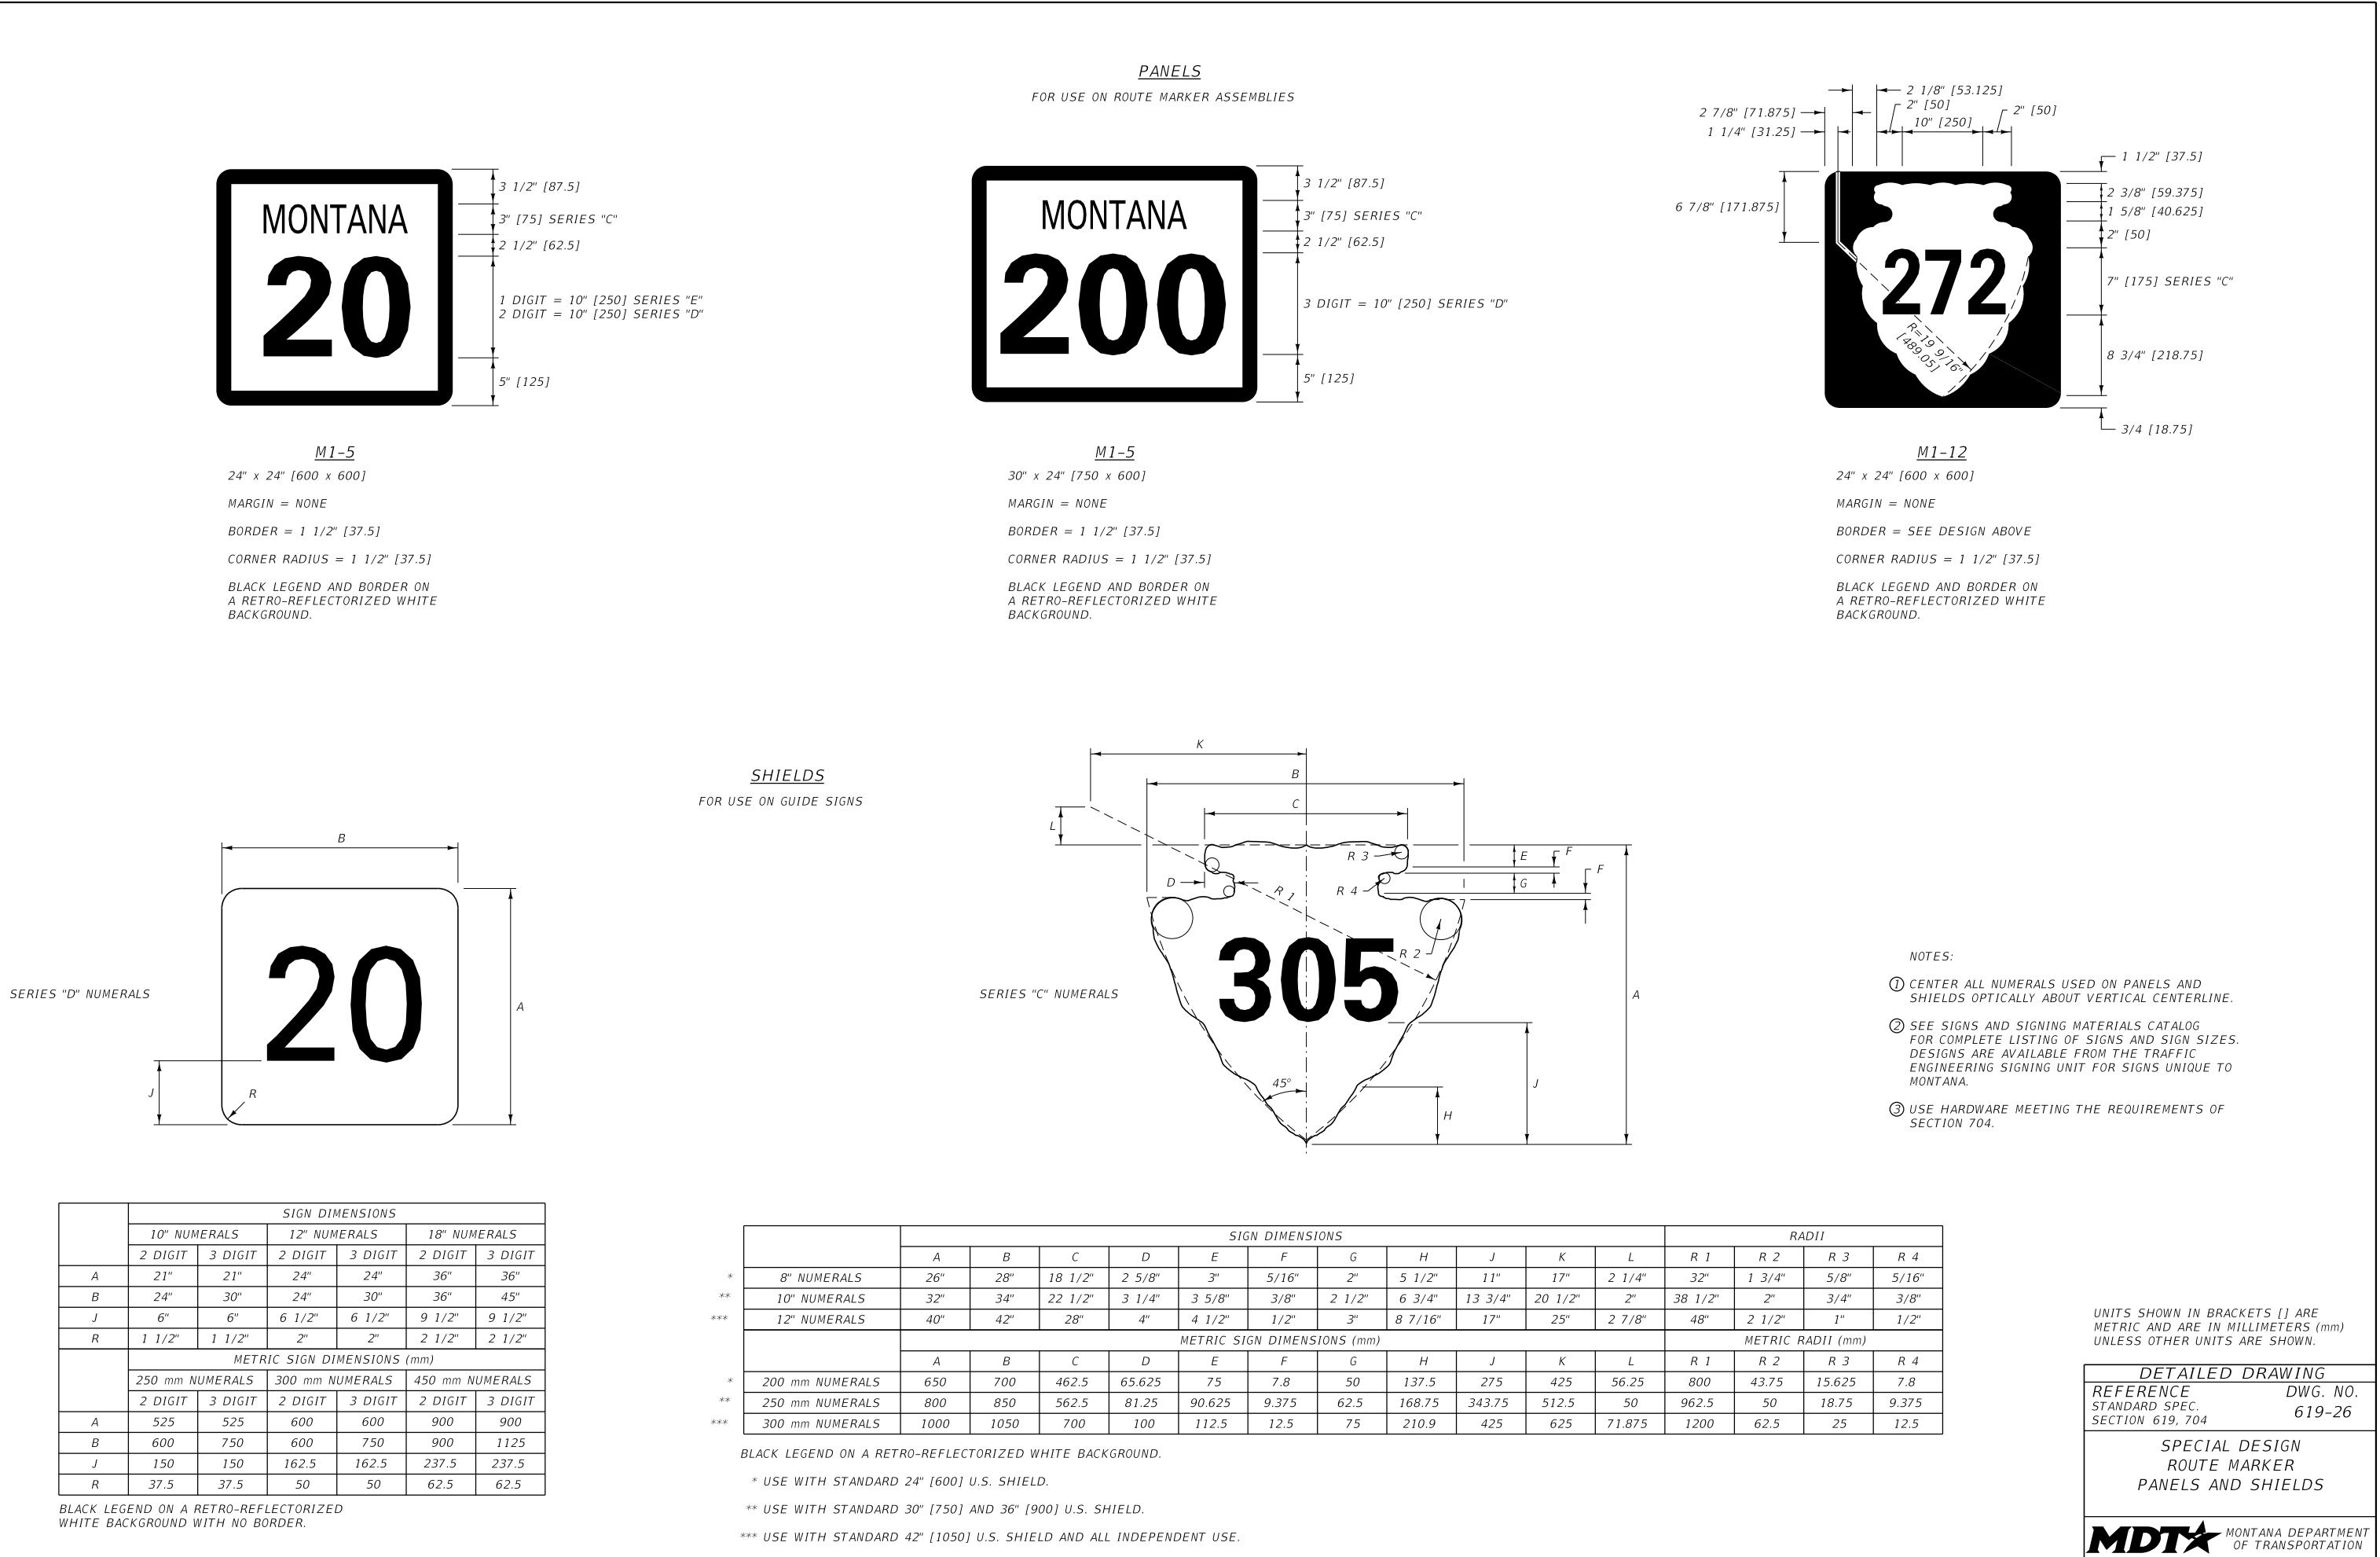

MAJOR SIGN PANEL

CLOSED

OPEN


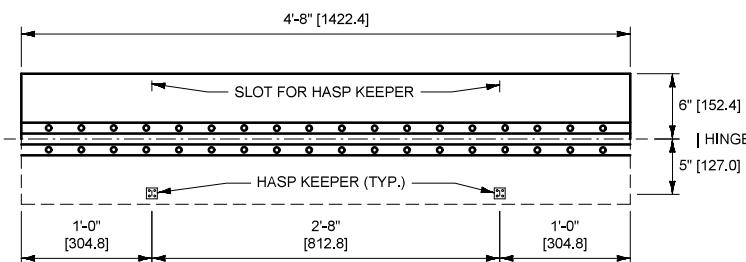


8" [200] UPPER CASE SERIES "E" MODIFIED

8" [200] UPPER CASE SERIES "E" MODIFIED

HINGE

ALUMINUM SHEET MOUNTING

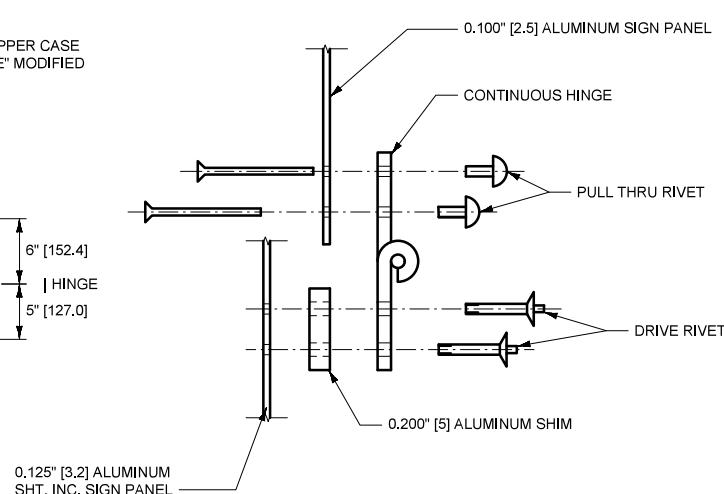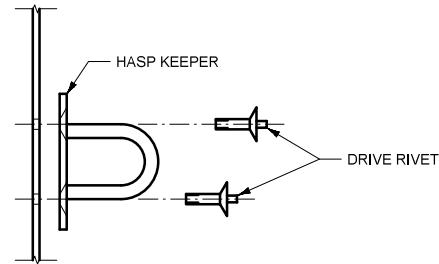

NOTES:

- ① SEE SIGNS AND SIGNING MATERIALS CATALOG FOR COMPLETE LISTING OF SIGNS AND SIGN SIZES. DESIGNS ARE AVAILABLE FROM THE TRAFFIC ENGINEERING SIGNING UNIT FOR SIGNS UNIQUE TO MONTANA.
- ② THE SIGN PANEL CONSISTS OF 0.125" [3.2] ALUMINUM SHEET INCREMENT AS SPECIFIED ON THE PLANS. THE HINGED PANEL CONSISTS OF 0.100" [2.5] SHEET ALUMINUM.
- ③ HARDWARE VISIBLE ON THE SIGN FACE MUST BE COVERED WITH RETRO-REFLECTIVE SHEETING OR PAINT MATCHING THE SIGN FACE COLOR.
- ④ SUBMIT SHOP DRAWINGS FOR APPROVAL PRIOR TO FABRICATION.
- ⑤ SUPPLEMENTAL SIGN PANELS BELOW MAJOR SIGN PANELS MUST HAVE A REFLECTORIZED LEGEND AND BACKGROUND MATCHING THE MAJOR PANEL COLORATION.
- ⑥ SECONDARY PANEL BOTTOM MARGIN MUST BE AT LEAST 5'-0" [1.5 m] ABOVE GROUND SURFACE.
- ⑦ HARDWARE MUST MEET STANDARD SPECIFICATION SECTION 704 REQUIREMENTS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS


REFERENCE STANDARD SPEC. SECTION 619, 704	DWG. NO. 619-30
-------------------------------------------------	--------------------

SIGN HINGE DETAIL


EFFECTIVE: JAN 23, 2020




--REVISED--
JUN 27, 2024

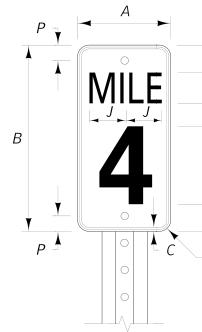


D10-1 AND D10-4

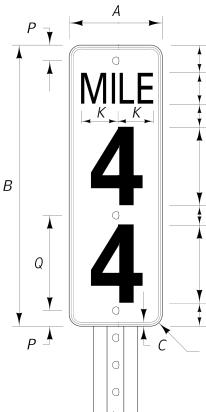


D10-2 AND D10-5

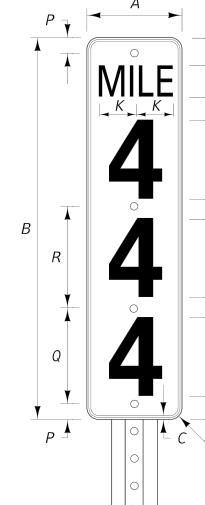

D10-3 AND D10-6

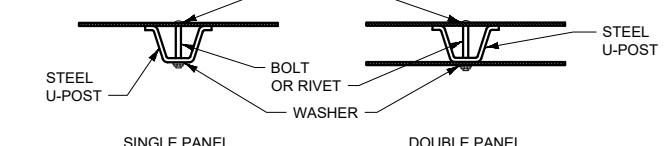

TYPICAL PANEL MOUNTING

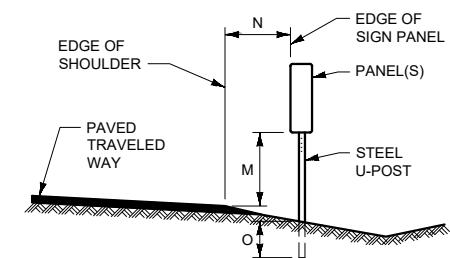

PANEL DIMENSION INFORMATION

INTERSTATE			
DIMENSION	D10-4 (1 DIGIT)	D10-5 (2 DIGIT)	D10-6 (3 DIGIT)
A	12.0"	12.0"	12.0"
B	24.0"	36.0"	48.0"
C	0.5"	0.5"	0.5"
D	3.5"	3.0"	3.0"
E	4.0" SERIES "B"	4.0" SERIES "B"	4.0" SERIES "B"
F	3.0"	3.0"	3.0"
G	10.0" SERIES "D"	10.0" SERIES "D"	10.0" SERIES "D"
H	3.5"	3.0"	2.5"
J	4.0"	3.0"	3.0"
K	1.5"	4.0"	4.0"
L	~	1.5"	1.5"
P	2.0"	2.0"	2.0"
Q	~	12.5"	12.5"
R	~	~	12.5"

METRIC PANEL DIMENSION INFORMATION

INTERSTATE #			
DIMENSION	D10-4 (1 DIGIT)	D10-5 (2 DIGIT)	D10-6 (3 DIGIT)
A	300	300	300
B	600	900	1200
C	10	10	10
D	88	75	75
E	100 SERIES "B"	100 SERIES "B"	100 SERIES "B"
F	75	75	75
G	250 SERIES "D"	250 SERIES "D"	250 SERIES "D"
H	87	75	63
J	98	75	74
K	40	98	98
L	~	40	40
P	50	50	50
Q	~	313	313
R	~	~	313

NON-INTERSTATE			
DIMENSION	D10-1 (1 DIGIT)	D10-2 (2 DIGIT)	D10-3 (3 DIGIT)
A	10.0"	10.0"	10.0"
B	18.0"	27.0"	36.0"
C	0.5"	0.5"	0.5"
D	3.0"	3.0"	3.0"
E	4.0" SERIES "B"	4.0" SERIES "B"	4.0" SERIES "B"
F	2.0"	2.0"	2.0"
G	6.0" SERIES "D"	6.0" SERIES "D"	6.0" SERIES "D"
H	3.0"	3.0"	3.0"
J	4.0"	3.0"	3.0"
K	1.5"	4.0"	4.0"
L	~	1.5"	1.5"
P	1.5"	1.5"	1.5"
Q	~	9.0"	9.0"
R	~	~	9.0"

OPTICALLY CENTER DIGITS ON VERTICAL $\frac{1}{2}$ OF PANEL.

NON-INTERSTATE #			
DIMENSION	D10-1 (1 DIGIT)	D10-2 (2 DIGIT)	D10-3 (3 DIGIT)
A	250	250	250
B	450	675	900
C	10	10	10
D	75	75	75
E	100 SERIES "B"	100 SERIES "B"	100 SERIES "B"
F	50	50	50
G	150 SERIES "D"	150 SERIES "D"	150 SERIES "D"
H	75	75	75
J	98	75	75
K	30	98	98
L	~	30	30
P	37.5	37.5	37.5
Q	~	225	225
R	~	~	225

OPTICALLY CENTER DIGITS ON VERTICAL $\frac{1}{2}$ OF PANEL.

ALL UNITS ARE IN MILLIMETERS (mm)

NOTES:

- ① MILEPOST PANELS CONSIST OF A RETRO-REFLECTORIZED WHITE LEGEND AND BORDER ON A RETRO-REFLECTORIZED GREEN BACKGROUND.
- ② MOUNT ALL MILEPOSTS ON STEEL U-POSTS (MIN. 2 LB/FT. [3 kg/m]) EXCEPT THE D10-6, WHICH IS MOUNTED ON A STEEL U-POST (MIN. 3 LB./FT. [4.5 kg/m]) AS NOTED IN THE SIGNING PLANS.
- ③ USE GALVANIZED OR CADMIUM PLATED 5/16" DIA. [M8] BOLT, NUT AND WASHER, AND JAM THREADS AFTER TIGHTENING. USE 5/16" [8] DIA. ALUMINUM OR CADMIUM PLATED BOLT RIVETS OR PAINT RIVET HEADS WITH BRILLIANT GREEN SIGN ENAMEL.
- ④ DO NOT RELOCATE OR MOVE A MILEPOST ONCE IT HAS BEEN PROPERLY PLACED.
- ⑤ HARDWARE MUST MEET STANDARD SPECIFICATION SECTION 704 REQUIREMENTS.


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE DWG. NO.
STANDARD SPEC. 619-32
SECTION 619, 704


MILEPOST (REFERENCE POST) DETAILS

EFFECTIVE: JAN 23, 2020

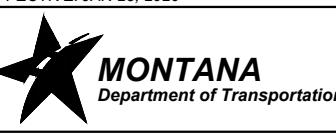

-REVISED--
JUN 27, 2024


7/23/2024 8:45 AM STDDR619032.DWG

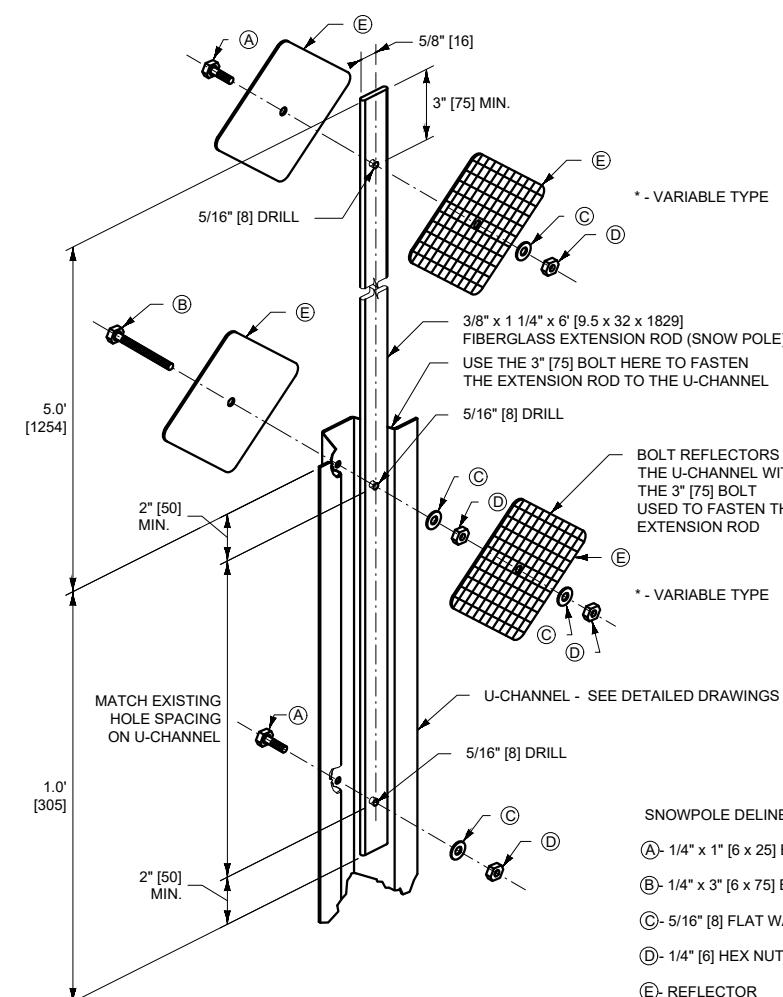

SNOWPOLE DELINEATOR DETAIL

DESIGN A USAGE:
USE FOR CONTINUOUS DELINEATION AND RT. SHOULDER OF ALL ROUTES.

DESIGN H USAGE:
USE ON LT. SHOULDER OF INTERSTATE ROUTES.

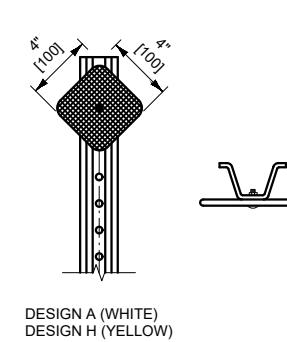


DESIGN A (WHITE)
DESIGN H (YELLOW)

DESIGN B USAGE:
USE ON LT. SHOULDER OF INTERSTATE RAMPS AND AUTHORIZED VEHICLE ONLY CROSSOVERS.


DESIGN G USAGE:
USE ON RT. SHOULDER OF INTERSTATE RAMPS.

DESIGN J USAGE:
USE FOR TRUCK ESCAPE RAMPS AND INTERCHANGE OFF RAMPS FROM MID-POINT TO GORE LT & RT FOR WRONG WAY TRAVELERS.

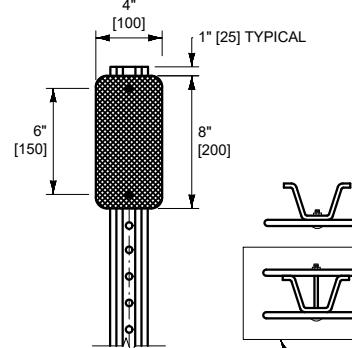

DESIGN B (YELLOW)
DESIGN G (WHITE)
DESIGN J (RED)

DESIGN C USAGE:
USE FOR CURVES WITH RADII 573' [170 m] OR LESS, BOTH OUTSIDE AND INSIDE OF CURVE.

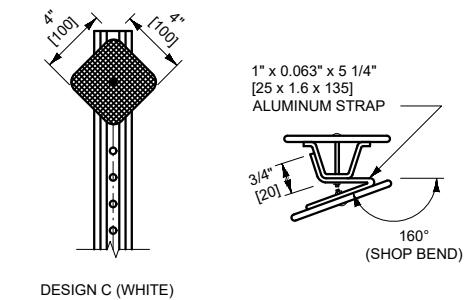


DESIGN C (WHITE)

NOTES:

- ① SOME TYPICAL USES ARE SHOWN FOR EACH DESIGN. REFER TO THE MUTCD FOR SPECIFIC GUIDANCE.
- ② USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.


DELINERATOR LEGEND	
TYPE I	
DESIGN "A"	—
DESIGN "B"	—
DESIGN "D"	—
DESIGN "F"	—
DESIGN "G"	—<
DESIGN "H"	—>
DESIGN "J"	—x
DESIGN "GJ"	x—<
DESIGN "BJ"	x—
TYPE II	
DESIGN "C"	—

DESIGN D USAGE:
NON-INTERSTATE ROUTES: USE AT APPROACHES WITH STOP OR YIELD SIGNS.
INTERSTATE ROUTES: USE AT RAMP AND CROSSROAD INTERSECTIONS.

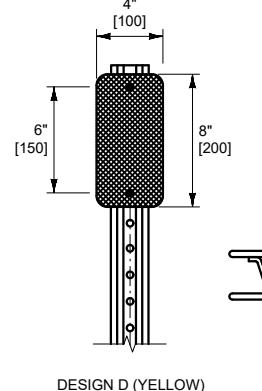

DESIGN D (YELLOW)

DESIGN F USAGE:
USE FOR CURVES WITH RADII GREATER THAN 573' [170 m]; 1433' [450 m] TO 765' [231 m] RADIUS: OUTSIDE ONLY; 764' [230 m] TO 573' [171 m] RADIUS: OUTSIDE AND INSIDE OF CURVE.

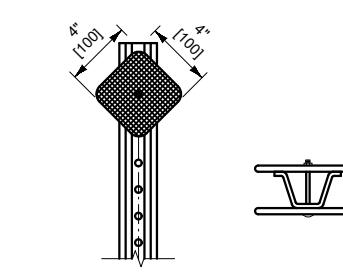


DESIGN F (WHITE)

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 619-34	DWG. NO. 619-34

DELINERATOR DETAILS	
EFFECTIVE: JAN 23, 2020	

REVISED-- JUN 26, 2025	MONTANA Department of Transportation
5/12/2025 3:33 PM	STDDR619034.DWG

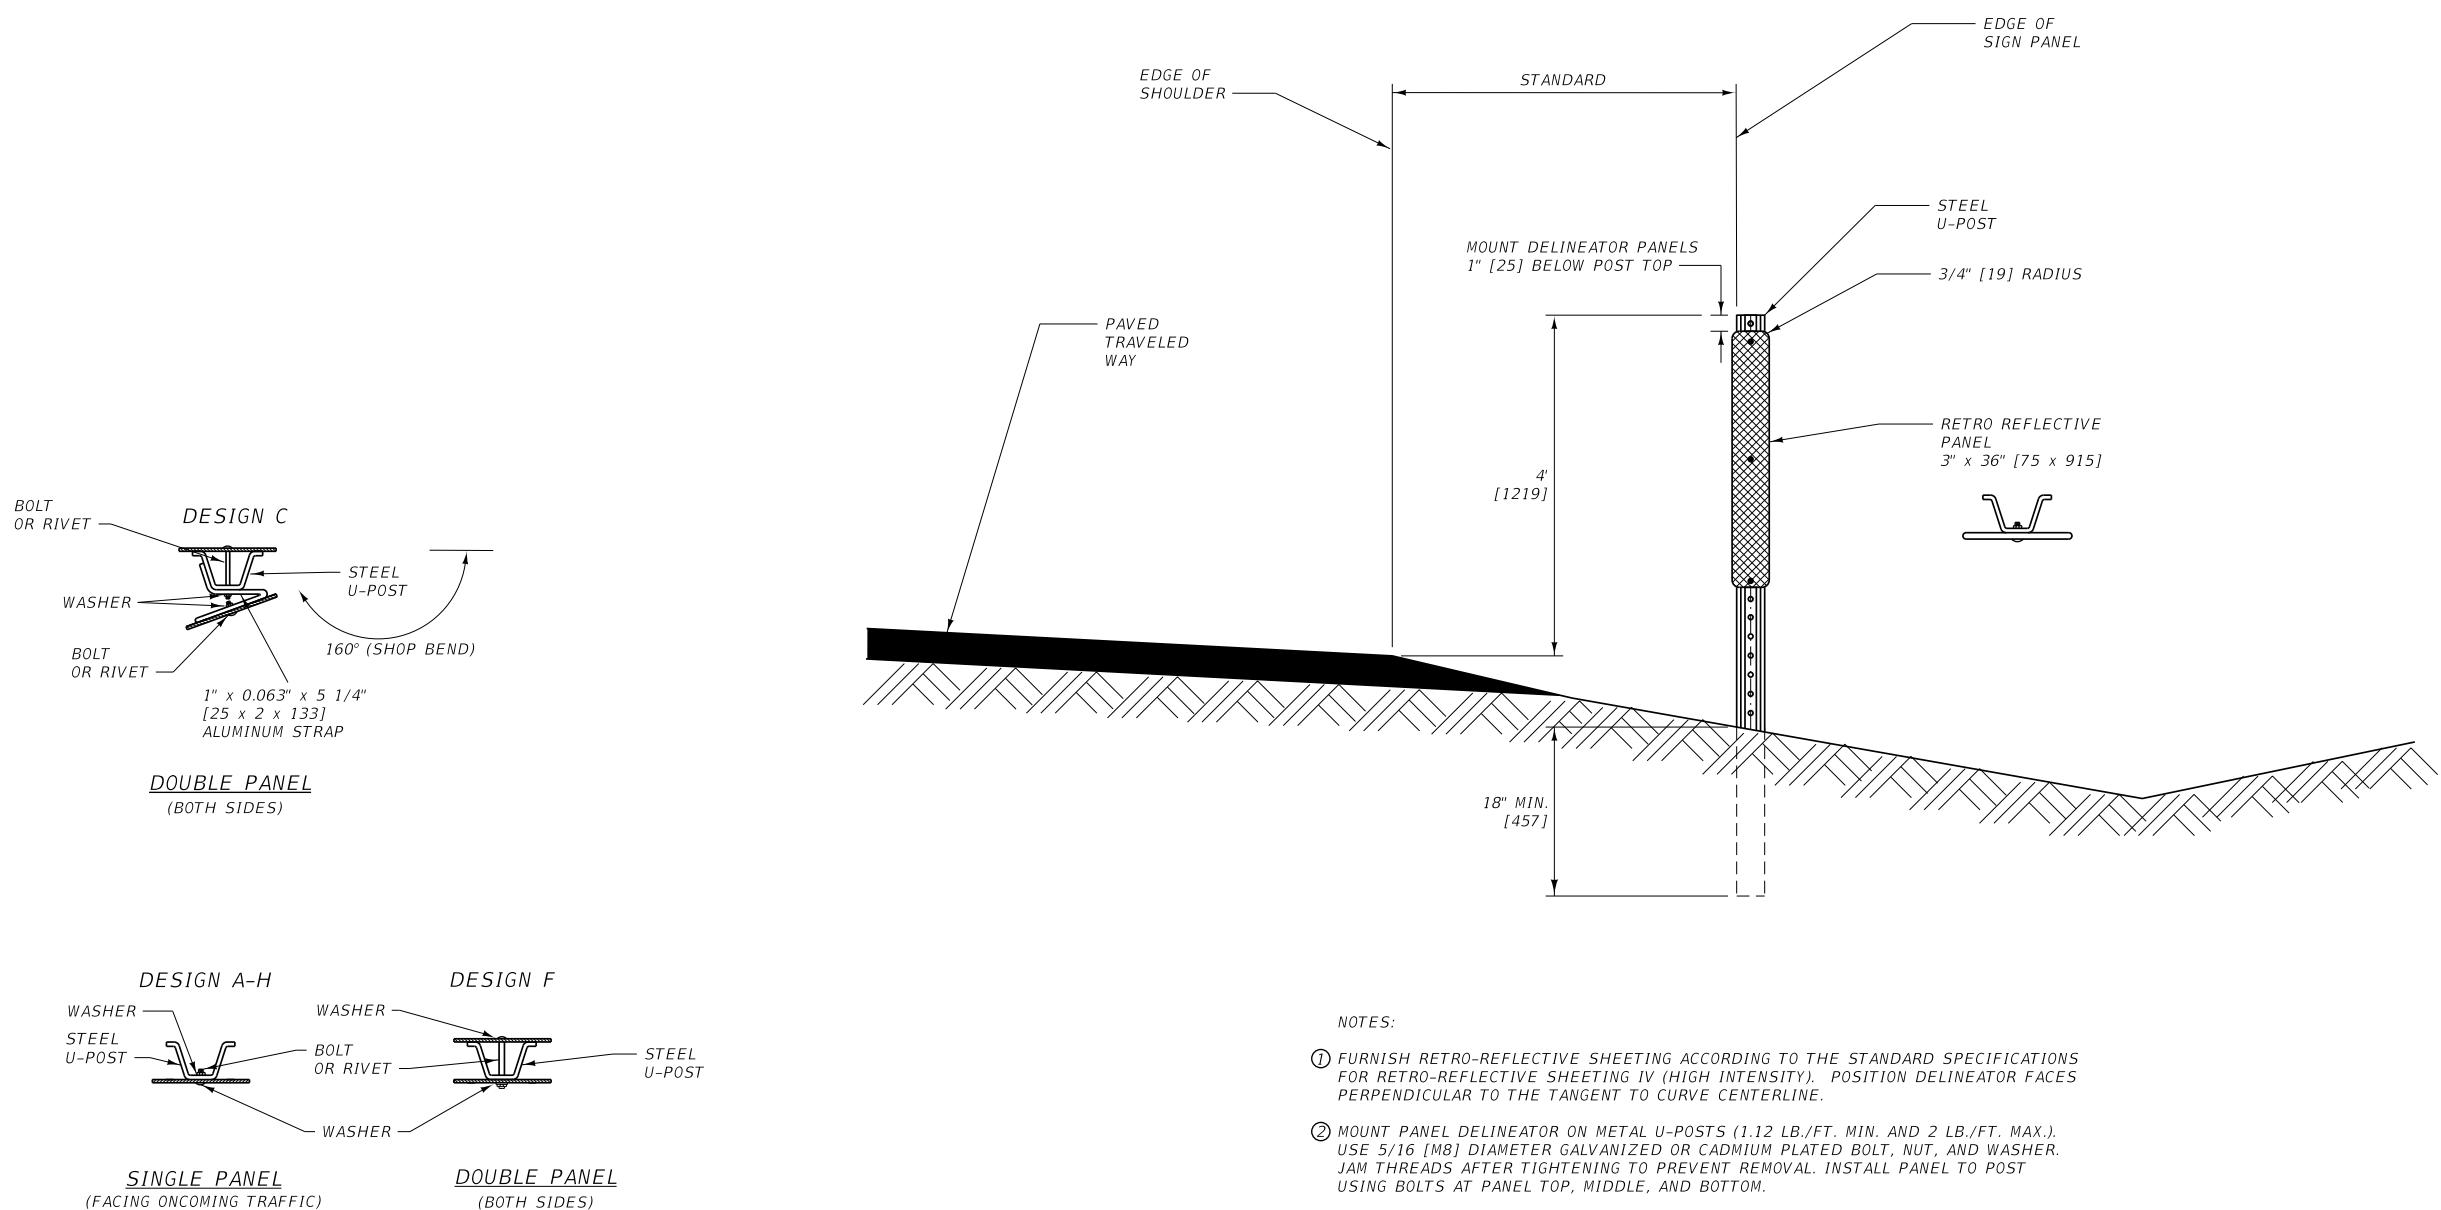

NOTE: TYPE "C & F" DELINEATORS TO HAVE STRIPS ON BOTH SIDES OF POSTS.

NOTES:

- ① FURNISH RETRO-REFLECTIVE SHEETING ACCORDING TO THE STANDARD SPECIFICATIONS FOR RETRO-REFLECTIVE SHEETING IV (HIGH INTENSITY). POSITION DELINEATOR FACES PERPENDICULAR TO THE TANGENT TO CURVE CENTERLINE.
- ② MOUNT PANEL DELINEATOR ON METAL U-POSTS (1.12 LB./FT. MIN. AND 2 LB./FT. MAX.). USE 5/16 [8] DIAMETER GALVANIZED OR CADMIUM PLATED BOLT, NUT, AND WASHER. JAM THREADS AFTER TIGHTENING TO PREVENT REMOVAL. INSTALL PANEL TO POST USING BOLTS AT PANEL TOP, MIDDLE, AND BOTTOM.
- ③ PLACE DELINEATORS AT A CONSTANT CLEARANCE DISTANCE FROM THE EDGE OF THE PAVEMENT EXCEPT WHERE GUARDRAIL OR OTHER OBSTRUCTIONS INTERFERE. ALIGN THE DELINEATORS WITH THE INSIDE EDGE OF THE OBSTRUCTION. CLEARANCE FOR DELINEATORS IS 6'-0" [1829] ON INTERSTATE HIGHWAYS, 4'-0" [1219] ON PRIMARY AND SECONDARY HIGHWAYS OR AS DETERMINED BY THE ENGINEER. THE STANDARD MOUNTING HEIGHT IS 4'-0" [1219] TO THE TOP OF THE POST. SUPPLY POST LENGTHS TO MAINTAIN THE PROPER MOUNTING HEIGHT AND A MINIMUM OF 18" [457] EMBEDMENT.
- ④ SPACE DELINEATORS ACCORDING TO DETAILED DRAWING 619-36. UNDER NORMAL SPACING, SHOULD A DELINEATOR FALL WITHIN A CROSSROAD OR APPROACH, IT MAY BE MOVED IN EITHER DIRECTION A DISTANCE NOT TO EXCEED ONE QUARTER OF THE NORMAL SPACING. ELIMINATE DELINEATORS STILL FALLING IN SUCH AREAS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	DWG. NO.
STANDARD SPEC.	619-35
SECTION 619,704	

PANEL DELINEATOR DETAIL

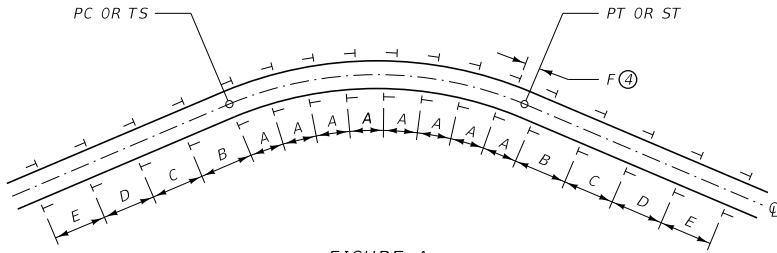


FIGURE A

SEE TABLE BELOW FOR SPACING VALUES

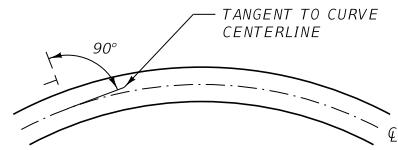


FIGURE B

HORIZONTAL CURVE SPACING TABLE					
RADIUS	SPACING ON CURVE		SPACING ON BOTH APPROACH TANGENTS		
	A	B	C	D	E
5730' & UP	300'	400'	400'	400'	400'
2865' - 5729'	225'	400'	400'	400'	400'
1910' - 2864'	160'	320'	400'	400'	400'
1433' - 1909'	130'	260'	400'	400'	400'
955' - 1432'	110'	220'	330'	400'	400'
716' - 954'	90'	185'	275'	400'	400'
478' - 715'	75'	150'	230'	300'	400'
287' - 477'	60'	125'	185'	300'	400'
0' - 286'	45'	90'	140'	275'	400'

METRIC HORIZONTAL CURVE SPACING TABLE					
RADIUS (m)	SPACING ON CURVE (m)		SPACING ON BOTH APPROACH TANGENTS (m)		
	A	B	C	D	E
1750 & UP	90	120	120	120	120
900 - 1749	65	120	120	120	120
600 - 899	50	95	120	120	120
450 - 599	40	75	120	120	120
300 - 449	35	65	100	120	120
200 - 299	25	55	80	120	120
150 - 199	20	45	70	90	120
100 - 149	20	35	55	90	120
0 - 99	15	25	40	80	120


NOTES:

- ① FURNISH RETRO-REFLECTIVE SHEETING ACCORDING TO THE STANDARD SPECIFICATIONS FOR RETRO-REFLECTIVE SHEETING B (HIGH INTENSITY). POSITION DELINEATOR FACES PERPENDICULAR TO THE TANGENT TO CURVE CENTERLINE AS SHOWN IN FIGURE B.
- ② MOUNT DELINEATORS ON METAL U-POSTS (1.12 LB./FT. [1.7 kg/m] MIN. AND 2 LB./FT. [3 kg/m] MAX.) WITH 3/16" [5] DIA. CADMIUM PLATED BOLT(S). DRILL OR PUNCH TWELVE 3/8" [9.5] MAXIMUM DIAMETER HOLES ON 1 INCH [25] CENTERS MEASURED FROM THE TOP OF THE POST. 1/4" [6.4] SQUARE HOLES MAY BE USED. IF SQUARE HOLES ARE USED, USE A LARGE HEADED BOLT OR AN APPROPRIATE WASHER. JAM THREADS AFTER TIGHTENING THE NUT TO PREVENT REMOVAL.
- ③ PLACE DELINEATORS AT A CONSTANT CLEARANCE DISTANCE FROM THE EDGE OF THE PAVEMENT EXCEPT WHERE GUARDRAIL OR OTHER OBSTRUCTIONS INTERFERE. ALIGN THE DELINEATORS WITH THE INSIDE EDGE OF THE OBSTRUCTION. CLEARANCE FOR DELINEATORS IS 6'-0" [1.8 m] ON INTERSTATE HIGHWAYS, 2'-0" TO 6'-0" [0.6 m TO 1.8 m] ON PRIMARY AND SECONDARY HIGHWAYS OR AS DETERMINED BY THE PROJECT MANAGER. THE STANDARD MOUNTING HEIGHT IS 4'-0" [1.2 m] TO THE TOP OF THE POST. SUPPLY POST LENGTHS TO MAINTAIN THE PROPER MOUNTING HEIGHT AND A MINIMUM OF 18" [0.45 m] EMBEDMENT.
- ④ SPACE DELINEATORS ACCORDING TO THE DISTANCES FOUND IN THE TABLE ABOVE OR AS SPECIFIED IN THE PLANS. IN FIGURE A, IF "F" IS GREATER THAN 20' [6 m] ADD ONE REGULAR DELINEATOR IN AT "A" SPACING. UNDER NORMAL SPACING, SHOULD A DELINEATOR FALL WITHIN A CROSSROAD OR APPROACH, IT MAY BE MOVED IN EITHER DIRECTION A DISTANCE NOT TO EXCEED ONE QUARTER OF THE NORMAL SPACING. ELIMINATE DELINEATORS STILL FALLING IN SUCH AREAS.
- ⑤ ALL DELINEATOR REFLECTORS HAVE 3/4" [18.75] CORNER RADII EXCEPT DESIGN "E".
- ⑥ MOUNT THE DELINEATOR REFLECTOR 1" [25] BELOW THE TOP OF THE METAL U-POST.
- ⑦ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.


DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 619-36
SECTION 619,704	
DELINATEATOR PLACEMENT DETAILS	
 MONTANA DEPARTMENT OF TRANSPORTATION	

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

TYPE 1
X3-2

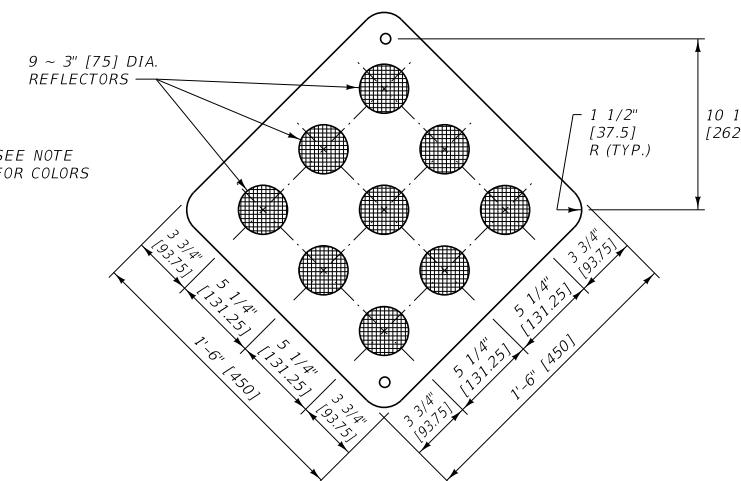


NOTE:
TYPE 1 OBJECT MARKERS HAVE YELLOW REFLECTORS ON A YELLOW OR BLACK BACKGROUND OR AN ALL YELLOW RETRO-REFLECTORIZED PANEL OF THE SAME SIZE. IF USED AS END OF ROAD MARKERS, TYPE 1 MARKERS ARE RETRO-REFLECTORIZED RED OR HAVE RED REFLECTORS ON A RED OR BLACK BACKGROUND.

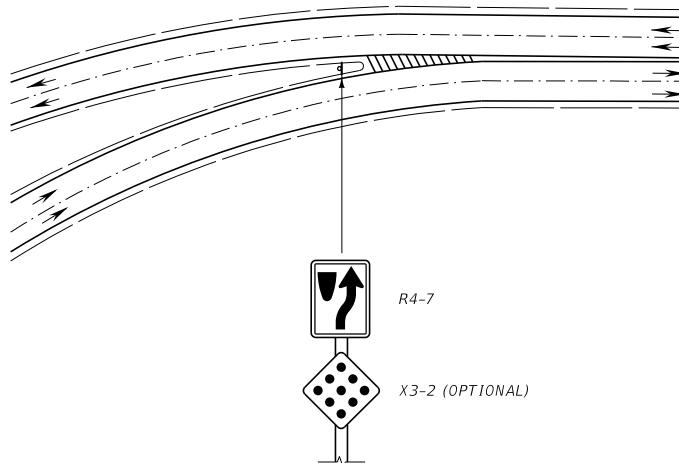


TYPICAL USE AND PLACEMENT
PLACEMENT OF X3-2 IS USED ONLY AS OPTIONAL TO ENHANCE TARGET VALUE WHEN NEEDED.

TYPE 2
X3-3

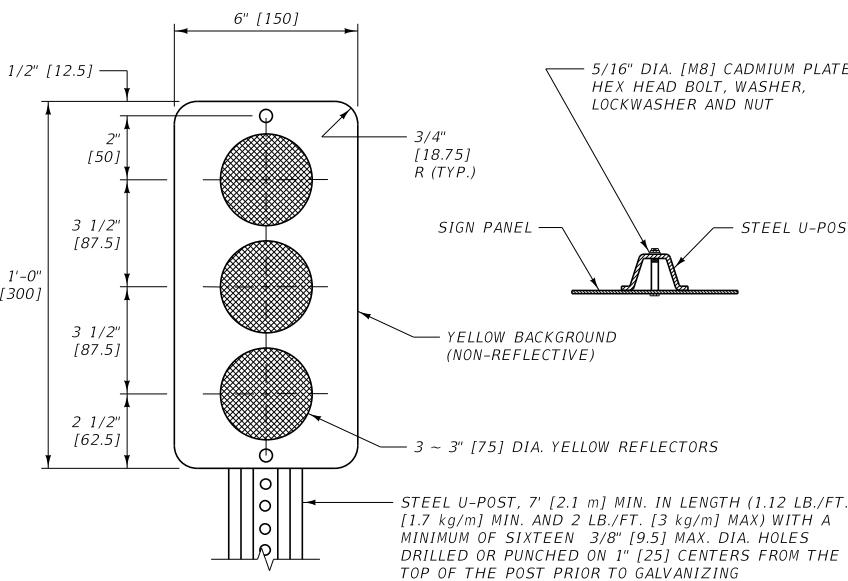

ALTERNATE DESIGN FOR TYPE 2 OBJECT MARKERS IS A YELLOW RETRO-REFLECTORIZED PANEL OF THE SAME SIZE.

TWO X3-3 PANELS MOUNTED BACK TO BACK ON STEEL U-POST

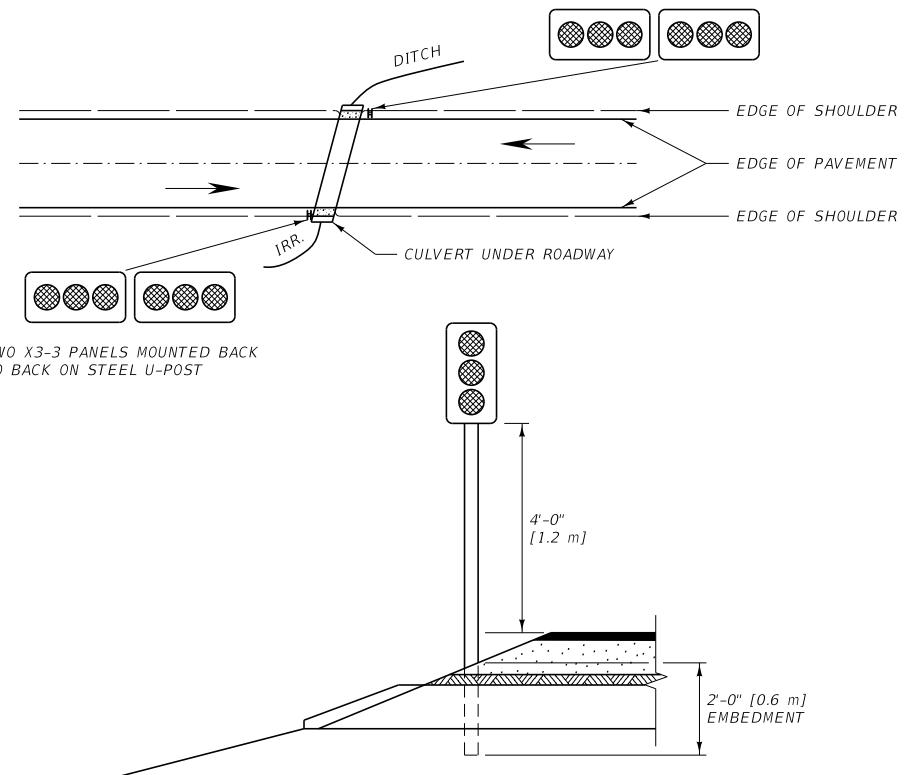



PLACE POST AND PANEL(S) SO THAT PANEL(S) ARE DIRECTLY ADJACENT TO INNER-MOST EDGE OF OBJECT NEAREST TRAVELED WAY.

TYPICAL USE AND PLACEMENT

GENERAL NOTES:

① USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

TYPE 3
OM-3
(OM-3L SHOWN)

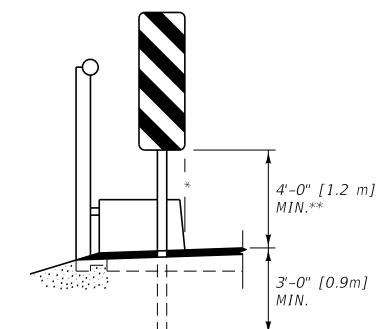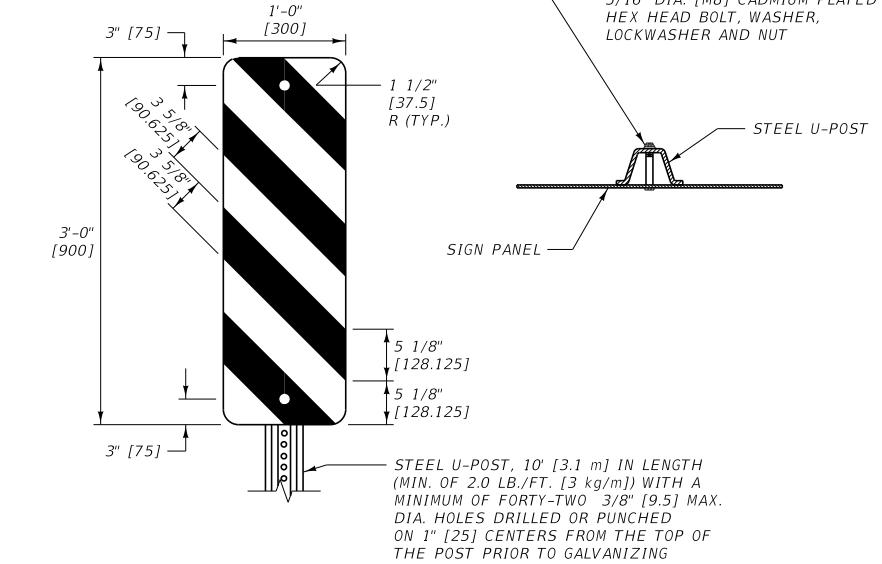


* PLACE POST AND PANEL SO THAT PANEL EDGE IS FLUSH WITH FACE OF OBJECT NEAREST TRAVELED WAY.

** WHEN MOUNTED 8'-0" [2.4 m] OR MORE FROM CURB OR SHOULDER, THE MOUNTING HEIGHT IS MEASURED FROM THE GROUND LINE INSTEAD OF THE EDGE OF PAVEMENT.

TYPICAL USE AND PLACEMENT


DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 619,704	DWG. NO. 619-38
OBJECT MARKER DESIGN AND PLACEMENT DETAILS FOR OBSTRUCTIONS ADJACENT TO OR WITHIN HIGHWAYS	

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

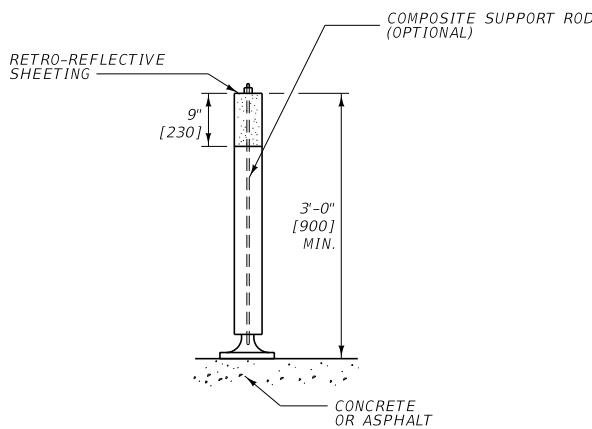


DETAILS ARE REPRESENTATIVE ONLY.
ACTUAL DESIGN USED/SPECIFIED MAY
VARY (SEE PLANS).

FLEXIBLE SURFACE-MOUNTED
DELINEATORS

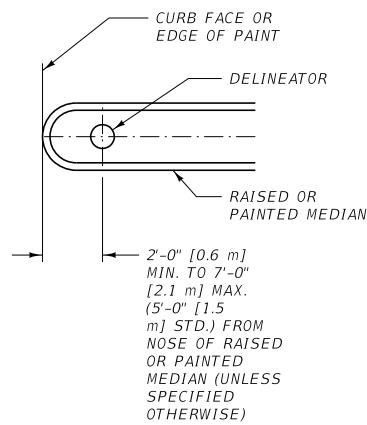

TYPICAL USE AND PLACEMENT

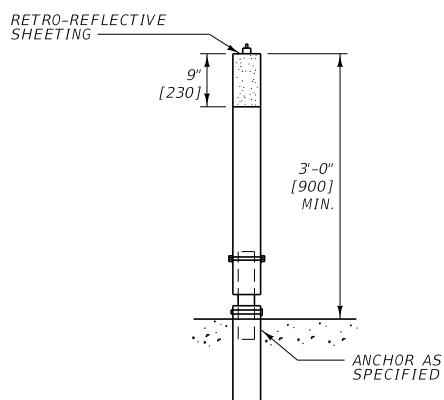

DETAILS ARE REPRESENTATIVE ONLY.
ACTUAL DESIGN USED/SPECIFIED MAY
VARY (SEE PLANS).

FLEXIBLE DRIVABLE
DELINEATORS

NOTES:


- ① MOUNT OR DRIVE FLEXIBLE DELINEATORS TO THE MANUFACTURER'S SPECIFICATIONS.
- ② THE EXACT LOCATION AND PLACEMENT OF THE FLEXIBLE DELINEATORS ARE SHOWN IN THE SIGNING PLANS.
- ③ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 619, 704	DWG. NO. 619-40
FLEXIBLE DELINEATORS	
 MONTANA DEPARTMENT OF TRANSPORTATION	


UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

BI BARRICADE


B(1)-L SHOWN

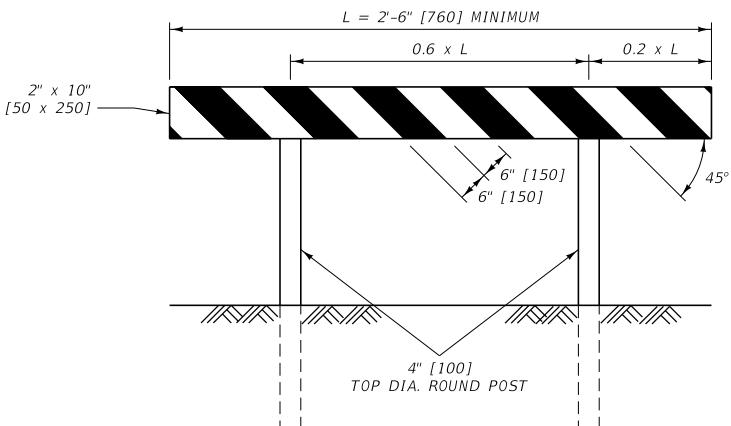


FRONT VIEW

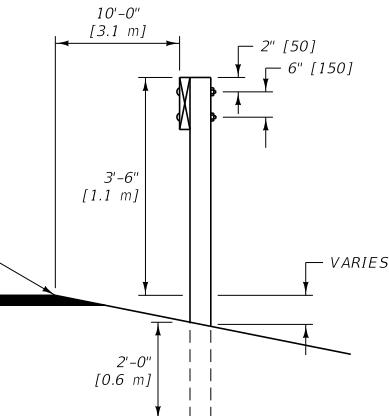

RIGHT SIDE VIEW

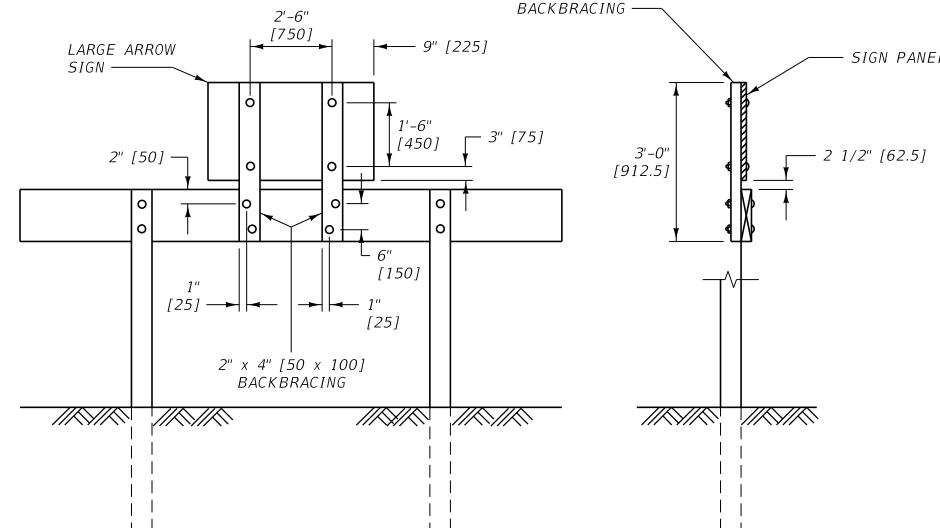


REAR VIEW

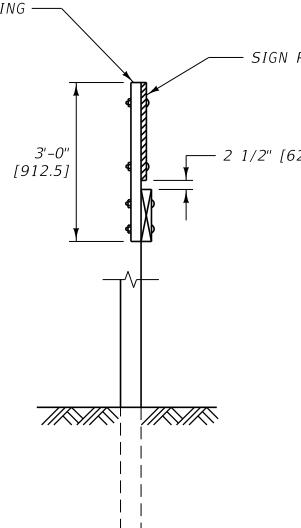


LEFT SIDE VIEW

BARRICADE DETAILS

BIII BARRICADE

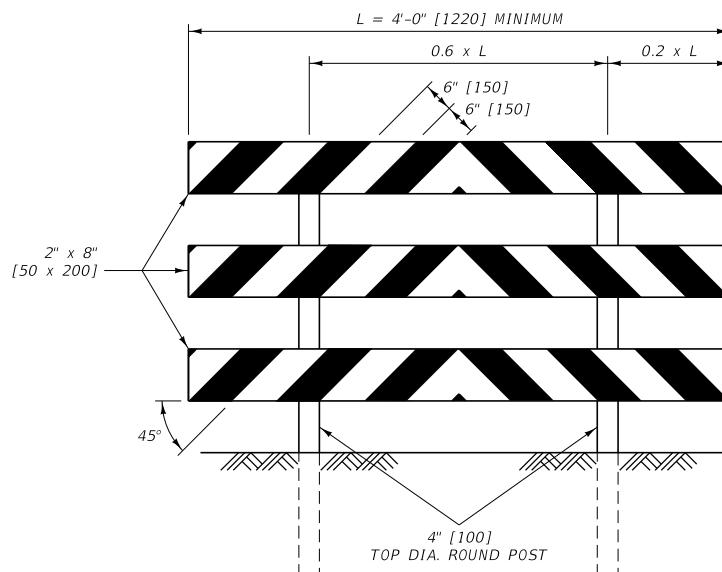


FRONT VIEW

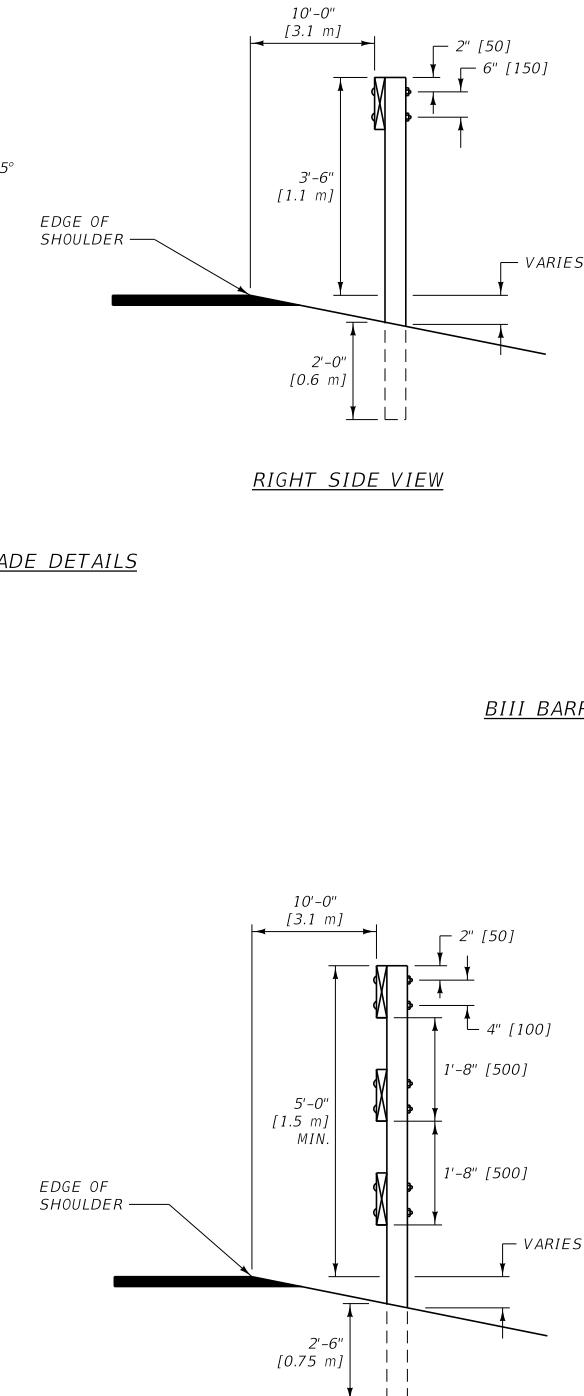


RIGHT SIDE VIEW

BARRICADE DETAILS

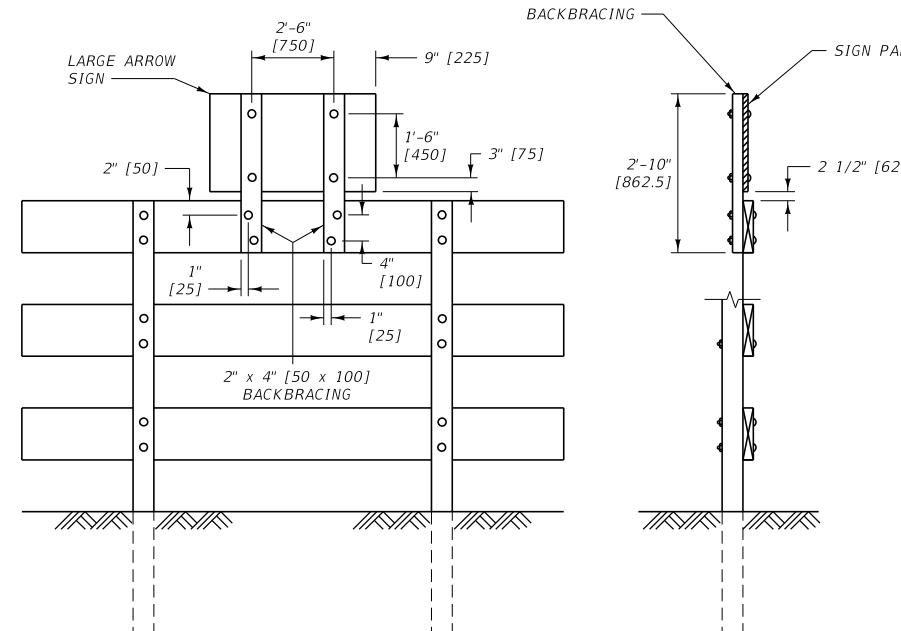

REAR VIEW

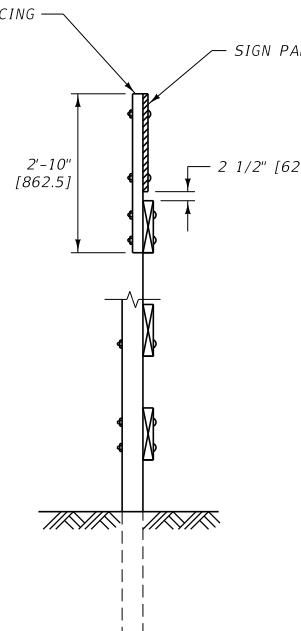




LEFT SIDE VIEW

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 619-42
SECTION 619, 704, 710

PERMANENT BARRICADE
DESIGN DETAILS

MDT MONTANA DEPARTMENT
OF TRANSPORTATION

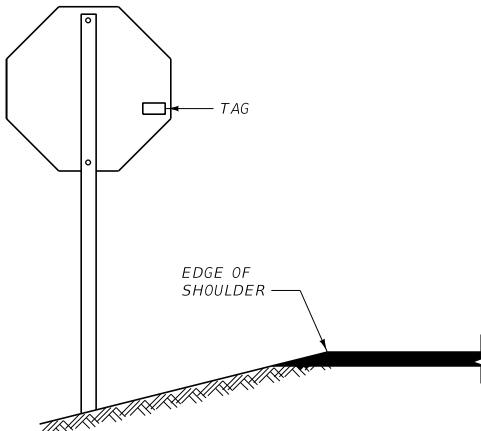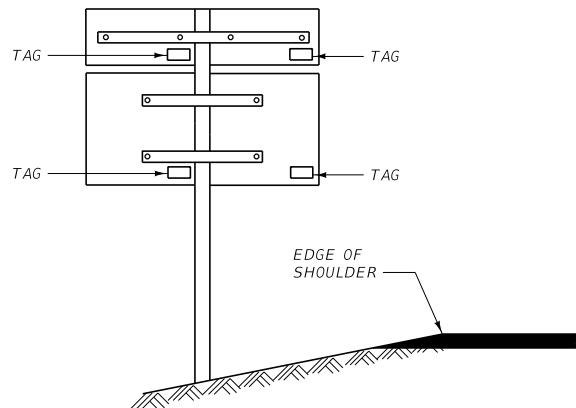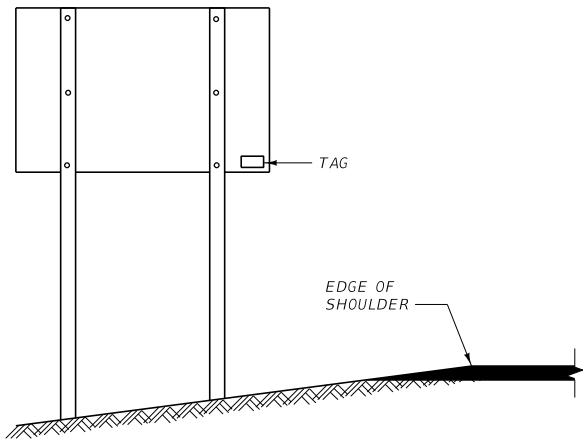

PLACEMENT DETAILS

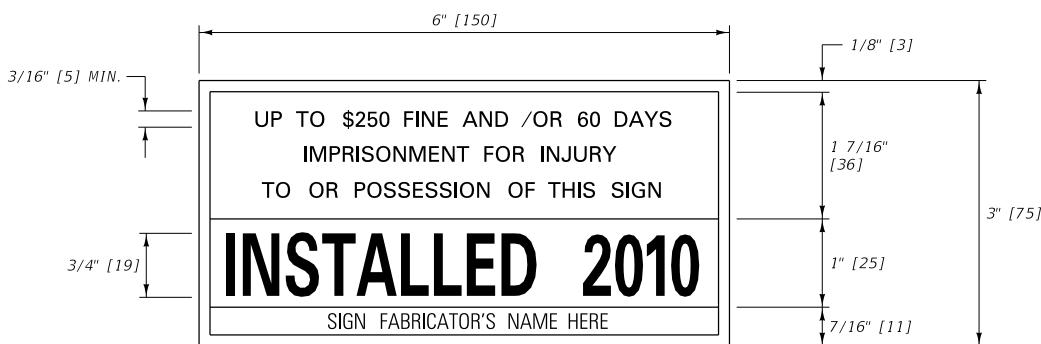

NOTES:

- ① FURNISH AND PLACE INSTALLATION DATE TAGS ON ALL SIGNS PRIOR TO FINAL ACCEPTANCE OF THE PROJECT.
- ② THE TAGS DISPLAY THE YEARS IN WHICH THE SIGNS WERE INSTALLED. SEE THE COLOR SEQUENCE TABLE SHOWN ON THIS DRAWING FOR THE APPROPRIATE COLORS. DATE TAGS ARE TO BE RETRO-REFLECTIVE.
- ③ PLACE A TAG ON THE BACK OF EACH SIGN, LOCATED NEAR THE LOWER CORNER OF THE SIGN NEAREST THE EDGE OF ROADWAY, TO BE VISIBLE FROM THE ROADWAY AS SHOWN IN THE EXAMPLES ABOVE.
- ④ PLACE TAGS ON ANY NEW SIGN INSTALLED IN THE FIELD AS ROUTINE MAINTENANCE BY MDT FORCES. MAINTENANCE DESIGN DATE TAGS CAN BE ORDERED FROM THE SIGN SHOP IN HELENA.
- ⑤ USE HARDWARE MEETING THE REQUIREMENTS OF SECTION 704.

DATE TAG DETAIL




DATE TAG COLOR SEQUENCE

DATE TAG COLOR CORRESPONDS TO THE LAST DIGIT OF THE INSTALLATION YEAR AS FOLLOWS:




0 - YELLOW	5 - RED
1 - WHITE	6 - PURPLE
2 - LIGHT BLUE	7 - ORANGE
3 - GOLD	8 - BLUE
4 - LIGHT GREEN	9 - GREEN

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 619, 704	DWG. NO. 619-44
INSTALLATION DATE TAGS	
MDT	MONTANA DEPARTMENT OF TRANSPORTATION

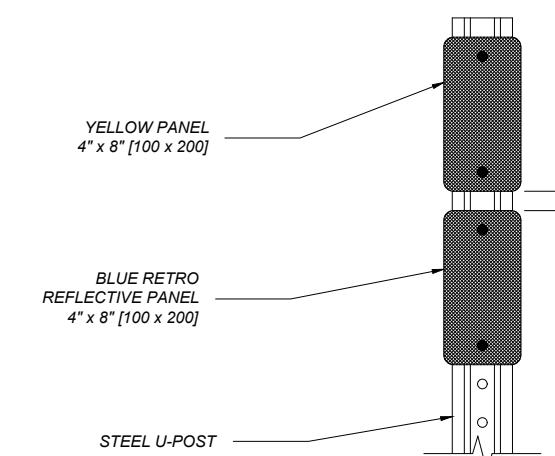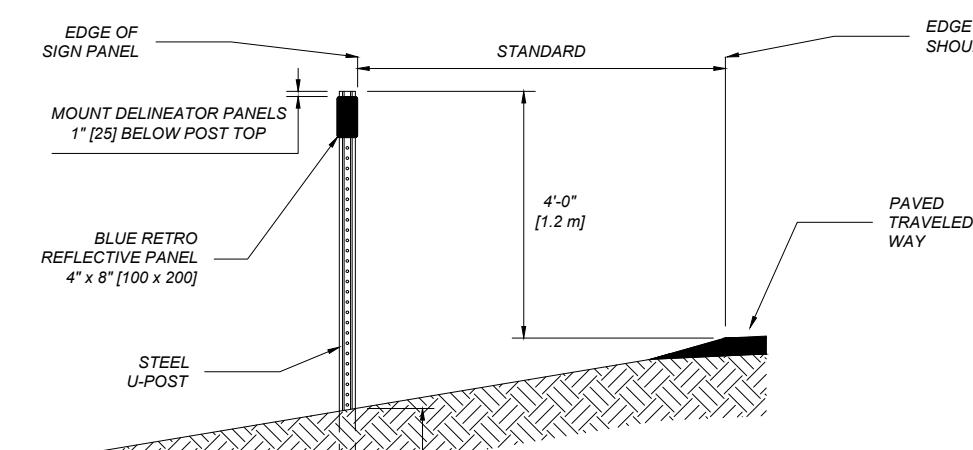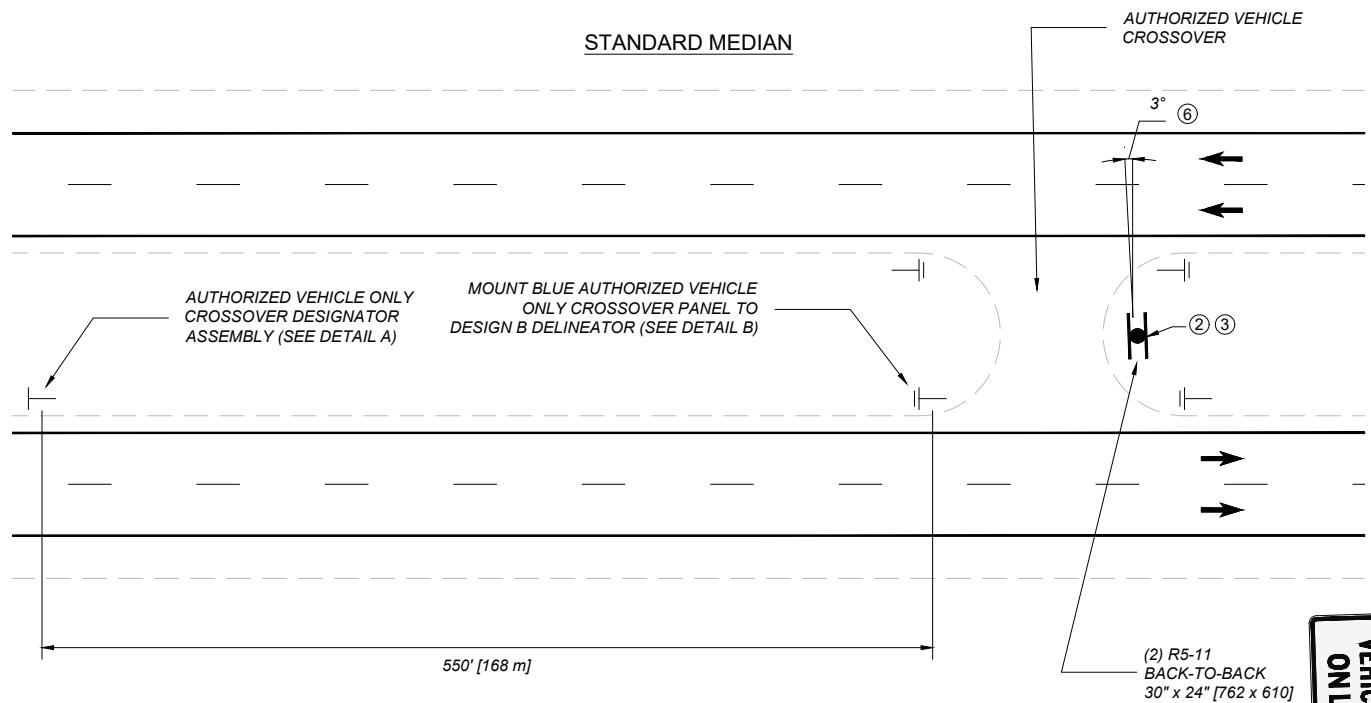

① DETAIL B

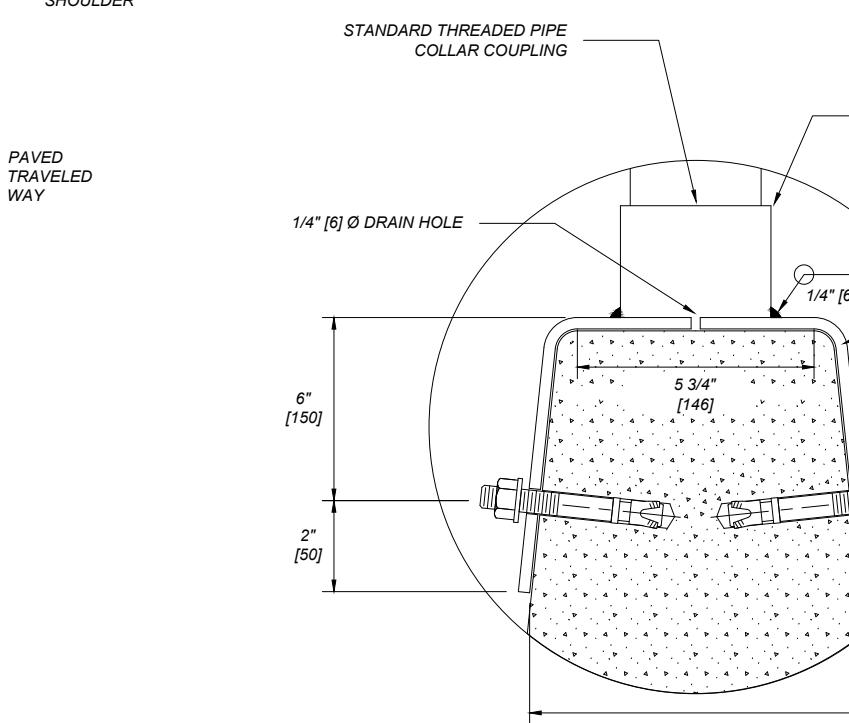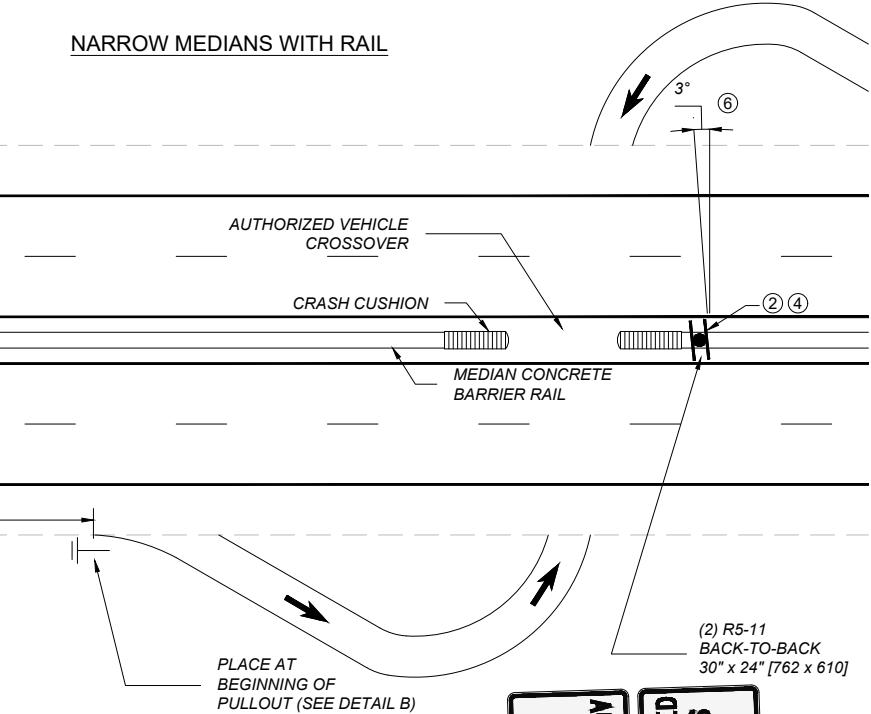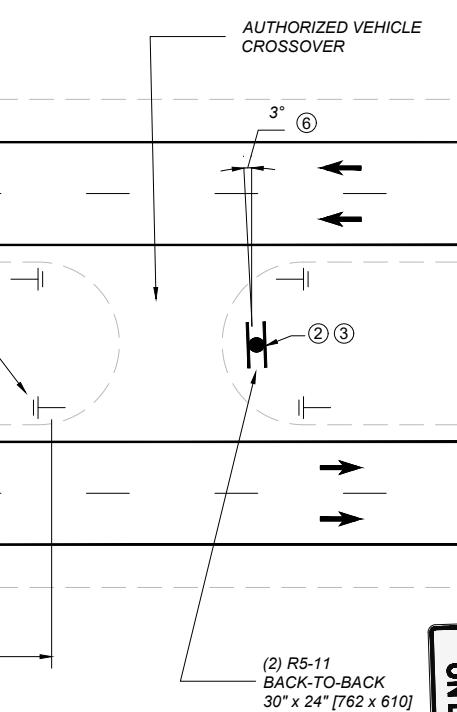

NOTES:

- ① APPLY THIS DETAIL TO BOTH SIDES OF THE INTERSTATE ON EACH APPROACH TO AUTHORIZED VEHICLE CROSSOVERS.
- ② FOR MEDIAN WIDTHS OF 76' [23 m] OR LESS, MOUNT THE R5-11 SIGNS BACK-TO-BACK. INSTALL AT THE CENTERLINE OF THE MEDIAN AND ON THE SIDE OF THE U-TURN AWAY FROM THE NEAREST INTERCHANGE.
- ③ FOR MEDIAN WIDTHS GREATER THAN 76' [23 m], INSTALL THE R5-11 SIGNS SEPARATELY ON BOTH SIDES OF THE U-TURN AT CLEARANCES SPECIFIED IN THE SIGN LOCATION AND SPECIFICATIONS.
- ④ FOR OPENINGS THROUGH MEDIAN GUARD RAILS, INSTALL THE SIGN POST IN LINE WITH THE GUARD RAIL POSTS.
- ⑤ AUTHORIZED VEHICLES SIGN MUST BE INSTALLED ON STANDARD HEIGHT BARRIER. TRUCK HEIGHT BARRIER RAIL WILL IMPEDE SIGHT DISTANCE.
- ⑥ AUTHORIZED VEHICLE SIGN MUST BE INSTALLED WITH A 3° SKEW. FOLLOW MANUFACTURER'S INSTALLATION INSTRUCTIONS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.





DETAILED DRAWINGS	
REFERENCE STANDARD SPEC. SECTION 619, 704	DWG. NO. 619-46

AUTHORIZED VEHICLE CROSSOVER DESIGNATOR

EFFECTIVE: JUN 26, 2025



STDDRD619046.DWG

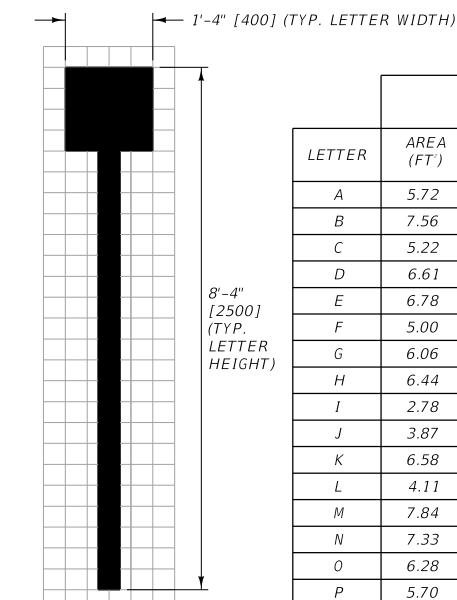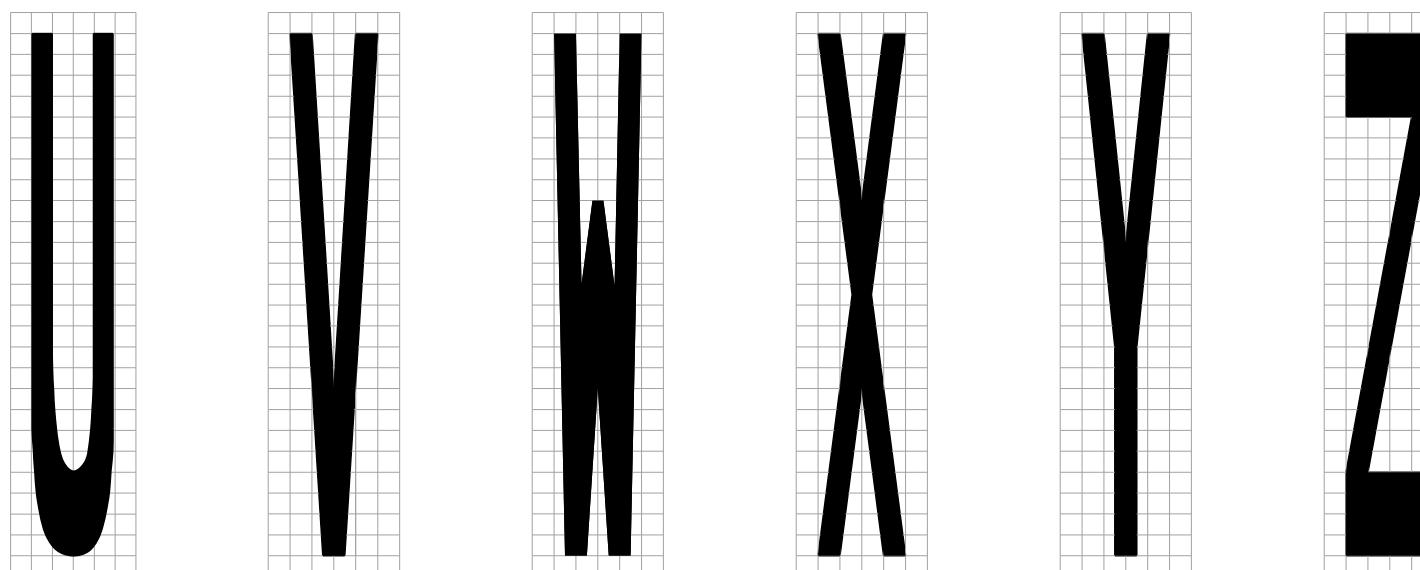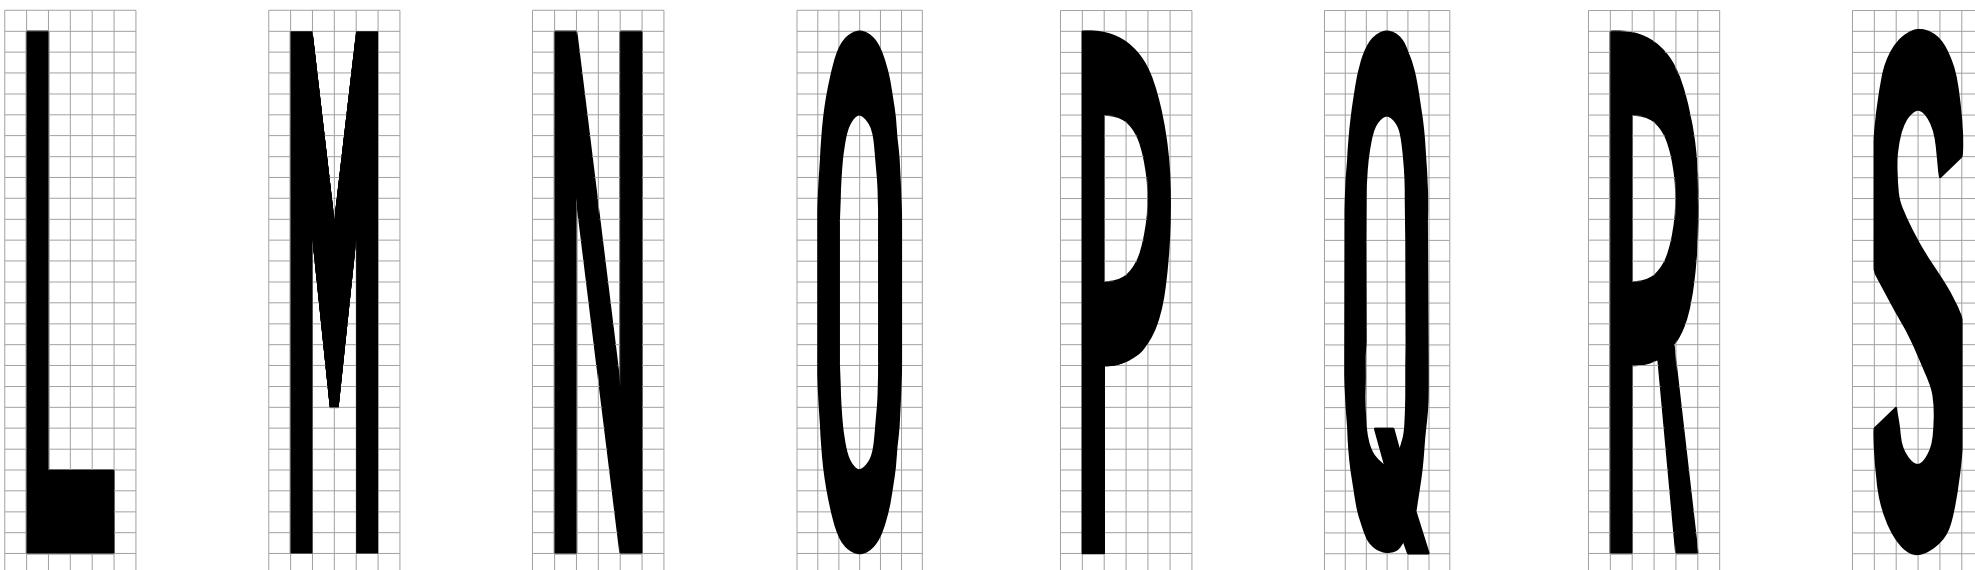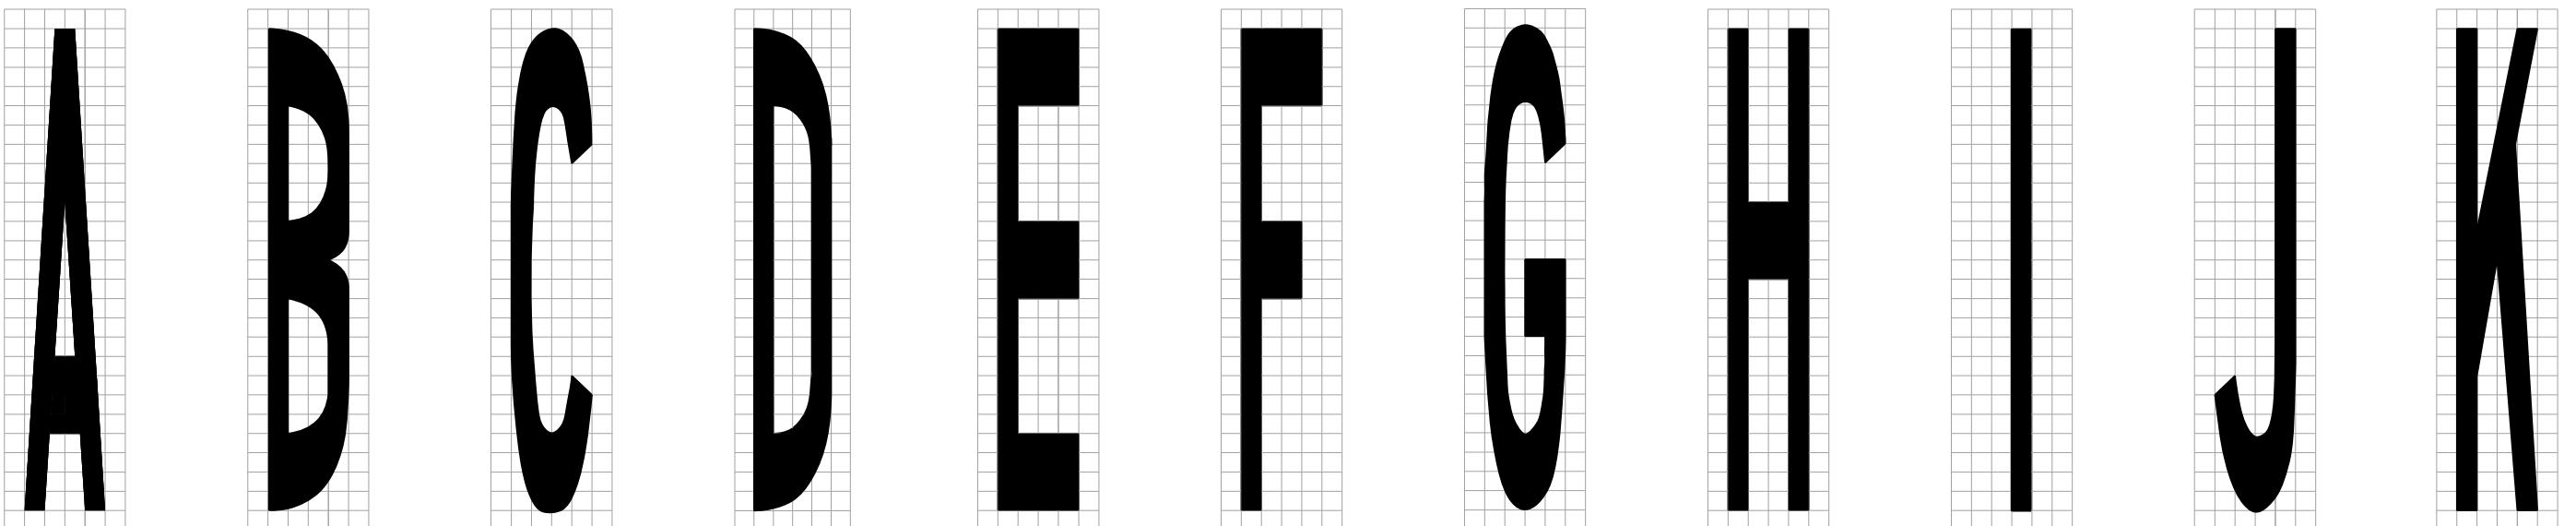











NOTES:

- ① EACH SQUARE EQUALS 4 INCHES [100 mm].
- ② ALL PAVEMENT MARKINGS ARE TO CONFORM TO THE REQUIREMENTS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" AND "STANDARD HIGHWAY SIGNS" PUBLICATIONS, FROM THE FEDERAL HIGHWAY ADMINISTRATION.
- ③ ALL LETTERS ARE TO BE WHITE.
- ④ USE THE SIZES OF LETTERS SHOWN UNLESS SMALLER OR LARGER SIZES ARE NEEDED. THE SIZE OF LETTERS MAY BE SCALED PROPORTIONATELY DOWN BY APPROXIMATELY ONE-THIRD FOR LOW-SPEED, URBAN CONDITIONS. THE MINIMUM HEIGHT OF ANY LETTER IS 6.0 FEET [1.8 m]. LARGER SIZES MAY BE USED FOR ABOVE AVERAGE SPEEDS AND OTHER CRITICAL LOCATIONS.
- ⑤ DO NOT EXCEED MORE THAN ONE LANE IN WIDTH FOR ANY PAVEMENT MARKINGS EXCEPT IN THE CASE OF THE WORD "SCHOOL". SEE DTL. DWG. NO. 620-10 FOR MORE INFORMATION.
- ⑥ FOR MULTIPLE LINES OF INFORMATION, PLACE THE INFORMATION SO IT READS IN THE DIRECTION OF TRAVEL. DO NOT EXCEED THREE LINES OF INFORMATION AT ANY LOCATION.
- ⑦ WHEN WORDS AND SYMBOLS ARE USED IN COMBINATION, SPACE THEM AT LEAST FOUR TIMES THE HEIGHT OF CHARACTERS FOR LOW-SPEED ROADS, BUT NOT MORE THAN TEN TIMES THE HEIGHT OF THE CHARACTERS UNDER ANY CONDITION.
- ⑧ ON NARROW, LOW-SPEED BICYCLE PATHS, SIZES OF LETTERS MAY BE SMALLER THAN SUGGESTED, BUT TO THE RELATIVE SCALE.
- ⑨ QUANTITIES ARE BASED ON THE SIZES OF PAVEMENT MARKINGS SHOWN AND ARE FOR ESTIMATING PURPOSES ONLY.
- ⑩ PAINT VOLUMES ASSUME A 17 MIL [0.432 mm] THICKNESS. EPOXY VOLUMES ASSUME A 22 MIL [0.559 mm] THICKNESS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 620	DWG. NO. 620-00

PAVEMENT MARKINGS (LETTERS)

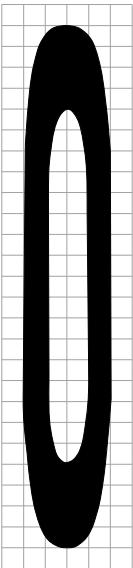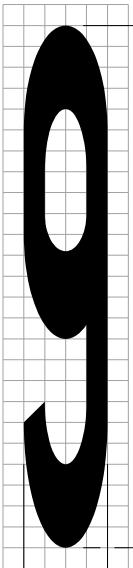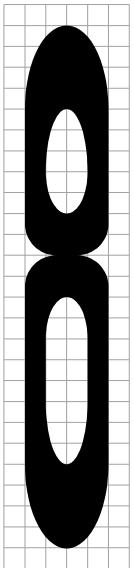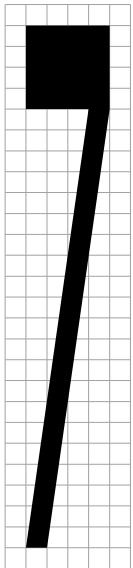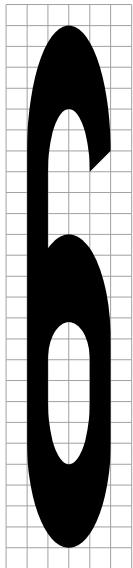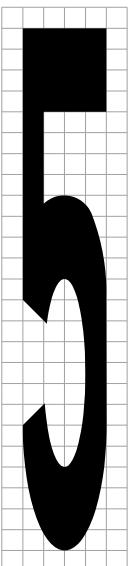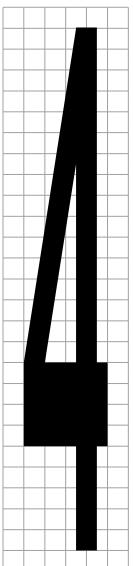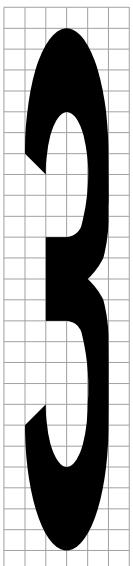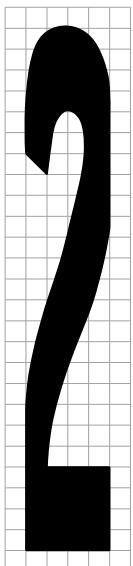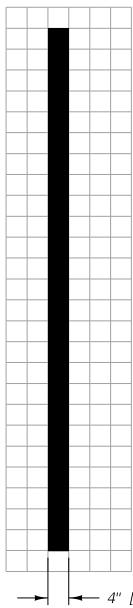

NOTES:

- ① EACH SQUARE EQUALS 4 INCHES [100].
- ② ALL PAVEMENT MARKINGS ARE TO CONFORM TO THE REQUIREMENTS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" AND "STANDARD HIGHWAY SIGNS" PUBLICATIONS, FROM THE FEDERAL HIGHWAY ADMINISTRATION.
- ③ ALL NUMBERS ARE TO BE WHITE.
- ④ USE THE SIZES OF NUMBERS SHOWN UNLESS SMALLER OR LARGER SIZES ARE NEEDED. THE SIZE OF NUMBERS MAY BE SCALED PROPORTIONATELY DOWN BY APPROXIMATELY ONE-THIRD FOR LOW-SPEED, URBAN CONDITIONS. THE MINIMUM HEIGHT OF ANY NUMBER IS 6 FEET [1.8 m]. LARGER SIZES MAY BE USED FOR ABOVE AVERAGE SPEEDS AND OTHER CRITICAL LOCATIONS.
- ⑤ DO NOT EXCEED MORE THAN ONE LANE IN WIDTH FOR ANY PAVEMENT MARKINGS EXCEPT IN THE CASE OF THE WORD "SCHOOL". SEE DTL. DWG. NO. 620-10 FOR MORE INFORMATION.
- ⑥ FOR MULTIPLE LINES OF INFORMATION, PLACE THE INFORMATION SO IT READS IN THE DIRECTION OF TRAVEL. DO NOT EXCEED THREE LINES OF INFORMATION AT ANY LOCATION.
- ⑦ WHEN WORDS AND SYMBOLS ARE USED IN COMBINATION, SPACE THEM AT LEAST FOUR TIMES THE HEIGHT OF CHARACTERS FOR LOW-SPEED ROADS, BUT NOT MORE THAN TEN TIMES THE HEIGHT OF THE CHARACTERS UNDER ANY CONDITION.
- ⑧ ON NARROW, LOW-SPEED BICYCLE PATHS, SIZES OF NUMBERS MAY BE SMALLER THAN SUGGESTED, BUT TO THE RELATIVE SCALE.
- ⑨ QUANTITIES ARE BASED ON THE SIZES OF PAVEMENT MARKINGS SHOWN AND ARE FOR ESTIMATING PURPOSES ONLY.
- ⑩ PAINT VOLUMES ASSUME A 17 MIL [0.432] THICKNESS. EPOXY VOLUMES ASSUME A 22 MIL [0.559] THICKNESS.

QUANTITIES			
#	AREA (FT ²)	PAINT (GAL.)	EPOXY (GAL.)
1	2.78	0.03	0.04
2	6.76	0.07	0.09
3	5.97	0.06	0.08
4	5.54	0.06	0.08
5	6.86	0.07	0.09
6	6.94	0.07	0.10
7	4.11	0.04	0.06
8	7.74	0.08	0.11
9	6.94	0.07	0.10
0	7.11	0.08	0.10

METRIC QUANTITIES		
#	AREA (m ²)	PAINT (liters)
1	0.25	0.11
2	0.61	0.26
3	0.54	0.23
4	0.50	0.22
5	0.62	0.27
6	0.62	0.27
7	0.37	0.16
8	0.70	0.30
9	0.62	0.27
0	0.62	0.27

DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	620-05
SECTION 620	
PAVEMENT MARKINGS (NUMBERS)	
MDT MONTANA DEPARTMENT OF TRANSPORTATION	

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

STOP

8'-4" [2500]

6'-4" [1900]

ONLY

8'-4" [2500]

6'-0" [1800]

RIGHT

8'-4" [2500]

7'-0" [2100]

LANE

8'-4" [2500]

6'-4" [1900]

LEFT

8'-4" [2500]

6'-4" [1900]

TURN

8'-4" [2500]

6'-4" [1900]

SCHOOL

10.00' [3000]

11.60' [3480]

NOTE: EACH SQUARE EQUALS 0.40' [120]

NOTES:

- ① UNLESS OTHERWISE NOTED EACH SQUARE EQUALS 4 [100] INCHES.
- ② ALL PAVEMENT MARKINGS ARE TO CONFORM TO THE REQUIREMENTS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" AND "STANDARD HIGHWAY SIGNS" PUBLICATIONS, FROM THE FEDERAL HIGHWAY ADMINISTRATION.
- ③ ALL WORDS ARE TO BE WHITE.
- ④ USE THE SIZES OF WORDS SHOWN UNLESS SMALLER OR LARGER SIZES ARE NEEDED. THE SIZE OF WORDS MAY BE SCALED PROPORTIONATELY DOWN BY APPROXIMATELY ONE-THIRD FOR LOW-SPEED, URBAN CONDITIONS. THE MINIMUM HEIGHT OF ANY WORD IS 6 FEET [1.8 m]. LARGER SIZES MAY BE USED FOR ABOVE AVERAGE SPEEDS AND OTHER CRITICAL LOCATIONS.
- ⑤ DO NOT EXCEED MORE THAN ONE LANE IN WIDTH FOR ANY PAVEMENT MARKINGS, EXCEPT IN THE CASE OF THE WORD "SCHOOL". WHEN "SCHOOL" IS EXTENDED TO THE WIDTH OF TWO LANES, SCALE THE WORD UP PROPORTIONATELY TO FIT THE APPLICATION WIDTH.
- ⑥ FOR MULTIPLE LINES OF INFORMATION, PLACE THE INFORMATION SO IT READS IN THE DIRECTION OF TRAVEL. DO NOT EXCEED THREE LINES OF INFORMATION AT ANY LOCATION.
- ⑦ WHEN WORDS AND SYMBOLS ARE USED IN COMBINATION, SPACE THEM AT LEAST FOUR TIMES THE HEIGHT OF CHARACTERS FOR LOW-SPEED ROADS, BUT NOT MORE THAN TEN TIMES THE HEIGHT OF THE CHARACTERS UNDER ANY CONDITION.
- ⑧ ON NARROW, LOW-SPEED BICYCLE PATHS, SIZES OF LETTERS MAY BE SMALLER THAN SUGGESTED, BUT TO THE RELATIVE SCALE.
- ⑨ QUANTITIES ARE BASED ON THE SIZES OF PAVEMENT MARKINGS SHOWN AND ARE FOR ESTIMATING PURPOSES ONLY.
- ⑩ PAINT VOLUMES ASSUME A 17 MIL [0.432] THICKNESS. EPOXY VOLUMES ASSUME A 22 MIL [0.559] THICKNESS.

QUANTITIES			
WORD	AREA (FT ²)	PAINT (GAL.)	EPOXY (GAL.)
STOP	22.77	0.24	0.31
ONLY	21.89	0.23	0.30
RIGHT	26.05	0.28	0.36
LANE	23.94	0.25	0.33
LEFT	20.00	0.21	0.27
TURN	23.98	0.25	0.33
SCHOOL	48.14	0.51	0.66


METRIC QUANTITIES			
WORD	AREA (m ²)	PAINT (liters)	EPOXY (liters)
STOP	2.05	0.89	1.15
ONLY	1.98	0.85	1.11
RIGHT	2.34	1.01	1.31
LANE	2.16	0.93	1.21
LEFT	1.80	0.78	1.01
TURN	2.16	0.93	1.21
SCHOOL	4.54	1.96	2.54

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 620	DWG. NO. 620-10
PAVEMENT MARKINGS (WORDS)	
MDT	MONTANA DEPARTMENT OF TRANSPORTATION


DIRECTIONAL ARROW FOR BIKE LANE

AREA = 4.56 FT² [0.41 m²]
P = 0.05 GAL. [0.18 L]
E = 0.06 GAL. [0.23 L]
(1 SQUARE = 4" [100])

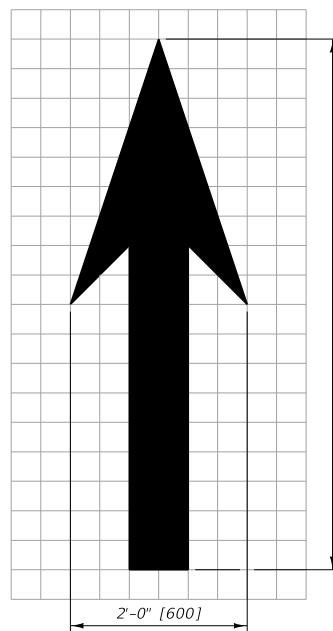


COMBINED ARROW

AREA = 25.99 FT² [2.54 m²]
P = 0.28 GAL. [1.10 L]
E = 0.36 GAL. [1.42 L]
(1 SQUARE = 0.32" [100])

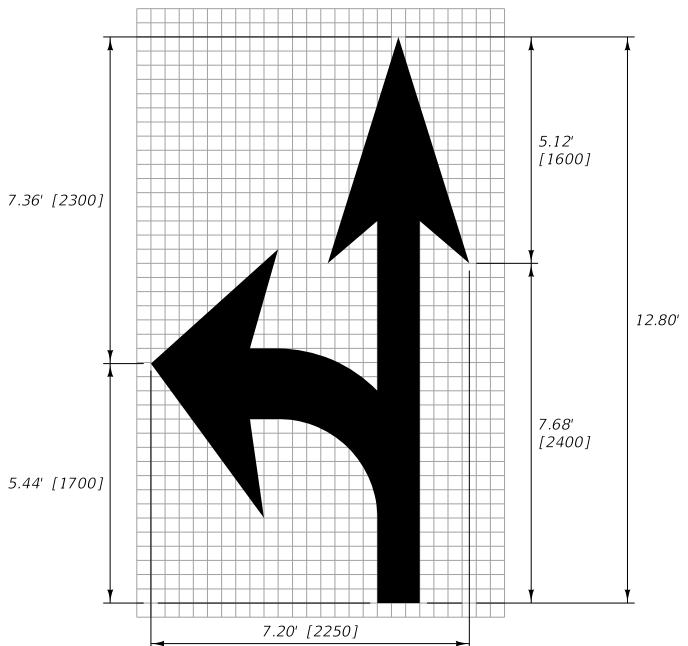


18' [5.5m] LANE-REDUCTION ARROW (RIGHT)

(FOR LEFT LANE, USE MIRROR IMAGE)
AREA = 38.63 FT² [3.83 m²]
P = 0.41 GAL. [1.65 L]
E = 0.53 GAL. [2.14 L]
(1 SQUARE = 8" [200])

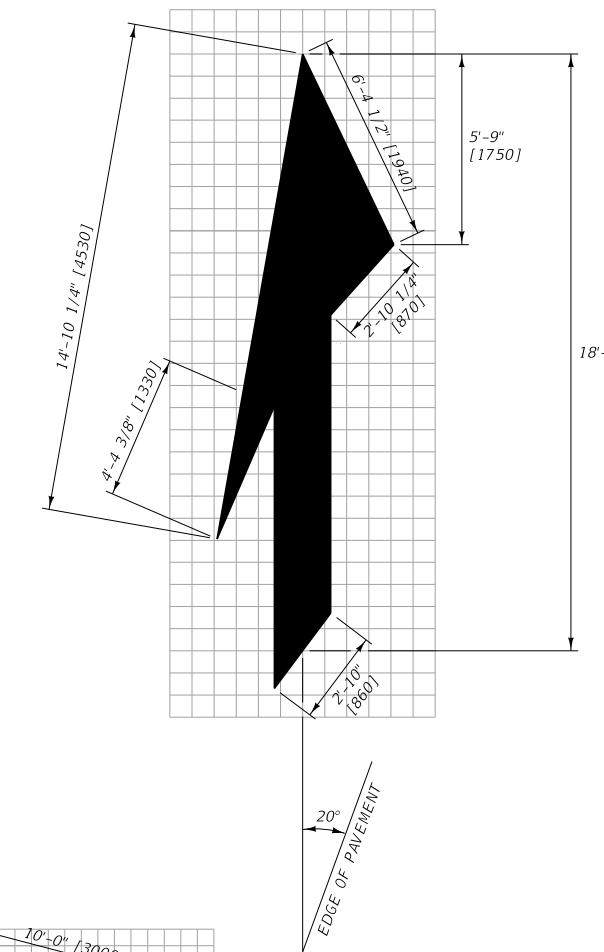


STRAIGHT ARROW

AREA = 11.42 FT² [1.12 m²]
P = 0.12 GAL. [0.48 L]
E = 0.16 GAL. [0.63 L]
(1 SQUARE = 0.32" [100])

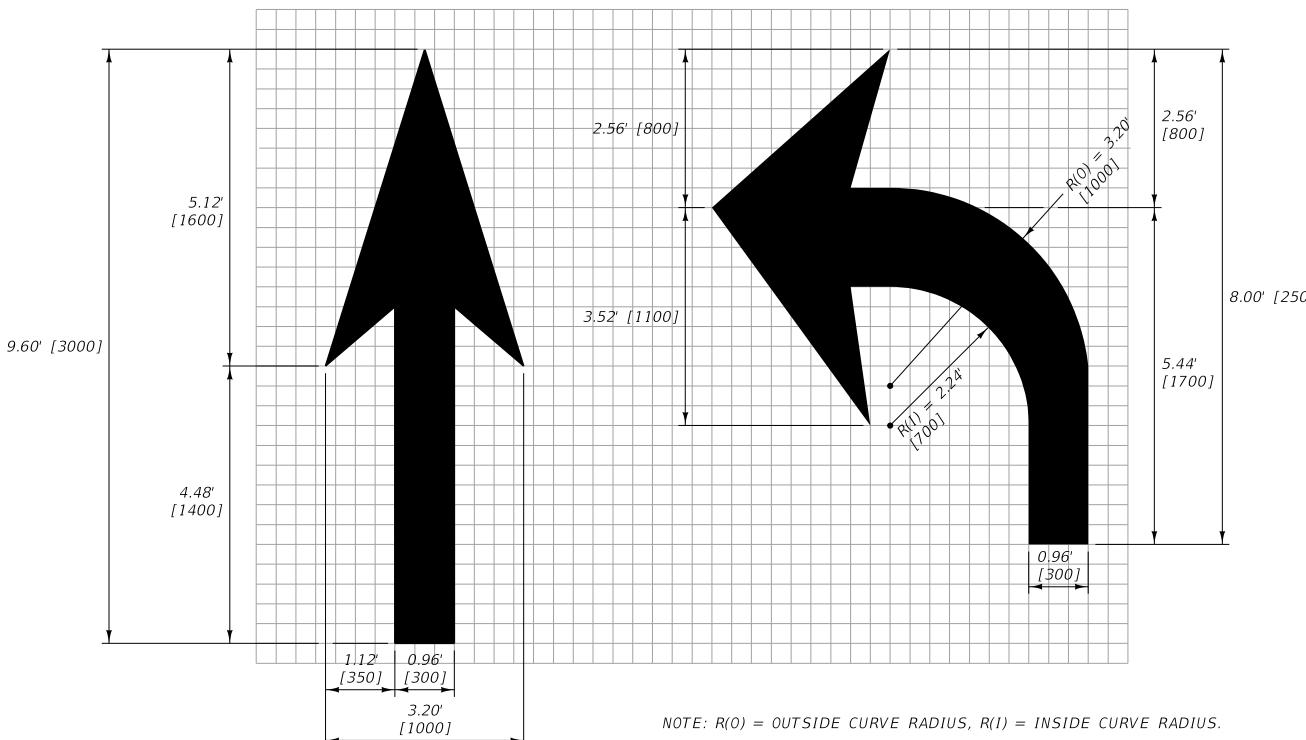


TURN ARROW

AREA = 15.57 FT² [1.52 m²]
P = 0.16 GAL. [0.66 L]
E = 0.21 GAL. [0.85 L]
(1 SQUARE = 0.32" [100])

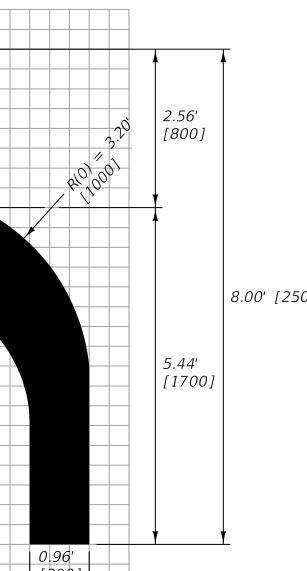

FREEWAY AND RAMP ARROW

AREA = 23.64 FT² [2.15 m²]
P = 0.25 GAL. [0.93 L]
E = 0.32 GAL. [1.20 L]
(1 SQUARE = 8" [200])

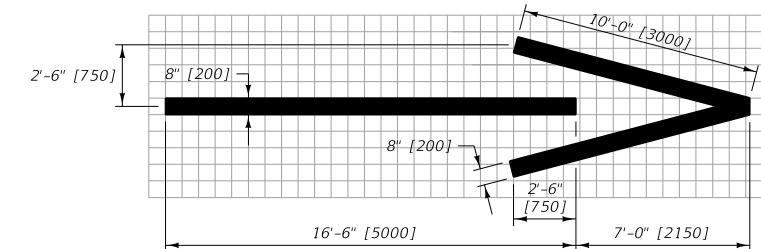


NOTES:

- ① ALL PAVEMENT MARKINGS ARE TO CONFORM TO THE REQUIREMENTS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" AND "STANDARD HIGHWAY SIGNS" PUBLICATIONS, FROM THE FEDERAL HIGHWAY ADMINISTRATION.
- ② ALL ARROWS ARE TO BE WHITE.
- ③ USE THE SIZES OF ARROWS SHOWN UNLESS SMALLER OR LARGER SIZES ARE NEEDED. THE SIZE OF ARROWS MAY BE SCALED PROPORTIONATELY DOWN BY APPROXIMATELY ONE-THIRD FOR LOW-SPEED, URBAN CONDITIONS. LARGER SIZES MAY BE USED FOR ABOVE AVERAGE SPEEDS AND OTHER CRITICAL LOCATIONS.
- ④ DO NOT EXCEED MORE THAN ONE LANE IN WIDTH FOR ANY PAVEMENT MARKINGS EXCEPT IN THE CASE OF THE WORD "SCHOOL". SEE DTL. DWG. NO. 620-10 FOR MORE INFORMATION.
- ⑤ WHEN WORDS AND SYMBOLS ARE USED IN COMBINATION, SPACE THEM AT LEAST FOUR TIMES THE HEIGHT OF CHARACTERS FOR LOW-SPEED ROADS, BUT NOT MORE THAN TEN TIMES THE HEIGHT OF THE CHARACTERS UNDER ANY CONDITION.
- ⑥ QUANTITIES ARE BASED ON THE SIZES OF PAVEMENT MARKINGS SHOWN AND ARE FOR ESTIMATING PURPOSES ONLY.
- ⑦ (P) - PAINT VOLUMES ASSUME A 17 MIL [0.432] THICKNESS.
(E) - EPOXY VOLUMES ASSUME A 22 MIL [0.559] THICKNESS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 620-15
SECTION 620

PAVEMENT MARKINGS
(ARROWS)

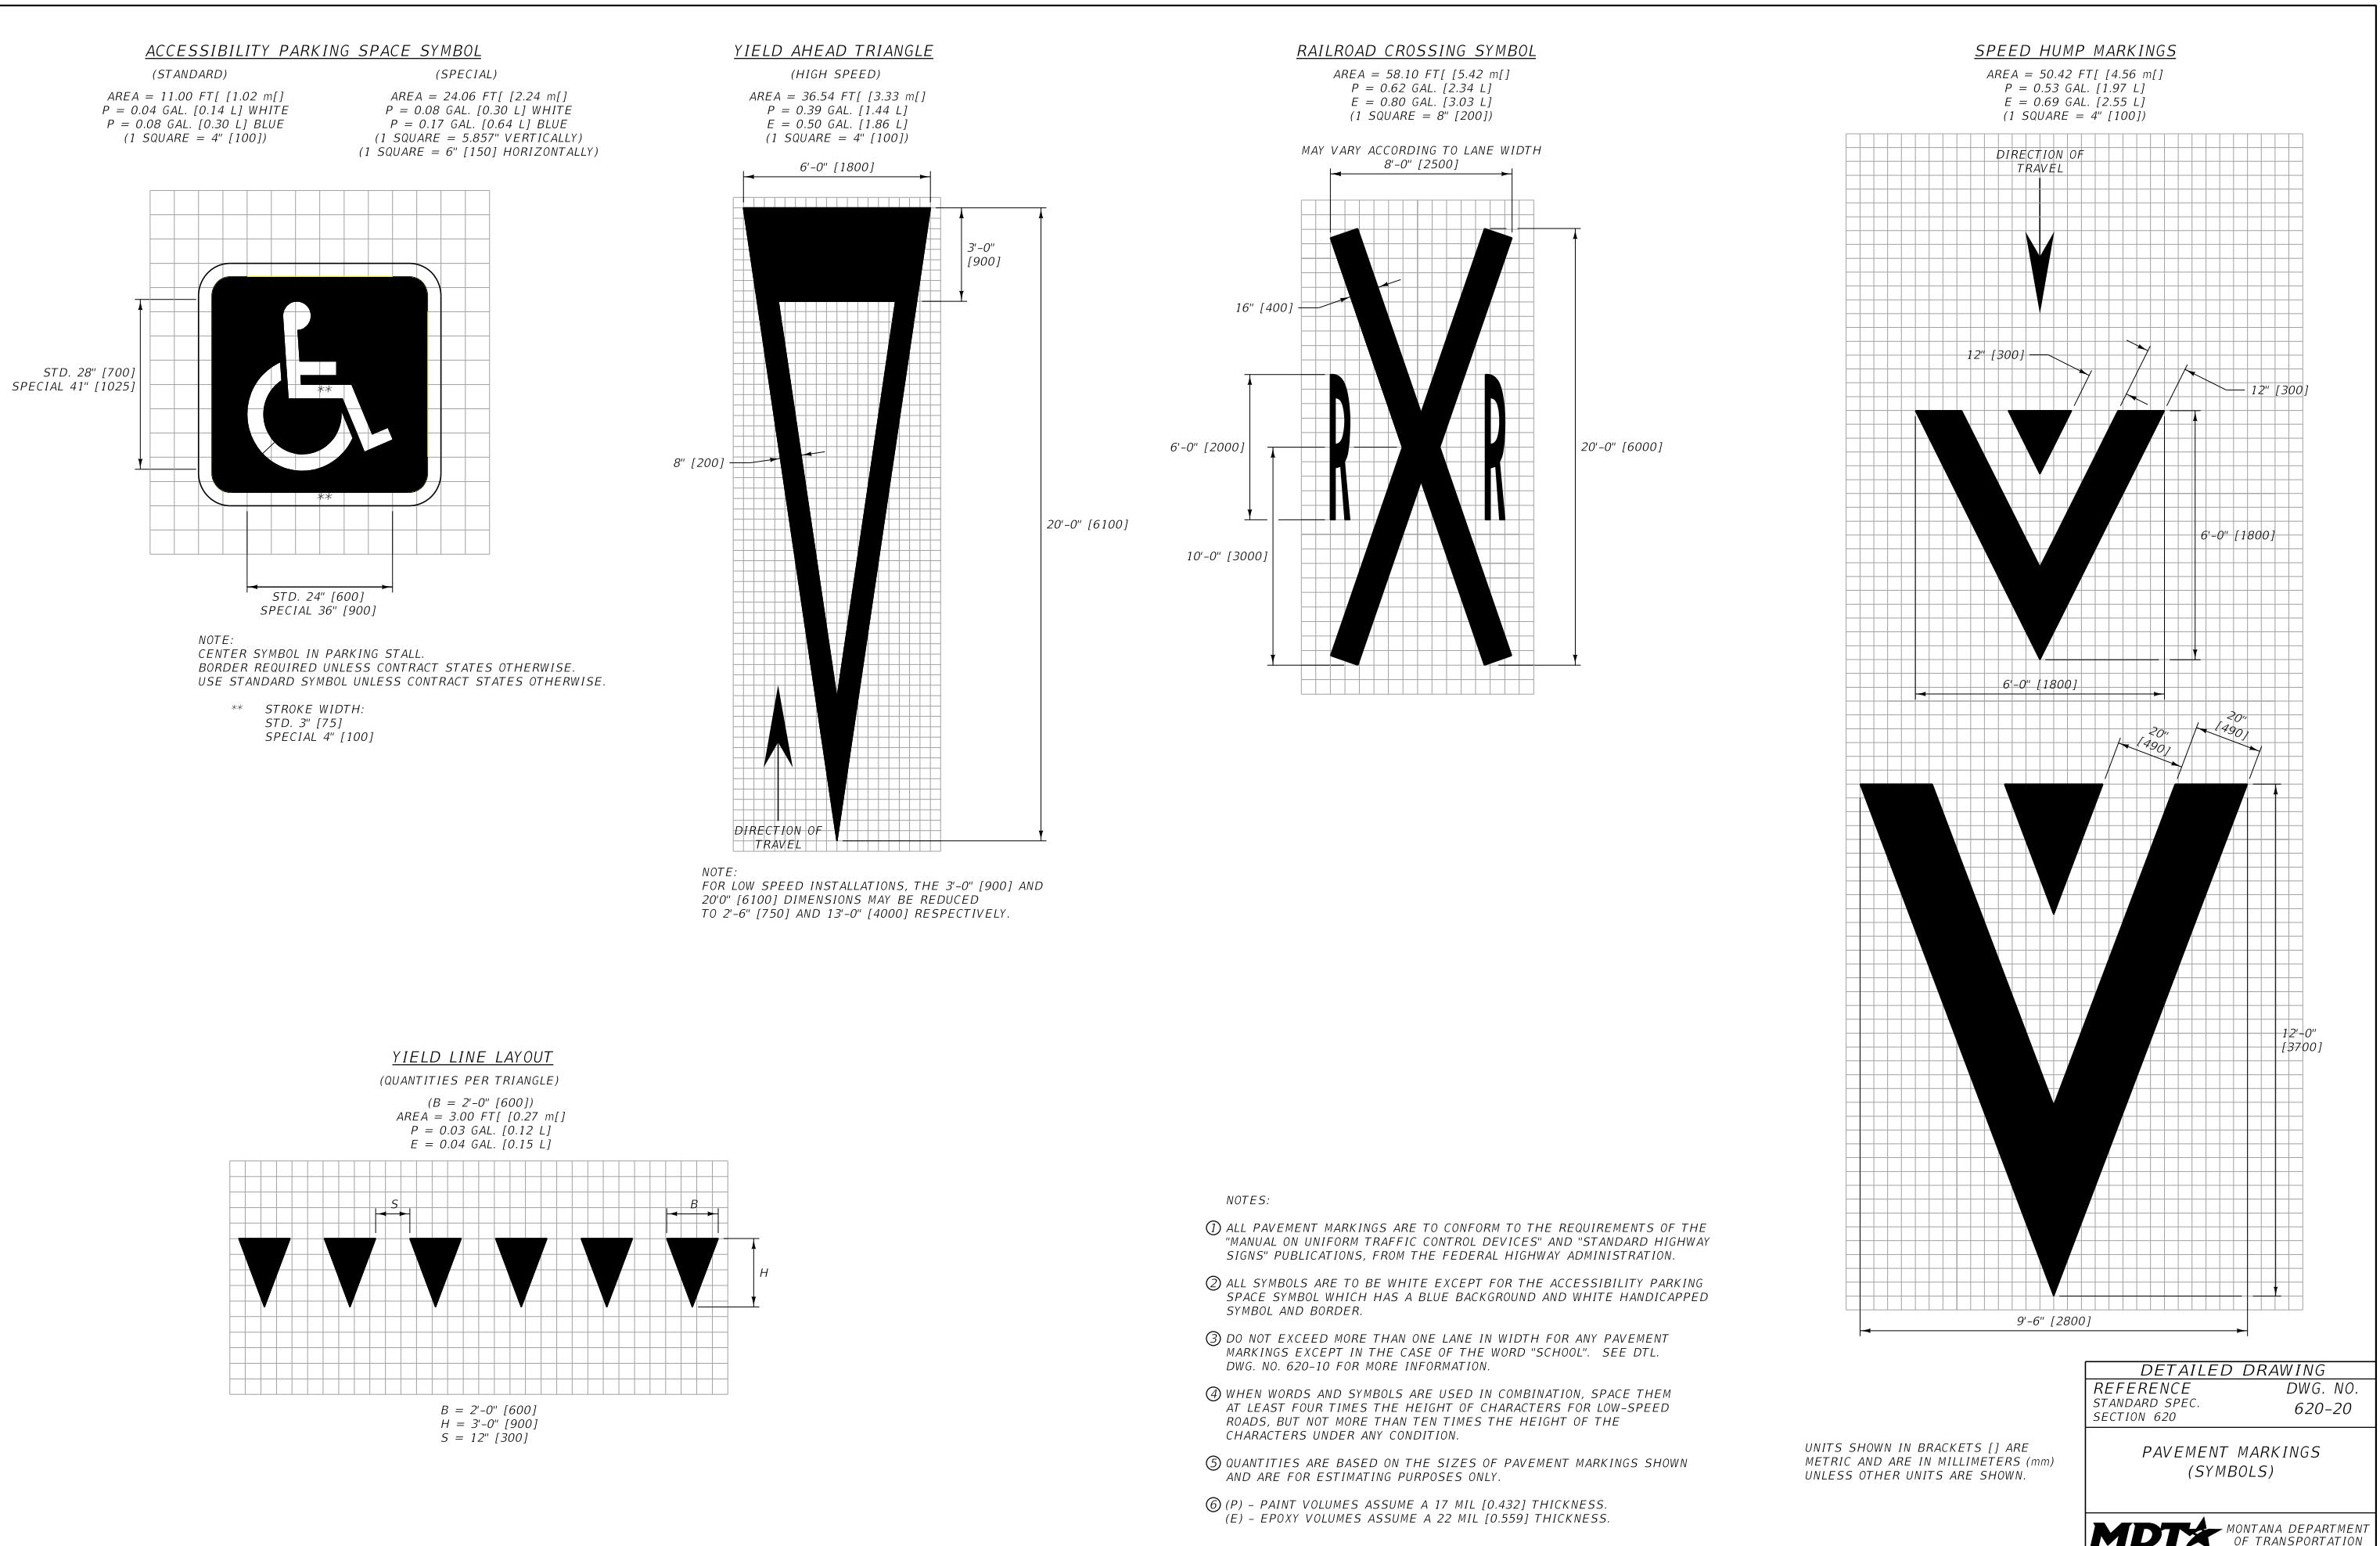


SHARROW SYMBOL

AREA = 12.52 FT² [1.12 m²]
P = 0.13 GAL. [0.48 L]
E = 0.17 GAL. [0.63 L]
(1 SQUARE = 4" [100])

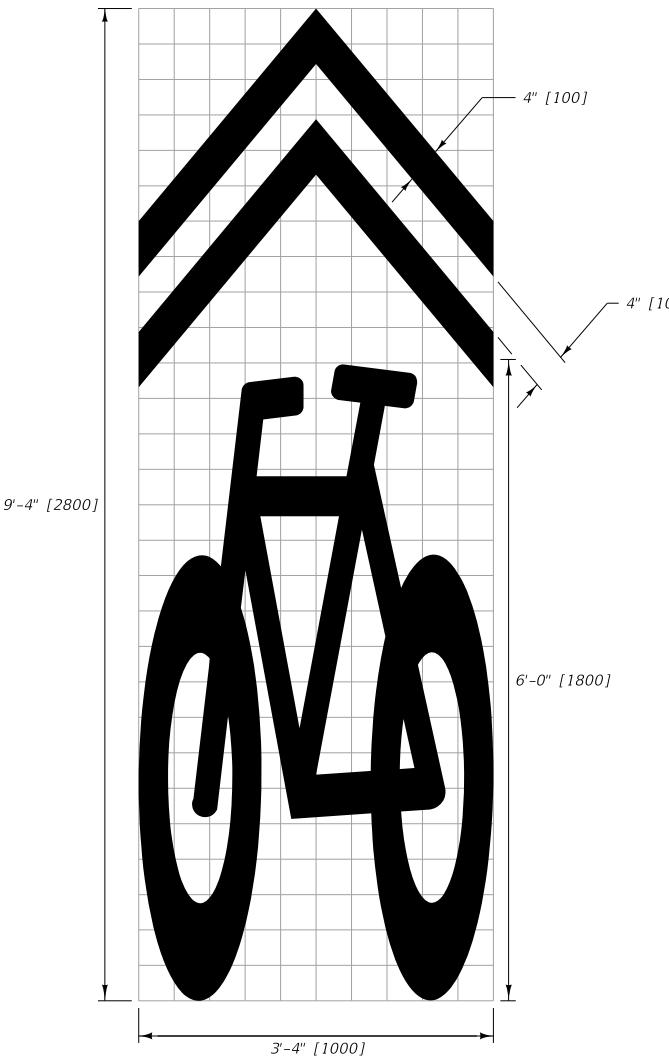


BIKE LANE SYMBOL

AREA = 5.95 FT² [0.54 m²]
P = 0.06 GAL. [0.23 L]
E = 0.08 GAL. [0.30 L]
(1 SQUARE = 4" [100])

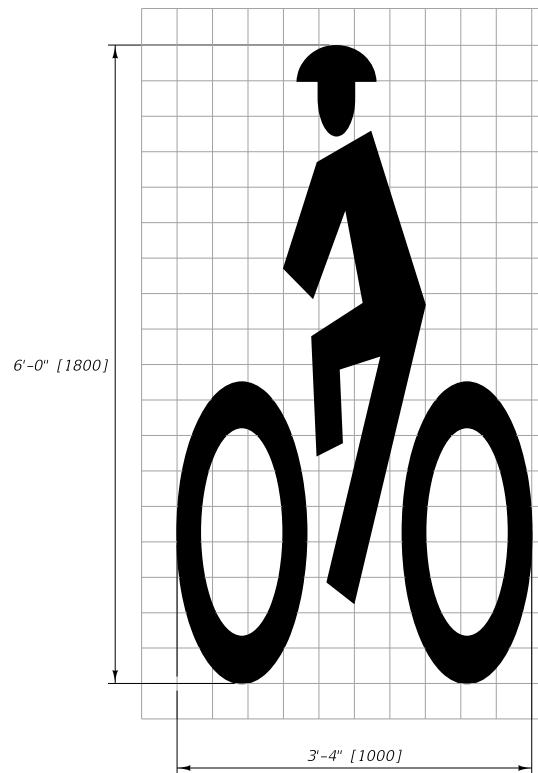

PREFERENTIAL LANE SYMBOL

AREA = 11.16 FT² [1.05 m²]
P = 0.12 GAL. [0.45 L]
E = 0.15 GAL. [0.59 L]
(1 SQUARE = 0.65' [200])

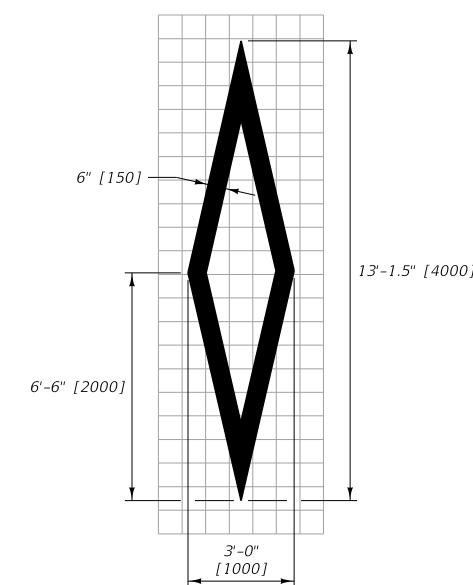


NOTES:

- ① ALL PAVEMENT MARKINGS ARE TO CONFORM TO THE REQUIREMENTS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" AND "STANDARD HIGHWAY SIGNS" PUBLICATIONS, FROM THE FEDERAL HIGHWAY ADMINISTRATION.
- ② DO NOT EXCEED MORE THAN ONE LANE IN WIDTH FOR ANY PAVEMENT MARKINGS EXCEPT IN THE CASE OF THE WORD "SCHOOL". SEE DTL. DWG. NO. 620-10 FOR MORE INFORMATION.
- ③ WHEN WORDS AND SYMBOLS ARE USED IN COMBINATION, SPACE THEM AT LEAST FOUR TIMES THE HEIGHT OF CHARACTERS FOR LOW-SPEED ROADS, BUT NOT MORE THAN TEN TIMES THE HEIGHT OF THE CHARACTERS UNDER ANY CONDITION.
- ④ QUANTITIES ARE BASED ON THE SIZES OF PAVEMENT MARKINGS SHOWN AND ARE FOR ESTIMATING PURPOSES ONLY.
- ⑤ (P) - PAINT VOLUMES ASSUME A 17 MIL [0.432] THICKNESS.
(E) - EPOXY VOLUMES ASSUME A 22 MIL [0.559] THICKNESS.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 620-25
SECTION 620	
PAVEMENT MARKINGS (SYMBOLS)	




DOUBLE YELLOW AND NO PASSING RUMBLE STRIPE




YELLOW SKIP RUMBLE STRIPE

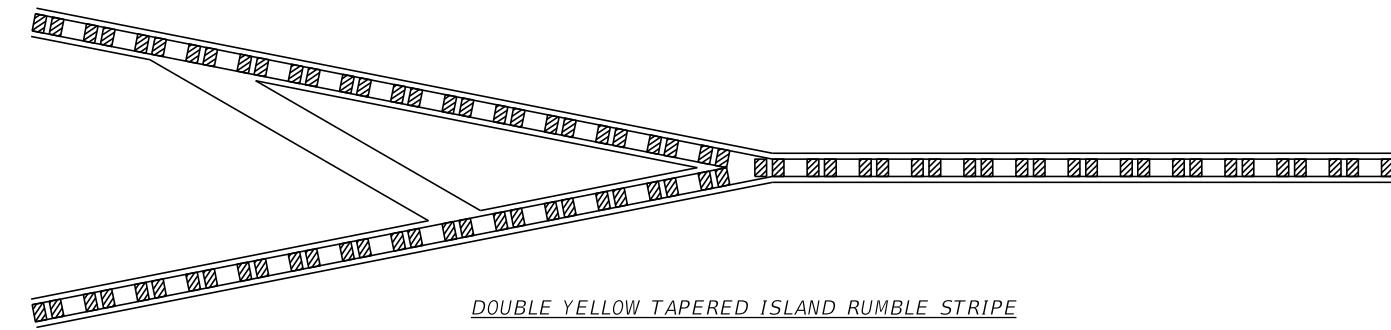

DOUBLE YELLOW TAPERED ISLAND RUMBLE STRIPE

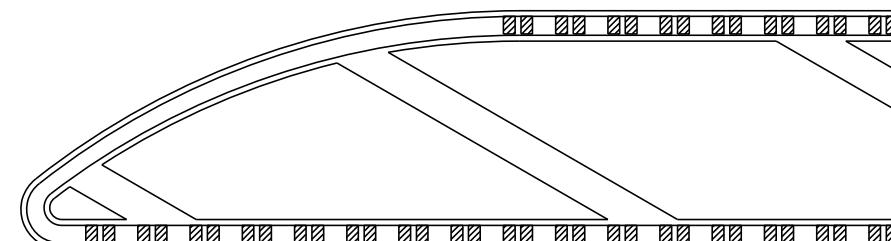

DOUBLE YELLOW BULLNOSE ISLAND RUMBLE STRIPE

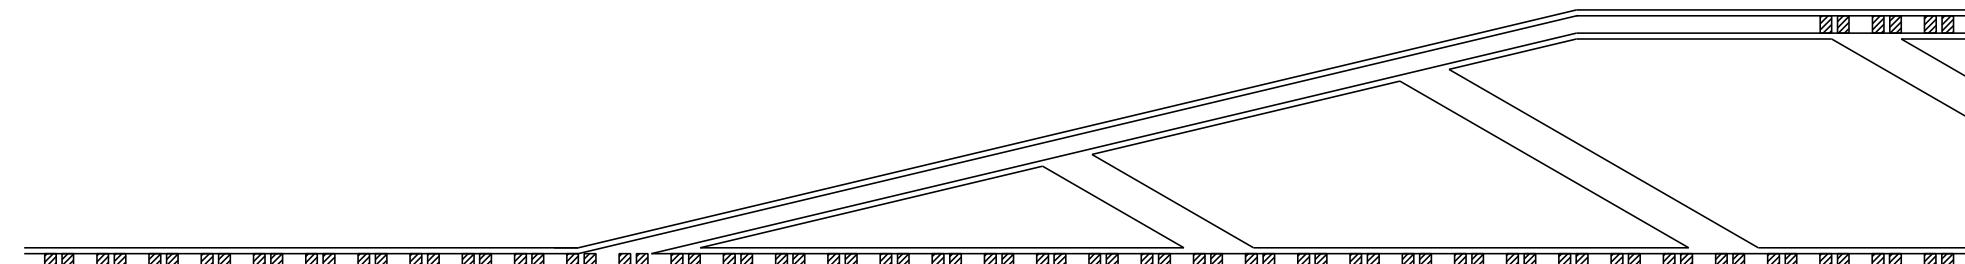


DOUBLE YELLOW TURN LANE RUMBLE STRIPE

NOTES:

① SEE CENTERLINE RUMBLE STRIPS DTL. DWG. NO. 411-05 FOR ADDITIONAL INFORMATION.

② ALL PAVEMENT MARKINGS ARE TO CONFORM TO THE REQUIREMENTS OF THE "MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES" AND "STANDARD HIGHWAY SIGNS" PUBLICATIONS, FROM THE FEDERAL HIGHWAY ADMINISTRATION.


DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	620-30
CENTERLINE RUMBLE STRIPING	

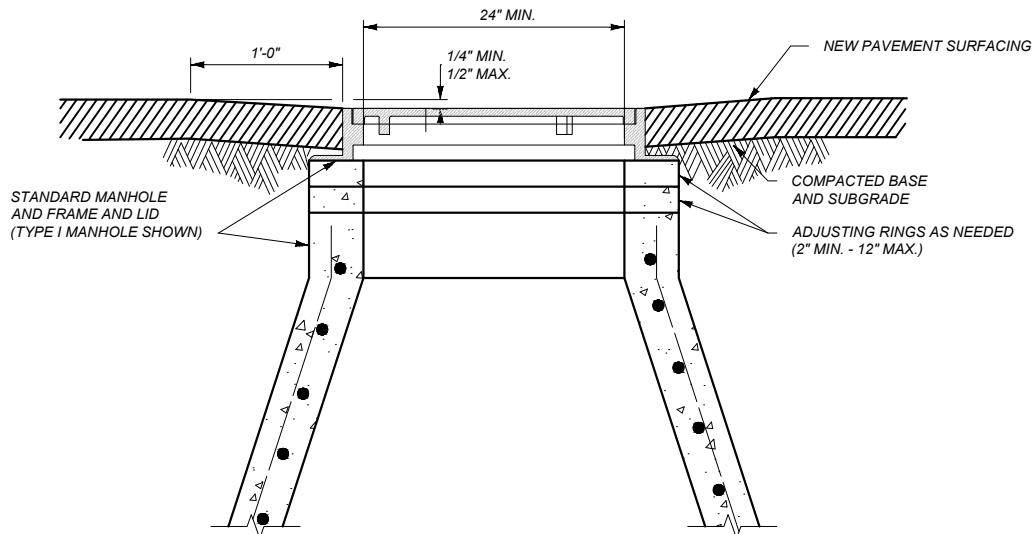

NOTES:

- ① RAISE MANHOLE LID FRAME ASSEMBLY TO NEEDED ELEVATION USING VERTICAL ADJUSTMENT RINGS.
- ② LOWER MANHOLE BY REPLACING CONE AND BARREL SECTION LENGTHS WITH SHORTER LENGTHS AS NEEDED.
- ③ SLOPE MANHOLE FRAME TO MATCH FINISHED SURFACING CROSS SLOPE.
- ④ MAKE FINAL MANHOLE ADJUSTMENTS BEFORE PAVING.

MANHOLE ADJUSTMENT DETAIL

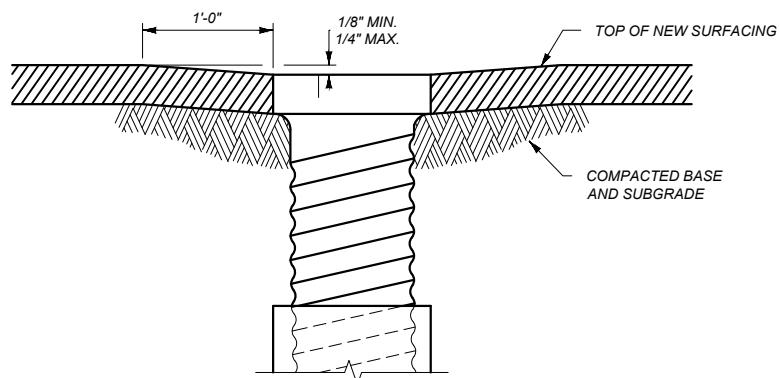

NOTES:

- ① ADJUST WATER VALVES UPWARD OR DOWNWARD AS REQUIRED.
- ② MAKE FINAL ADJUSTMENT BEFORE PAVING.

VALVE BOX ADJUSTMENT DETAIL

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 604, 621

DWG. NO.
621-00

**MANHOLE AND VALVE BOX
ADJUSTMENT DETAILS**


EFFECTIVE: JAN 23, 2020



--REVISED--
APR 28, 2022
JUN 27, 2024
JAN 15, 2026

11/29/2025 8:42 AM


STDDRD621000.DWG

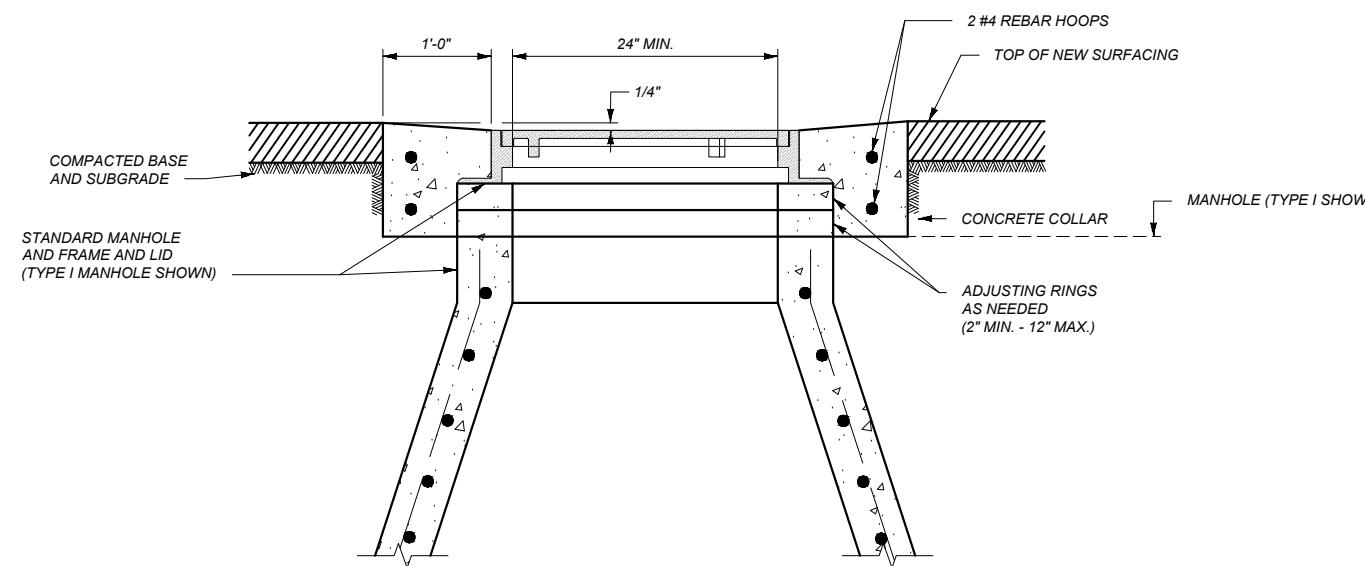

NOTES:

- ① RAISE MANHOLE LID FRAME ASSEMBLY TO NEEDED ELEVATION USING VERTICAL ADJUSTMENT RINGS.
- ② LOWER MANHOLE BY REPLACING CONE AND BARREL SECTION LENGTHS WITH SHORTER LENGTHS AS NEEDED.
- ③ SLOPE MANHOLE FRAME TO MATCH FINISHED SURFACING CROSS SLOPE.
- ④ CONSTRUCT CONCRETE COLLAR USING CLASS GENERAL CONCRETE OR APPROVED EQUAL.


MANHOLE ADJUSTMENT DETAIL

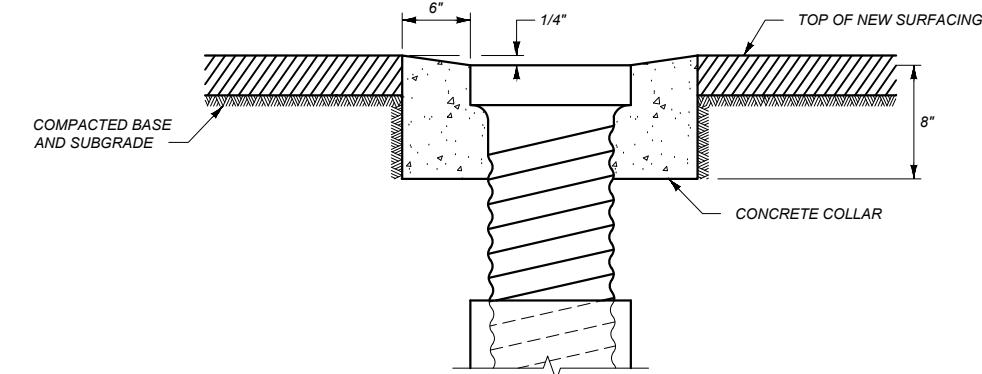

NOTES:

- ① ADJUST WATER VALVES UPWARD OR DOWNWARD AS REQUIRED.
- ② CONSTRUCT CONCRETE COLLAR OF CLASS GENERAL CONCRETE OR APPROVED EQUAL.


VALVE BOX ADJUSTMENT DETAIL

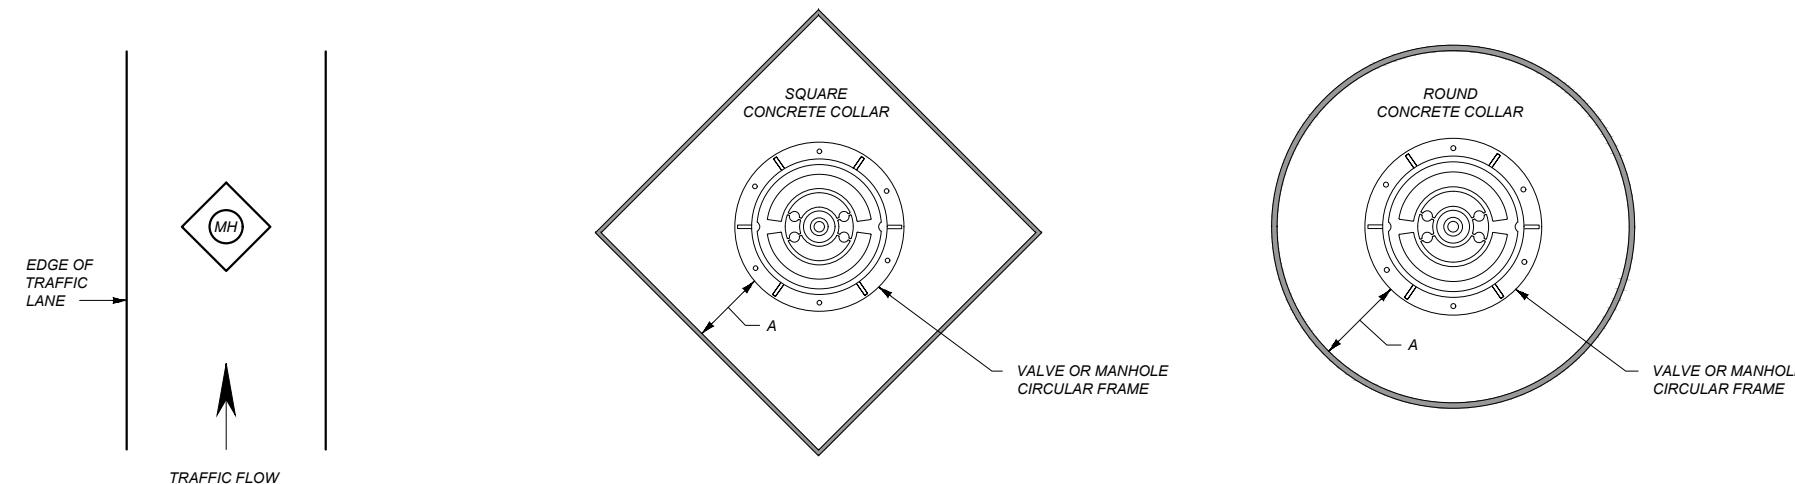

TYPE	DIMENSIONS	SQUARE COLLAR QUANTITIES		ROUND COLLAR QUANTITIES	
		A	CLASS GENERAL CONCRETE	CLASS GENERAL CONCRETE	0.4 C.Y.
MANHOLE	1'-0"		0.5 C.Y.		0.4 C.Y.
VALVE	0'-6"		0.2 C.Y.		0.1 C.Y.


CONCRETE COLLAR DETAIL

DETAILED DRAWINGS					
REFERENCE STANDARD SPEC.	DWG. NO. 621-05				
SECTION 604, 621					
MANHOLE AND VALVE BOX ADJUSTMENT DETAILS					
EFFECTIVE: JAN 23, 2020					
<div style="text-align: center;">  MONTANA Department of Transportation </div>					
<table border="1" style="width: 100%; text-align: center;"> <tr> <td>-REVISED-</td> </tr> <tr> <td>APR 28, 2022</td> </tr> <tr> <td>JUN 27, 2024</td> </tr> <tr> <td>JAN 15, 2026</td> </tr> </table>		-REVISED-	APR 28, 2022	JUN 27, 2024	JAN 15, 2026
-REVISED-					
APR 28, 2022					
JUN 27, 2024					
JAN 15, 2026					
2/20/2024 2:08 PM					
STDDRD621005.DWG					

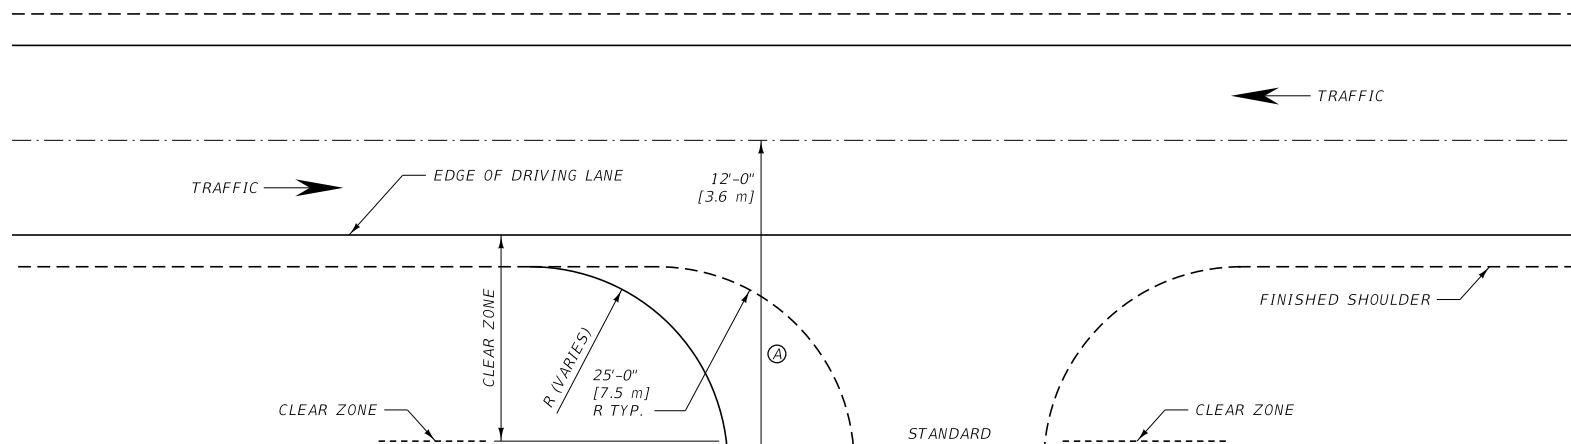

NOTES:

- Ⓐ THE MINIMUM DISTANCE FROM THE EDGE OF DRIVING LANE TO THE FIRST MAILBOX SHOULD BE THE CLEAR ZONE DISTANCE PLUS 6'-0" (1.8 m).
- Ⓑ THE WIDTH OF THE APPROACH AND MAILBOX TURNOUT COMBINED SHOULD NOT EXCEED 40'-0" (12.0 m). IF MORE THAN 40'-0" (12.0 m), THE MAILBOX TURNOUT WIDENING IS NOT REQUIRED.

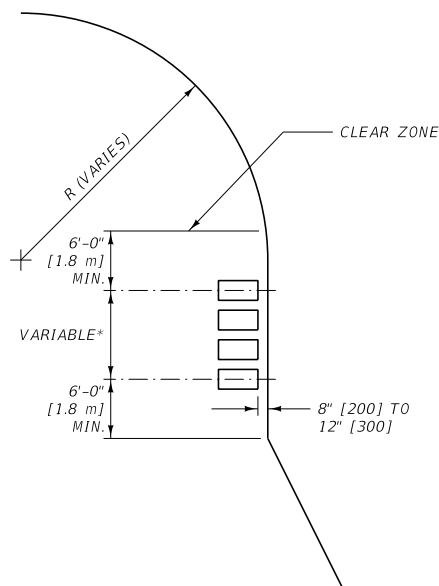

MAILBOX LOCATION DETAIL

NOTE:


* THE MINIMUM SPACING BETWEEN MAILBOXES IS EQUAL TO THREE-FOURTHS OF THEIR HEIGHT ABOVE THE GROUND. SEE DTL. DWG. NO. 623-20 AND 623-25 FOR MAILBOX DETAILS.

NOTES:

- ① LOCATE NEW INSTALLATIONS, IF POSSIBLE, ON THE RIGHT SIDE OF THE PUBLIC ROAD OR PRIVATE APPROACH.
- ② APPROACH QUANTITIES ARE NOT INCLUDED IN MAILBOX TURNOUT QUANTITIES.
- ③ PROVIDE ADEQUATE APPROACH RADIUS FOR THIS TURNOUT. ADJUST THE RADIUS BASED ON FIELD CONDITIONS AND DOCUMENT REASONS DURING THE FIELD REVIEW.
- ④ SEE DETAILED DRAWING NUMBER 203-05 FOR ADDITIONAL GUIDANCE.


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE	DWG. NO.
STANDARD SPEC.	623-10
SECTION 623	
APPROACH	
MAILBOX TURNOUT	
 MONTANA DEPARTMENT OF TRANSPORTATION	

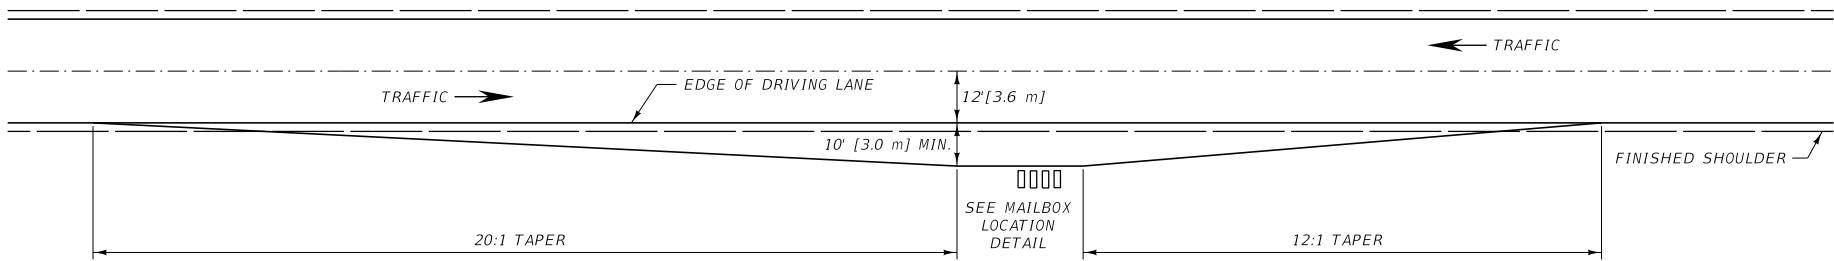


TURNOUT WITHOUT APPROACH

NOTE:
ACTUAL SIZE AND LOCATION TO BE DETERMINED BY
THE PROJECT MANAGER.

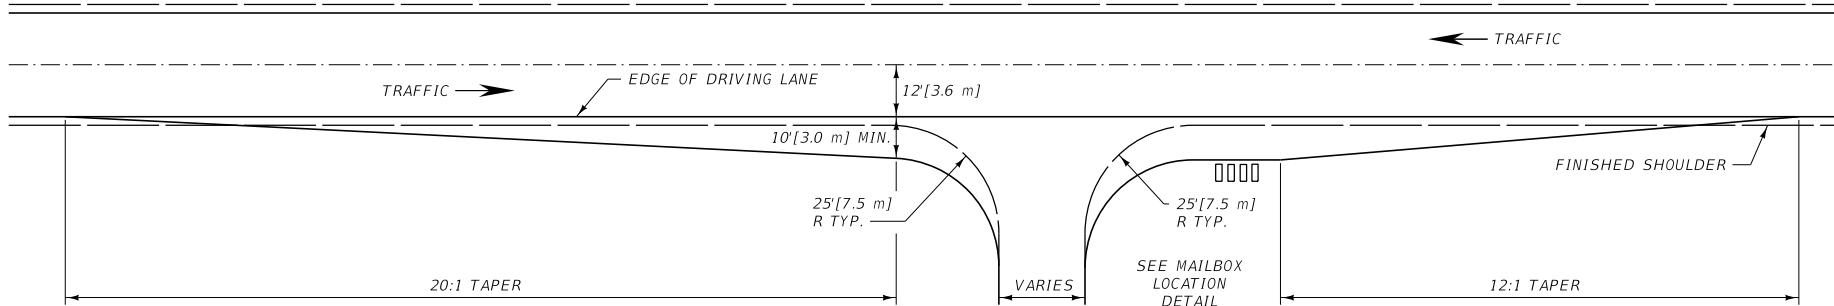

TURNOUT WITH APPROACH

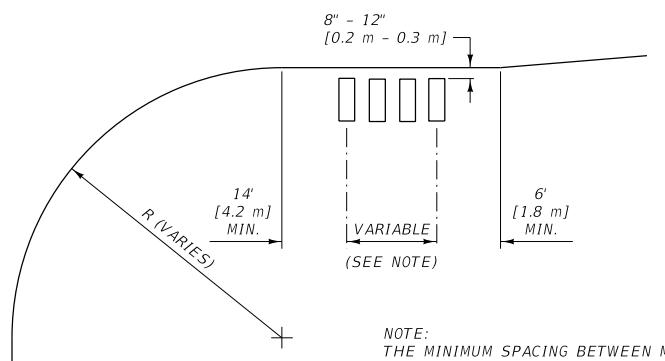

NOTE:
THE MINIMUM SPACING BETWEEN MAILBOXES IS EQUAL
TO THREE-FOURTHS OF THEIR HEIGHT ABOVE THE
GROUND. SEE DTL. DWG. NO. 623-20 AND 623-25
FOR MAILBOX DETAILS.


MAILBOX LOCATION DETAIL

NOTES:


- ① LOCATE NEW INSTALLATIONS, IF POSSIBLE, ON THE FAR
RIGHT SIDE OF AN INTERSECTION WITH A PUBLIC ROAD OR
PRIVATE DRIVEWAY.
- ② APPROACH QUANTITIES ARE NOT INCLUDED IN TURNOUT
QUANTITIES.

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. SECTION 623
MAILBOX TURNOUT	
 MONTANA DEPARTMENT OF TRANSPORTATION	

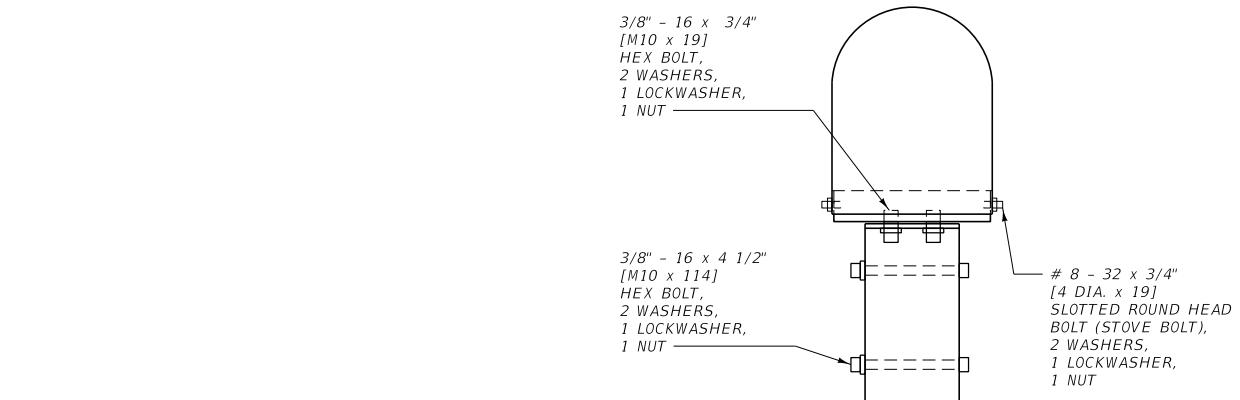


SINGLE MAILBOX ASSEMBLY ③

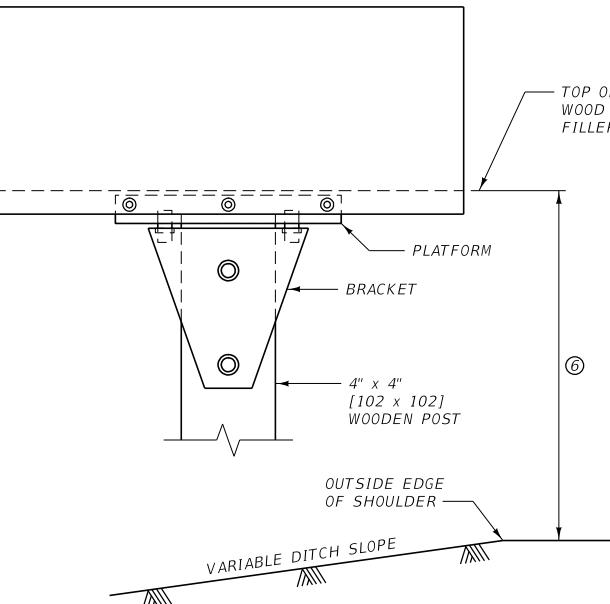

OUTSIDE EDGE
OF SHOULDER
VARIABLE DITCH SLOPE

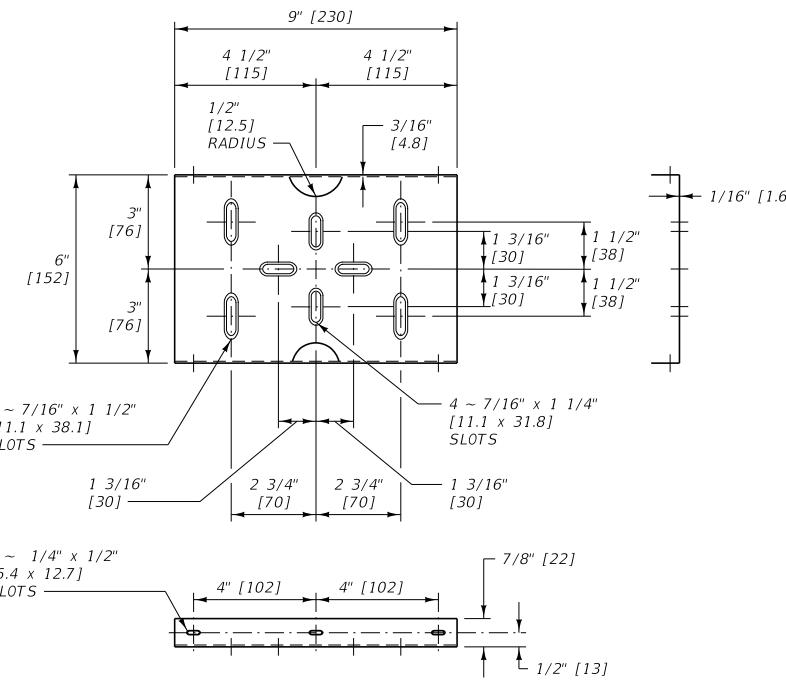

PLATFORM (STANDARD)

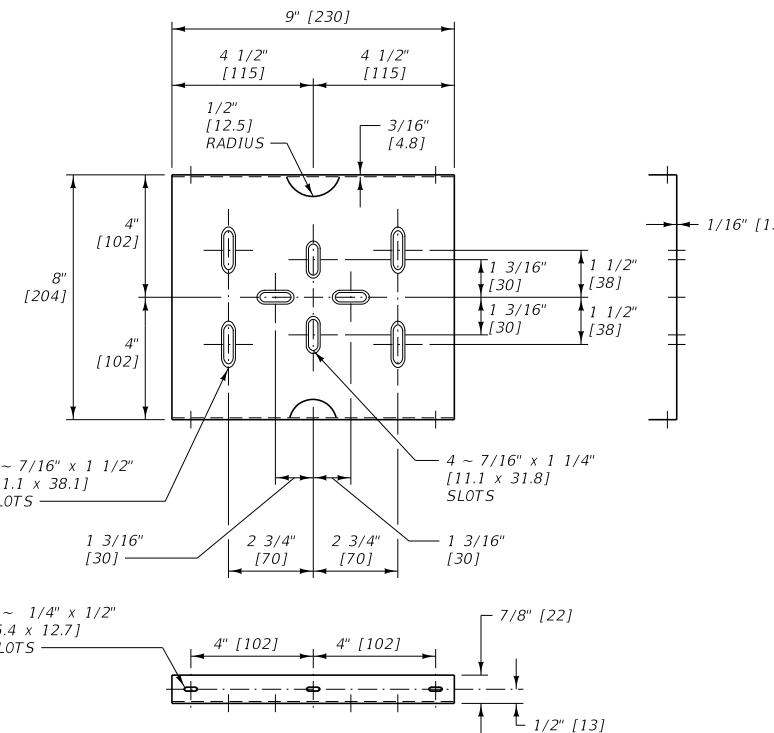


PLATFORM (LARGE)

NOTES:

- ① GALVANIZE ALL MATERIALS MEETING SECTION 711.
- ② STAKE MAILBOX LOCATIONS BEFORE INSTALLATION FOR PROPER HEIGHT AND DISTANCE FROM THE ROADWAY. ONCE STAKED, NOTIFY THE PROJECT MANAGER AND THE POST OFFICE. THE PROJECT MANAGER AND POSTMASTER/MAILCARRIER ARE ALLOWED 48 HOURS TO REVIEW AND MODIFY THE STAKED LOCATIONS PRIOR TO FINAL INSTALLATION.
- ③ OTHER NCHRP 350 OR MASH CRASH TESTED MAILBOX SUPPORTS AND ASSEMBLIES MAY ALSO BE USED.
- ④ LOCATE THE MAILBOX 8" [0.2 m] TO 12" [0.3 m] OUTSIDE THE EDGE OF THE SHOULDER OR 6" [0.15 m] TO 12" [0.3 m] FROM THE FACE OF CURB.
- ⑤ FOR MULTIPLE MAILBOX INSTALLATIONS, SPACE THE MAILBOX SUPPORTS A MINIMUM DISTANCE OF 42" [1.05 m] APART.
- ⑥ FOR RURAL LOCATIONS USE A 38" TO 42" [965 TO 1065] MOUNTING HEIGHT. FOR URBAN LOCATIONS USE A 45" TO 48" [1145 TO 1220] MOUNTING HEIGHT.
- ⑦ SEE "A GUIDE TO MAILBOX SAFETY IN MONTANA" FOR ADDITIONAL INFORMATION.

UNITS SHOWN IN BRACKETS [] ARE
METRIC AND ARE IN MILLIMETERS (mm)
UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 623 & 711	DWG. NO. 623-20
MAILBOX DETAIL	

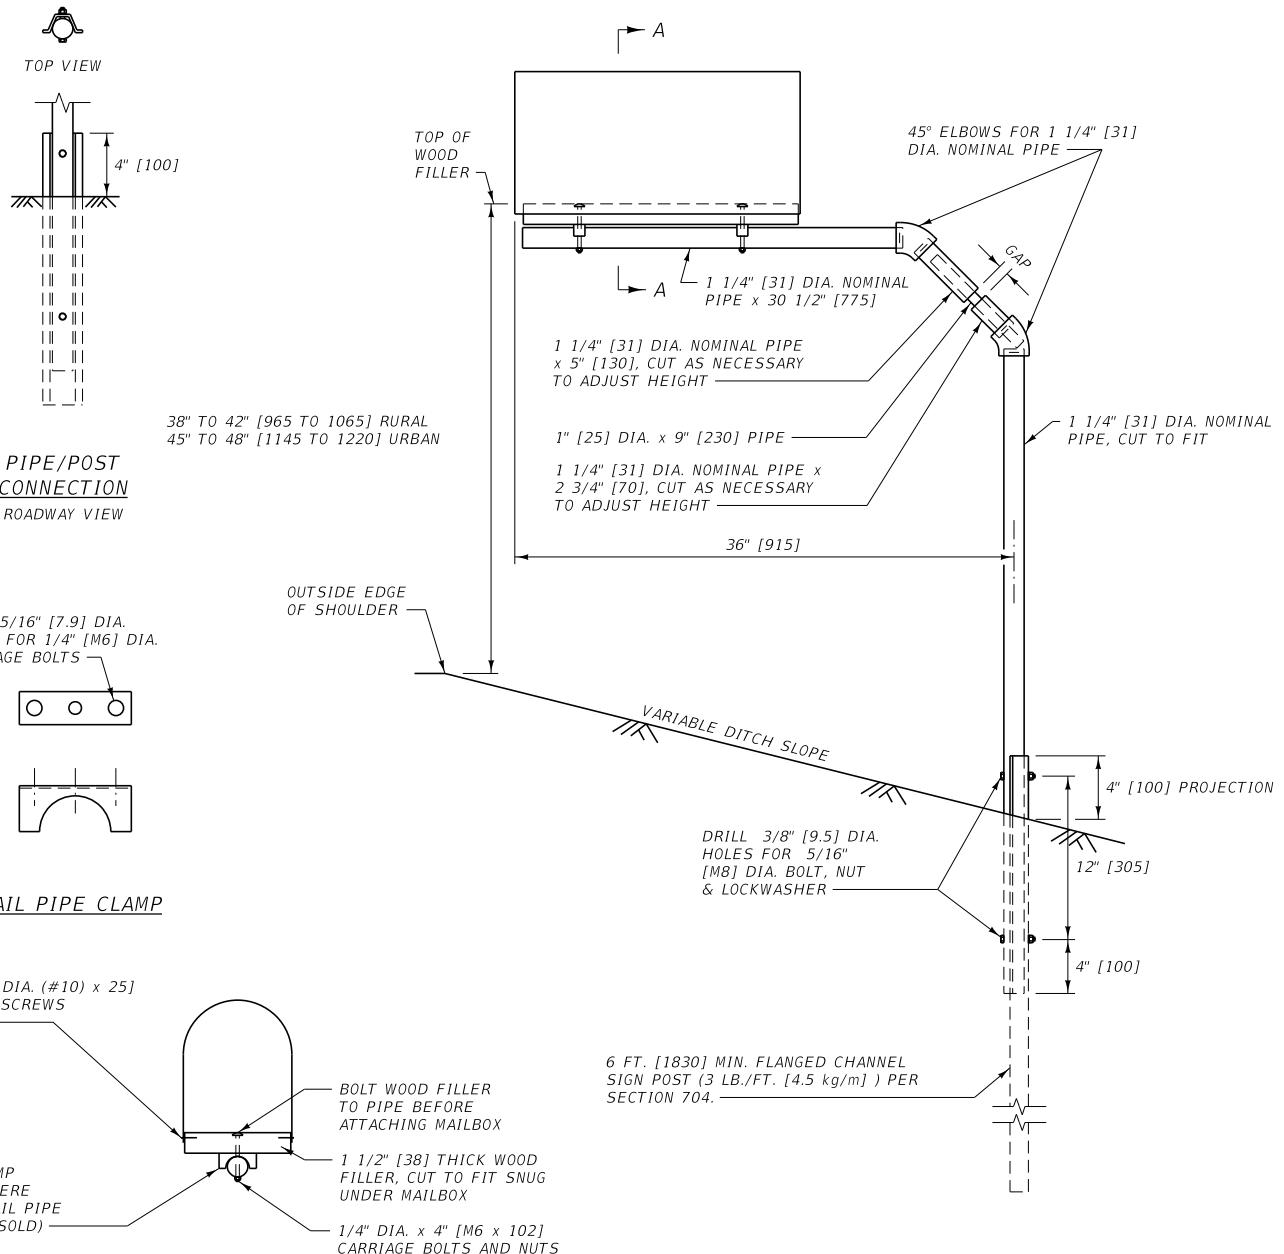


NOTES:

- ① GALVANIZE ALL MATERIALS MEETING SECTION 711.
- ② STAKE MAILBOX LOCATIONS BEFORE INSTALLATION FOR PROPER HEIGHT AND DISTANCE FROM THE ROADWAY. ONCE STAKED, NOTIFY THE PROJECT MANAGER AND THE POST OFFICE. THE PROJECT MANAGER AND POSTMASTER/MAIL CARRIER ARE ALLOWED 48 HOURS TO REVIEW AND MODIFY THE STAKED LOCATIONS PRIOR TO FINAL INSTALLATION.
- ③ OTHER NCHRP 350 OR MASH CRASH TESTED MAILBOX SUPPORTS AND ASSEMBLIES MAY ALSO BE USED.
- ④ LOCATE THE MAILBOX 8" TO 12" [0.2 TO 0.3 METERS] OUTSIDE THE EDGE OF THE SHOULDER OR 6" TO 12" [0.15 TO 0.3 METERS] FROM THE FACE OF CURB.
- ⑤ SEE "A GUIDE TO MAILBOX SAFETY IN MONTANA", FOR ADDITIONAL INFORMATION.


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION 623,704, AND 711	DWG. NO. 623-25
OPTIONAL MAILBOX DETAIL	

ELEVATION VIEW

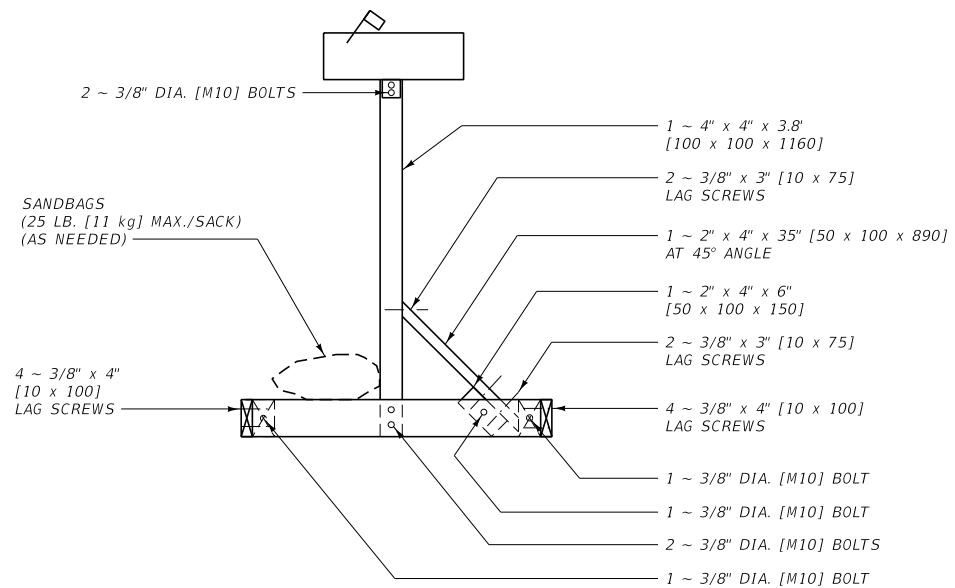


FRONT VIEW

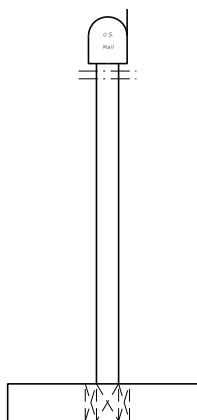

NOTES:

- ① THIS MOUNTING DEVICE IS INTENDED FOR USE IN CONSTRUCTION ZONES.
- ② BOLT PLACEMENT IS SYMMETRICAL THROUGHOUT MOUNTING BRACKET.
- ③ ALL BOLT CONNECTIONS ARE FINISHED WITH A WASHER AND NUT.
- ④ FOR THE POST USE EITHER DOUGLAS FIR OR HEM FIR, WHICH IS SURFACED FOUR SIDES (S4S) AND FREE OF HEART CENTER (FOHC).

PLAN VIEW

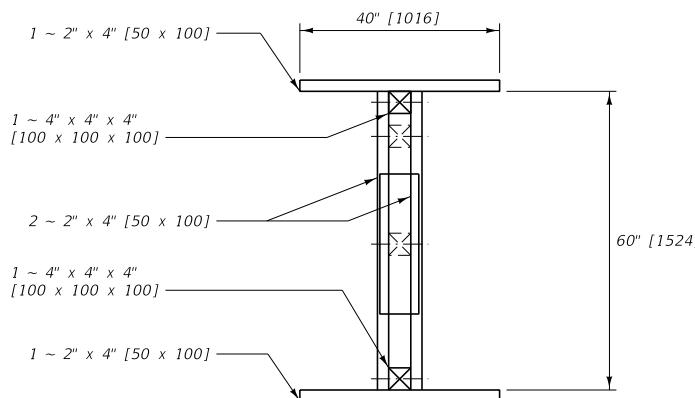


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING
REFERENCE DWG. NO.
STANDARD SPEC. 623-30
SECTION 623

TEMPORARY MAILBOX SUPPORT


MOUNTING SYSTEM

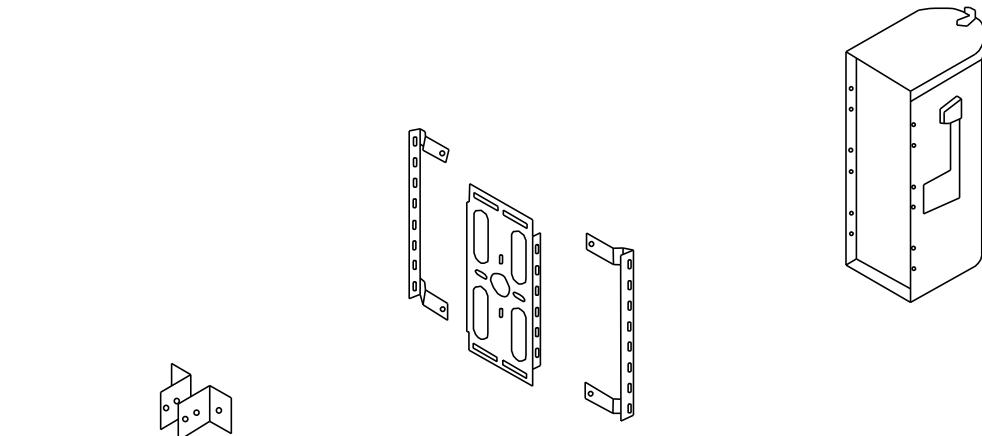

NOTES:

- ① THIS MOUNTING DEVICE IS INTENDED FOR USE IN CONSTRUCTION ZONES.
- ② BOLT PLACEMENT IS SYMMETRICAL THROUGHOUT MOUNTING BRACKET.
- ③ ALL BOLT CONNECTIONS ARE FINISHED WITH A WASHER AND NUT.


ATTACHMENT DETAILS

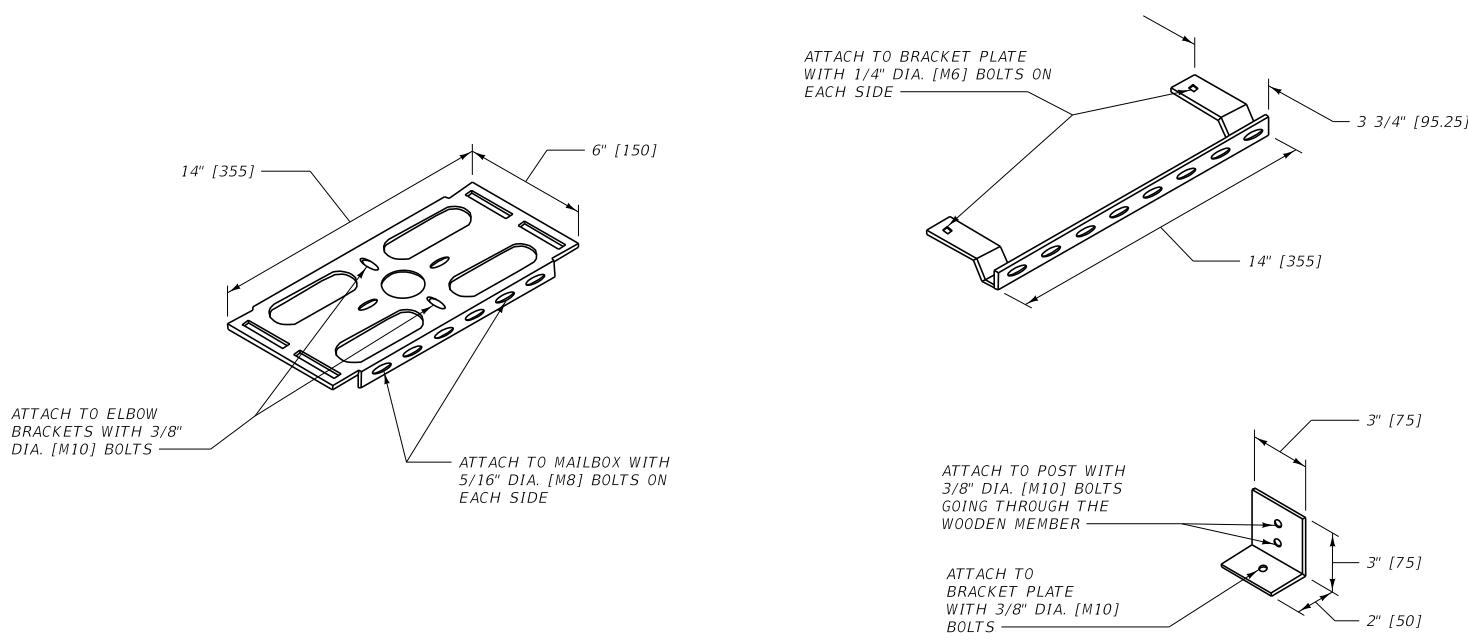


UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC.	DWG. NO. 623-35 SECTION 623

TEMPORARY MAILBOX SUPPORT BRACKET DETAILS

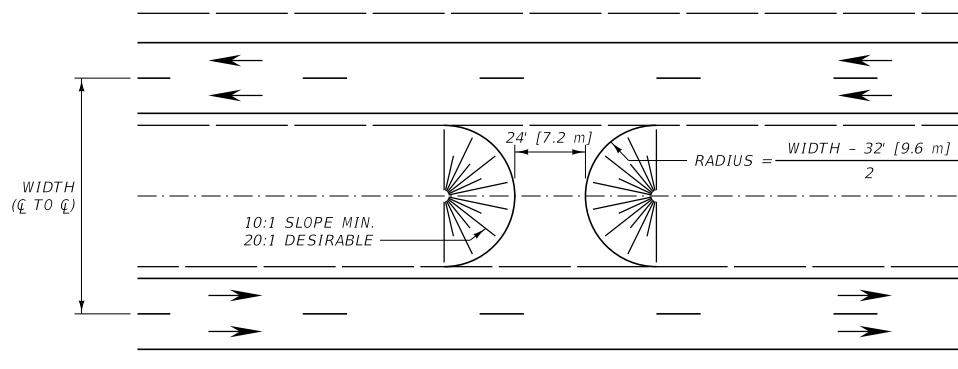


PLAN
(INTERSTATE LAYOUT SHOWN)

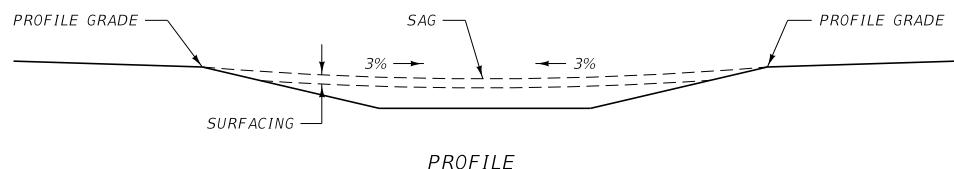

PROFILE

MEDIAN WIDTHS 36' [10.8 m] TO 76' [22.8 m]

LOCATE AND CONSTRUCT TURNOUTS ABOVE IN CONJUNCTION WITH DITCH BLOCKS IF AT ALL POSSIBLE. PROVIDE DRAINAGE WHEN NECESSARY.

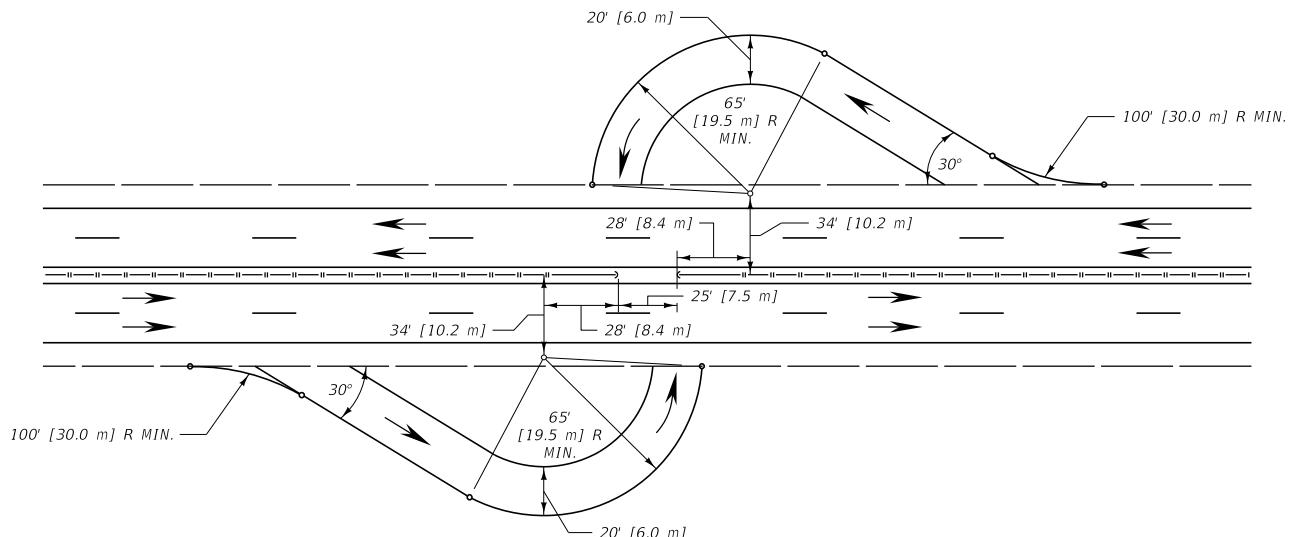



STANDARD U-TURN FOR NARROW MEDIANs

NOTES:



- ① NARROW MEDIANs, MEDIAN WIDTHS GREATER THAN 76' [22.8 m] AND INDEPENDENT ROADWAYS REQUIRE SPECIAL DESIGN.
- ② GRADES: UNIFORM BETWEEN INSIDE SHOULDERS OF MAIN TRAVELED WAY EXCEPT FOR SPECIAL DESIGN.
- ③ SURFACING: SEE PLANS FOR QUANTITIES.
- ④ DRAINAGE: USE 18" [450] OR 24" [600] CULVERTS IF REQUIRED.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWING	
REFERENCE STANDARD SPEC. SECTION	DWG. NO. 900-00
U-TURN MEDIAN OPENINGS ON CONTROLLED ACCESS HIGHWAYS	

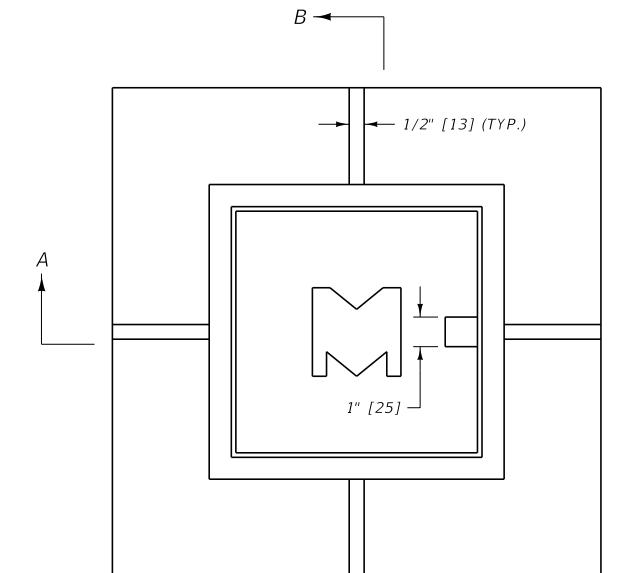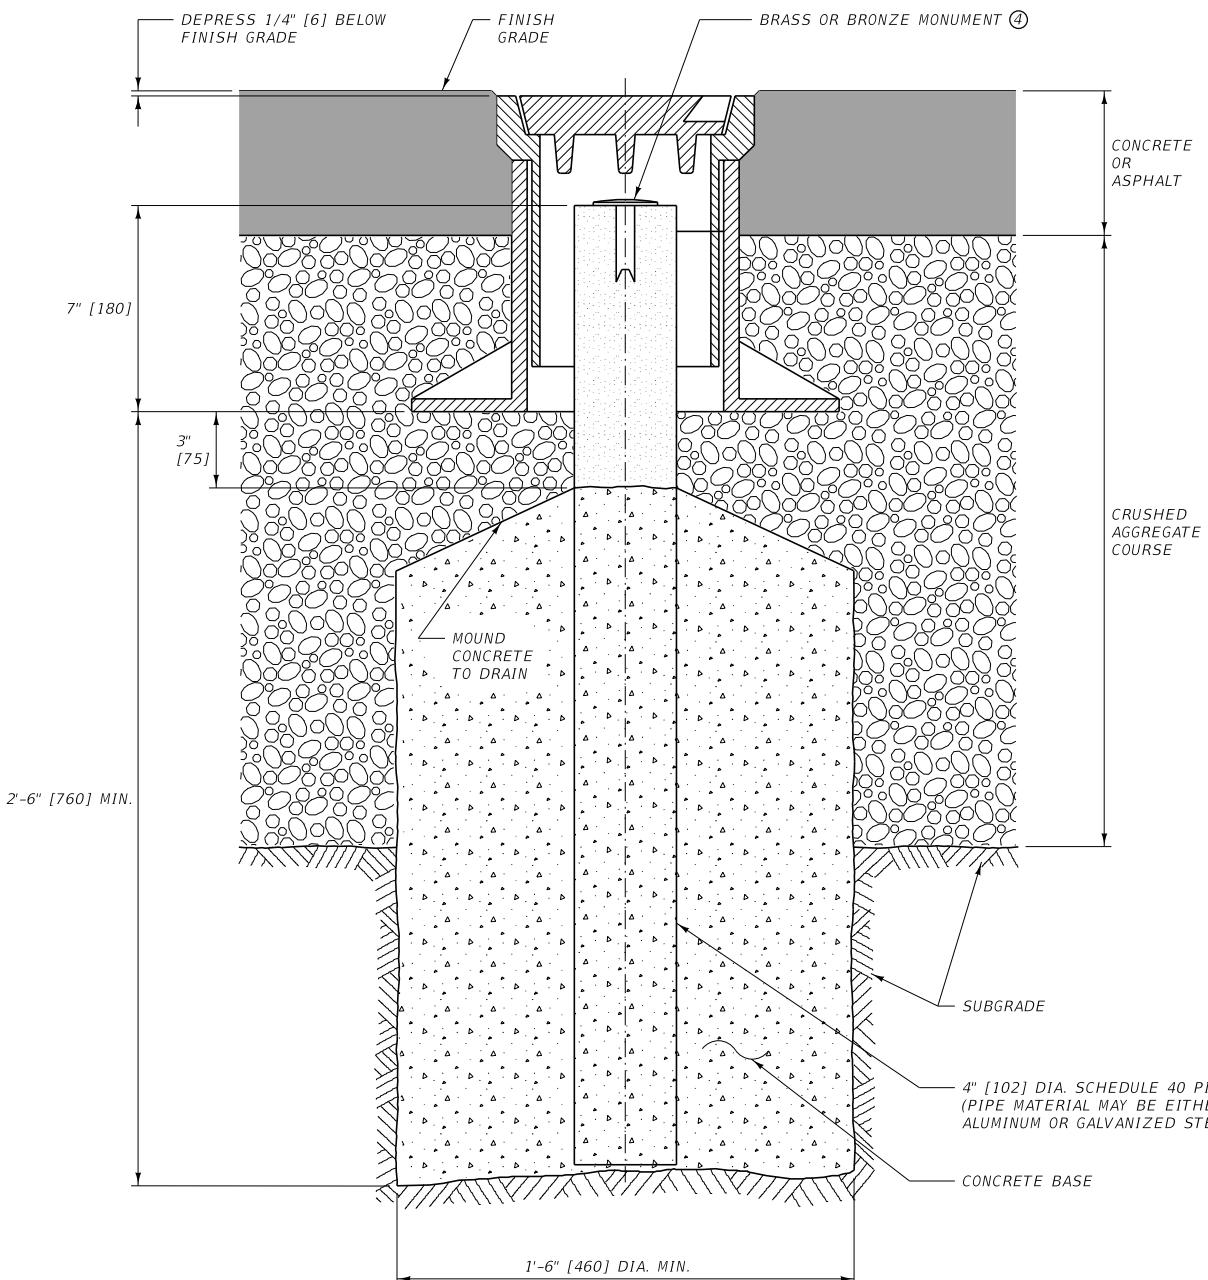

NEENAH FOUNDRY R-1968 TYPE 36-B ADJUSTABLE MONUMENT BOX (HEAVY DUTY) OR APPROVED EQUAL

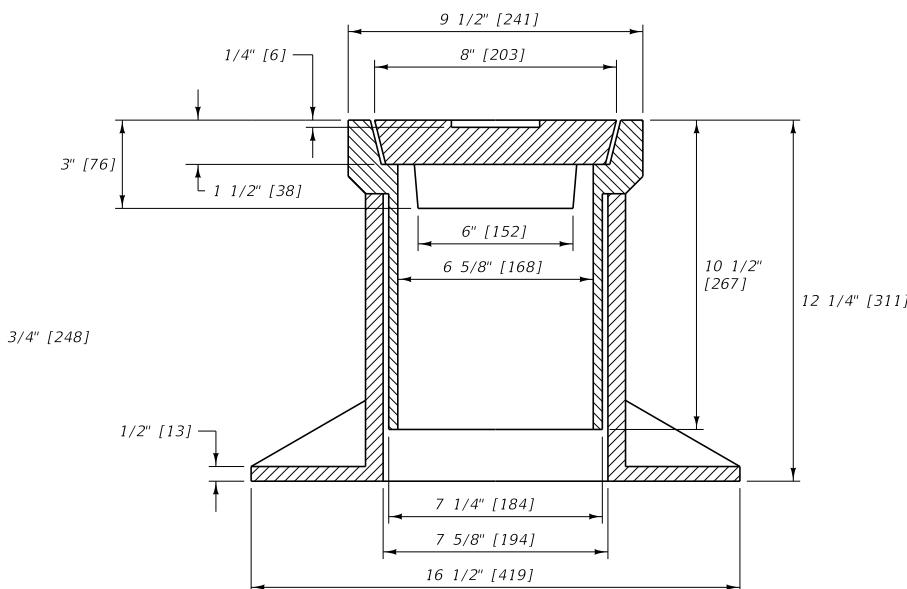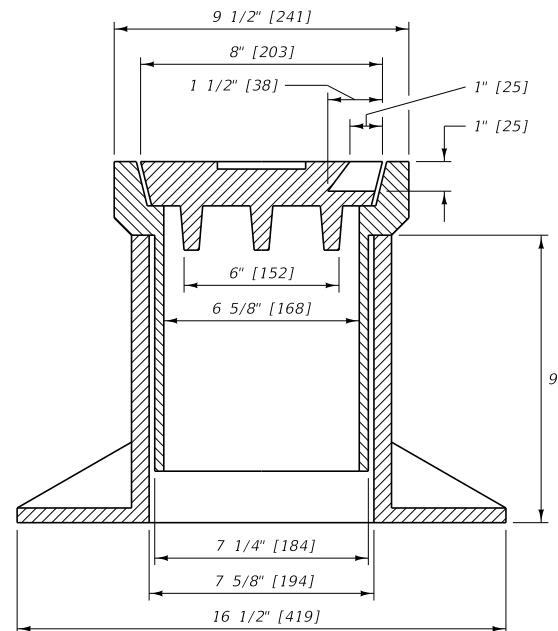


NOTES:


- ① INSTALL THE 4" [102] DIA. PIPE, CONCRETE BASE AND ADJUSTABLE MONUMENT BOX AS DETAILED. PLACE CONCRETE IN THE PIPE UP TO 10" [255] BELOW THE TOP OF THE PIPE (DO NOT FILL COMPLETELY.)
- ② POSITION THE CENTER OF THE PIPE TO WITHIN 1/2" [13] HORIZONTALLY OF THE DESIRED COORDINATES AND CENTER THE MONUMENT BOX OVER THE PIPE.
- ③ DEPENDING ON CONTRACT REQUIREMENTS, EITHER MDT FORCES UNDER THE DIRECT SUPERVISION OF A MONTANA LICENSED PROFESSIONAL LAND SURVEYOR OR CONTRACTOR FORCES UNDER THE DIRECT SUPERVISION OF A MONTANA LICENSED PROFESSIONAL LAND SURVEYOR IS REQUIRED TO FILL THE REMAINING 10" [255] OF THE 4" [102] DIA. PIPE WITH CONCRETE, SET AND MARK THE BRASS OR BRONZE MONUMENT WITHIN THE BOX AFTER CONSTRUCTION. THE MONTANA LICENSED PROFESSIONAL LAND SURVEYOR IS REQUIRED TO PREPARE AND FILE CORNER RECORDATIONS IN ACCORDANCE WITH STATE STATUTES, ADMINISTRATIVE RULES OF MONTANA AND PROVISIONS OF THE MDT SURVEY MANUAL. PROVIDE COPIES OF FILED CORNER RECORDATIONS TO THE PROJECT MANAGER, WHO WILL FORWARD THEM TO THE DISTRICT SURVEY MANAGER.
- ④ AN ACCEPTABLE BRONZE MONUMENT IS THE "BERNTSEN C25DB" OR APPROVED EQUAL. AN ACCEPTABLE BRASS MONUMENT IS THE "SURV-KAP M/M-BCS-2 1/2 D" OR APPROVED EQUAL.
- ⑤ USE CLASS GENERAL CONCRETE OR APPROVED EQUAL.

UNITS SHOWN IN BRACKETS () ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.


DETAILED DRAWING	REFERENCE	DWG. NO.
STANDARD SPEC.	SECTION	900-15
ADJUSTABLE MONUMENT BOX		
MDT MONTANA DEPARTMENT OF TRANSPORTATION		

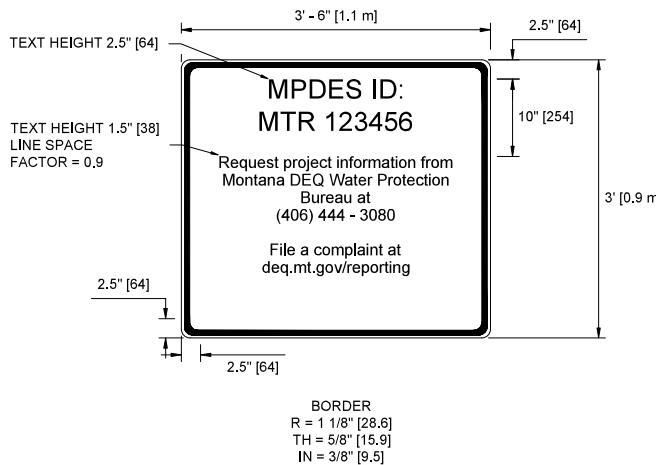

MPDES SWPPP SIGN DETAIL

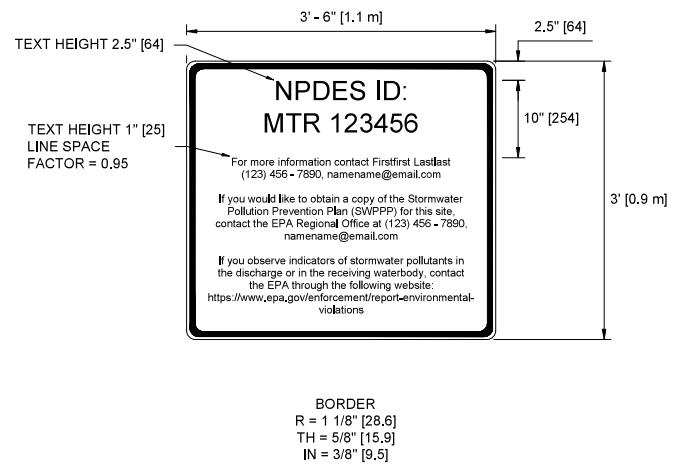

NPDES SWPPP SIGN DETAIL

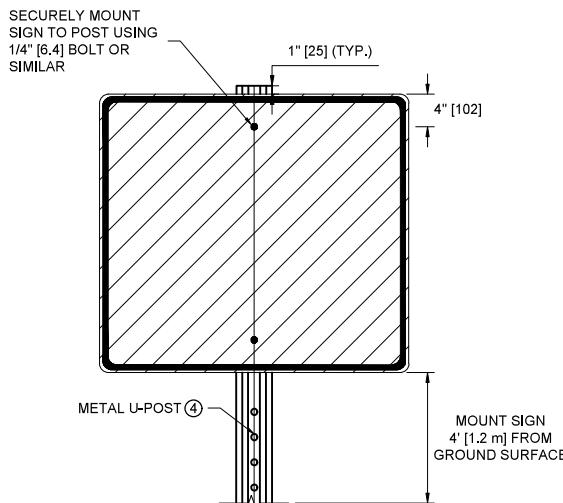

SWPPP SIGN POST DETAIL

NOTES:

- ① INSTALL SIGNAGE AT A PUBLICLY ACCESSIBLE LOCATION NEAREST THE MOST ACTIVE PROJECT PORTION.
- ② INSTALL SIGN FACE PARALLEL TO TRAVEL DIRECTION WITH TEXT FACING ROADWAY.
- ③ USE NON-RETRO-REFLECTIVE SIGN FACE MATERIAL.
- ④ AFFIX SIGN TO METAL U-POST (MIN. 3 LB./FT. [4.5 kg/m]) DRIVEN 2' [0.6 m] (MIN.) IN THE GROUND.

UNITS SHOWN IN BRACKETS [] ARE METRIC AND ARE IN MILLIMETERS (mm) UNLESS OTHER UNITS ARE SHOWN.

DETAILED DRAWINGS

REFERENCE
STANDARD SPEC.
SECTION 208, 704

DWG. NO.
900-20

PUBLIC SIGNAGE - STORMWATER

EFFECTIVE: JUN 27, 2024



--REVISED--